



LOOP TAGGING SYSTEM

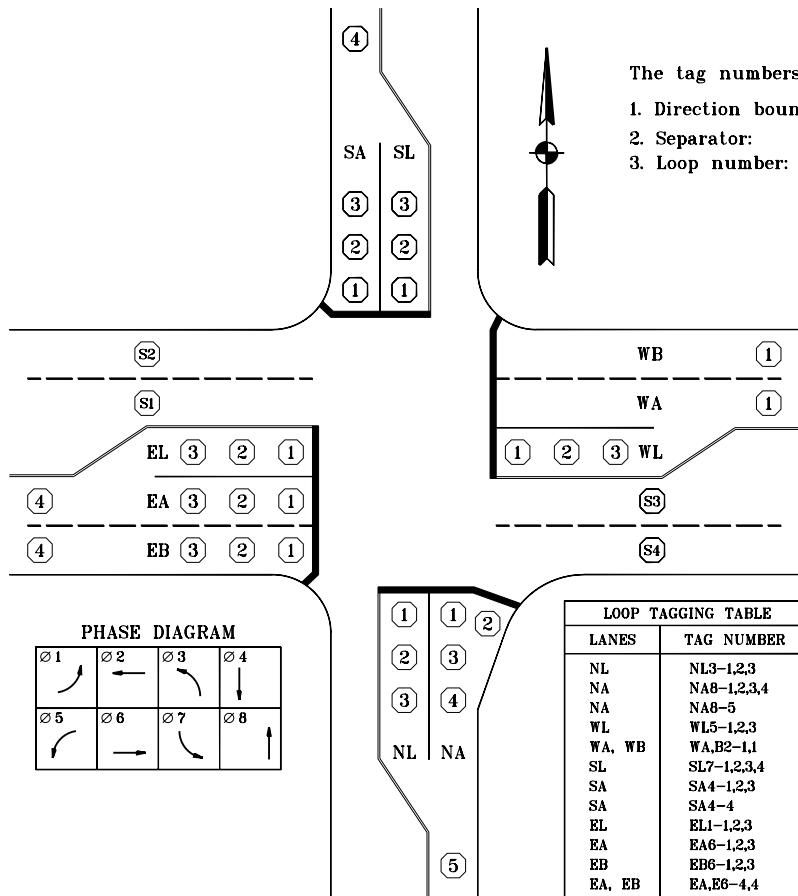

LOOP TAGGING TABLE	
LANES	TAG NUMBER
NL	NL3-1,2,3
NA	NA8-1,2,3,4
NA	NA8-5
WL	WL5-1,2,3
WA, WB	WA,B2-1,1
SL	SL7-1,2,3,4
SA	SA4-1,2,3
SA	SA4-4
EL	EL1-1,2,3
EA	EA6-1,2,3
EB	EB6-1,2,3
EA, EB	EA,EB-4,4
WA	WA-S1
WB	WB-S2
EA	EA-S3
EB	EB-S4

Each loop lead-in cable (2C/16) shall be tagged according to the designation shown on the plans. The tag numbers for lead-in cable shall be assigned as follows:

1. Direction bound: N, S, E, or W.
2. Lane designation: L = Left turn.
A = Through lane closest to centerline of roadway.
B = Next lane out from centerline of roadway.
Alphabet is continued to lane closest to edge of pavement.
3. Phase number: 1 through 8.
4. Separator: -
5. Loop number: 1 = Loop closest to stop line.
2 = Next loop away from stop line.
Numbering is continued to loop farthest from stop line.

The tag numbers for system loops shall be assigned as follows:

1. Direction bound and lane designation are the same as for lead-in cable.
2. Separator: -
3. Loop number: S1 is used for the southernmost approach.
Numbering is continued in a clockwise direction beginning with S2.

INDIANA DEPARTMENT OF TRANSPORTATION	
LOOP TAGGING SYSTEM	
MARCH 1995	
STANDARD DRAWING NO. E 805-SGLT-01	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 3-01-95