

# BEDROCK AQUIFER SYSTEMS OF PIKE COUNTY, INDIANA

## Pike County Bedrock Aquifer Systems

In Pike County rock types exposed at the bedrock surface range from relatively unproductive shales to moderately productive sandstones. Thin limestone and coal seams are sometimes noted as water-bearing. Three bedrock aquifer systems are identified for Pike County based on bedrock lithology. Bedrock aquifers are used extensively throughout the county except in the north and northeast where adequate ground water is generally available from shallower unconsolidated material in the buried bedrock valley or within the floodplains of the White and East Fork White Rivers. Elsewhere in the county, unconsolidated materials are very thin, primarily consisting of weathered bedrock residuum.

The susceptibility of bedrock aquifer systems to surface contamination is largely dependent on the type and thickness of the overlying sediments. Just as recharge for bedrock aquifers cannot exceed that of overlying unconsolidated deposits, susceptibility to surface contamination will not exceed that of overlying deposits. However, because the bedrock aquifer systems have complex fracturing systems, once a contaminant has been introduced into a bedrock aquifer system, it will be difficult to track and remediate.

In general, the potential for encountering mineralized or saline ground water in Pike County increases rapidly for bedrock wells deeper than about 300 feet.

### **Pennsylvanian-McLeansboro Group Aquifer System**

The outcrop/subcrop area of the McLeansboro Group is mostly confined to the northwestern portion of Pike County, where it ranges in thickness from 0 feet at its contact with the underlying Carbonate Group to about 150 feet at the western county line. This aquifer system consists in ascending order of the Shelburn, Patoka, Bond, and Mattson Formations; however, only the Shelburn Formation is present in Pike County. The Shelburn Formation contains the Busseton Sandstone member at or near its base. The sandstone is typically gray to tan in color, fine to medium-grained, and massive. It is interbedded in places with gray shale. It is fairly extensive and is used in places as an aquifer, even though its low permeability typically limits well yields.

The depth to the bedrock surface in the McLeansboro Group is generally less than 50 feet. Wells range in depth from 45 to 307 feet, but are typically 75 to 175 feet deep. The amount of rock penetrated typically ranges from 40 or 155 feet, with a maximum of 298 feet. Static water levels in wells developed in the McLeansboro Group range from 12 to 55 feet below land surface, but are typically between 15 and 40 feet below the surface.

In general the McLeansboro Group in Pike County is considered a minor ground-water source with most wells producing from the Busseton sandstone member or from a combination of McLeansboro and Carbonate Group formations. Most domestic wells produce between 3 and 10 gpm with localized yields of up to 30 gpm.

Water quality is generally good and the aquifer system is not very susceptible to contamination from the land surface. However, in limited areas some improperly constructed or abandoned oil wells may have caused some contamination in the immediate vicinity of the wells. Expected contaminants would be dissolved solids, especially sodium and chloride, and crude oil. Natural water quality gets progressively worse (more salty) in wells deeper than about 200 or 300 feet.

### **Pennsylvanian-Carbonate Group Aquifer System**

This Middle Pennsylvanian bedrock aquifer system consists in ascending order of the Linton, Petersburg, and Dugger Formations. The entire section (although not its maximum thickness) of the Carbonate Group is present in Pike County. The thickness of the group ranges from 0 along its eastern edge to about 400 feet where it dips beneath younger rocks to the west. Most of the thickness of this group consists of variable shales and sandstones with some coal and limestone. The outcrop/subcrop of the Carbonate Group occurs as a broad north-northwest to south-southeast trending band covering nearly 75 percent of Pike County. The depth to the bedrock surface is typically less than 40 feet.

Well depths in the Carbonate Group range from 23 to 345 feet with most constructed at depths between 65 and 210 feet. The amount of rock penetrated by these wells typically ranges from 40 to 170 feet with a maximum of 323 feet. Static water levels in the wells vary from 0 (flowing) to 100 feet below the land surface, but are typically between 10 and 60 feet below the surface.

The Carbonate Group is considered a minor ground-water source in Pike County with most wells producing from the thicker sandstone and coal units. Most wells for homes, irrigation, and stock produce between 1 and 13 gpm with localized yields of up to 25 gpm. A few dry holes have been reported.

Water quality is generally good and the aquifer system is not very susceptible to contamination from the land surface. However, in areas of surface and underground coal mining, some localized contamination may have occurred. Contaminants are typically dissolved solids including calcium, magnesium, sulfate, bicarbonate, and iron. The natural quality of well water gets progressively more mineralized (commonly changing from a calcium-magnesium-bicarbonate type to a sodium bicarbonate or sodium chloride type) as wells are drilled deeper than about 200 to 300 feet and the rock strata dip beneath younger rocks to the southwest.

### **Pennsylvanian-Raccoon Creek Group Aquifer System**

Aquifers contained within this Lower and Middle Pennsylvanian bedrock have generally low yielding capability. This aquifer system consists, in ascending order of the Mansfield, Brazil, and Staunton Formations. The Mansfield Formation rests unconformably on rocks of late Mississippian age. This crossonal contact surface is quite irregular in elevation, resulting in quite variable thickness of Mansfield rocks. Total thickness of the group in the county ranges from about 350 feet near the eastern county line to about 800 feet in the northwestern part of the county. Shale and sandstone compose approximately 95 percent of the group, and clay, coal, and limestone make up nearly all the rest. Shale is more common than sandstone. The sandstone is mostly fine grained. The outcrop/subcrop area of the Raccoon Creek Group exists along the east side of Pike County and in a buried bedrock valley in the northeastern corner of the county. The depth to the bedrock surface is typically less than 30 feet, except in parts of a buried bedrock valley system, where the depth to bedrock may be over 150 feet.


Well depths in the Raccoon Creek Group are highly variable, ranging from 35 to 300 feet. However, most are constructed at depths of 60 to 200 feet. The amount of rock penetrated by wells typically ranges from 20 to 140 feet, with a maximum of 185 feet. Static water levels in the wells vary from 4 to 75 feet below the land surface, but they are typically between 10 and 50 feet below the surface.

In general, the Raccoon Creek Group Aquifer System is considered a dependable ground-water source in Pike County, with many wells producing from the basal sandstone of the Mansfield Formation. Yields for domestic wells typically range from 2 to 10 gpm. Potentially higher yielding wells may be obtained locally for light industrial, irrigation, farm operation, or small municipal usage of up to 50 gpm. Because of the low permeability of the bedrock, the abundance of shale confining zones both above and below aquifer systems, and the limitation in available drawdown, it is seldom possible to divert large volumes of water into any particular pumping center.

Water quality is generally good and the aquifer system is not very susceptible to contamination from the land surface. However, in areas of surface and underground coal mining, some localized contamination may have occurred. Contaminants are typically dissolved solids including calcium, magnesium, sulfate, bicarbonate, and iron. Natural water quality gets progressively worse (more salty) in wells ranging in depth from 300 to 400 feet as the strata dip beneath younger rocks to the southwest.





### **Underground Mine Areas**

In these areas various coal seams within the Carbonate Group have been removed by underground mining methods. Approximately 50 percent of the coal has been removed, leaving the potential for storage of substantial amounts of water in the larger mines. Although the Division has no records of wells drilled into these mines, yields of a few hundred gpm are possible. A limitation on use of the water could be its more mineralized nature.

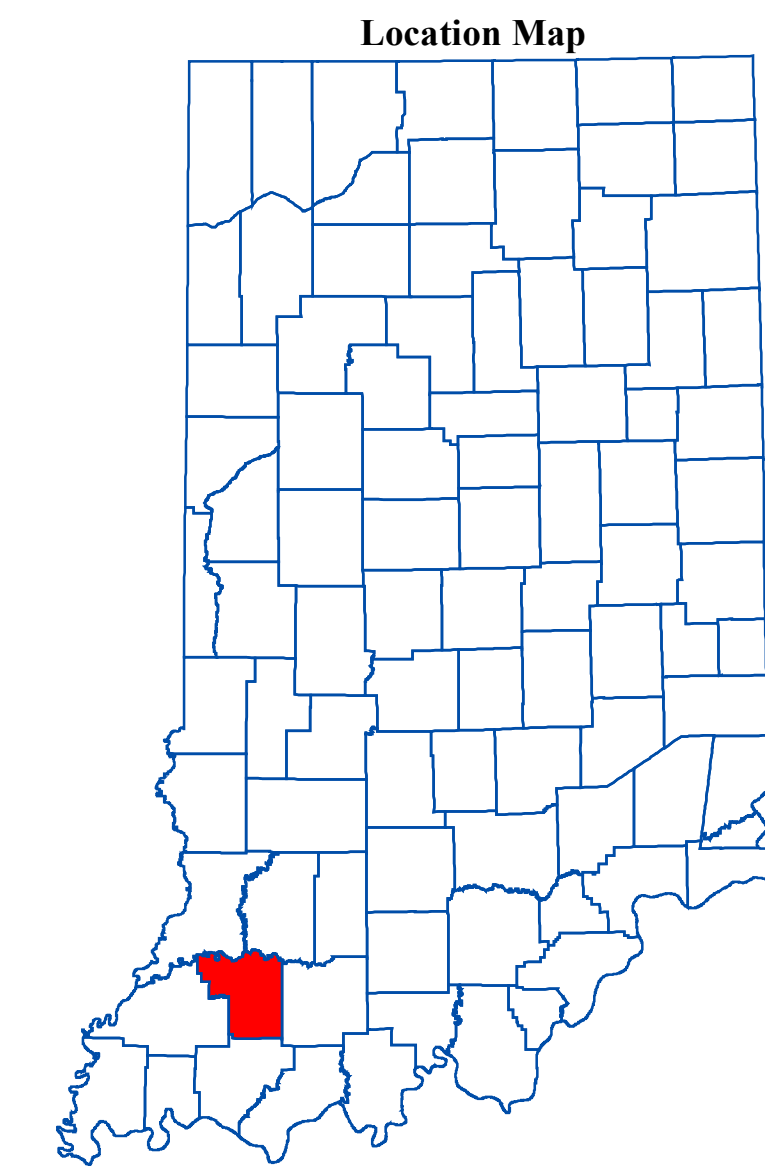

### EXPLANATION

- County Road
- State Road & US Highway
- Stream
- Lake & River
- Municipal Boundary

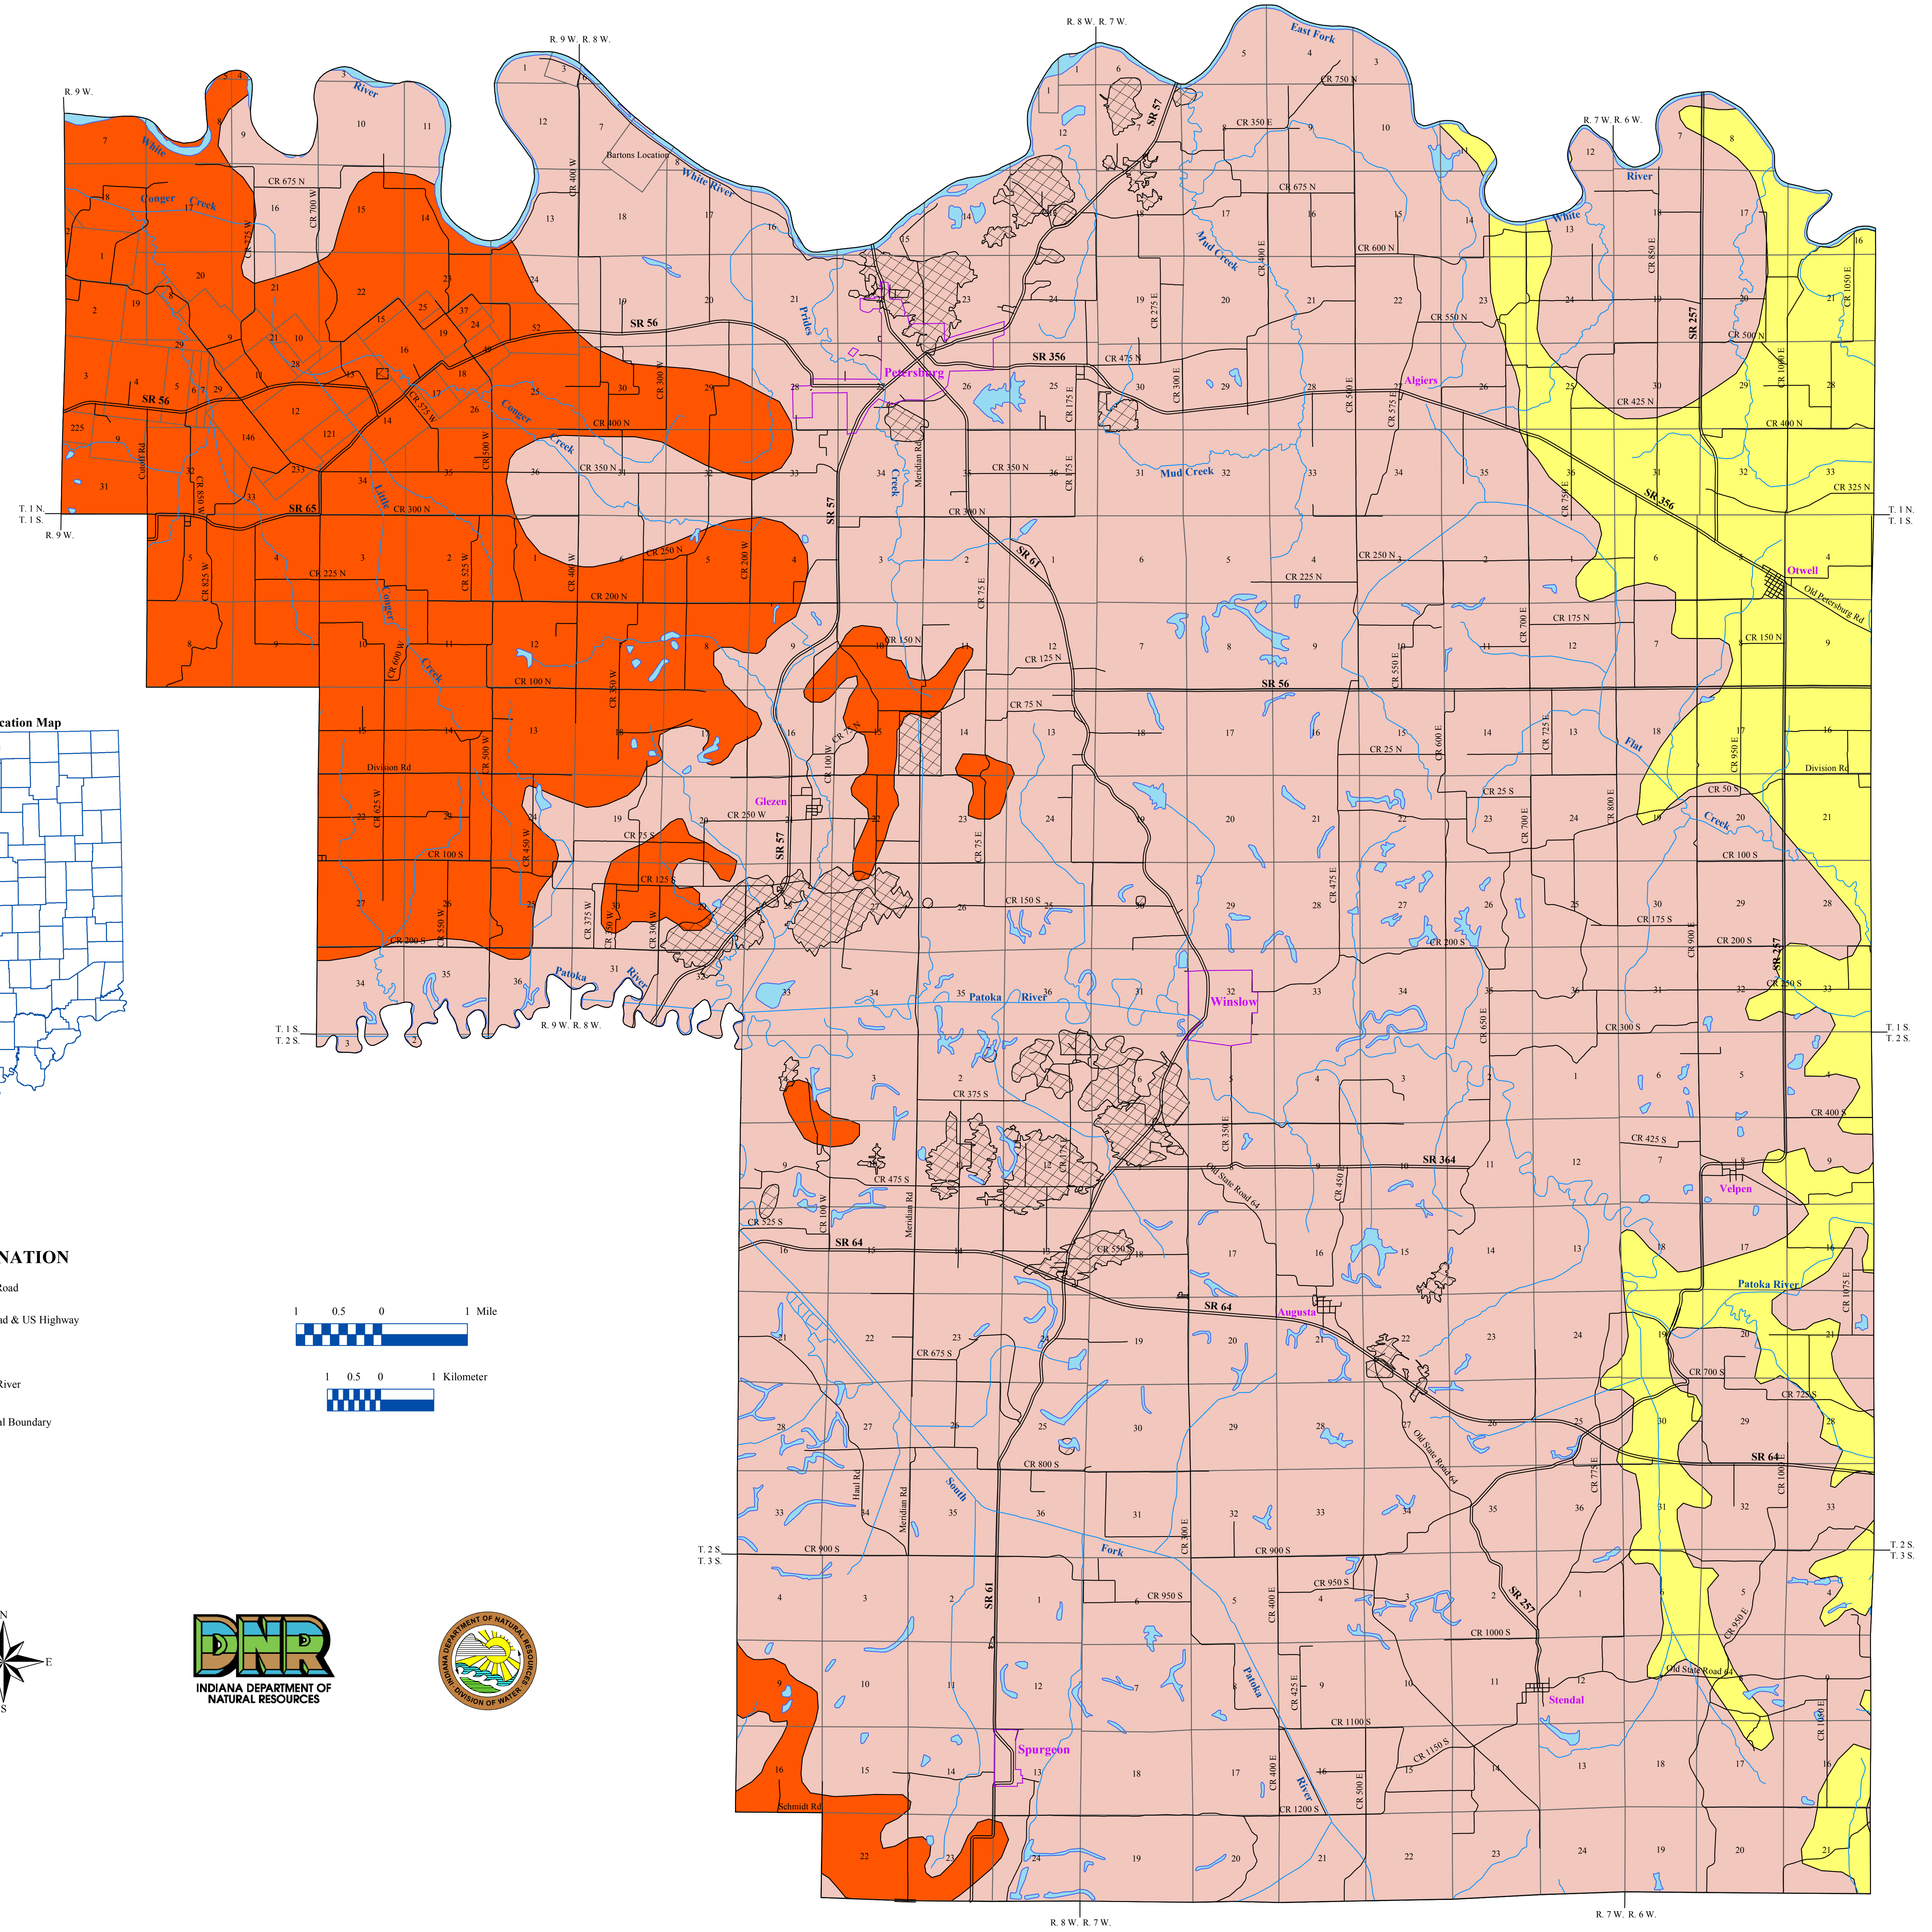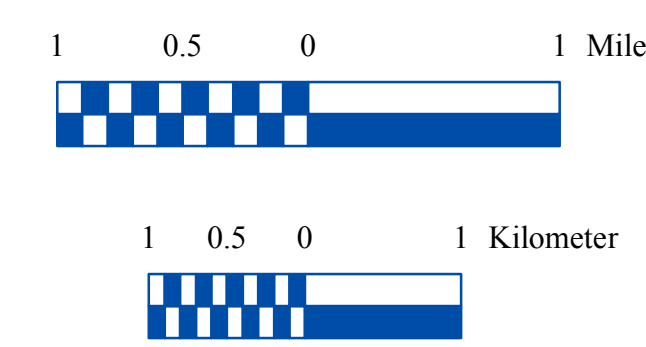

### Map Use and Disclaimer Statement

We request that the following agency be acknowledged in products derived from this map: Indiana Department of Natural Resources, Division of Water.

This map was compiled by staff of the Indiana Department of Natural Resources, Division of Water using data believed to be reasonably accurate. However, a degree of error is inherent in all maps. This product is distributed "as is" without warranties of any kind, either expressed or implied. This map is intended for use only at the published scale.

This map was created from several existing shapefiles. Underground Coal Mines in Southwestern Indiana (polygon shapefile, 20001002), Township and Range Lines of Indiana (line shapefile, 20020621), Land Survey Lines of Indiana (polygon shapefile, 20020621), and County Boundaries of Indiana (polygon shapefile, 20050523) were all from the Indiana Geological Survey and based on a 1:24,000 scale, except the Bedrock Geology of Southwestern Indiana (polygon shapefile, 20001124), which was at a 1:500,000 scale. Draft road shapefiles, System1 (line shapefiles, 2003), were from the Indiana Department of Transportation and based on a 1:24,000 scale. City Areas in Southwestern Indiana (polygon shapefile, 1999) was from ESRI and based on a 1:100,000 scale. Stream27 (line shapefile, 20000420) was from the Center for Advanced Applications in GIS at Purdue University.

### Bedrock Aquifer Systems of Pike County, Indiana

by  
Gregory P. Schrader and William C. Herring  
Division of Water, Resource Assessment Section

June 2003