
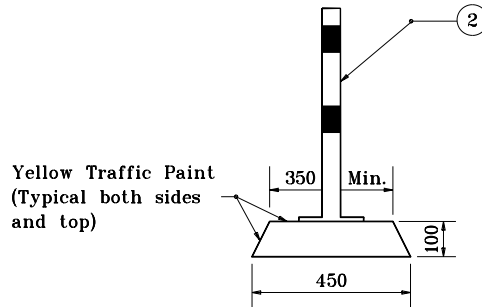


GENERAL NOTES

- ① A 300 mm section of the temporary bituminous divider shall be removed or omitted every 7.5 m to provide drainage on tilt or superelevated sections.
- ② See Standard Drawing 801-TCDV-01 for details of tubular marker.

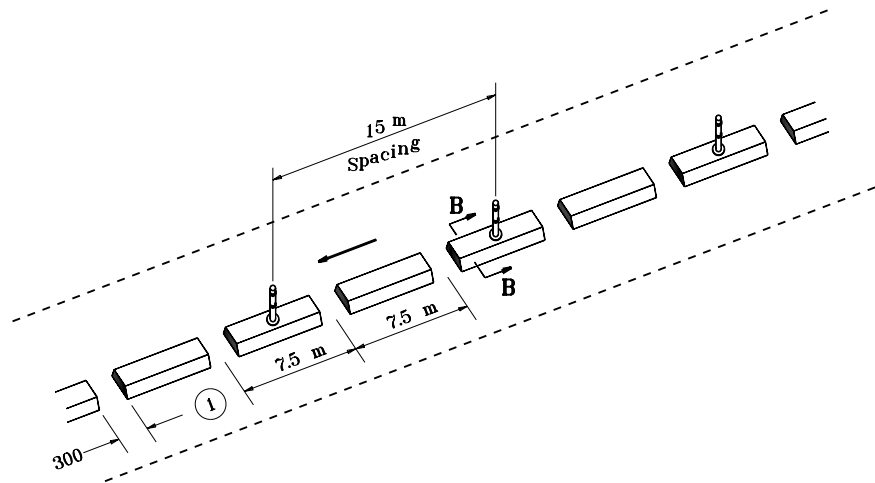

Yellow Traffic Paint
(Typical both sides
and top)

SECTION "B-B"

**TEMPORARY BITUMINOUS DIVIDER
WITH TUBULAR MARKERS**

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION	
TEMPORARY BITUMINOUS DIVIDER	
SEPTEMBER 1997	
STANDARD DRAWING NO. 801-TCDV-03	
	/s/ Anthony L. Uremovich 9-01-97 DESIGN STANDARDS ENGINEER DATE
	/s/ Donald W. Lucas 9-01-97 CHIEF HIGHWAY ENGINEER DATE