




NORMAL SHOULDER SECTION

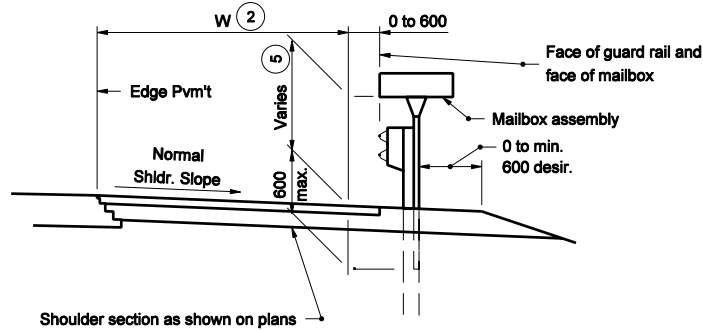

SHOULDER SECTION WITH GUARDRAIL

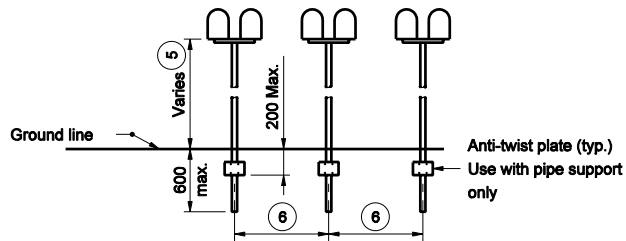

SPACING FOR MULTIPLE POST INSTALLATION

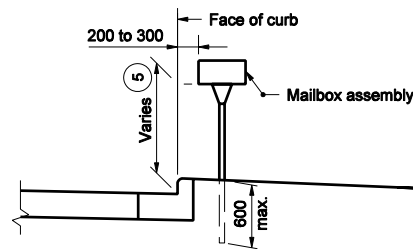

CURBED SECTION

GENERAL NOTES

- ② See plans for W
- ⑤ The normal height range is 990 to 1200. Contact the local postmaster to establish appropriate installation height
- ⑥ Established by the U.S. Postal Service, usually 1015 to 1220.


All dimensions are in mm unless otherwise specified

INDIANA DEPARTMENT OF TRANSPORTATION

**MAILBOX ASSEMBLIES
ELEVATION VIEW**

MARCH 2005

STANDARD DRAWING NO. 611-MBAS-04



/s/ Richard L. VanCleave 3-01-05
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-01-05
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER