



LOOP WIRING DIAGRAM

GENERAL NOTES

- ① Duct loop wires to be twisted around each other a minimum of 5 turns/300 mm then coiled and tied with self-locking strips.
- ② Loop wires to be tagged in or out as indicated.
- ③ See splice detail (waterproofing) on Standard Drawing 805-SGLI-04.

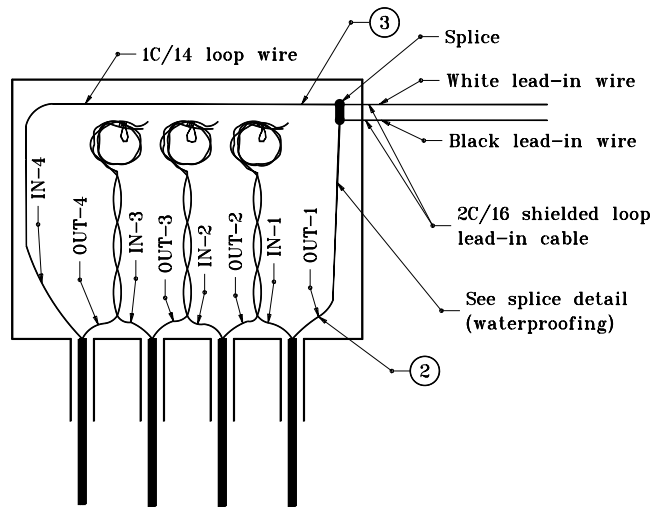

**DETAIL A
DETECTOR HOUSING WIRING**

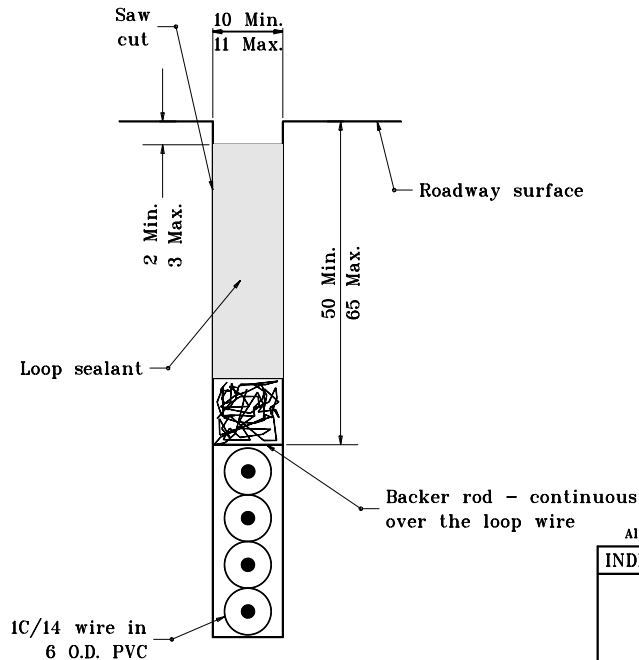

**LOOP SAW-CUT DETAIL
SECTION B-B**

All dimensions are in mm unless otherwise specified.

| | |
|---|--|
| INDIANA DEPARTMENT OF TRANSPORTATION | |
| TRAFFIC SIGNAL LOOP INSTALLATION | |
| MARCH 1995 | |
| STANDARD DRAWING NO. 805-SGLI-02 | |
| | /s/ Anthony L. Uremovich 3-01-95 DESIGN STANDARDS ENGINEER DATE |
| | /s/ Donald W. Lucas 3-01-95 CHIEF HIGHWAY ENGINEER DATE |

Source Sheet: NONE