



GENERAL NOTES

1. This sheet shall be used when W-beam guardrail is specified along a two-lane two-way roadway to shield the piers of overhead structures.
2. The details on this sheet are typical guardrail layouts for shielding the piers of single overhead structures. The required length of guardrail shall be determined in accordance with Tables P-1-1 and P-1-2, and shall be as shown on the plans.
3. Dimensions and details not shown on this sheet shall be as shown on the plans.
4. Tables P-1-1 and P-1-2 are shown on Standard Drawing 601-RPPG-06.

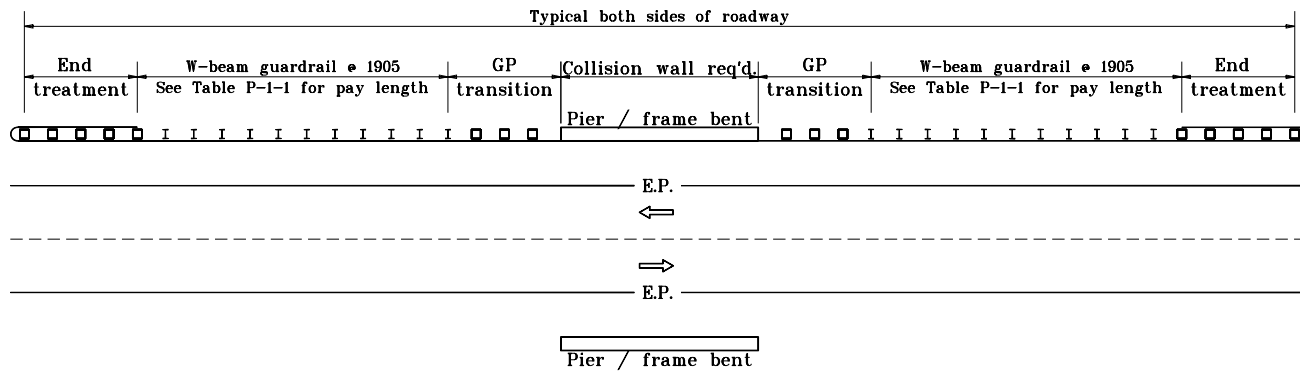

TWO-LANE TWO-WAY WITH SINGLE OVERHEAD STRUCTURE AND PIER TO E.P. ≤ 4.9 m

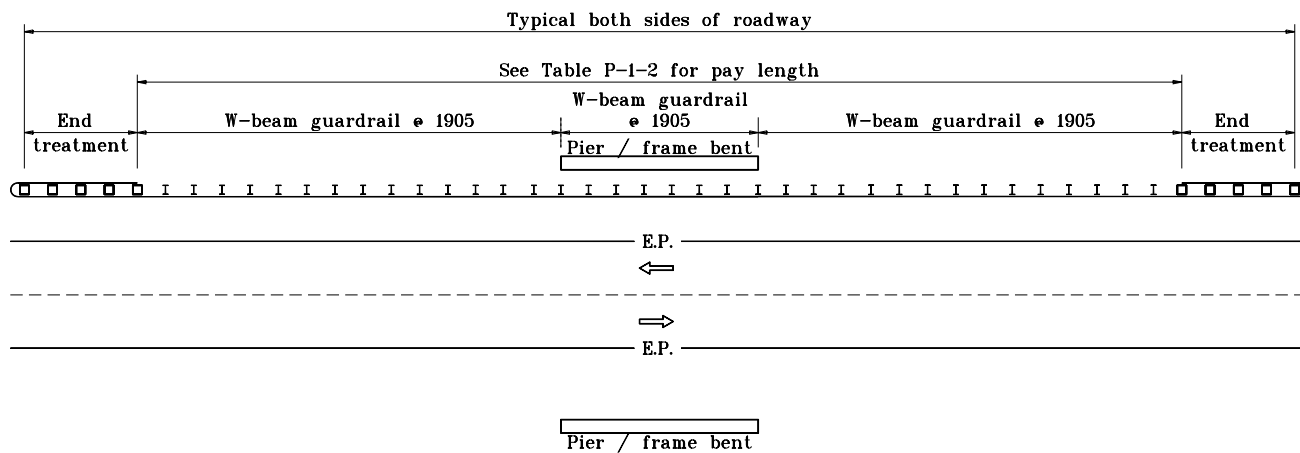

TWO-LANE TWO-WAY WITH SINGLE OVERHEAD STRUCTURE AND PIER TO E.P. > 4.9 m

All dimensions are in mm unless otherwise specified.

| | |
|---|---|
| INDIANA DEPARTMENT OF TRANSPORTATION | |
| ROADSIDE PIER PROTECTION GUARDRAIL | |
| APRIL 1995 | |
| STANDARD DRAWING NO. 601-RPPG-04 | |
| | /s/ Anthony L. Uremovich 4-03-95 DESIGN STANDARDS ENGINEER DATE |
| DESIGN STANDARDS ENGINEER | /s/ Donald W. Lucas 4-03-95 CHIEF HIGHWAY ENGINEER DATE |

Source Sheet: **P-1**