




NORMAL SHOULDER SECTION

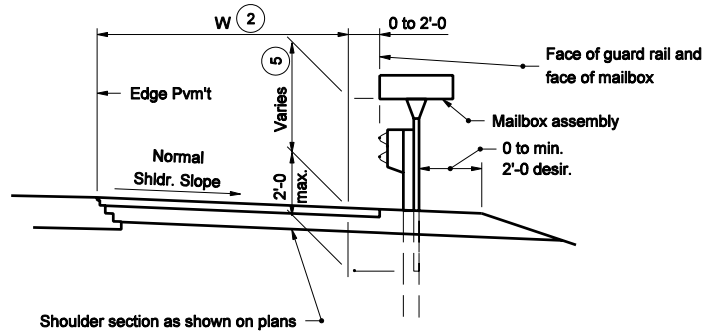

SHOULDER SECTION WITH GUARDRAIL

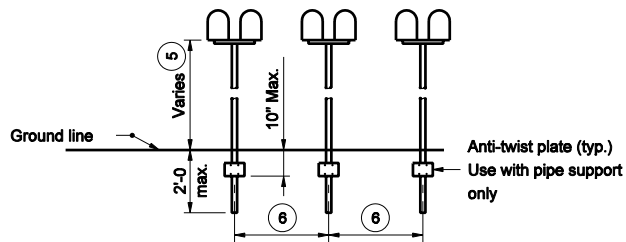

SPACING FOR MULTIPLE POST INSTALLATION

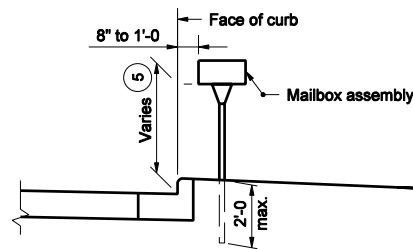

CURBED SECTION

GENERAL NOTES

- ② See plans for W
- ⑤ The normal height range is 3'-3 to 3'-11. Contact the local postmaster to establish appropriate installation height.
- ⑥ Established by the U.S. Postal Service, usually 3'-4 to 4'-0.

INDIANA DEPARTMENT OF TRANSPORTATION	
MAILBOX ASSEMBLIES ELEVATION VIEW	
MARCH 2005	
STANDARD DRAWING NO. E 611-MBAS-04	
	/s/ Richard L. VanCleave 3-01-05 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard K. Smutzer 3-01-05 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	