



**REINFORCED-CONCRETE FILLED EPOXY-COATED STEEL PIPE PILE ENCASEMENT PLAN VIEW**

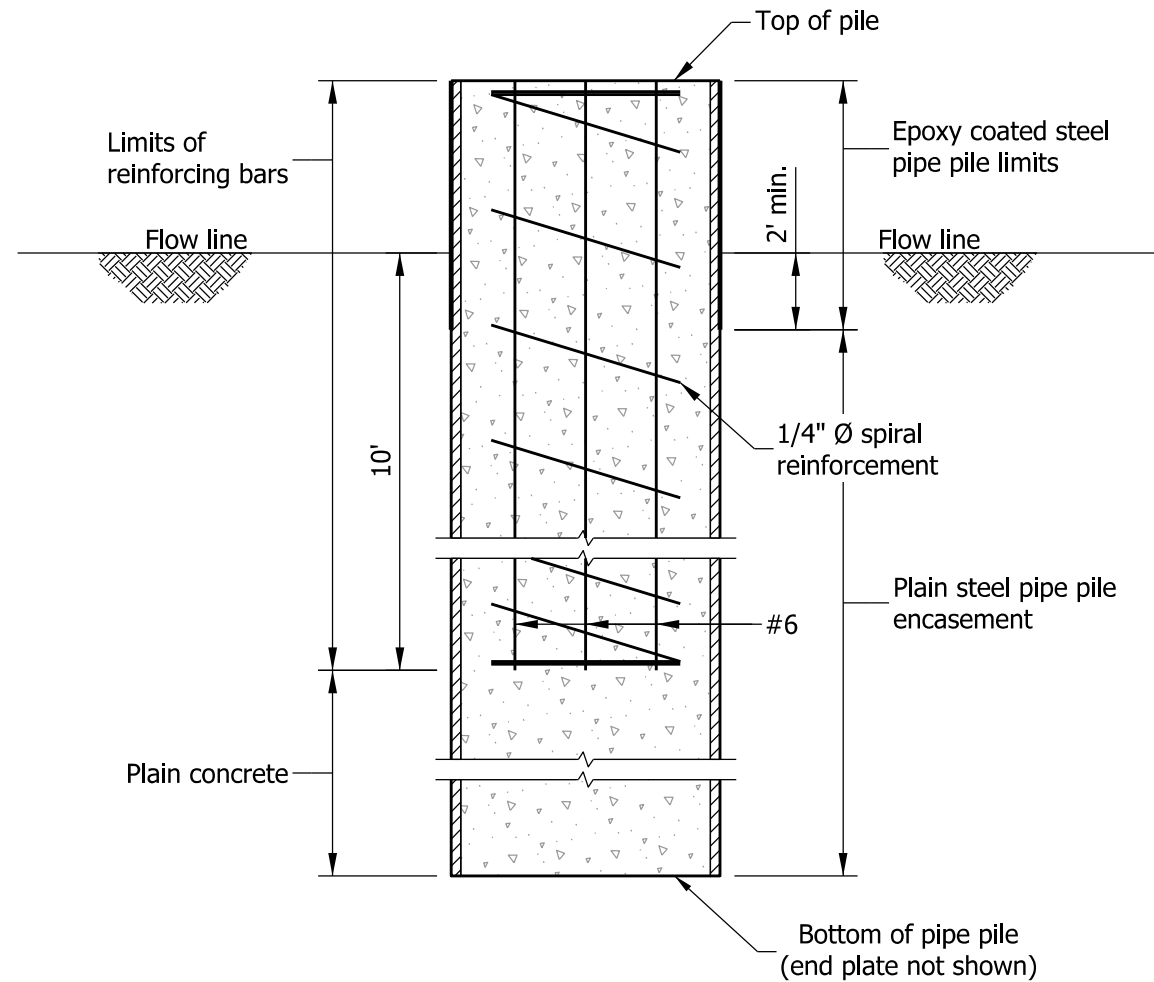

**SECTION A-A**

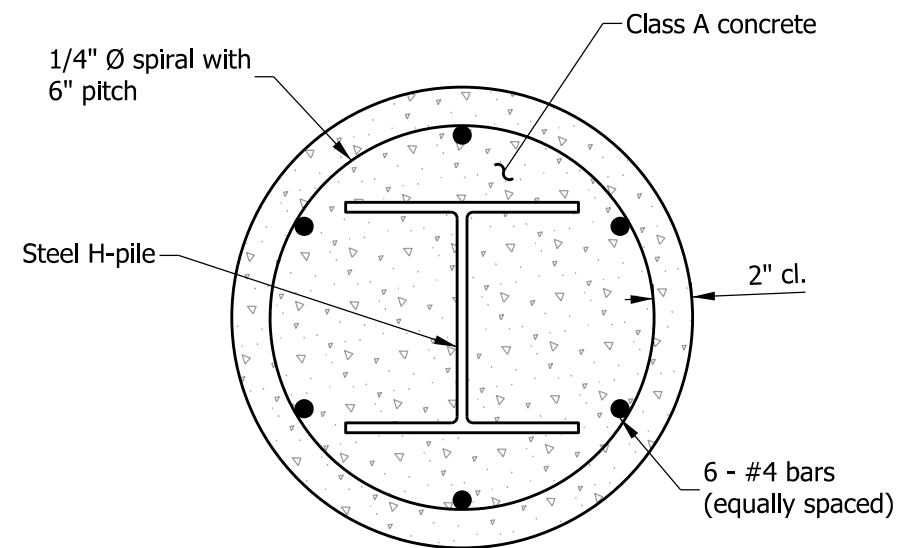

**STEEL H - PILES REINFORCED-CONCRETE ENCASEMENT PLAN VIEW**


TABLE OF MATERIALS			
Steel H-Pile designation	Minimum pile diameter	Reinforcing bars, lb/ft	Class A concrete, yd³/ft
HP 14	2'-3"	5.8	0.12
HP 12	2'-0"	5.6	0.10
HP 10	1'-9"	5.4	0.08

**INDIANA DEPARTMENT OF TRANSPORTATION**

**REINFORCED-CONCRETE ENCASEMENT FOR PILES**

**SEPTEMBER 2012**

**STANDARD DRAWING NO. E 701-BPIL-01**




*/s/ Richard L. VanCleave* 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

*/s/ Mark A. Miller* 09/04/12


CHIEF ENGINEER DATE

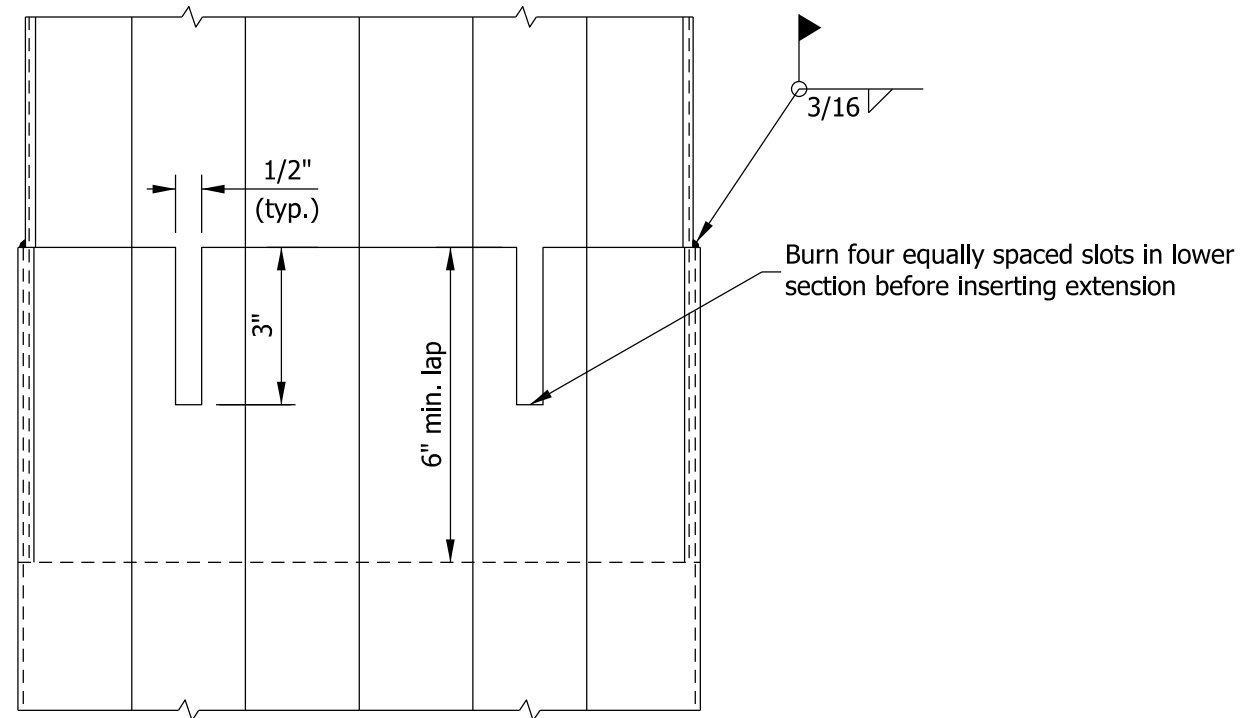

FOR FLUTED PIPE

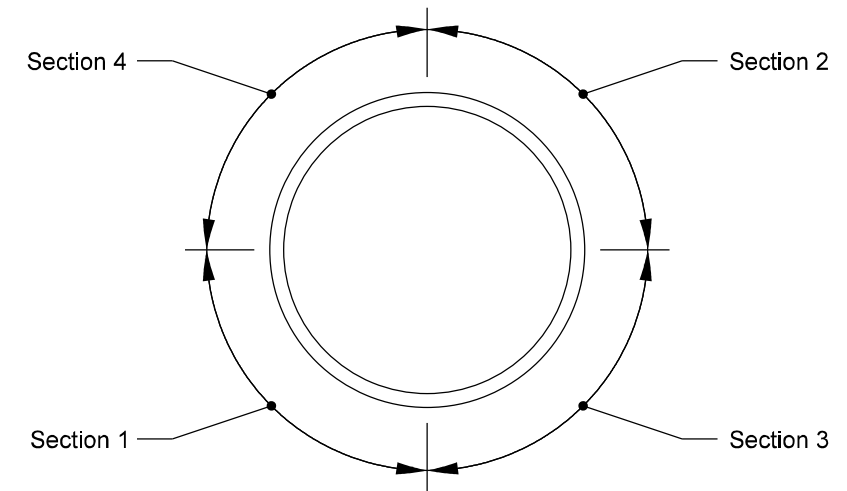

WELDING SEQUENCE

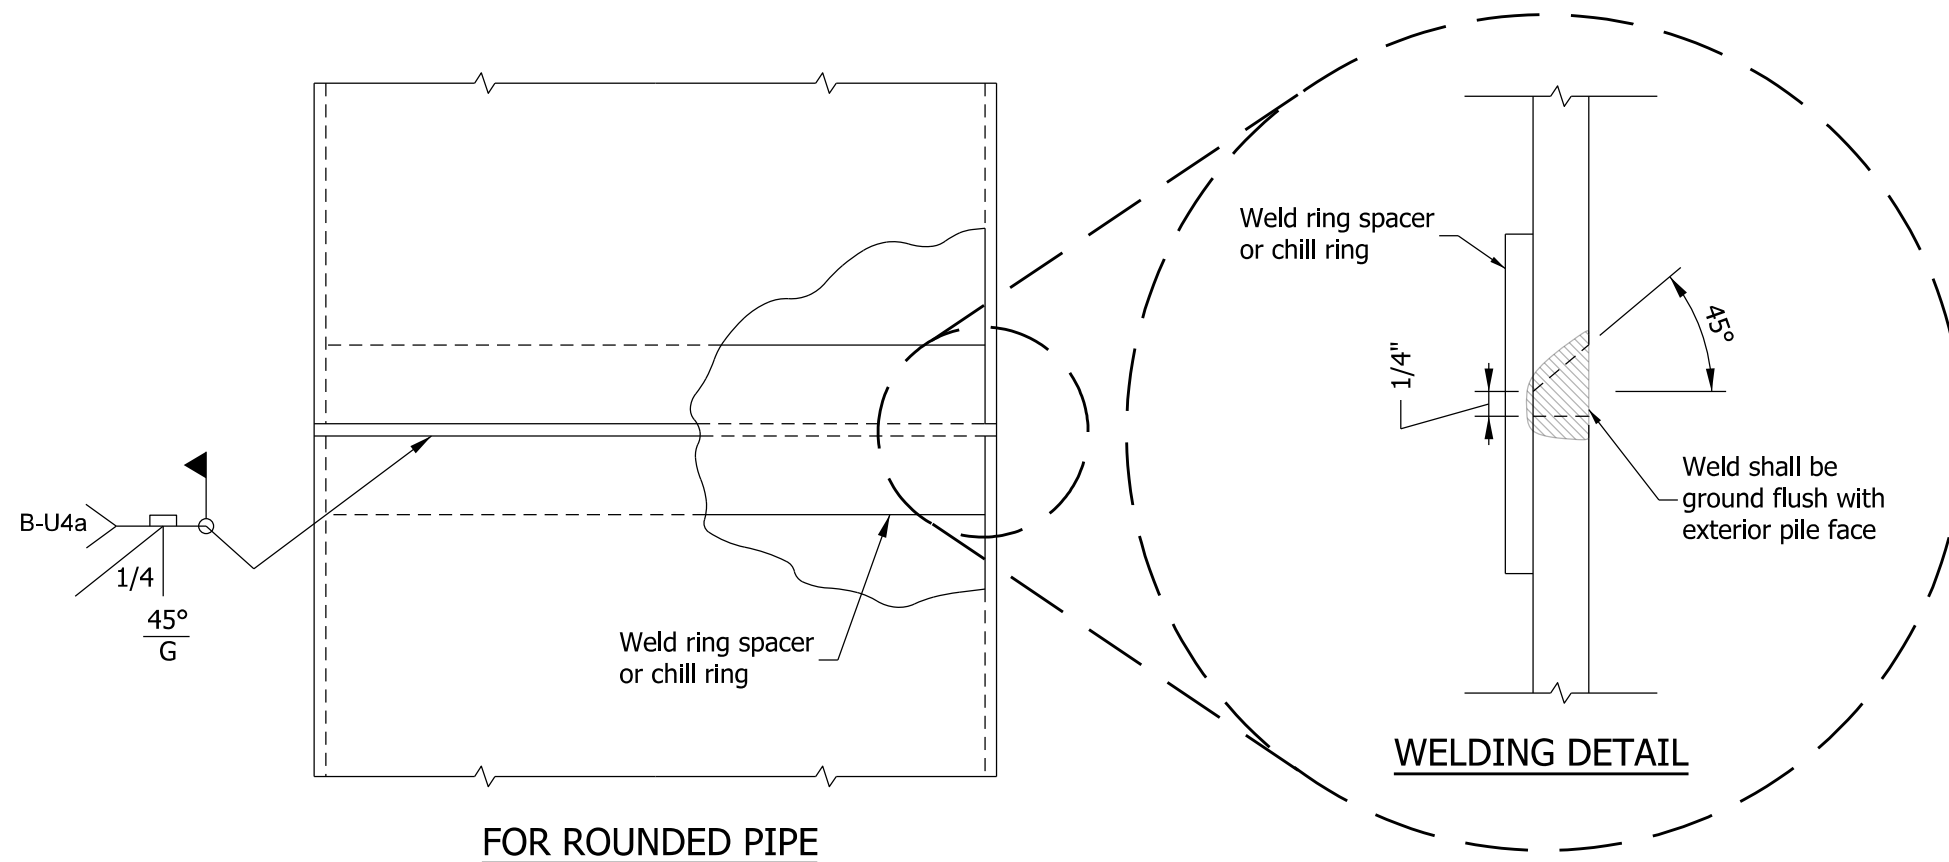

FOR ROUNDED PIPE


INDIANA DEPARTMENT OF TRANSPORTATION			
FIELD SPLICING PIPE PILES			
SEPTEMBER 2012			
STANDARD DRAWING NO.		E 701-BPIL-02	
	/s/ <i>Richard L. VanCleave</i>		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ <i>Mark A. Miller</i>		09/04/12
	CHIEF ENGINEER		DATE



PROCEDURE FOR SPLICING PARTIALLY DRIVEN PILING


1. Upper Pile Section

Prepare outside of both flanges and one side of web by beveling to a 45° angle. Prepare all surfaces to be welded by grinding.

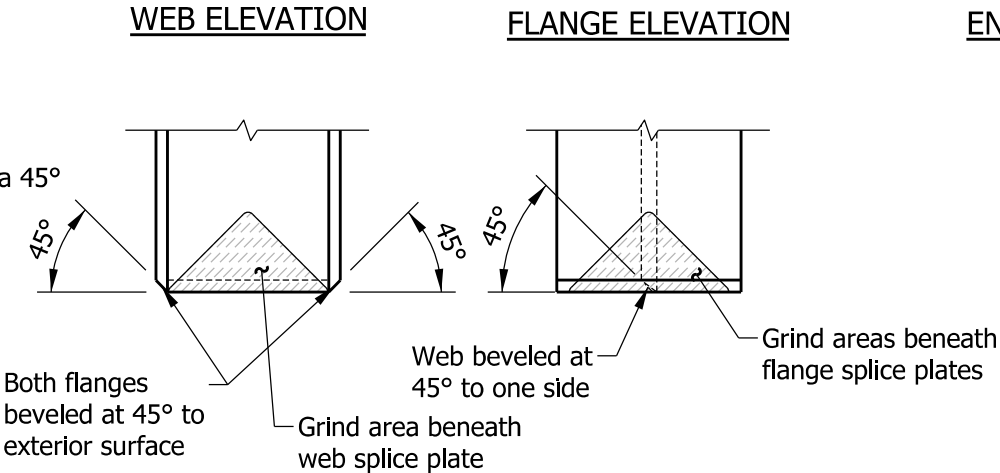


2. Lower Pile Section

Prepare top of pile by restoring it to its original cross section. Grind all surfaces to be welded, extending 1/2" beyond weld area(s).

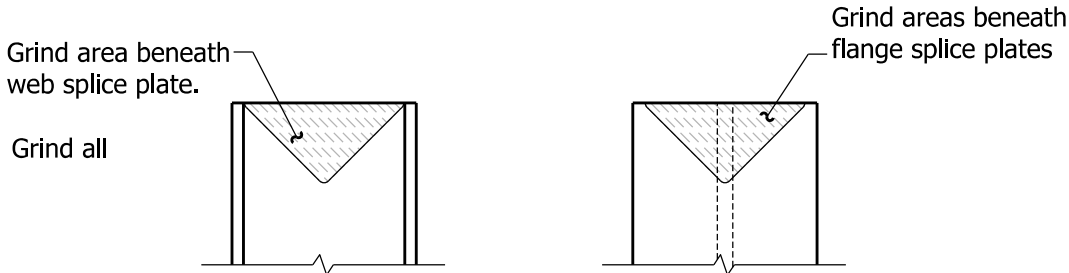


3. Upper Pile Section

Fillet weld web splice plate to upper pile section at two locations.

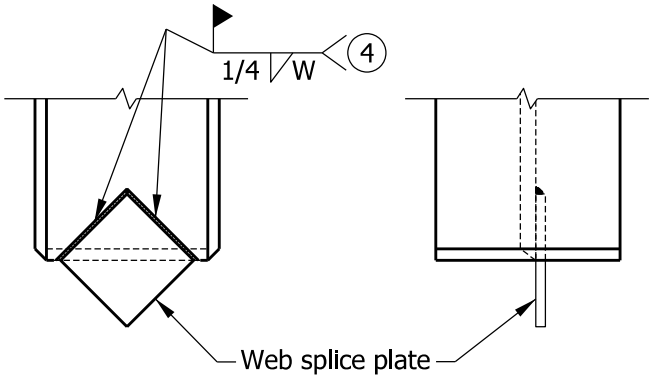

4. Lower Pile Section


Tack weld two backer plates to inside of flange.

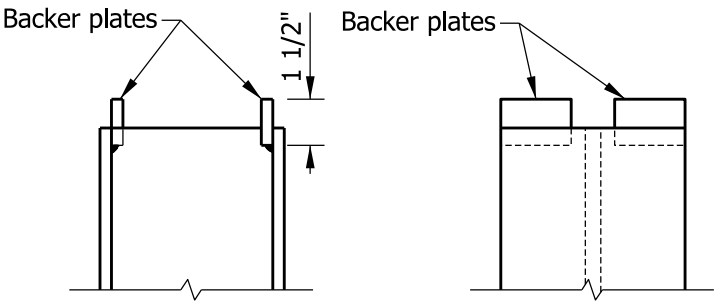

NOTES

- Steel H piling may be spliced in a horizontal position prior to driving, using splice plates and web and flange welds as shown.
- Two flange splice plates, one web splice plate, and four backer plates will be required per splice.
- All fillet welds shall be single pass.
- See table for splice plate dimensions W and F.

SPLICE PLATE AND BACKER PLATE DIMENSIONS

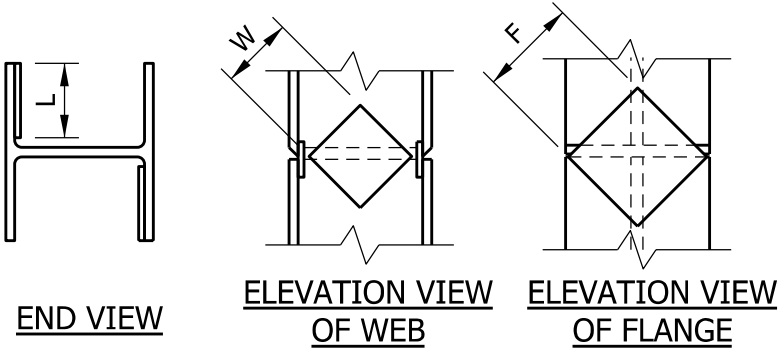

H-PILE SIZE	HP 10	HP 12	HP 14
Flange Splice Plate, F	7"	8 1/4"	10 1/4"
Web Splice Plate, W	5 3/8"	6 3/4"	8"
Backer Plate Length, L	4 1/8"	5"	6 1/4"

NOTE: Splice plate thickness = 3/8"  
Backer plate thickness = 1/4"

INDIANA DEPARTMENT OF TRANSPORTATION

STEEL H-PILE  
SPLICE

SEPTEMBER 2012

STANDARD DRAWING NO. E 701-BPIL-03



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE


Procedure continued on Standard Drawing E 701-BPIL-04.

PROCEDURE FOR SPLICING PARTIALLY DRIVEN PILING (cont.)


5. Combine Pile Sections

Lift and hold upper pile section into place, maintaining 1/4" gap between upper and lower pile sections by using the remaining two backer plates as a spacing guide. Plumb the pile. Tack weld the untacked side of the two backer plates to the inside upper flange. Remove the backer plate spacers and tack weld them to the inside flange portion of the upper and lower sections of the pile. Fillet weld the remaining two sides of the web splice plate to the lower section.


WEB ELEVATION

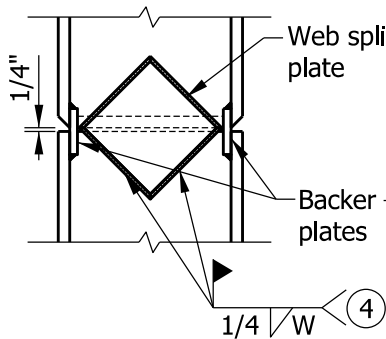

FLANGE ELEVATION



END VIEW

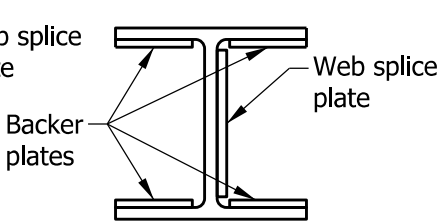


NOTES

- 1. Steel H piling may be spliced in a horizontal position prior to driving, using splice plates and web and flange welds as shown.
- 2. Two flange splice plates, one web splice plate, and four backer plates will be required per splice.
- 3. All fillet welds shall be single pass.
- 4 See Standard Drawing E 701-BPIL-03 table for splice plate dimensions W and F.


6. Combined Pile Section

Complete Joint Penetration (CJP) weld the web. See Detail A.

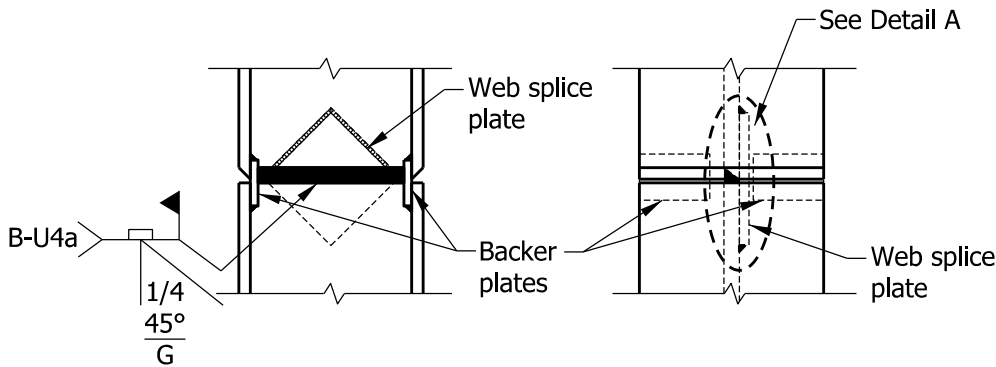



7. Combined Pile Section

Complete Joint Penetration (CJP) weld both flanges. Grind weld smooth with the pile exterior face. See Detail B.




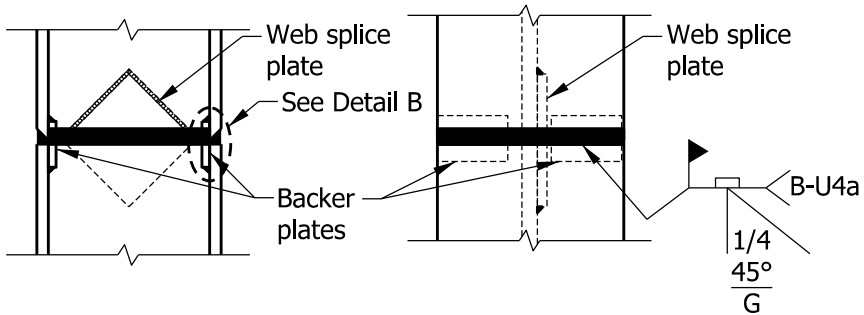


8. Combined Pile Section

Fillet weld the flange splice plates to the flanges.

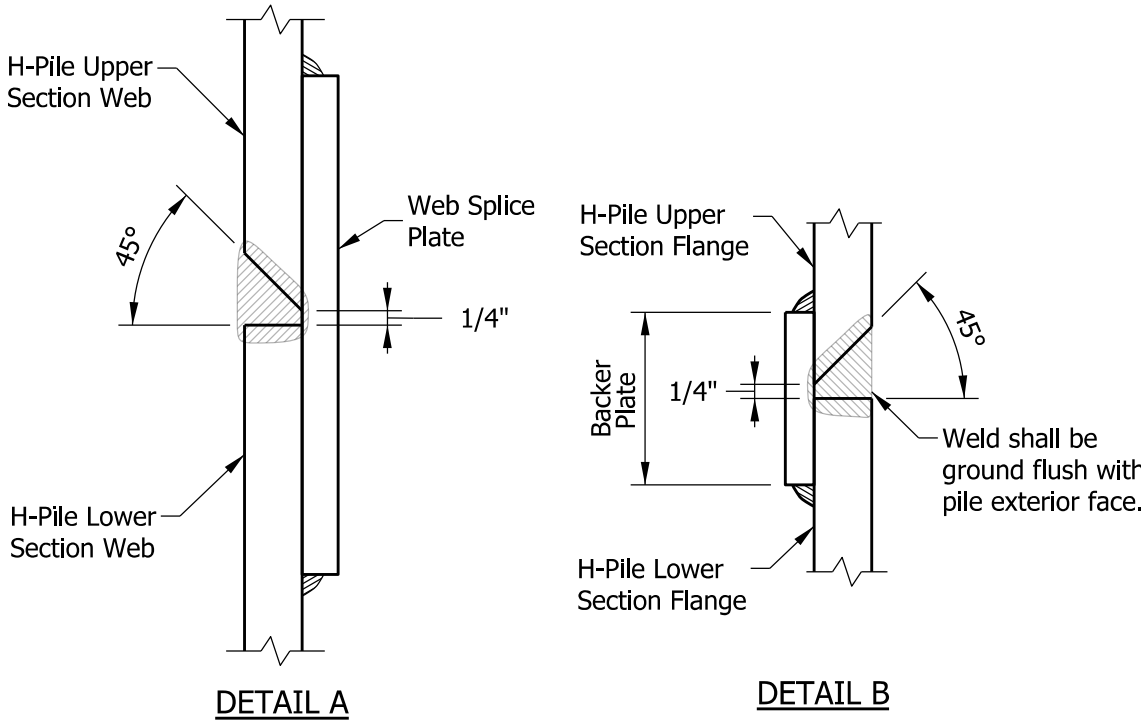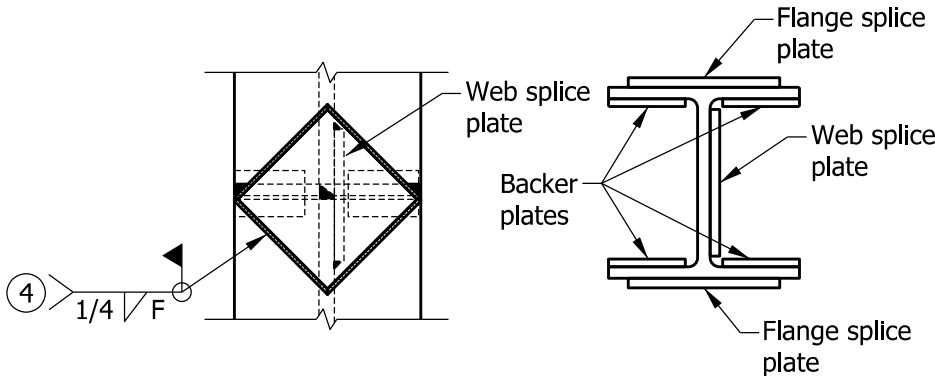


INDIANA DEPARTMENT OF TRANSPORTATION			
STEEL H-PILE SPLICE (CONTINUED) SEPTEMBER 2012			
STANDARD DRAWING NO.		E 701-BPIL-04	
	/s/ Richard L. VanCleave		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ Mark A. Miller		09/04/12
	CHIEF ENGINEER		DATE

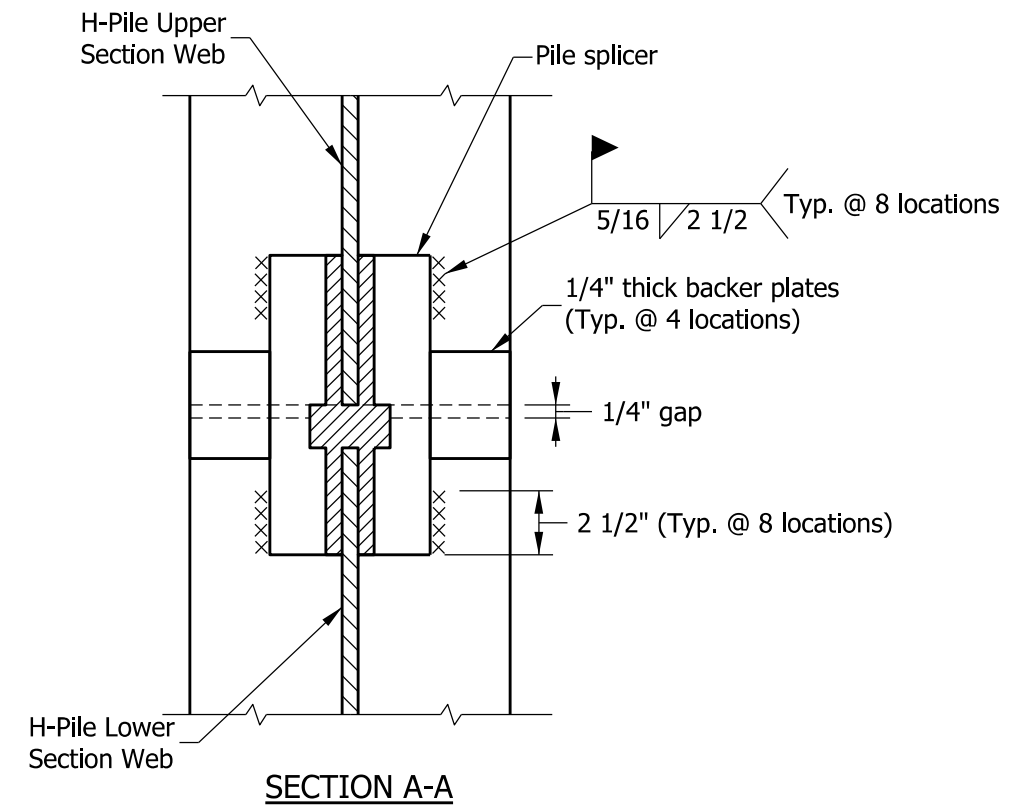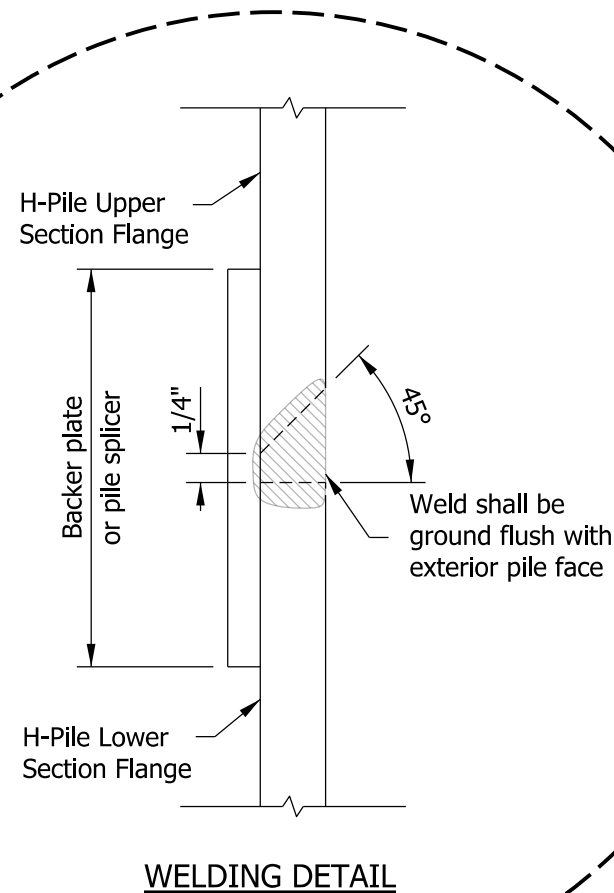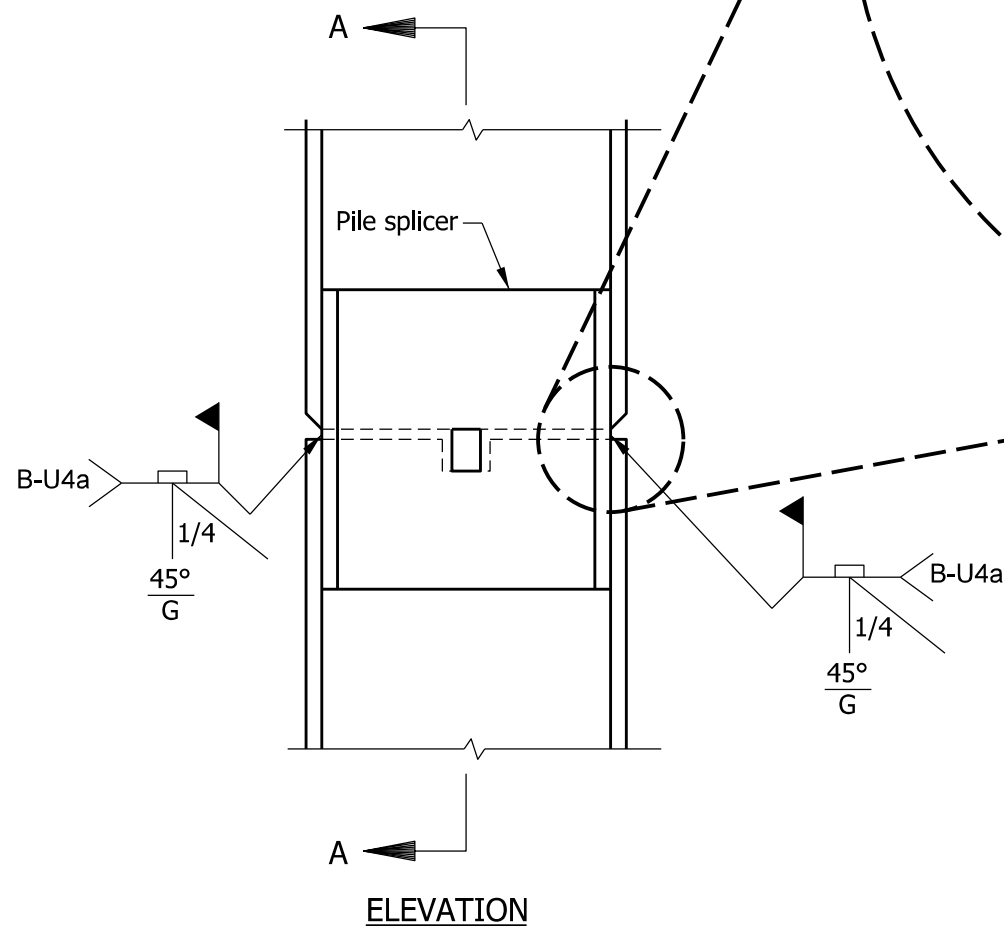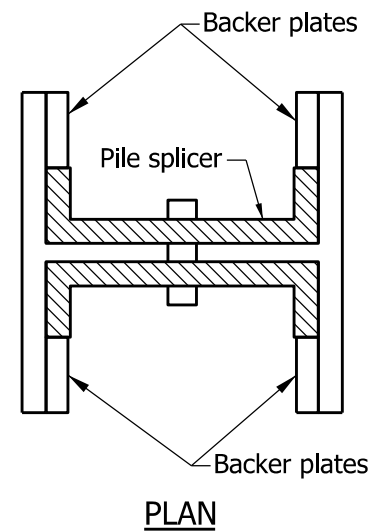

**ALTERNATE STEEL H-PILE SPLICE  
USING MECHANICAL PILE SPLICER**

INDIANA DEPARTMENT OF TRANSPORTATION	
ALTERNATE STEEL H-PILE MECHANICAL SPLICE	
SEPTEMBER 2012	
STANDARD DRAWING NO.	E 701-BPIL-05
	/s/ <i>Richard L. VanCleave</i> 09/04/12 SUPERVISOR, ROADWAY STANDARDS DATE
	/s/ <i>Mark A. Miller</i> 09/04/12 CHIEF ENGINEER DATE

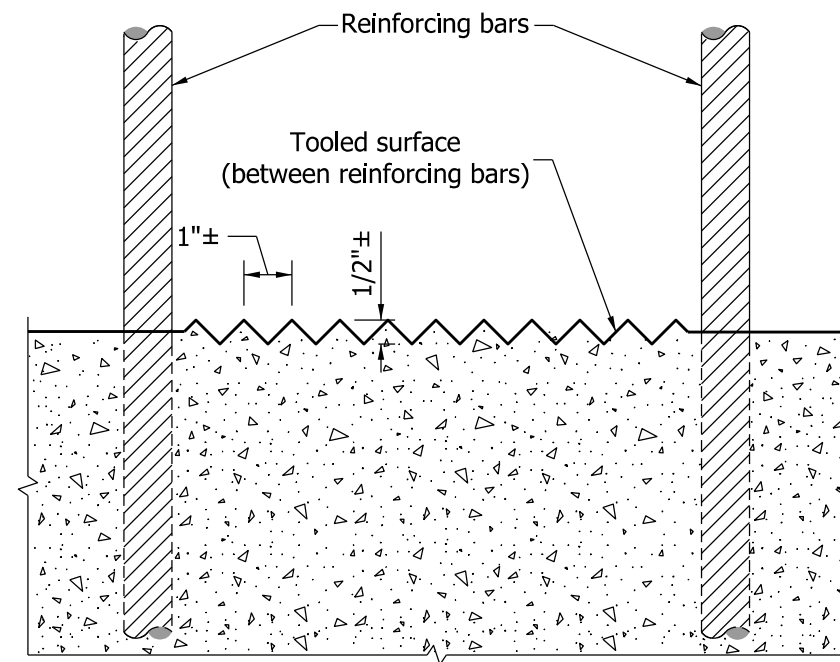


INDIANA DEPARTMENT OF TRANSPORTATION

TYPE A  
CONSTRUCTION JOINT

MARCH 2003

STANDARD DRAWING NO. E 702-CJTA-01




DETAILS PLACED IN THIS FORMAT 09/04/12

/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

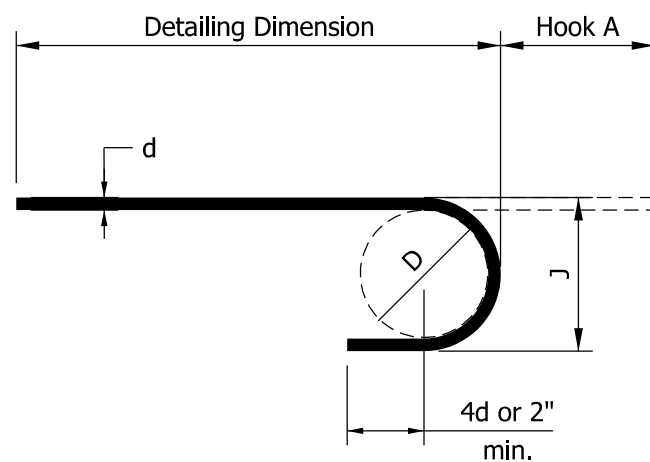

180° HOOK

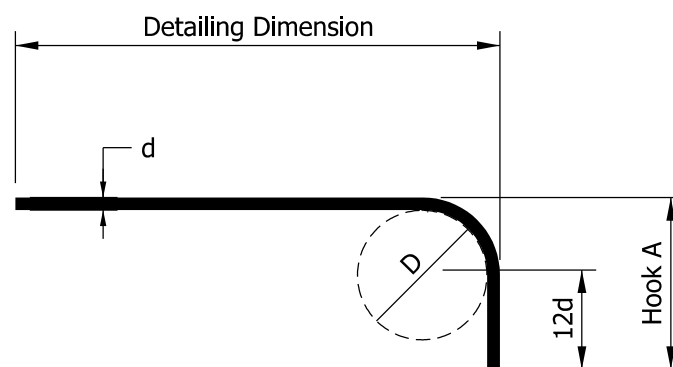






90° HOOK

## REINFORCING BAR NOTES

1. All dimensions on bending diagrams shall be measured out-to-out of bars.
2. All dimensions on details shall be measured on centerlines of bars, except where cover or cl. is indicated.
3. Bent bars will be given a numeric bar mark, e.g., 588. The last two digits, e.g., 88, indicate the mark. The characters preceding the last two digits, e.g., 5, indicate the size of the bar.
4. Bent reinforcing bars' marks on standard drawings will consist of the first digit as the bar size; the second digit, 7, indicating that it shall be placed in a bridge railing, or 8, indicating that it shall be placed in a bridge-railing transition, or 9, indicating that it shall be placed elsewhere; and the third and fourth digits as the serial number for that bar size.
5. Straight bars will be designated by size and length.
6. Standard size hooks shown shall be used on all hooked bars unless noted.
7. See the plans for lap and embedment lengths.

STANDARD END HOOKS				
		180° HOOK		90° HOOK
BAR SIZE	D	HOOK A	J	HOOK A
#3	2 1/4"	5"	3"	6"
#4	3"	6"	4"	8"
#5	3 3/4"	7"	5"	10"
#6	4 1/2"	8"	6"	1'-0"
#7	5 1/4"	10"	7"	1'-2"
#8	6"	11"	8"	1'-4"
#9	9 1/2"	1'-3"	11 3/4"	1'-7"
#10	10 3/4"	1'-5"	1'-1 1/4"	1'-10"
#11	12"	1'-7"	1'-2 3/4"	2'-0"
#14	18 1/4"	2'-3"	1'-9 3/4"	2'-7"
#18	24"	3'-0"	2'-4 1/2"	3'-5"

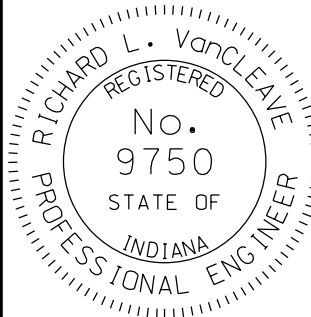INDIANA DEPARTMENT OF TRANSPORTATION	
BAR BENDING DETAILS	
SEPTEMBER 2012	
STANDARD DRAWING NO.	E 703-BRST-01
	<div> <div>/s/ <i>Richard L. VanCleave</i></div> <div>09/04/12</div> <div>SUPERVISOR, ROADWAY STANDARDS</div> <div>DATE</div> </div> <div> <div>/s/ <i>Mark A. Miller</i></div> <div>09/04/12</div> <div>CHIEF ENGINEER</div> <div>DATE</div> </div>

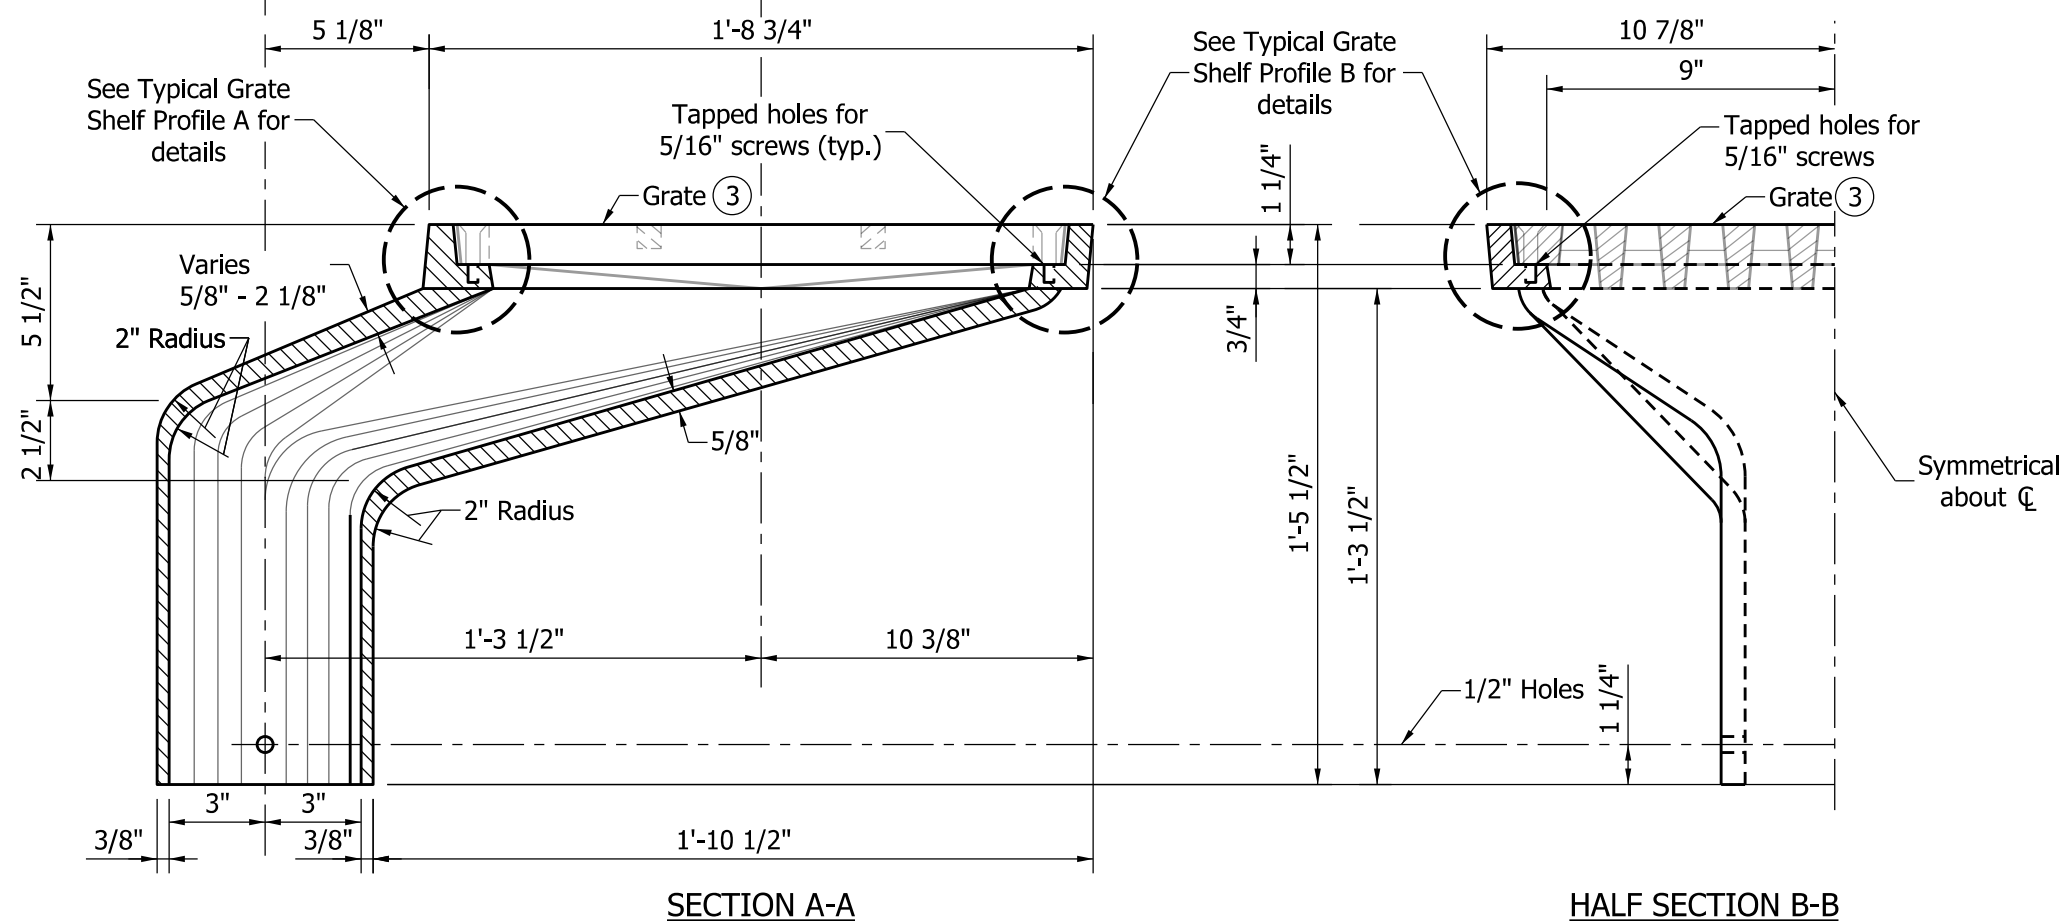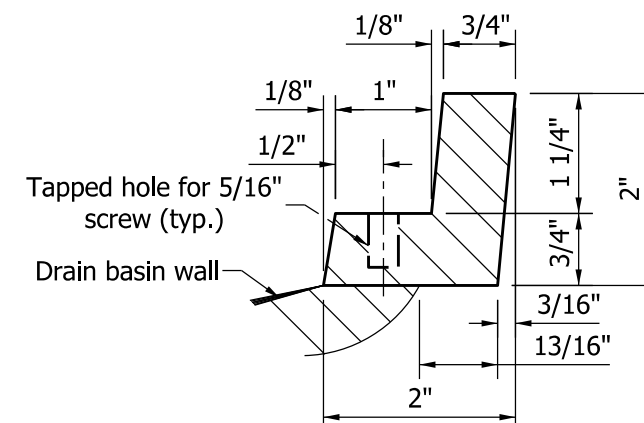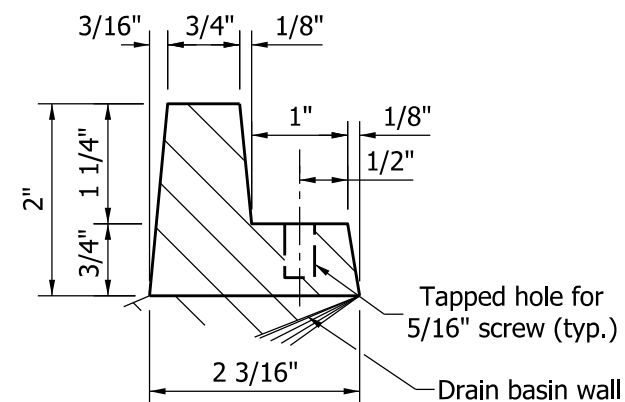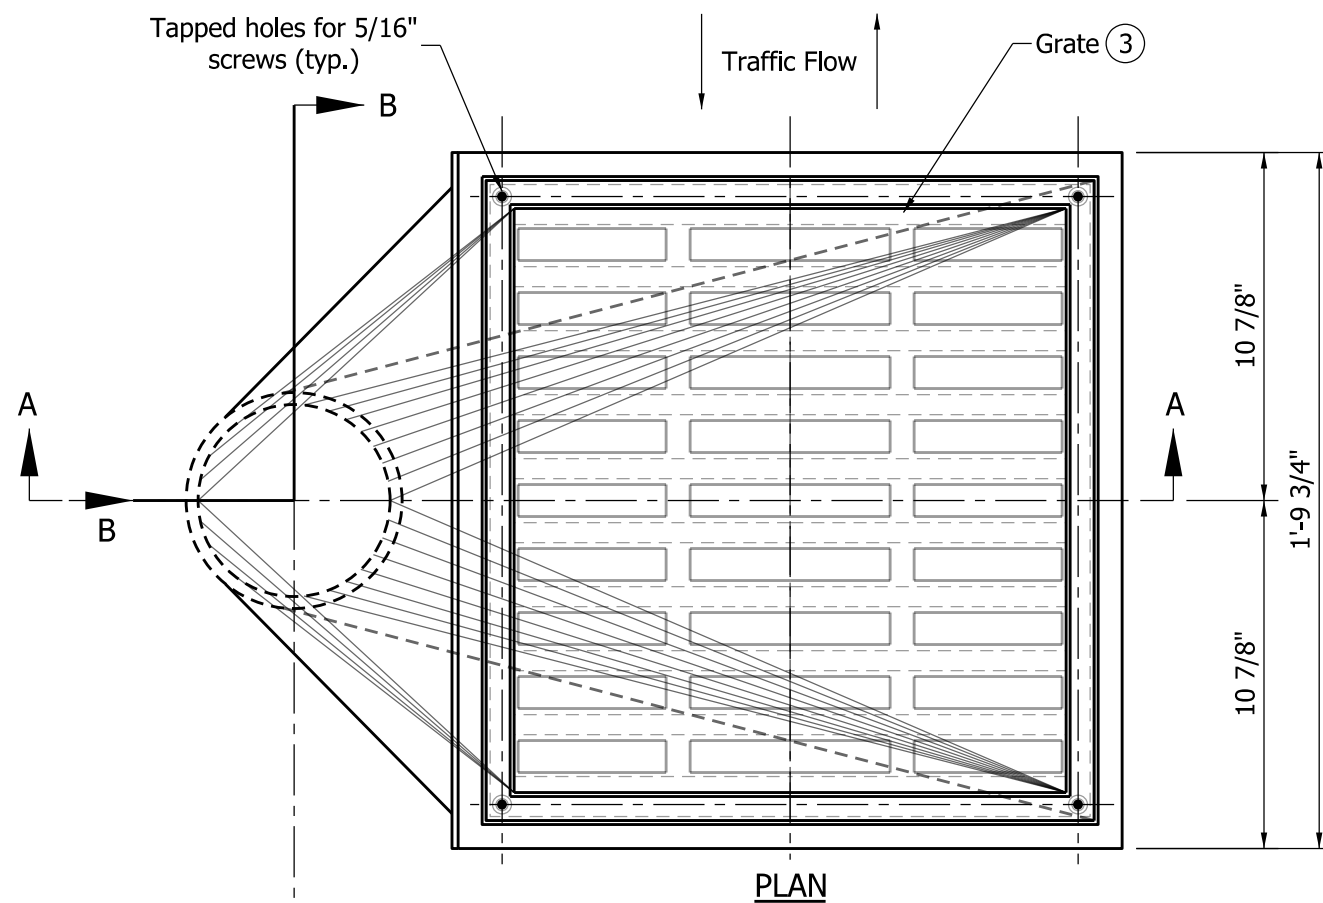

## NOTES


- See Standard Drawing E 715-BDCG-01 for deck drain casting extension pipe details.
- See Standard Drawing E 704-BDCG-05 for adjusting frame details.
- (3) See Standard Drawing E 704-BDCG-02 for grate details.

INDIANA DEPARTMENT OF TRANSPORTATION

DECK DRAIN  
TYPE OS

SEPTEMBER 2012

STANDARD DRAWING NO. E 704-BDCG-01




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE


② 3/8" countersunk  
holes for screws  
(typ.)

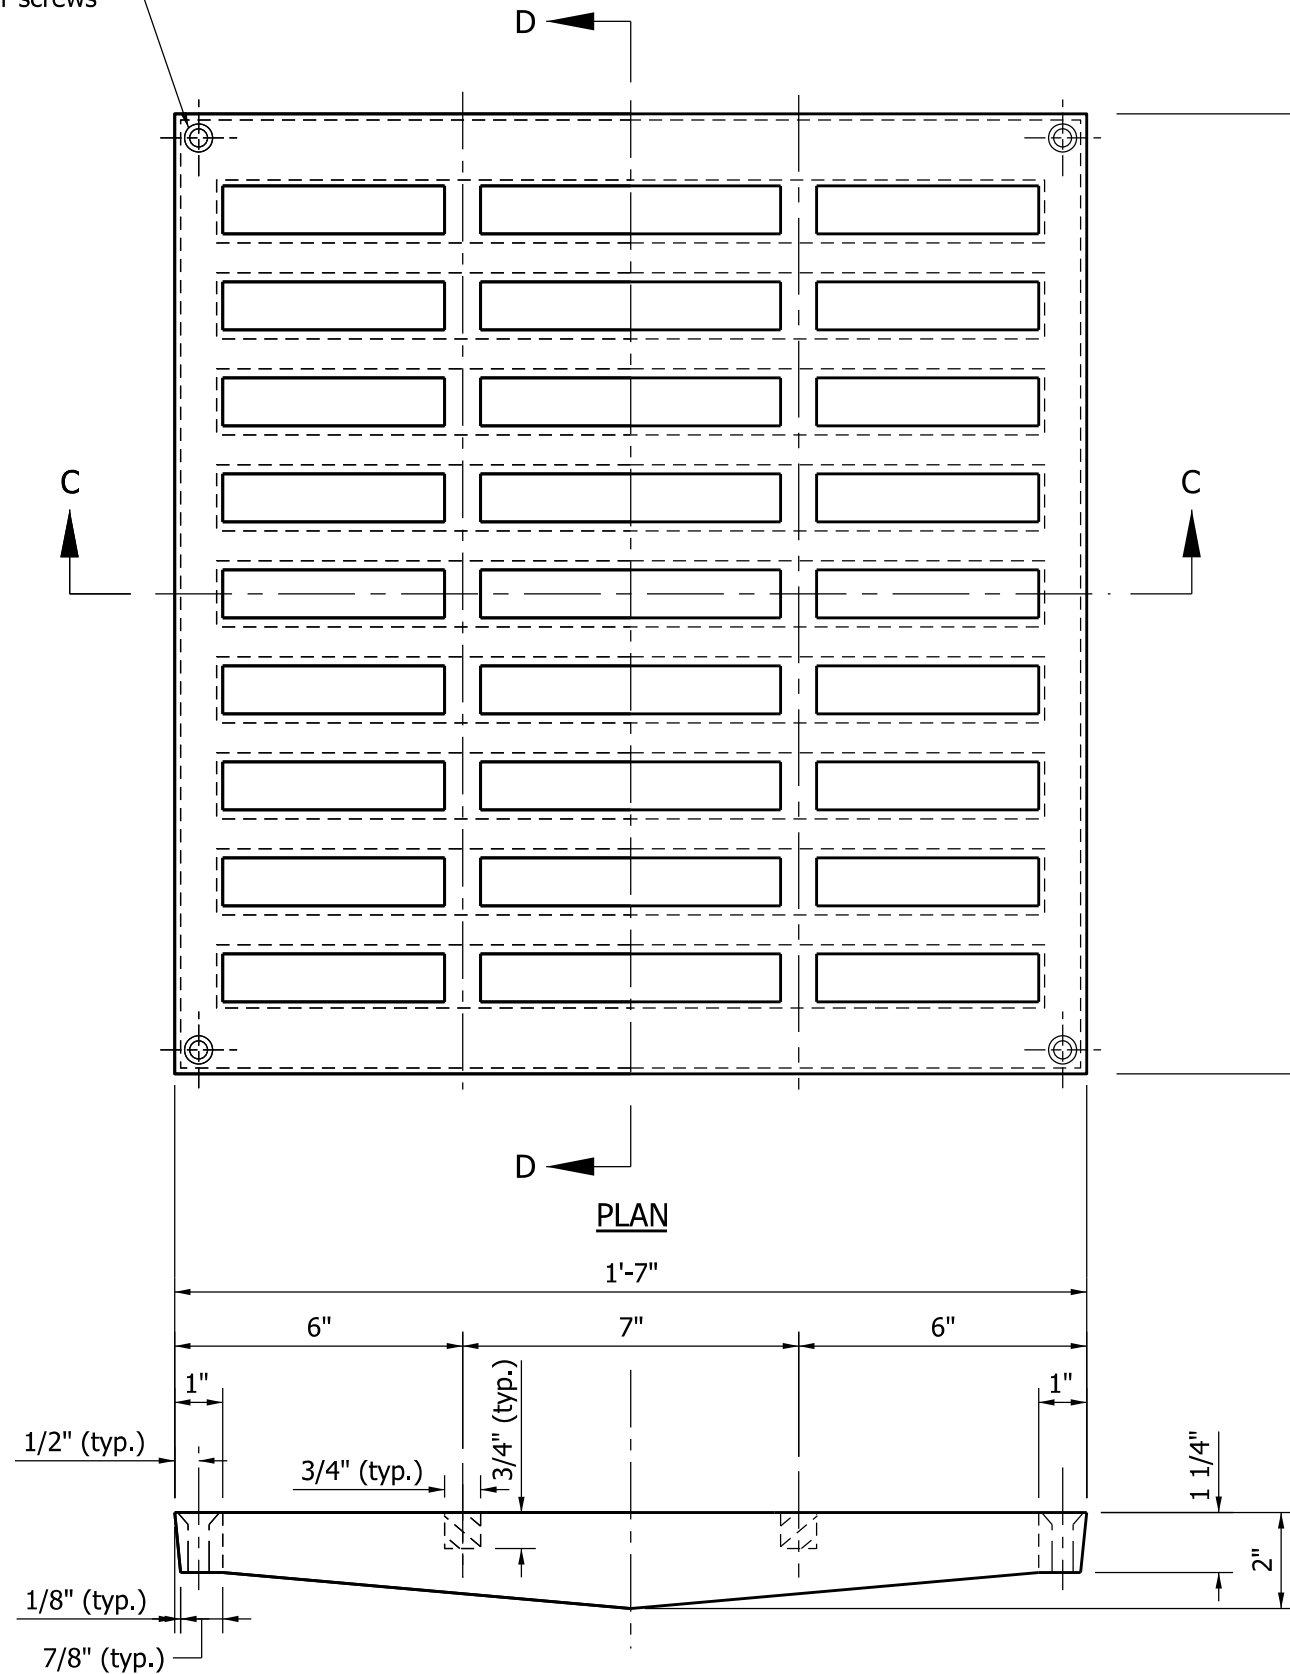

PLAN

SECTION C-C

Varies (2" @  $\phi$ )

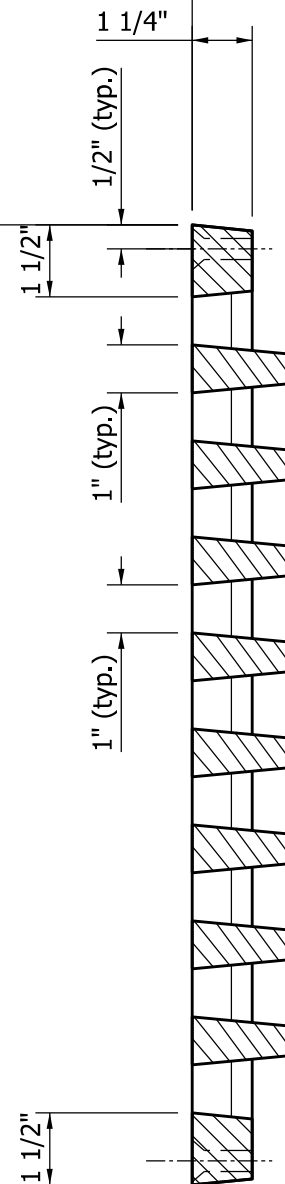

SECTION D-D

## NOTES


1. This grate used with Type OS deck drain. See Standard Drawing E 704-BDCG-01 for deck drain details.
- ② 4 - 5/16" x 1 3/4" flat-head stainless steel screws required for each grate.

INDIANA DEPARTMENT OF TRANSPORTATION

DECK DRAIN TYPE OS  
GRATE

SEPTEMBER 2012

STANDARD DRAWING NO. E 704-BDCG-02



/s/ *Richard L. VanCleave* 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ *Mark A. Miller* 09/04/12


CHIEF ENGINEER DATE



1. See Standard Drawing E 715-BDCG-01 for deck drain casting extension pipe details.
2. See Standard Drawing E 704-BDCG-05 for adjusting frame details.
- ③ 3. See Standard Drawing E 704-BDCG-04 for grate details.

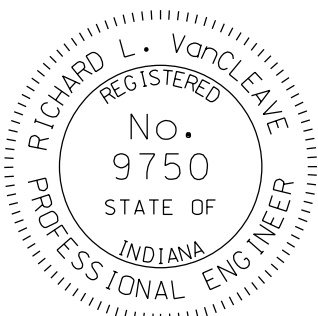INDIANA DEPARTMENT OF TRANSPORTATION	
DECK DRAIN TYPE SQ	
SEPTEMBER 2012	
STANDARD DRAWING NO. E 704-BDCG-03	
	<div><div><i>/s/ Richard L. VanCleave</i>09/04/12</div><div>SUPERVISOR, ROADWAY STANDARDSDATE</div><div><i>/s/ Mark A. Miller</i>09/04/12</div><div>CHIEF ENGINEERDATE</div></div>




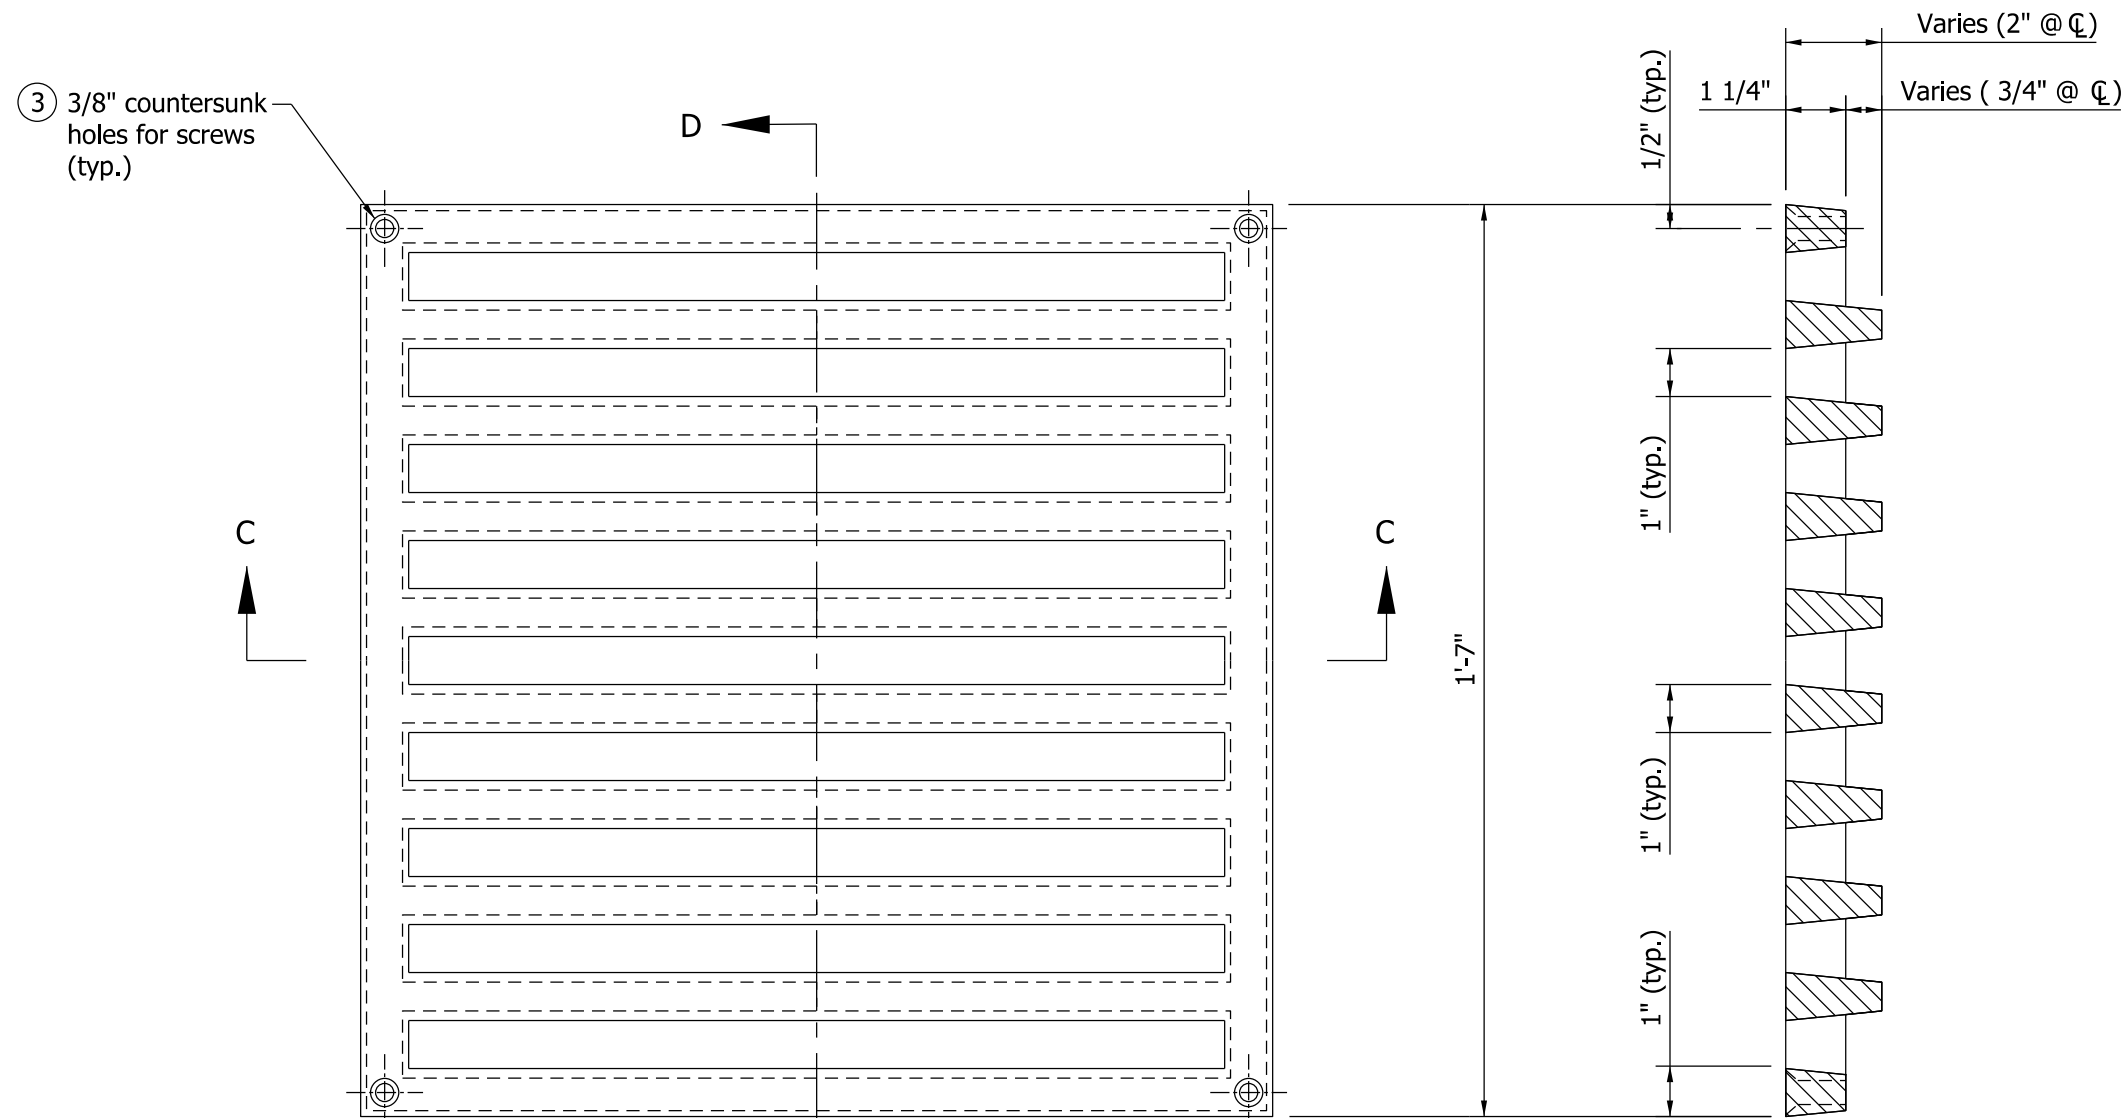


# NOTES

1. See the floor details on the plans for orientation of the grate.
2. This grate used with Type SQ deck drain. See Standard Drawing E 704-BDCG-03 for deck drain details.
- ③ 4 - 5/16" x 1 3/4" flat-head stainless steel screws required for each grate.


INDIANA DEPARTMENT OF TRANSPORTATION			
DECK DRAIN TYPE SQ GRATE			
SEPTEMBER 2012			
STANDARD DRAWING NO.		E 704-BDCG-04	
	/s/ <i>Richard L. VanCleave</i>		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ <i>Mark A. Miller</i>		09/04/12
	CHIEF ENGINEER		DATE

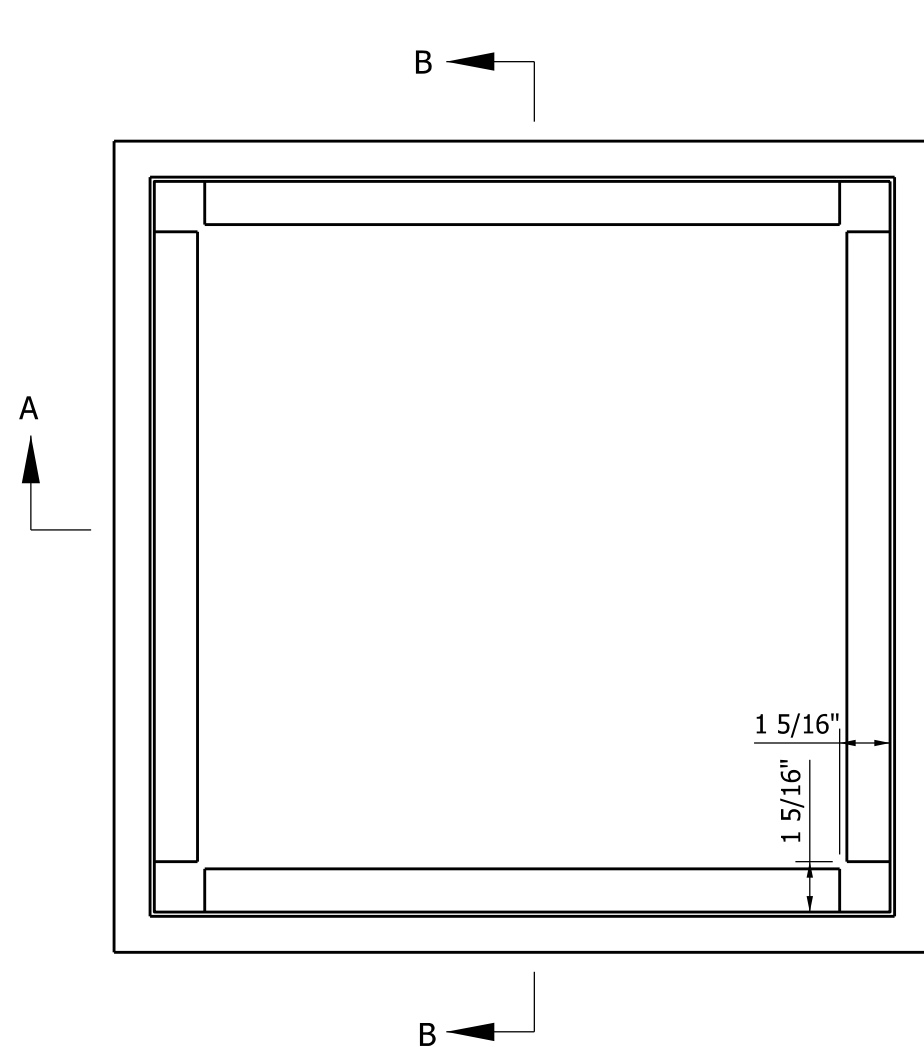

PLAN VIEW

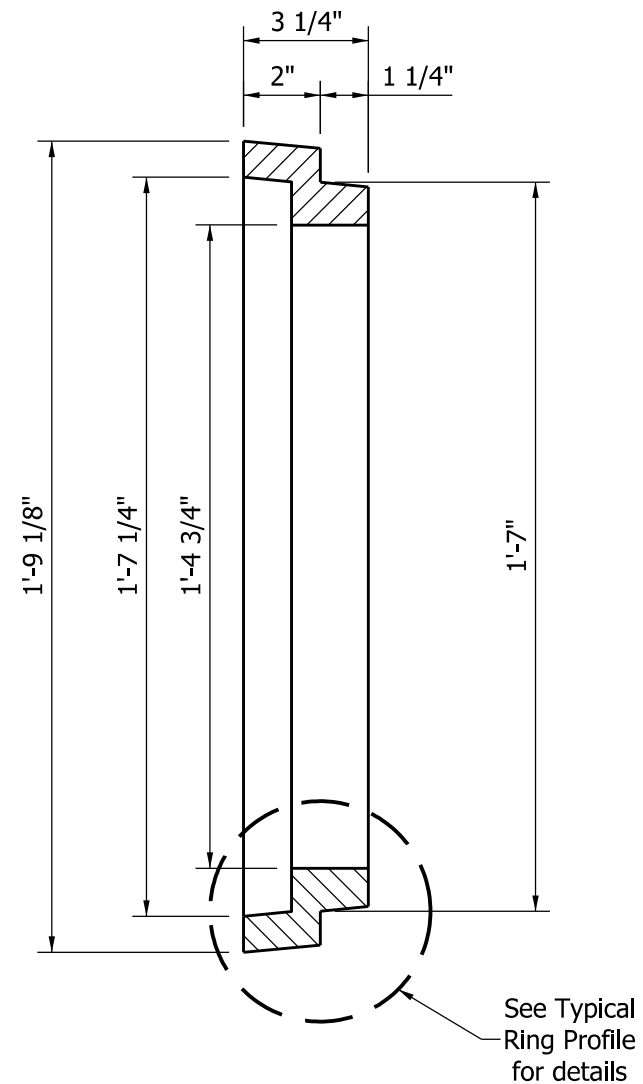


SECTION B-B

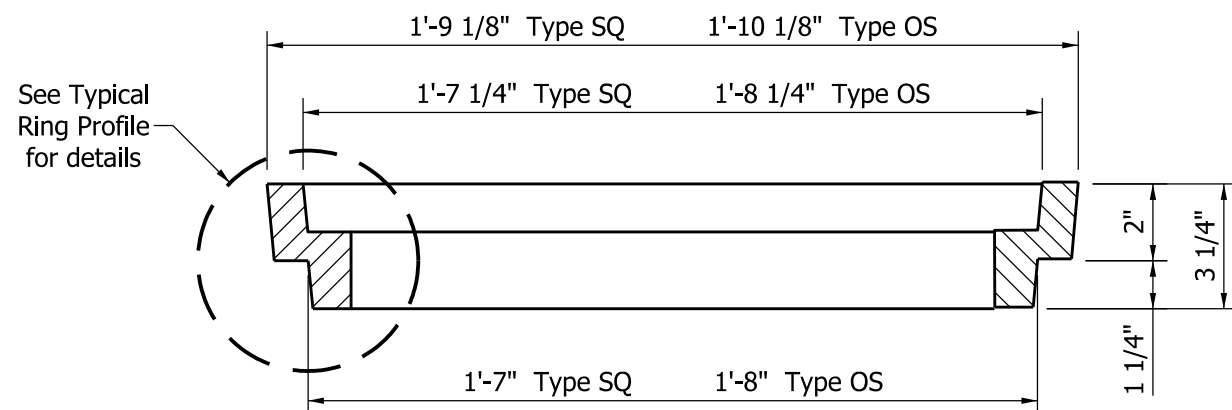

SECTION A-A

NOTES

1. 4 - 5/16" x 3 3/4" flat-head stainless steel screws required when frame is used.


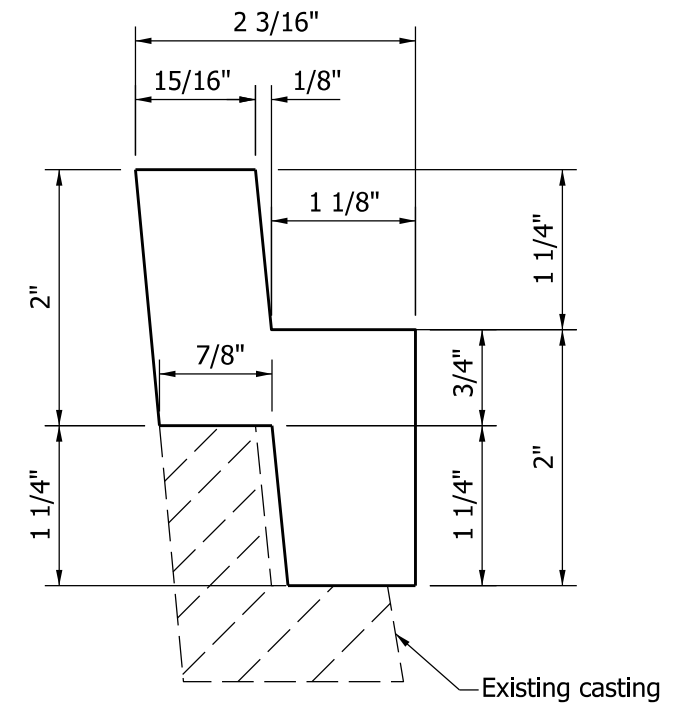


TYPICAL RING PROFILE


INDIANA DEPARTMENT OF TRANSPORTATION		
DECK DRAIN TYPE OS OR SQ ADJUSTING FRAME		
SEPTEMBER 2012		
STANDARD DRAWING NO.		E 704-BDCG-05
	/s/ <i>Richard L. VanCleave</i>	09/04/12
	SUPERVISOR, ROADWAY STANDARDS	DATE
	/s/ <i>Mark A. Miller</i>	09/04/12
	CHIEF ENGINEER	DATE

NOTE

1. See plans for drain spacing.

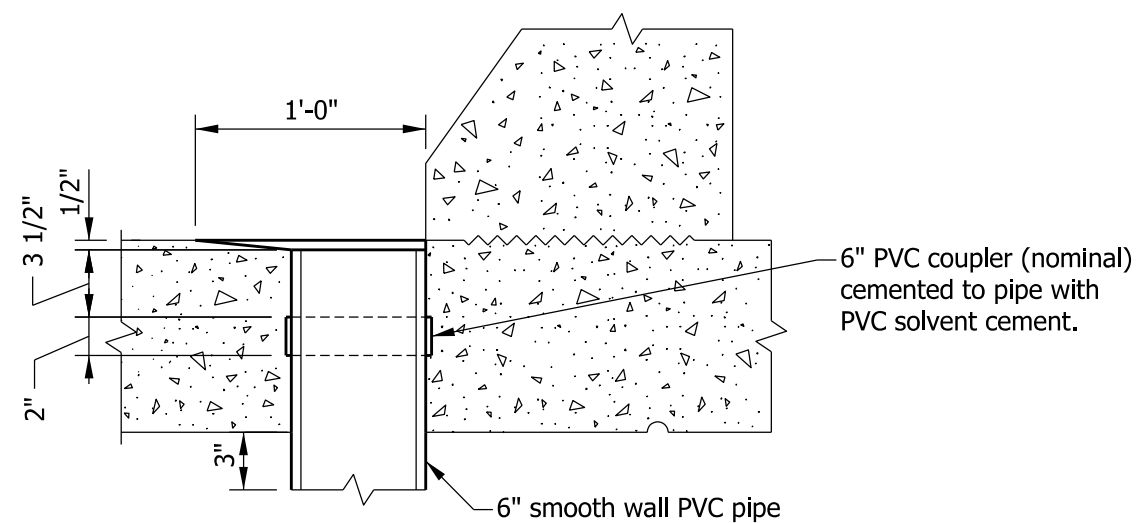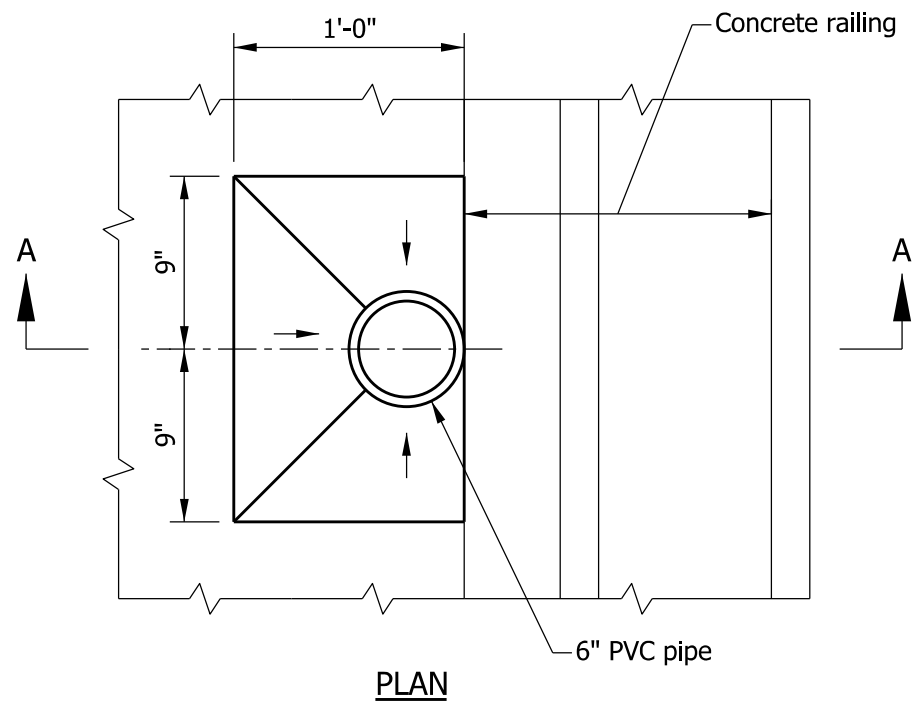




6" SMOOTH WALL PVC PIPE

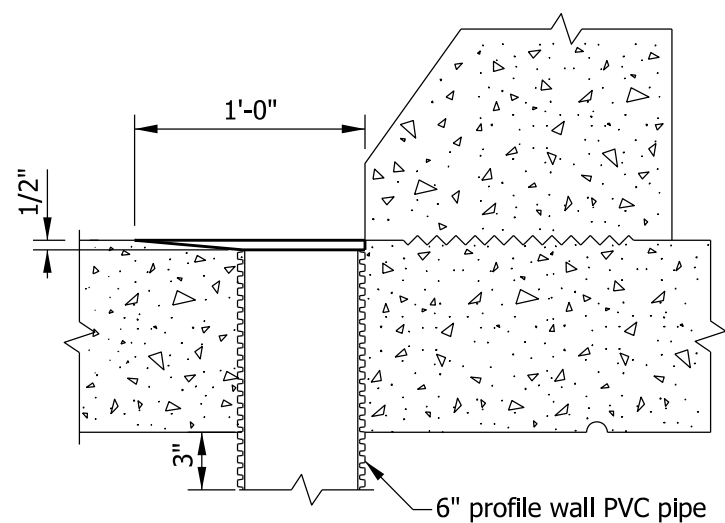

6" PROFILE WALL PVC PIPE

SECTION A-A

INDIANA DEPARTMENT OF TRANSPORTATION			
SLAB BRIDGE FLOOR DRAIN DETAIL			
SEPTEMBER 2012			
STANDARD DRAWING NO.		E 704-SBFD-01	
	/s/ <i>Richard L. VanCleave</i>		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ <i>Mark A. Miller</i>		09/04/12
	CHIEF ENGINEER		DATE

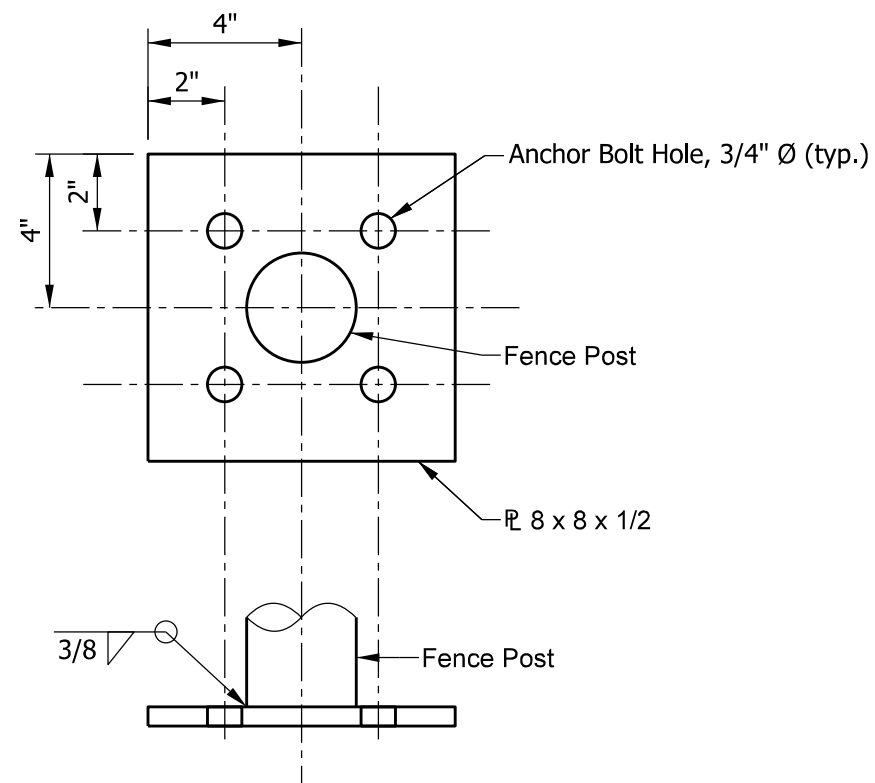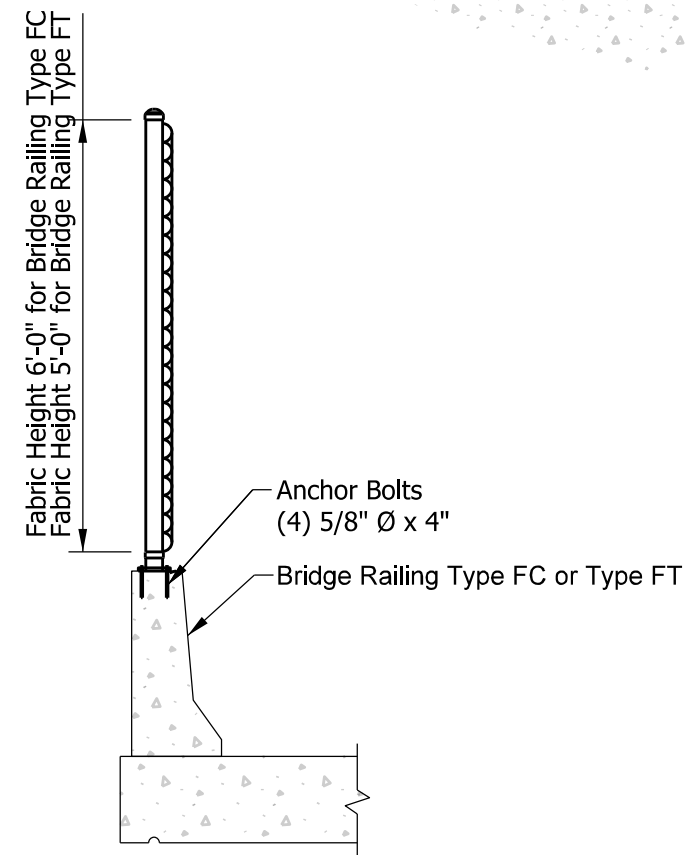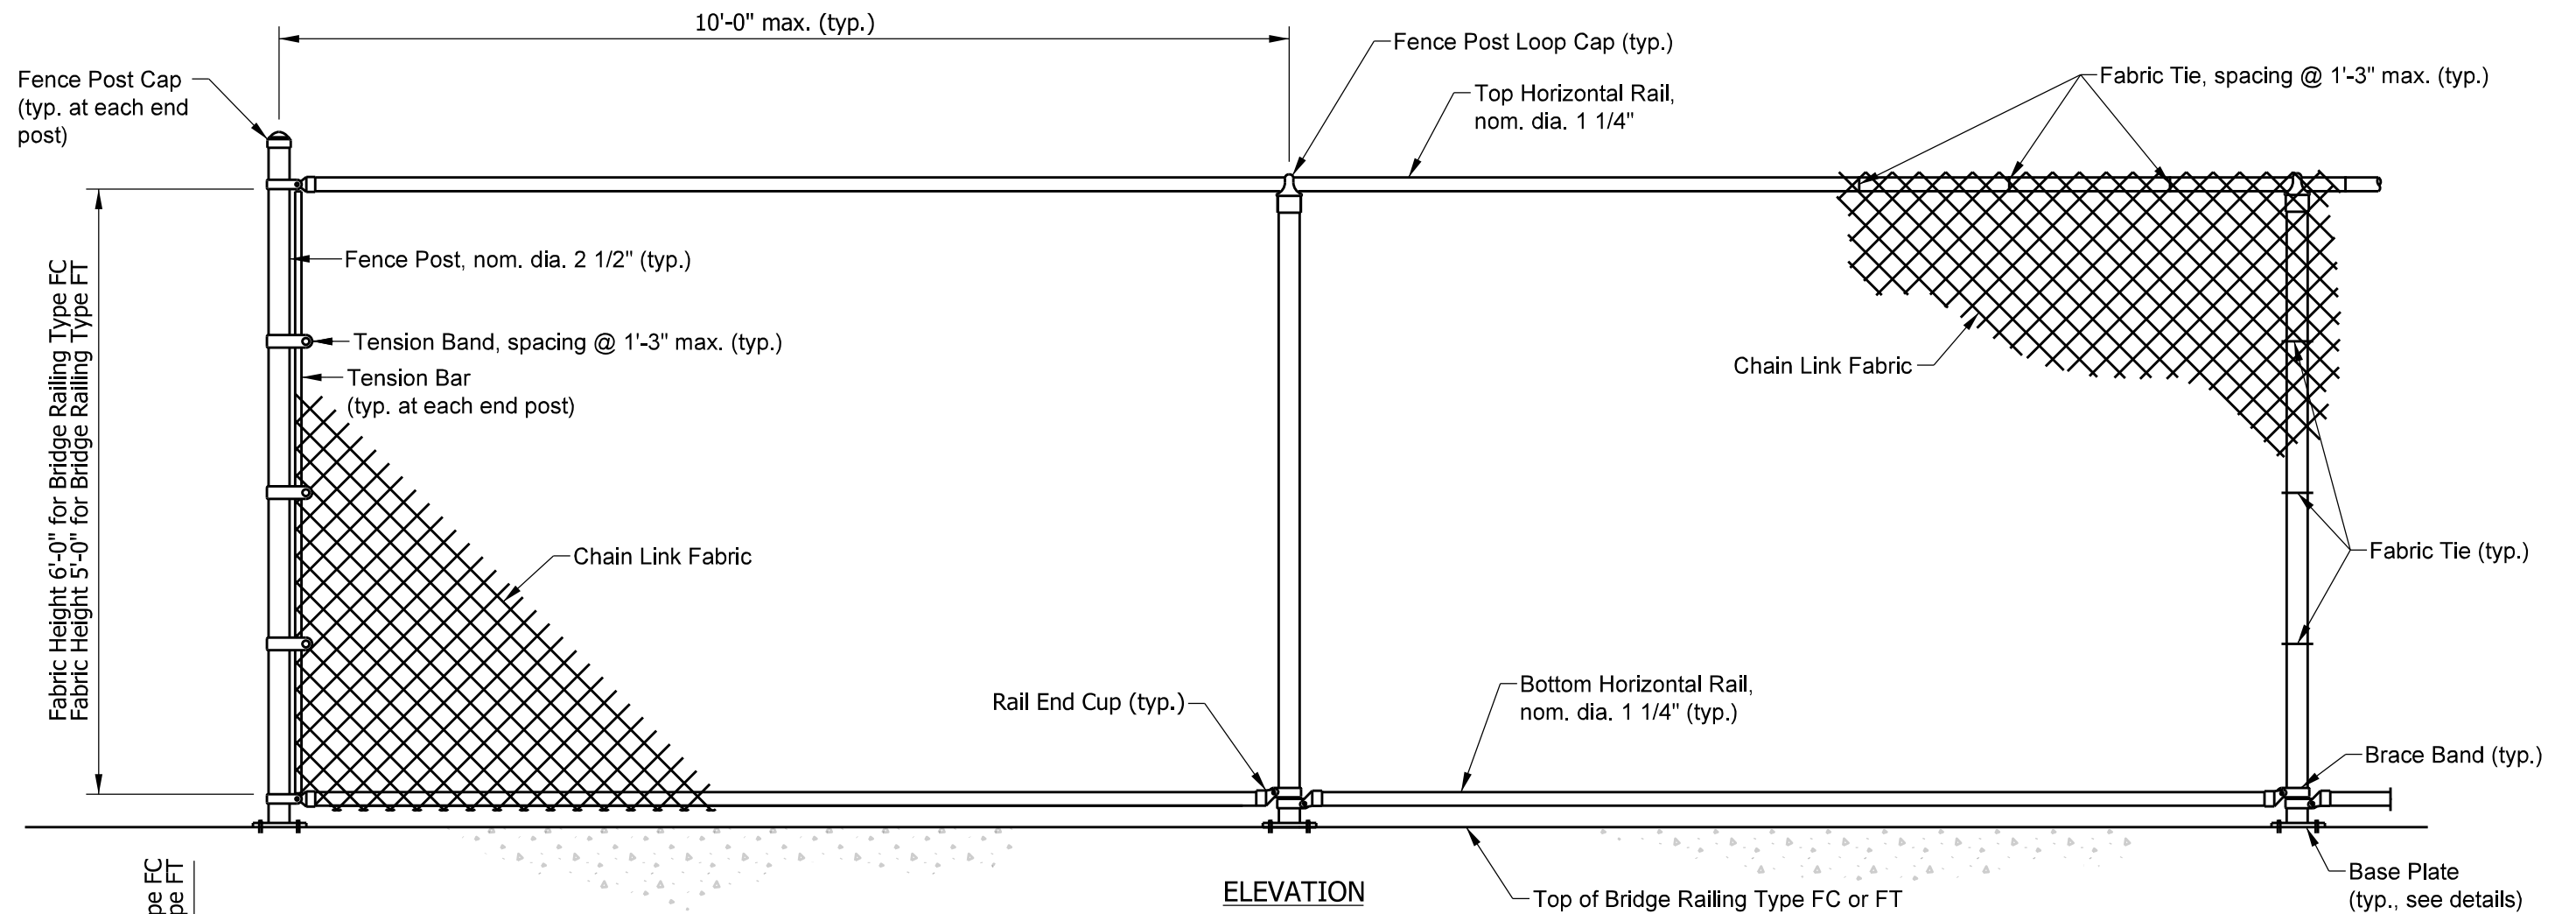


INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING  
PEDESTRIAN FENCE

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRPF-01




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

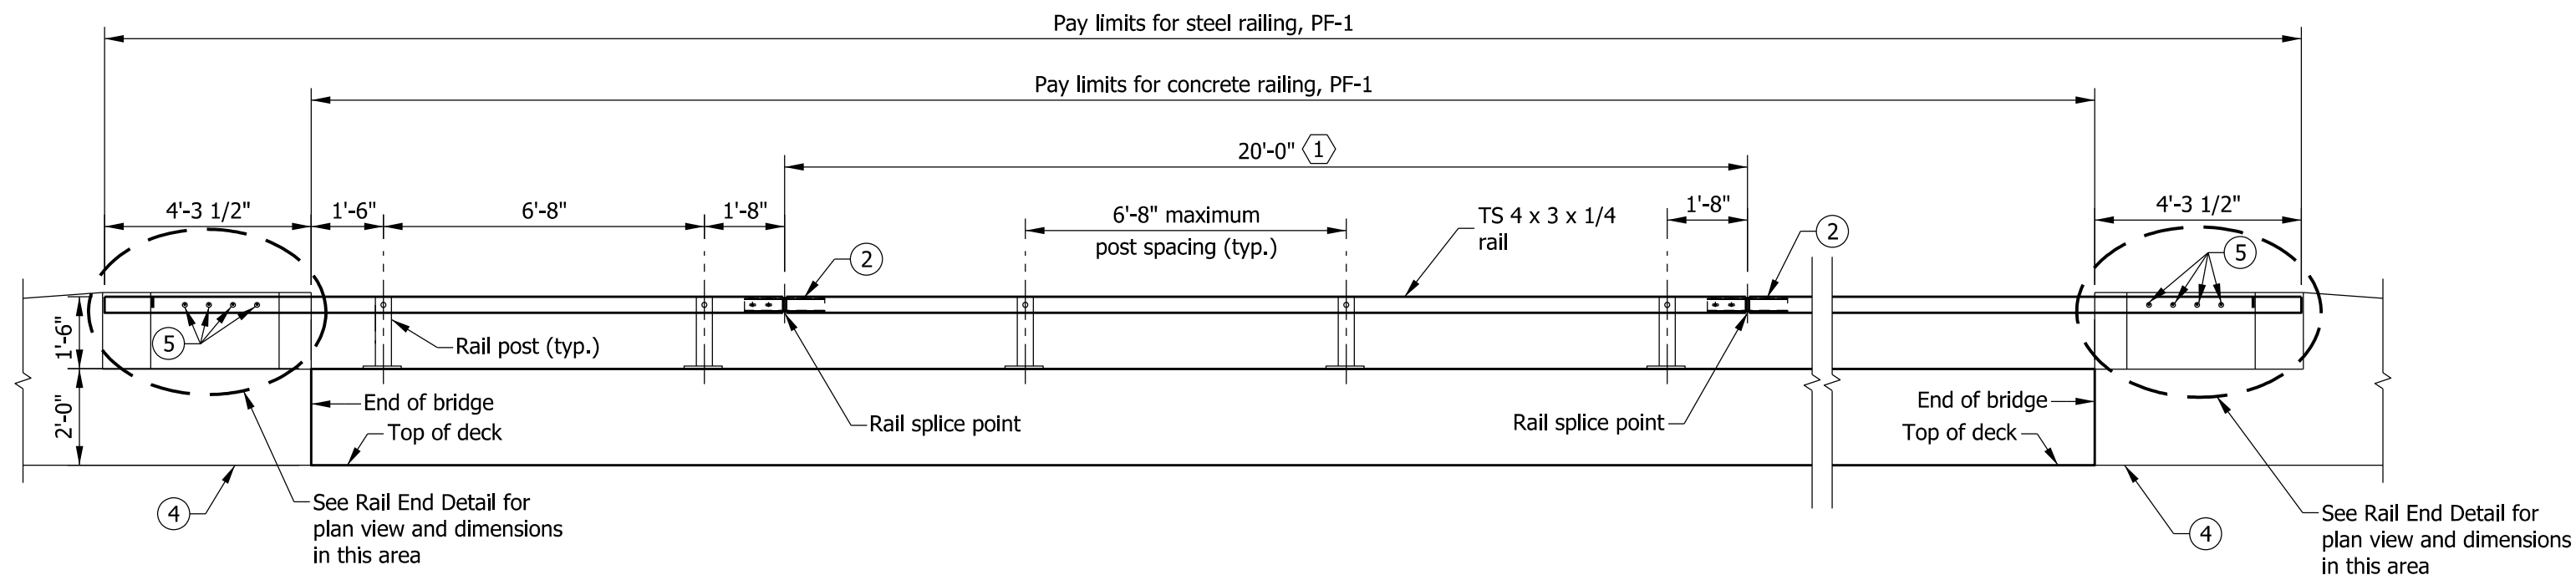

### ELEVATION


### NOTES

1. See Standard Drawing E 706-BRPP-06 for General Notes ①.
- ② See Standard Drawing E 706-BRPP-05 for rail tube details and rail splice details.
- ③ See Standard Drawing E 706-BRPP-06 for base plate detail and reinforcing-bar bends.
- ④ Concrete bridge railing transition, TPF-1. See Standard Drawings E 706-TTPP-01 and -02 for details.
- ⑤ 3/4" Ø x 11 1/2" round-head bolt in 7/8" Ø hole. Hole shall be slotted as required for expansion.
- ⑥ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

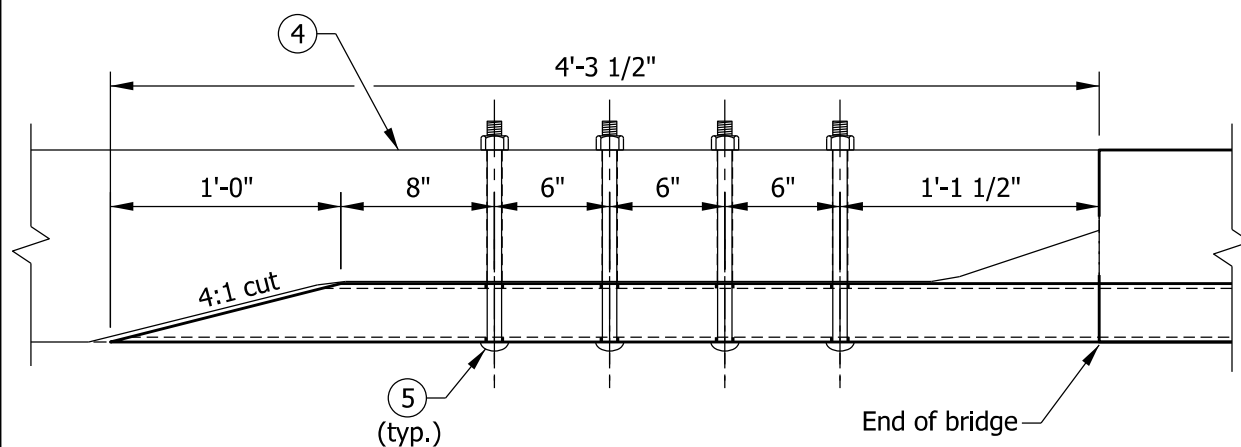

Plan view of TS 4 x 3 x 1/4

### RAIL END DETAIL

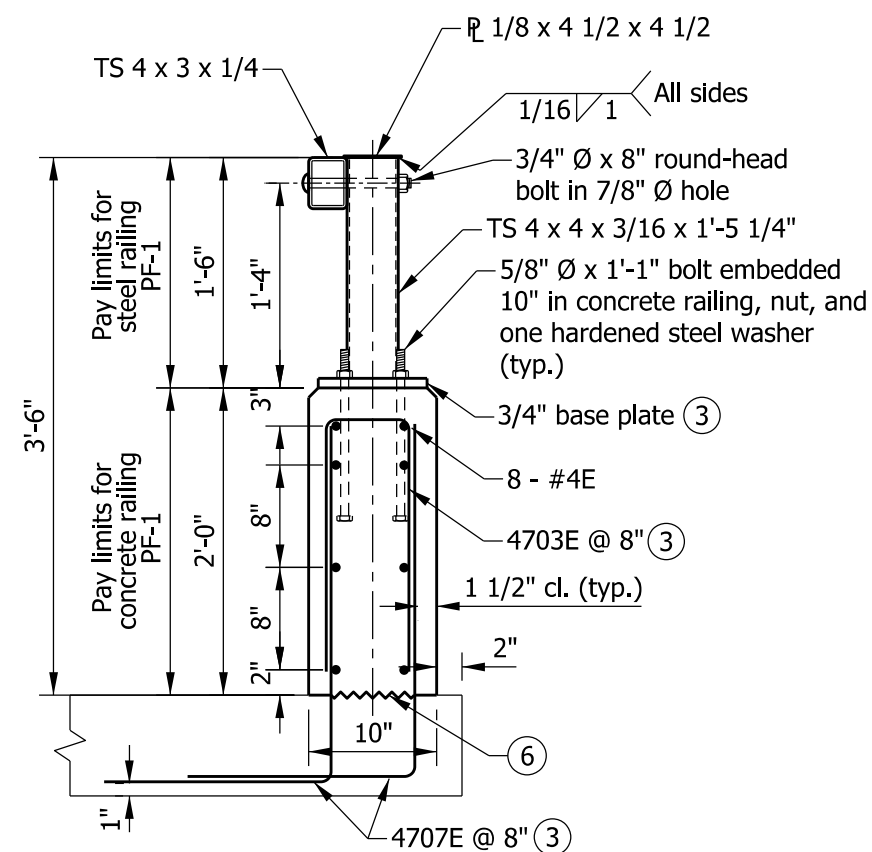

### TYPICAL SECTION


QUANTITIES FOR ONE RUNNING FOOT OF RAILING	
Concrete, class C	1.66 CFT
Reinforcing bars	17.0 LBS

### INDIANA DEPARTMENT OF TRANSPORTATION

### RAILING, PF-1

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRPP-01




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

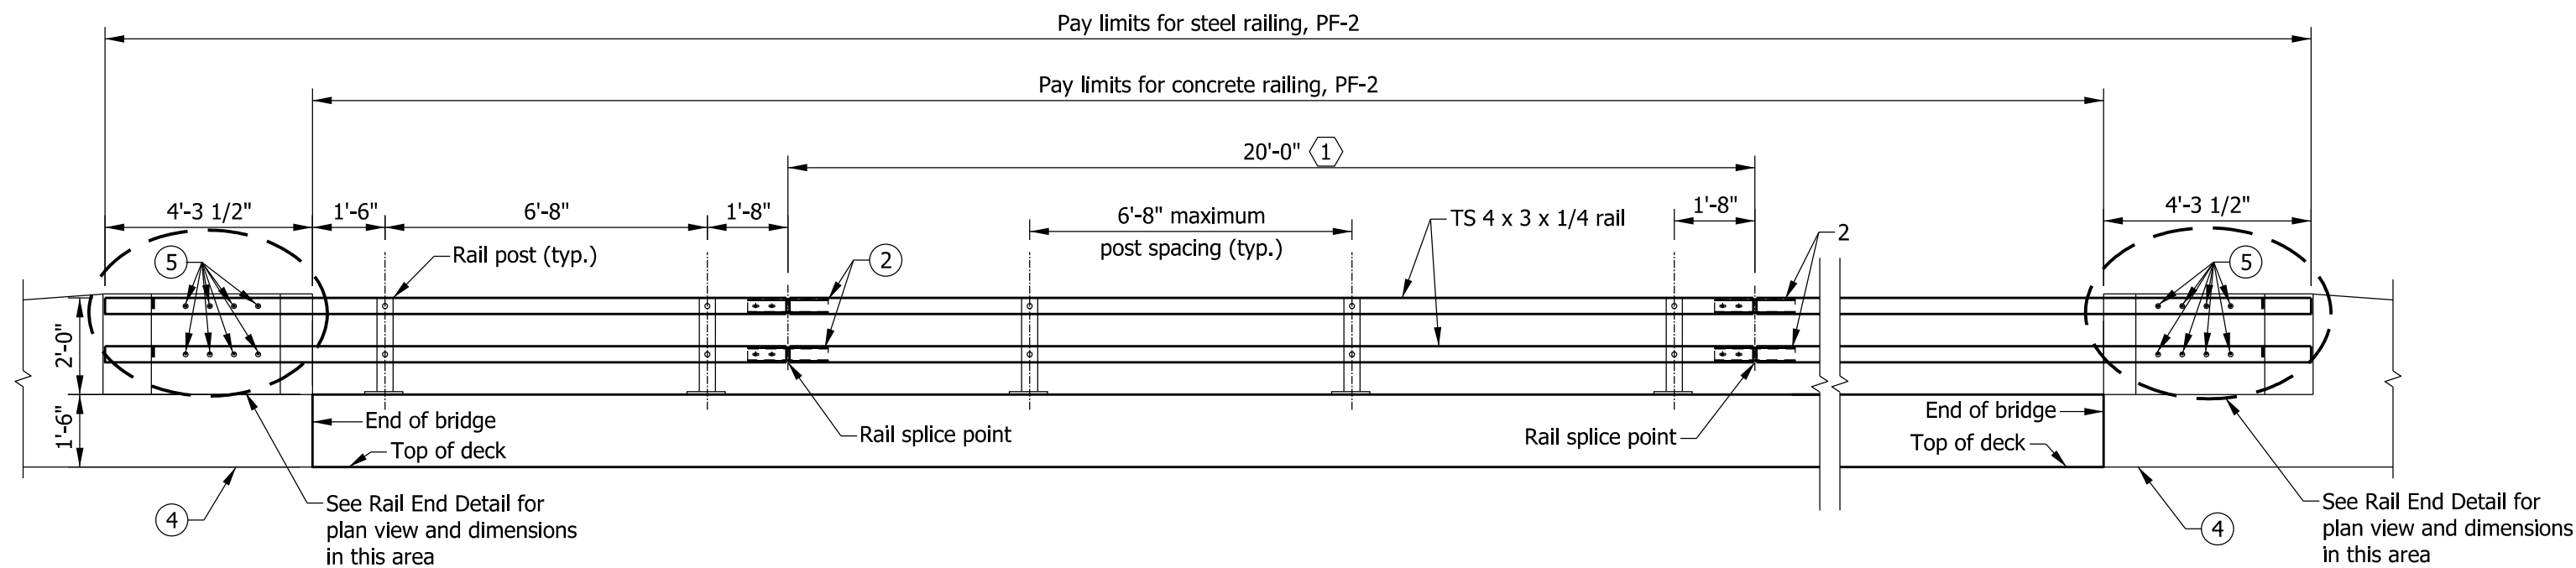


### ELEVATION

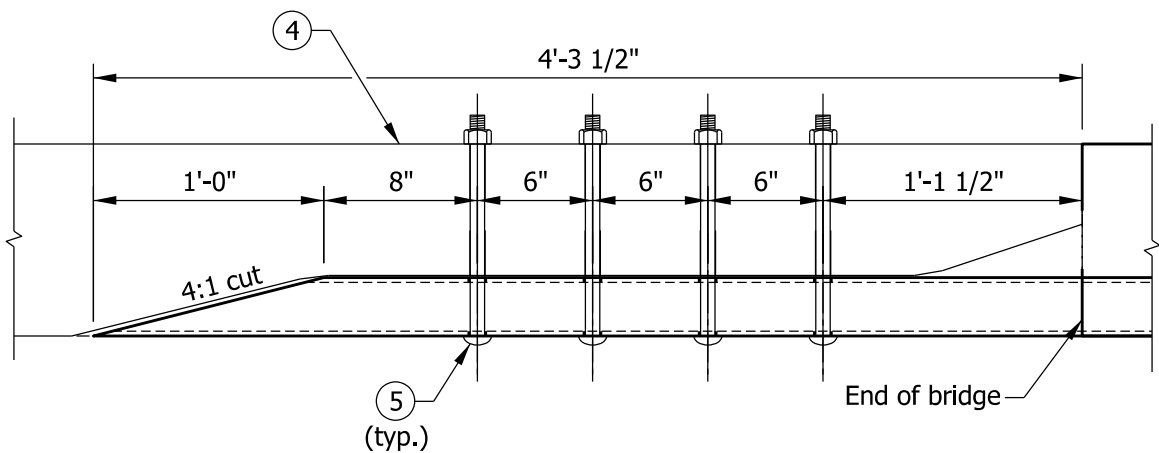

Plan view of TS 4 x 3 x 1/4

### RAIL END DETAIL

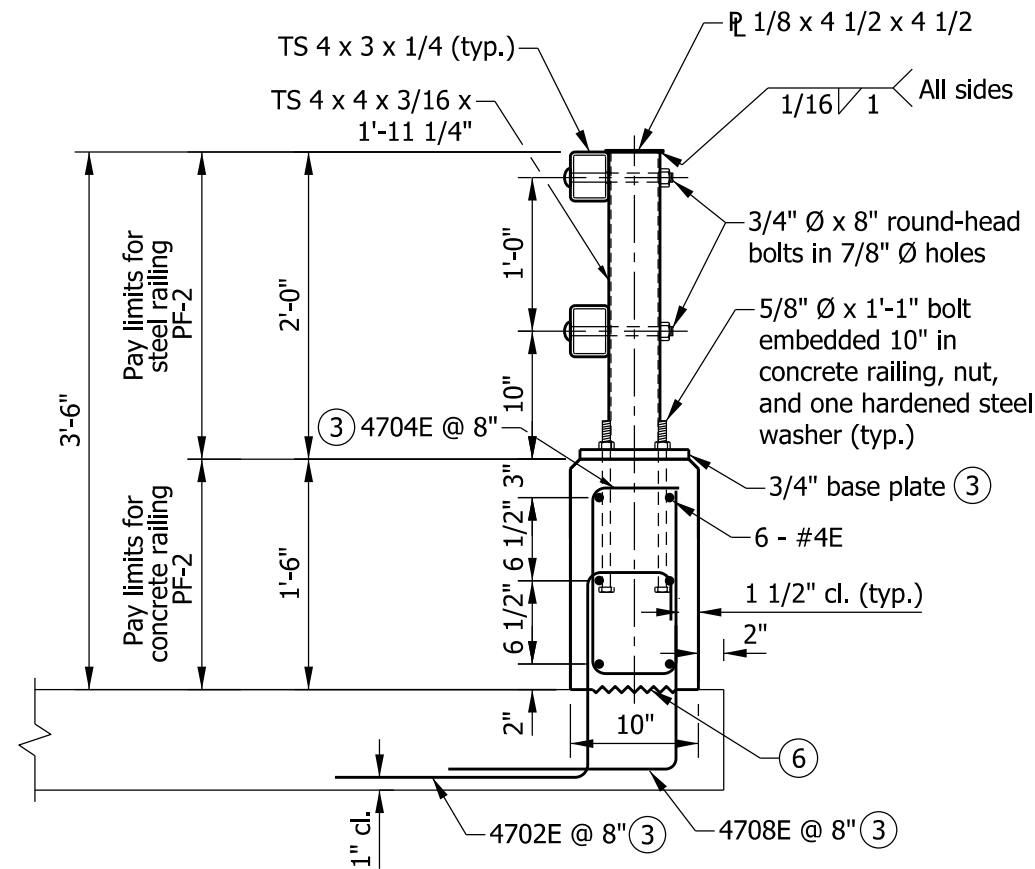

### TYPICAL SECTION

### NOTES


1. See Standard Drawing E 706-BRPP-06 for General Notes ①.
- ② See Standard Drawing E 706-BRPP-05 for rail tube details and rail splice details.
- ③ See Standard Drawing E 706-BRPP-06 for base plate detail and reinforcing-bar bends.
- ④ Concrete bridge railing transition, TPF-2. See Standard Drawings E 706-TTPP-03 and -04 for details.
- ⑤ 3/4" Ø x 11 1/2" round-head bolt in 7/8" Ø hole. Hole shall be slotted as required for expansion.
- ⑥ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

### INDIANA DEPARTMENT OF TRANSPORTATION

### RAILING, PF-2

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRPP-02






/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

QUANTITIES FOR ONE RUNNING FOOT OF RAILING	
Concrete, class C	1.25 CFT
Reinforcing bars	14.1 LBS

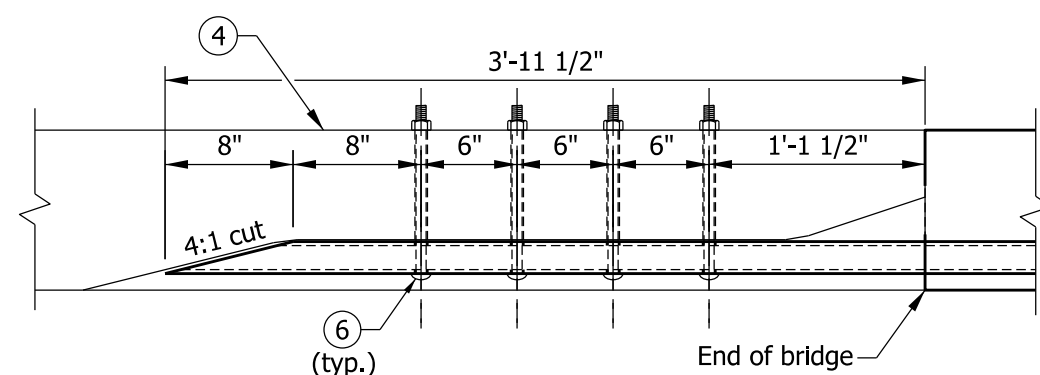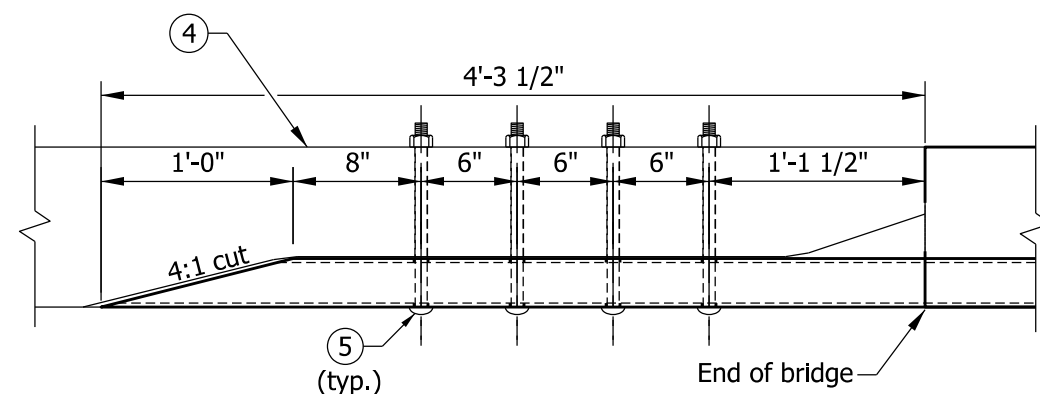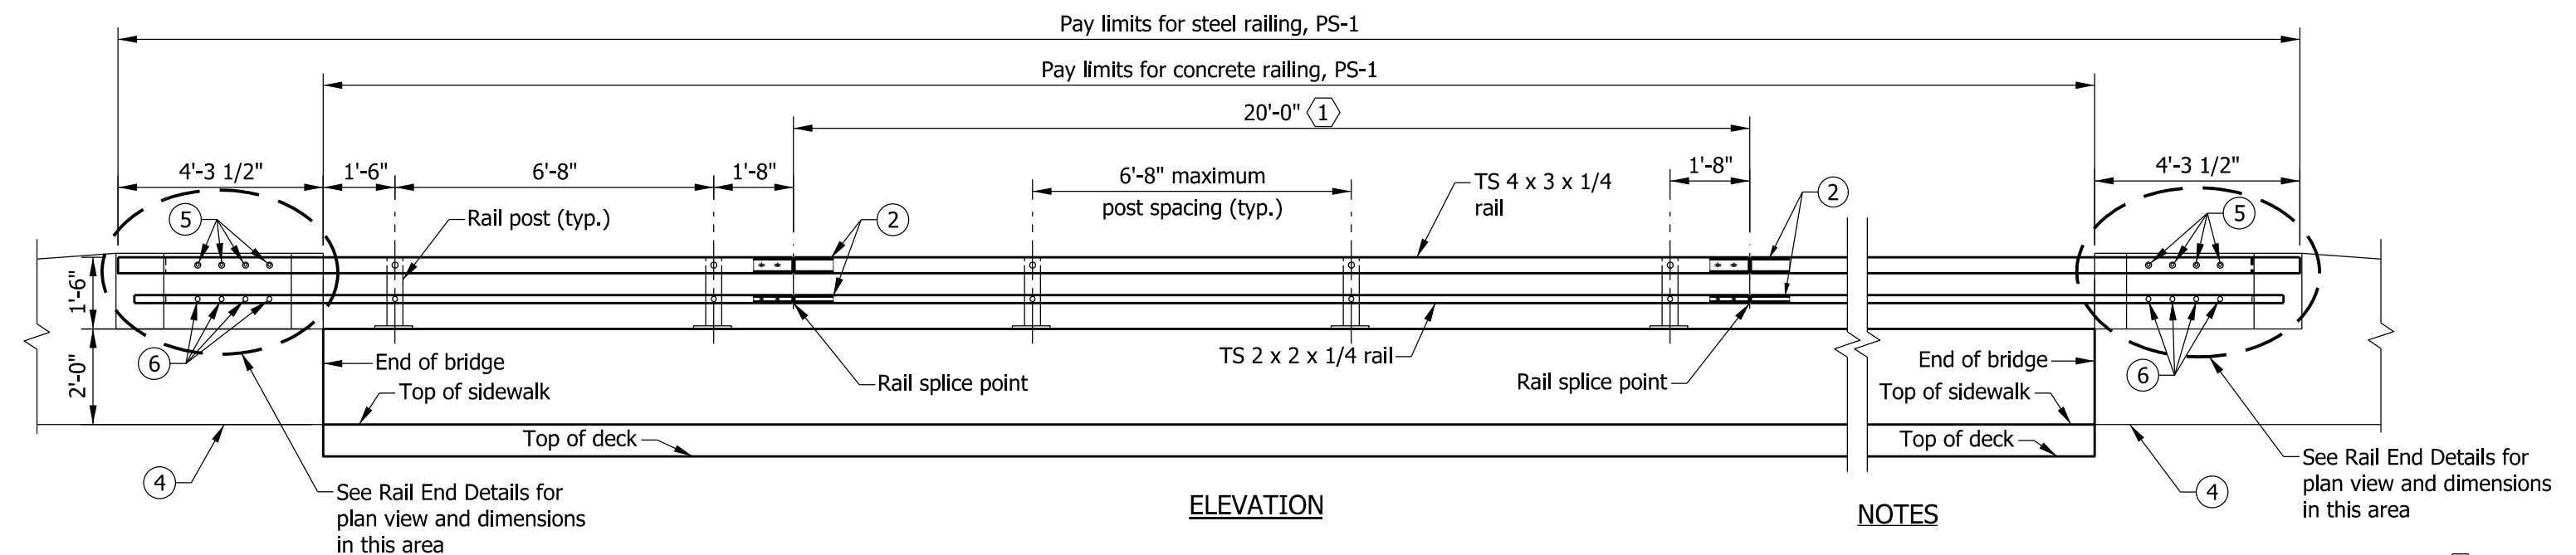

### RAIL END DETAILS

QUANTITIES FOR ONE RUNNING FOOT OF RAILING	
Concrete, class C	2.30 CFT
Reinforcing bars	19.6 LBS

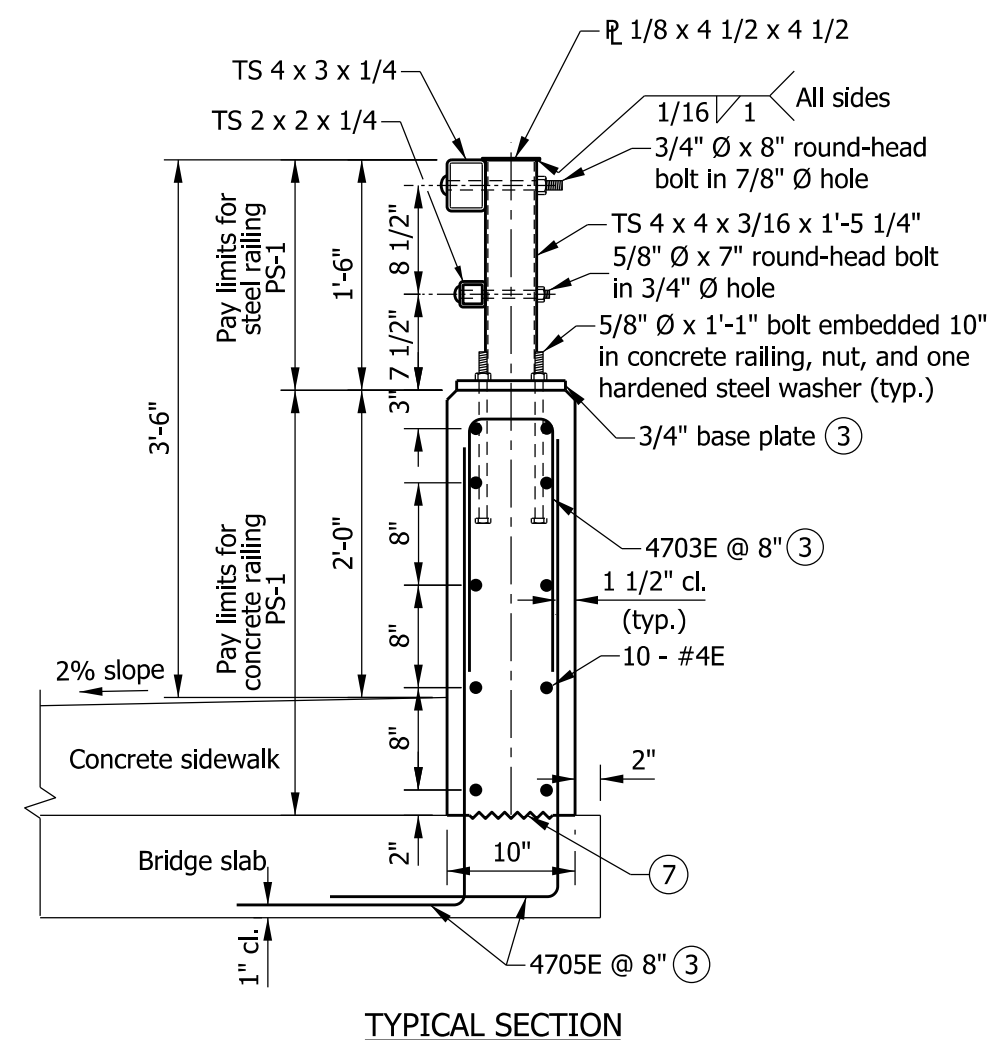

### NOTES


- See Standard Drawing E 706-BRPP-06 for General Notes (1).
- See Standard Drawing E 706-BRPP-05 for rail tube details and rail splice details.
- See Standard Drawing E 706-BRPP-06 for base plate detail and reinforcing-bar bends.
- Concrete bridge railing transition, TPS-1. See Standard Drawings E 706-TTPP-05 and -06 for details.
- 3/4" Ø x 11 1/2" round-head bolt in 7/8" Ø hole. Hole shall be slotted as required for expansion.
- 5/8" Ø x 10 1/2" round-head bolt in 3/4" Ø hole. Hole shall be slotted as required for expansion.
- Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

## INDIANA DEPARTMENT OF TRANSPORTATION

### RAILING, PS-1

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRPP-03




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE



/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

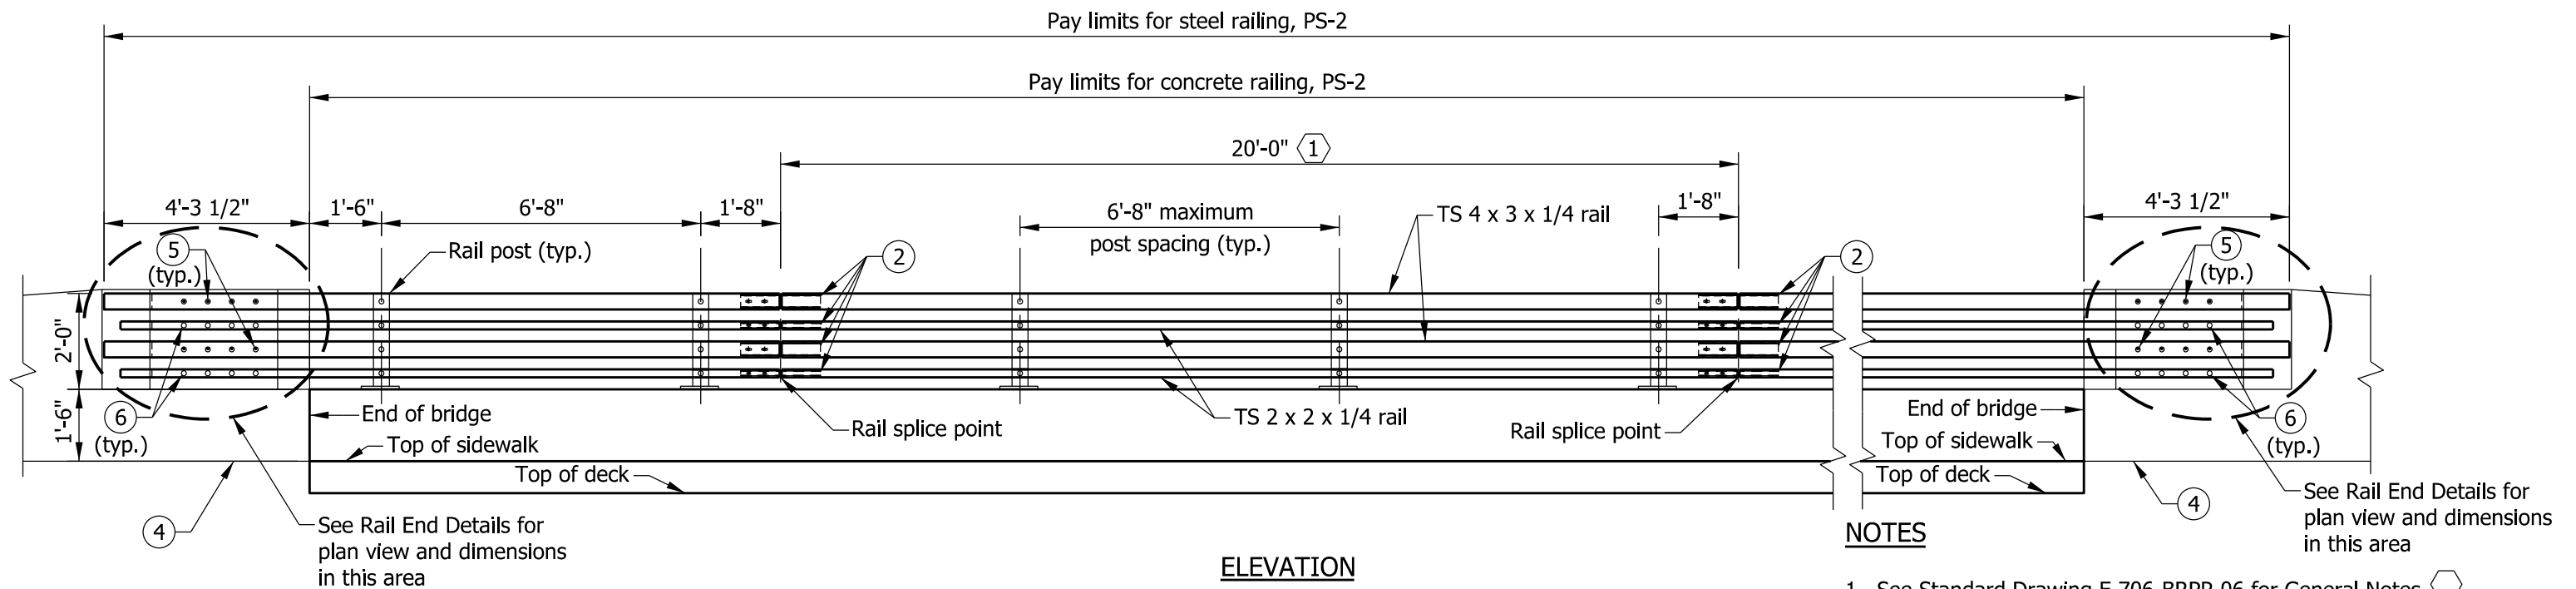

### NOTES


1. See Standard Drawing E 706-BRPP-06 for General Notes (1).
2. See Standard Drawing E 706-BRPP-05 for rail tube details and rail splice details.
3. See Standard Drawing E 706-BRPP-06 for base plate detail and reinforcing-bar bends.
4. Concrete bridge railing transition, TPS-2. See Standard Drawings E 706-TTPP-07 and -08 for details.
5. 3/4" Ø x 11 1/2" round-head bolt in 7/8" Ø hole. Hole shall be slotted as required for expansion.
6. 5/8" Ø x 10 1/2" round-head bolt in 3/4" Ø hole. Hole shall be slotted as required for expansion.
7. Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

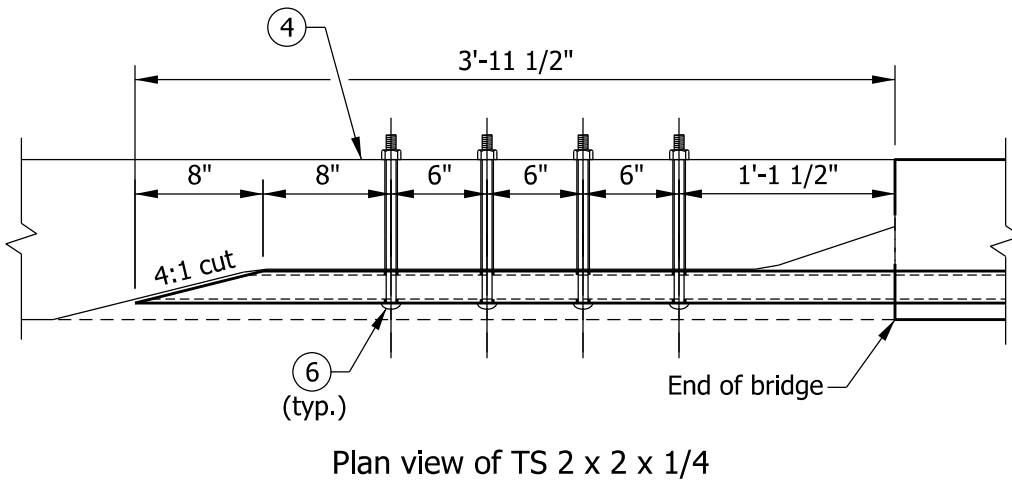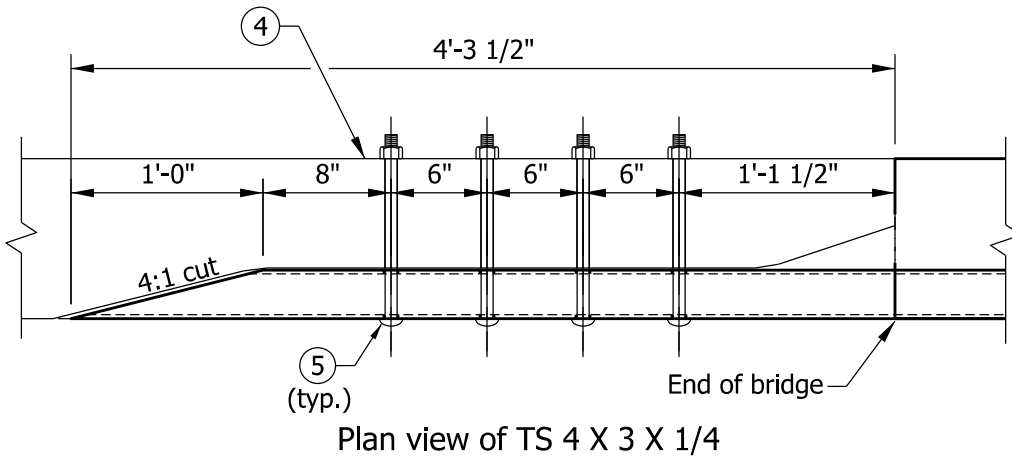

### RAIL END DETAILS

#### QUANTITIES FOR ONE RUNNING FOOT OF RAILING

Concrete, class C	1.89 CFT
Reinforcing bars	16.8 LBS

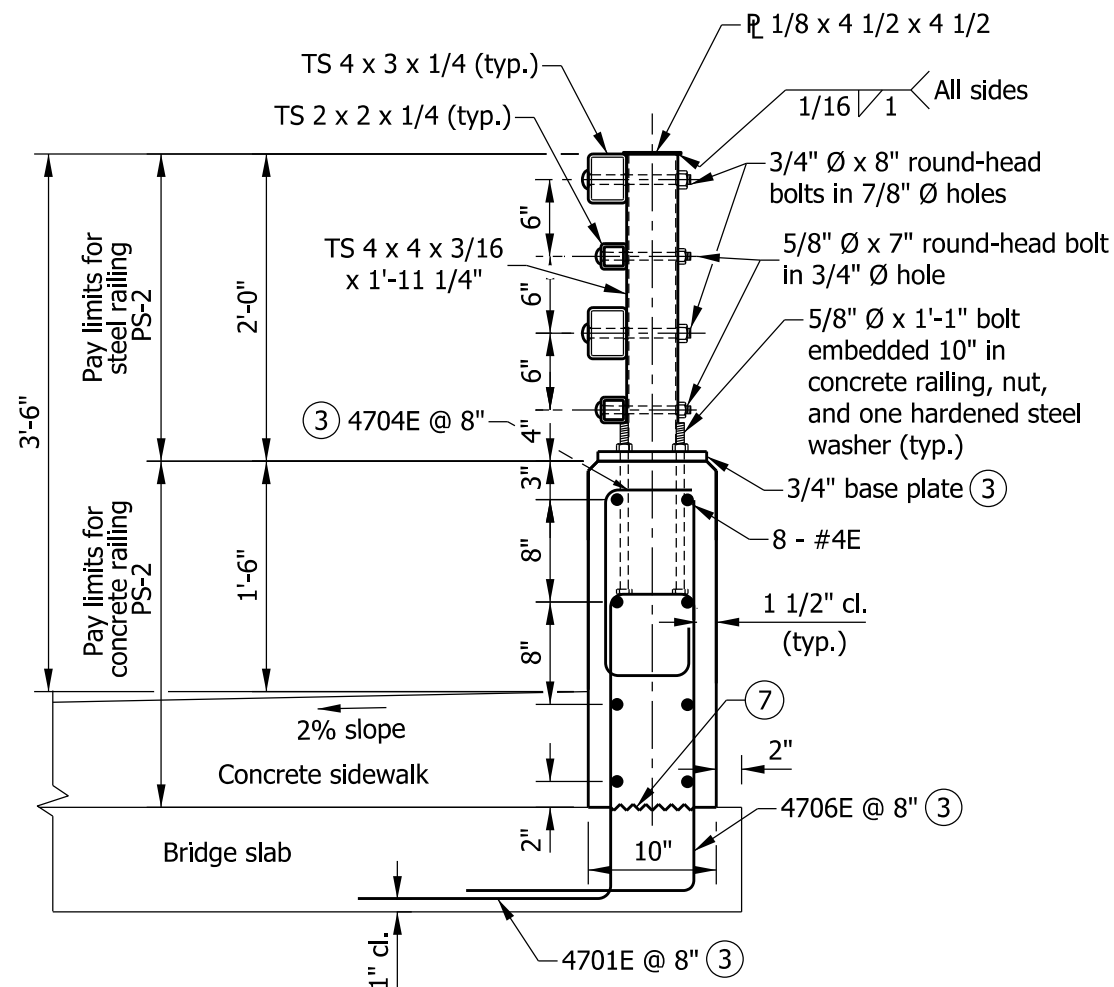


### INDIANA DEPARTMENT OF TRANSPORTATION

#### RAILING, PS-2

SEPTEMBER 2012


STANDARD DRAWING NO. E 706-BRPP-04





/s/ Richard L. VanCleave 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12  
CHIEF ENGINEER DATE




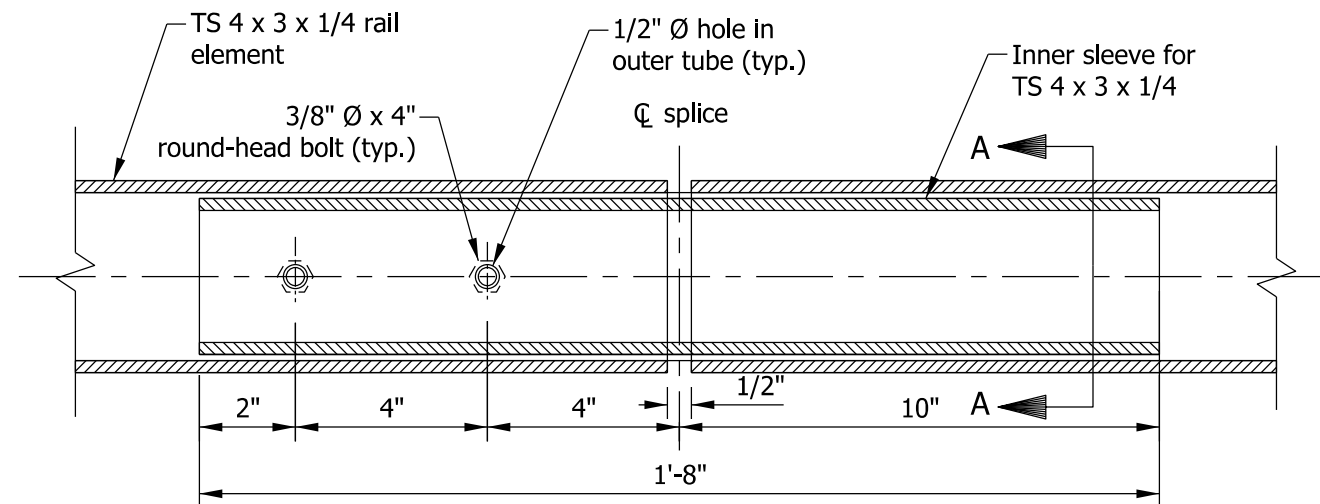

**SPLICE ASSEMBLY  
FOR TS 4 X 3 X 1/4 RAIL**

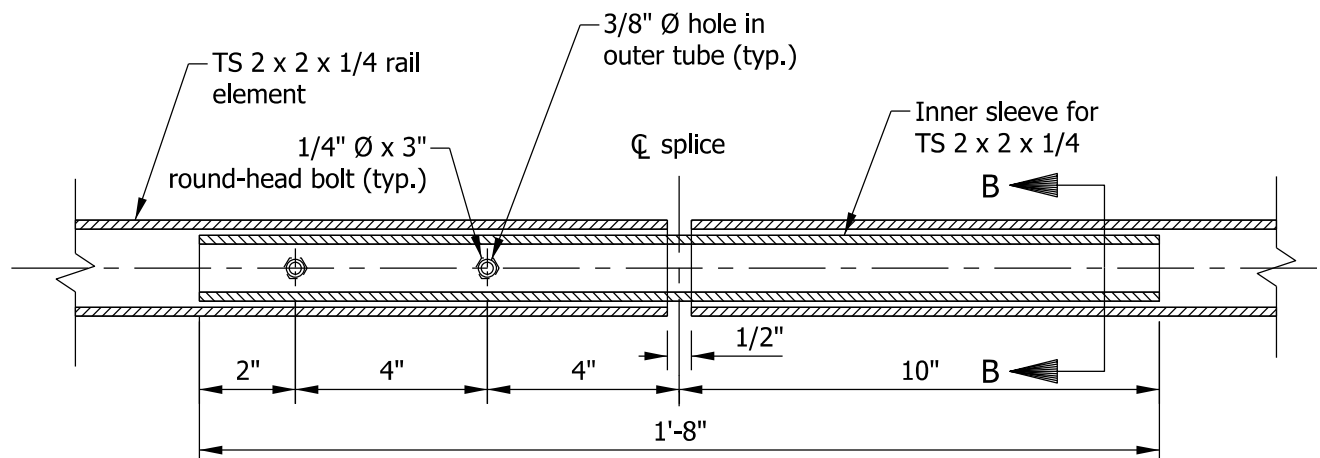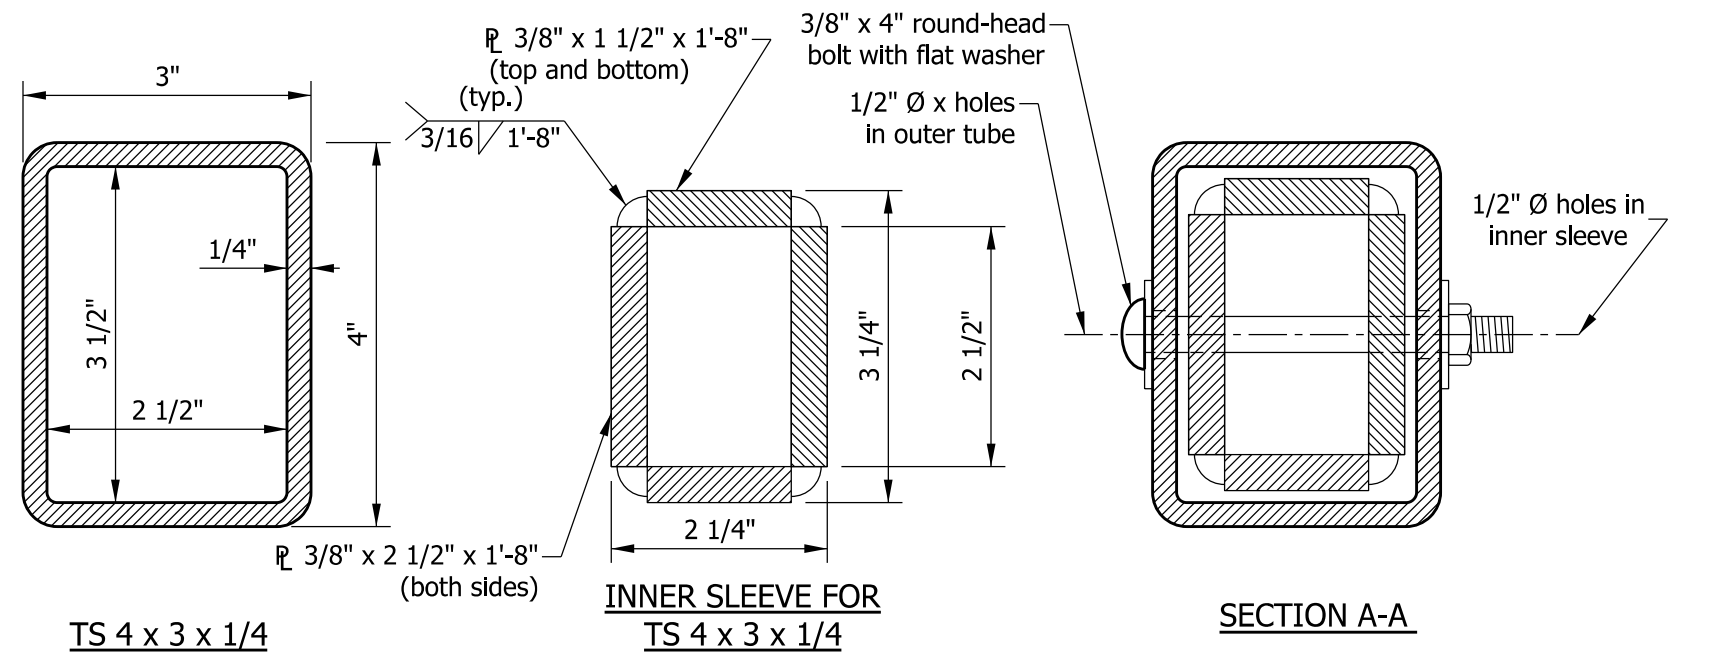

**SPLICE ASSEMBLY  
FOR TS 2 X 2 X 1/4 RAIL**

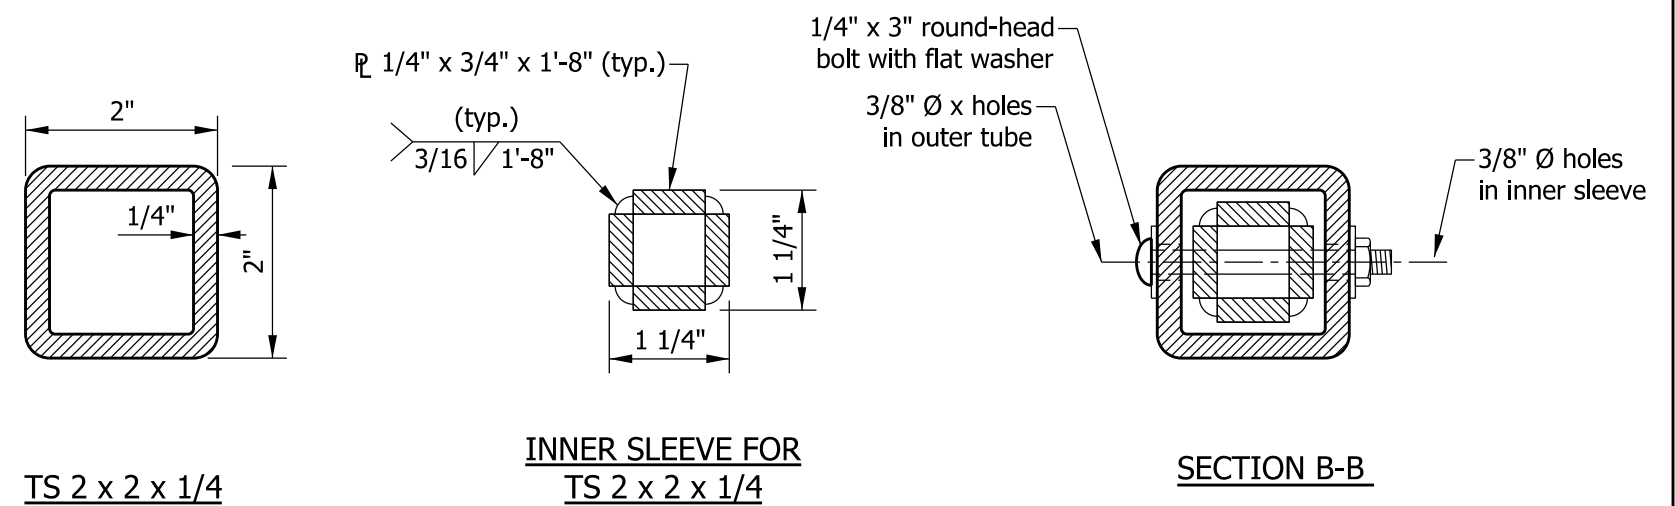


INDIANA DEPARTMENT OF TRANSPORTATION

RAILING, PF AND PS  
RAIL SPLICE DETAILS

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRPP-05

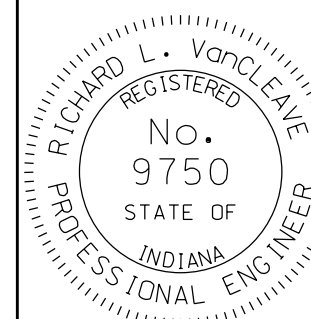

/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

GENERAL NOTES


- 1 Intermediate railing splices shall be placed every 20 ft.
- 2 See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
- 3 All chamfered edges shall be 3/4".
- 4 All reinforcing bars designated E shall be epoxy coated.

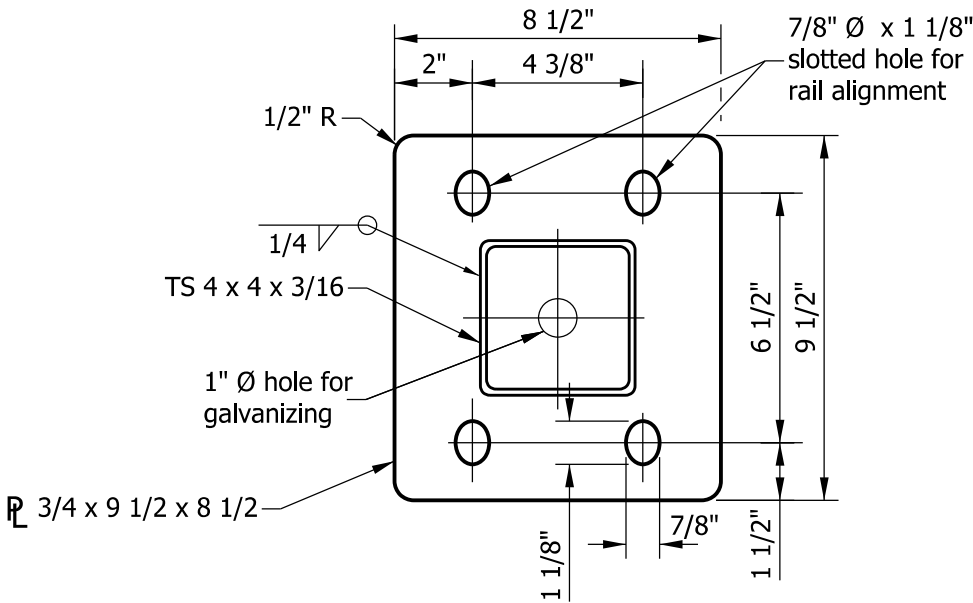


BASE PLATE DETAIL

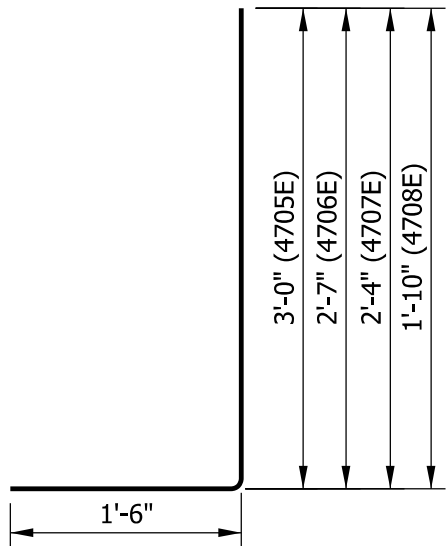


4705E x 4'-6"  
4706E x 4'-1"  
4707E x 3'-10"  
4708E x 3'-4"




4703E x 3'-11"

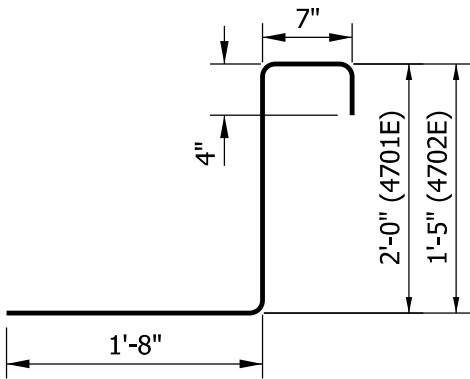


4701E x 4'-7"  
4702E x 4'-0"






4704E x 2'-9"

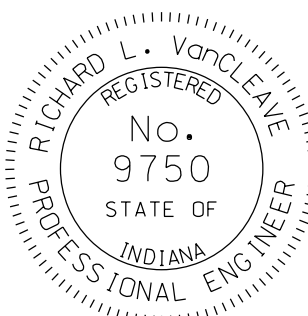INDIANA DEPARTMENT OF TRANSPORTATION			
RAILING, PF & PS DETAILS			
SEPTEMBER 2012			
STANDARD DRAWING NO.		E 706-BRPP-06	
	/s/ <i>Richard L. VanCleave</i>		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ <i>Mark A. Miller</i>		09/04/12
	CHIEF ENGINEER		DATE

NOTES

1. See Standard Drawing E 706-BRSF-03 for General Notes .
2. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

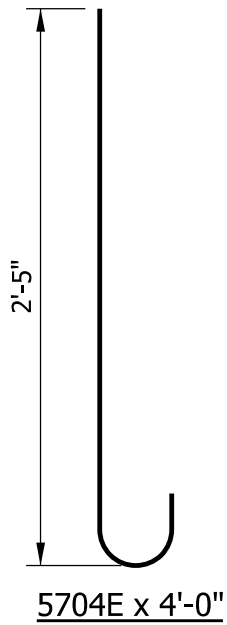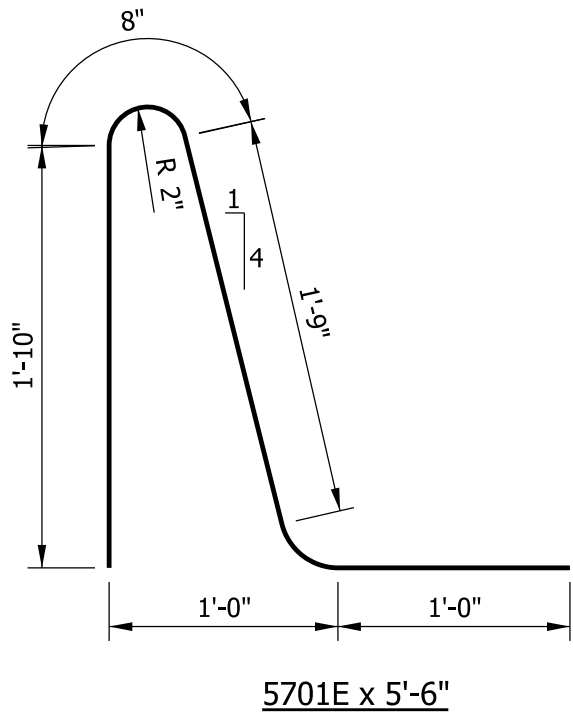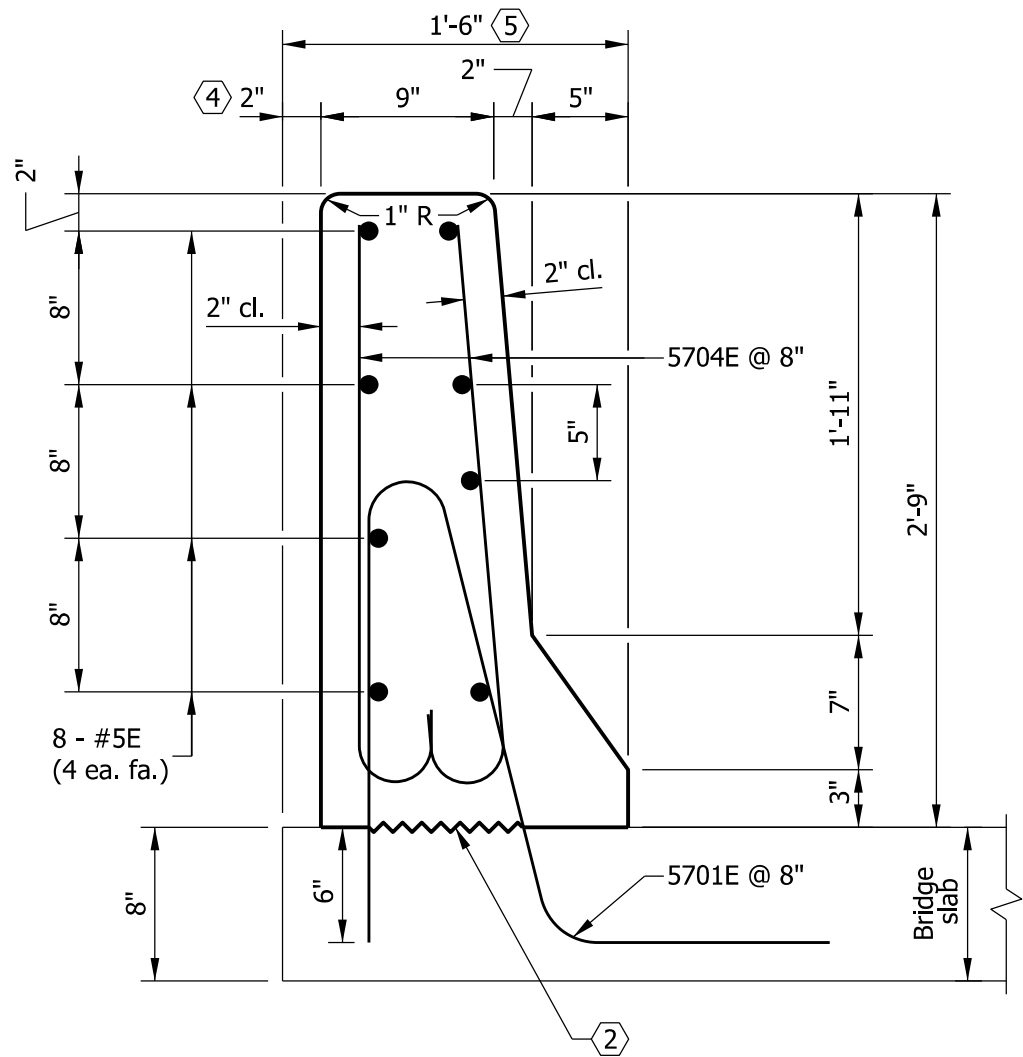


QUANTITIES FOR ONE RUNNING FOOT OF RAILING	
Concrete, class C	2.58 CFT
Reinforcing bars	26.3 LBS

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING  
TYPE FC

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRSF-01



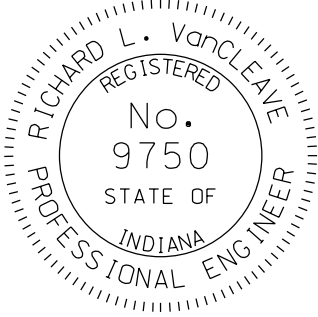


/s/ Richard L. VanCleave09/04/12


SUPERVISOR, ROADWAY STANDARDSDATE

/s/ Mark A. Miller09/04/12



CHIEF ENGINEERDATE

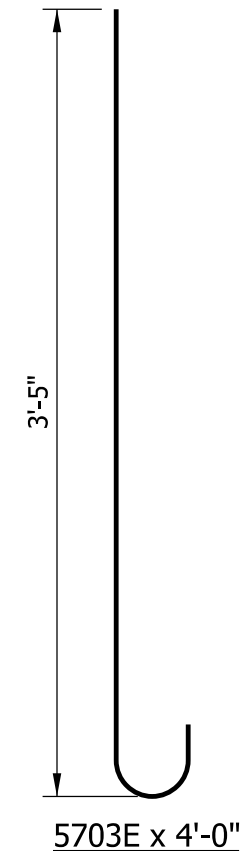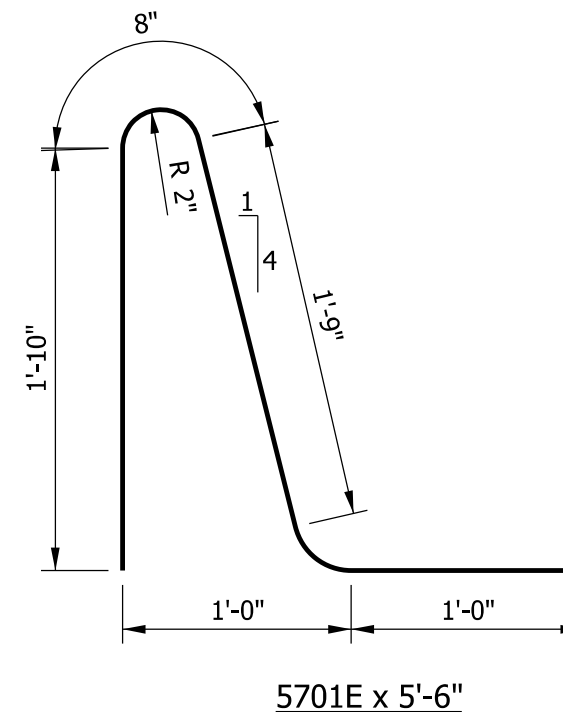
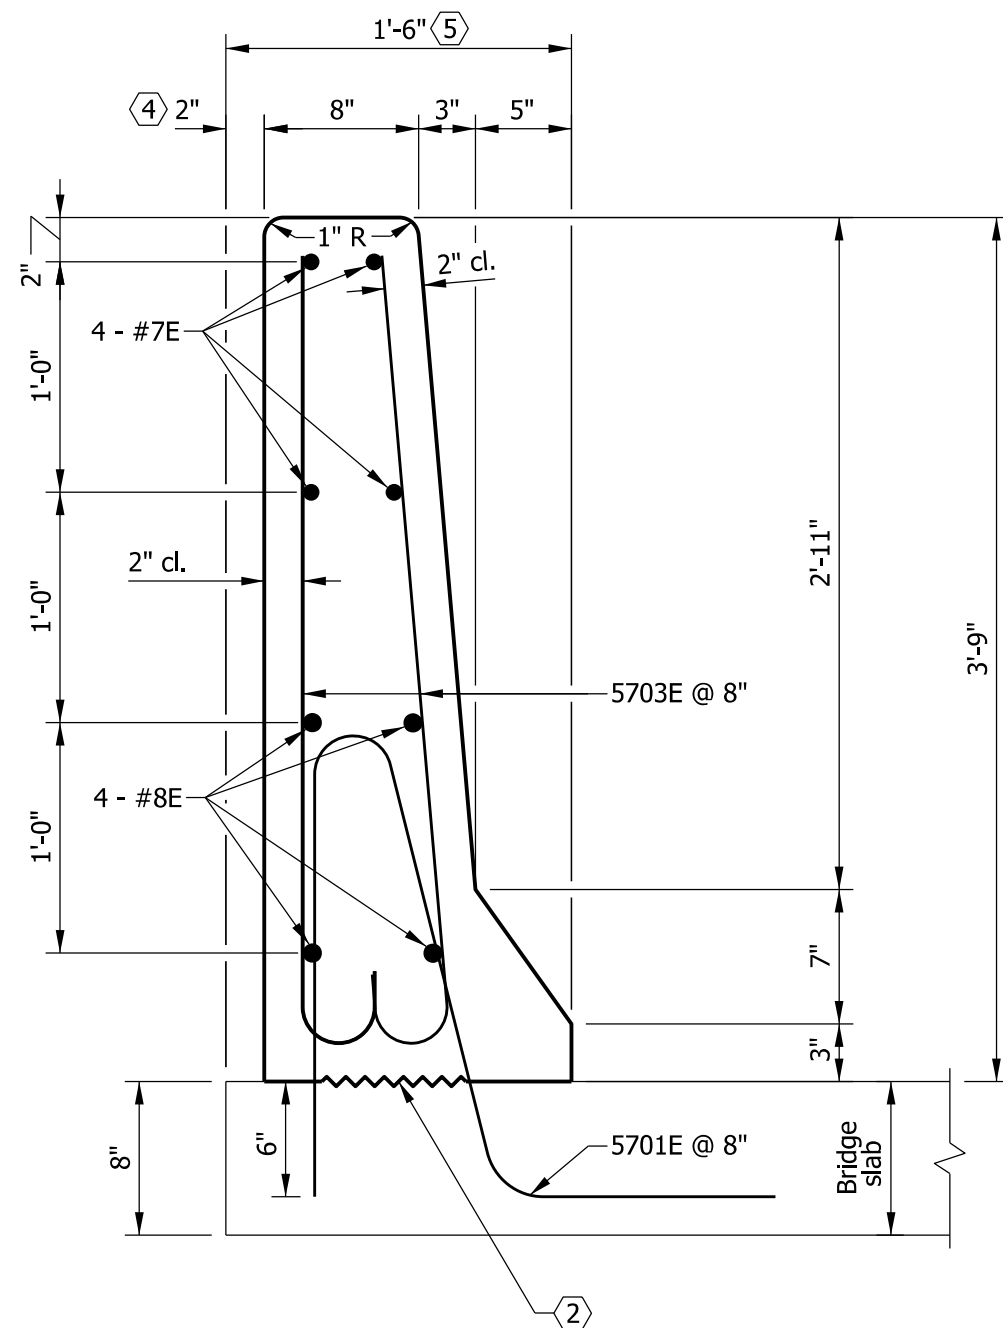


## NOTES

- See Standard Drawing E 706-BRSF-03 for General Notes .
- See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

QUANTITIES FOR ONE RUNNING FOOT OF RAILING	
Concrete, class C	3.29 CFT
Reinforcing bars	40.0 LBS

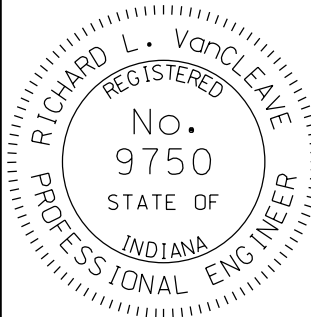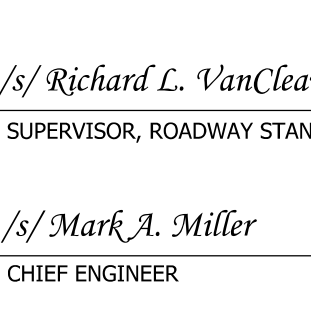INDIANA DEPARTMENT OF TRANSPORTATION	
BRIDGE RAILING TYPE FT	
SEPTEMBER 2012	
STANDARD DRAWING NO.	E 706-BRSF-02
	/s/ <i>Richard L. VanCleave</i> 09/04/12
	SUPERVISOR, ROADWAY STANDARDS DATE
	/s/ <i>Mark A. Miller</i> 09/04/12
	CHIEF ENGINEER DATE

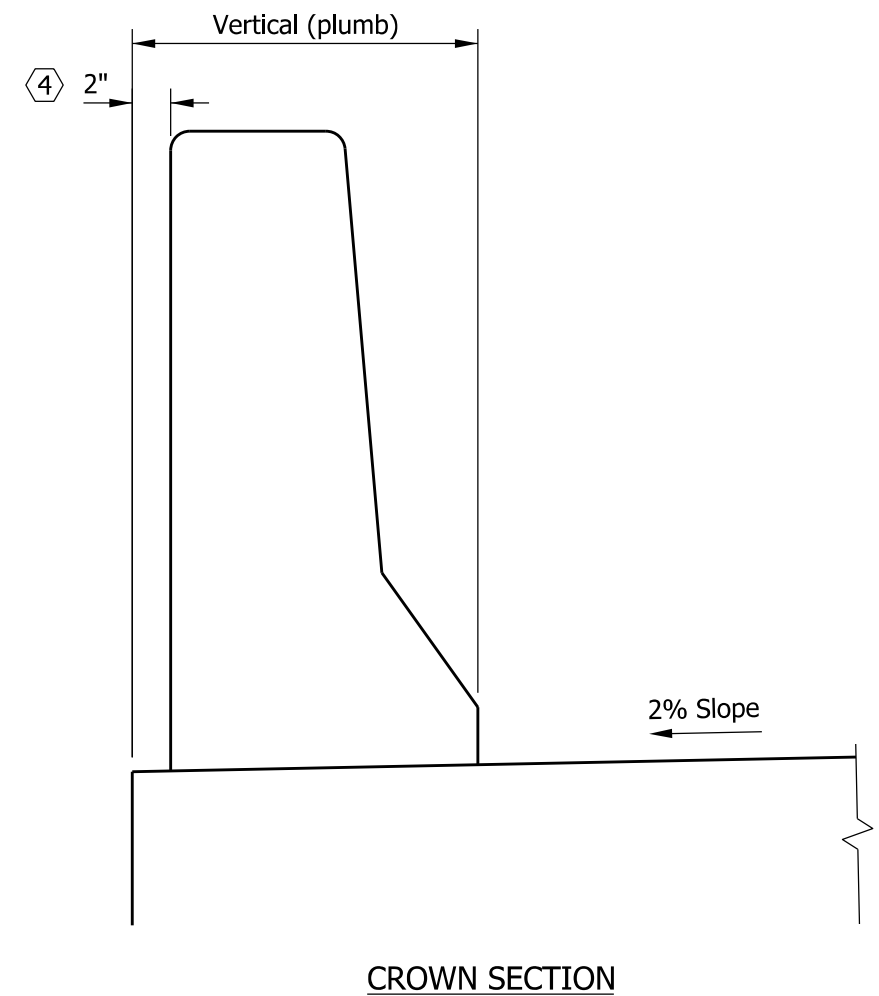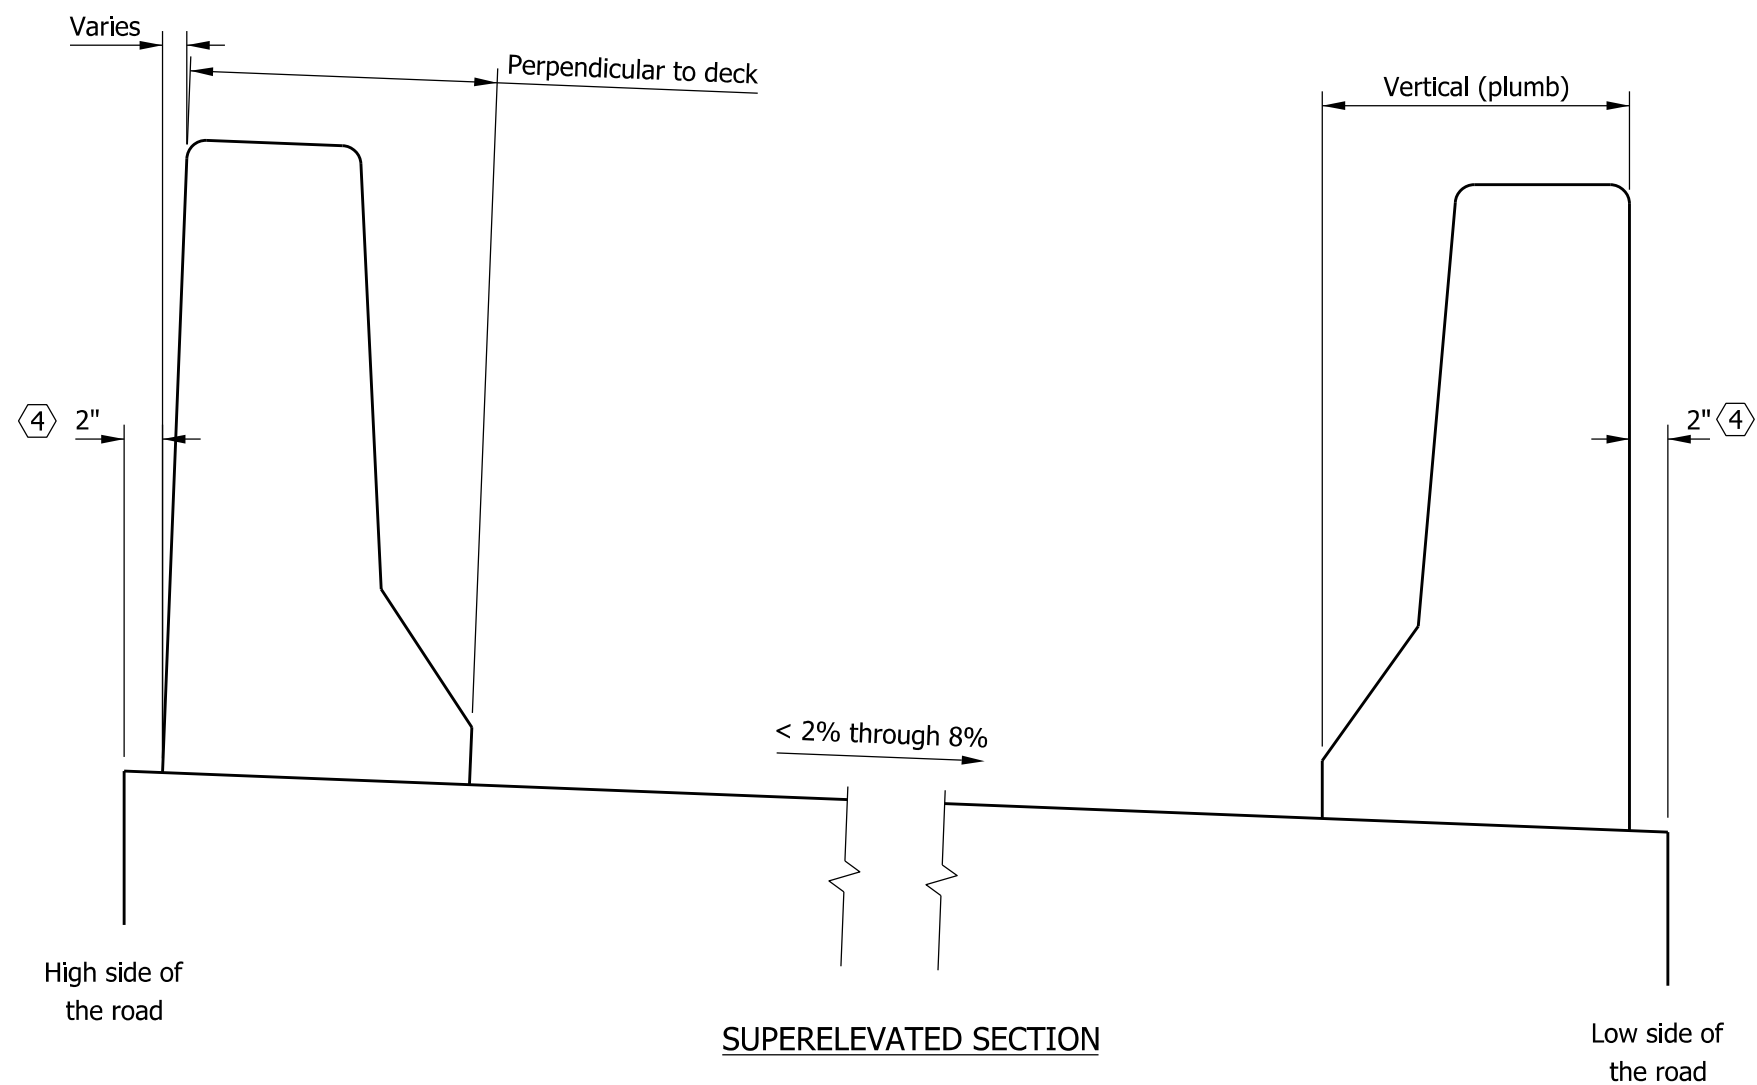

### GENERAL NOTES


- Minimum lap for #5 bars shall be 1'-11".
- Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
- A joint shall be provided between the bridge railing and railing transition at the end of the bridge slab as shown on Standard Drawing E 706-CBRT-01.
- For twin structures or other structures which are placed side by side, this dimension shall be reduced to 0 on the median side.
- For twin structures or other structures which are placed side by side, this dimension shall be reduced to 1'-4" on the median side.
- All reinforcing bars designated E shall be epoxy coated.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
PLACEMENT

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRSF-03




/s/ *Richard L. VanCleave* 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ *Mark A. Miller* 09/04/12


CHIEF ENGINEER DATE

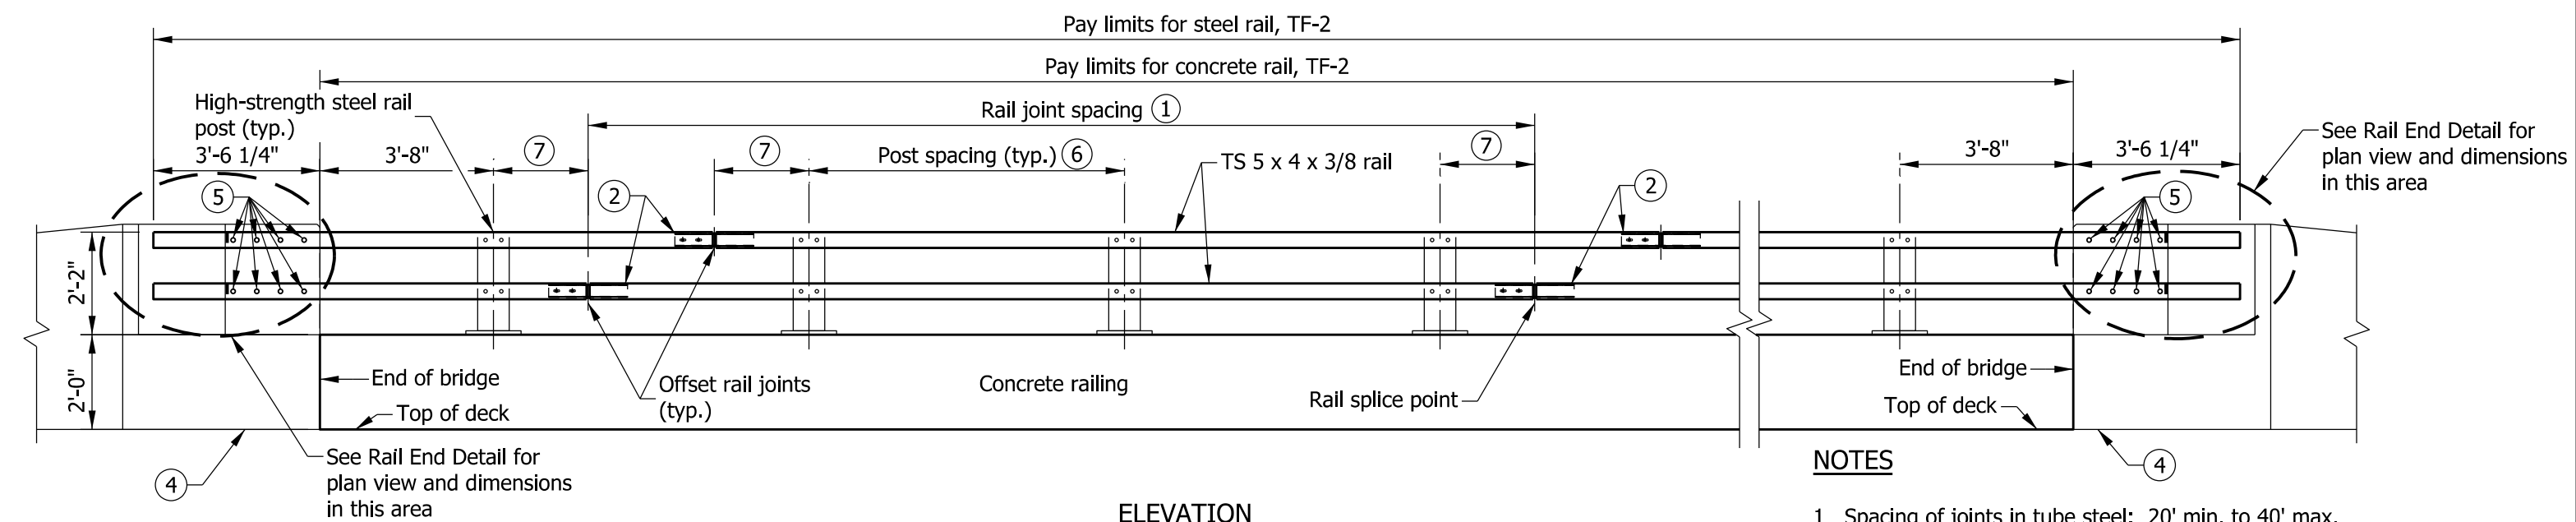


ELEVATION

NOTES

- 1 Spacing of joints in tube steel: 20' min. to 40' max.
- ② See Standard Drawing E 706-BRTF-02 for railing tube details and rail splice details.
- ③ See Standard Drawing E 706-BRTF-03 for base plate details and reinforcing-bar bends.
- ④ Concrete bridge railing transition type TTF-2. See Standard Drawings E 706-TTTF-01 through -04 for details.
- ⑤ 7/8" Ø x 1'-6" round-head bolt in 1" Ø hole. Hole is to be slotted as required for expansion.
- ⑥ Spacing of rail posts: 4'-0" min. to 7'-6" max.
- ⑦ Distance from centerline of rail splice to centerline of rail post: 18" min. to 30" max.
- ⑧ Weld-access hole. See Standard Drawing E 706-BRTF-03 for detail.
- ⑨ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

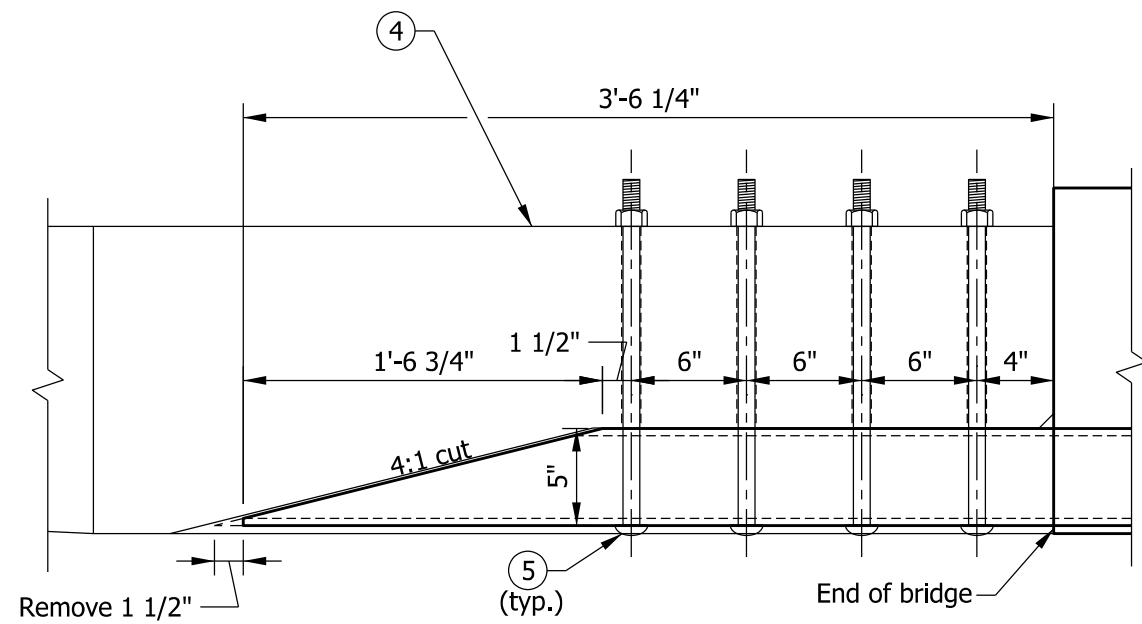




RAIL END DETAIL  
(Plan view of both TS 5 x 4 x 3/8 rails)

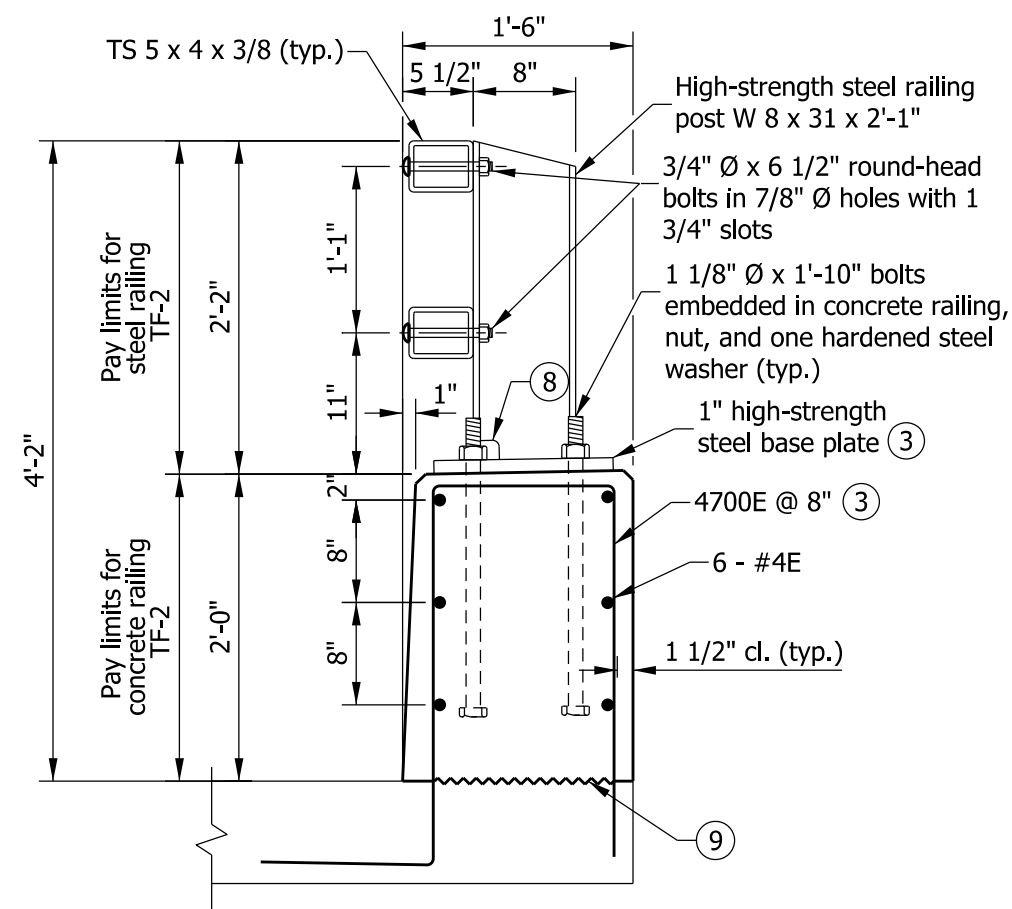


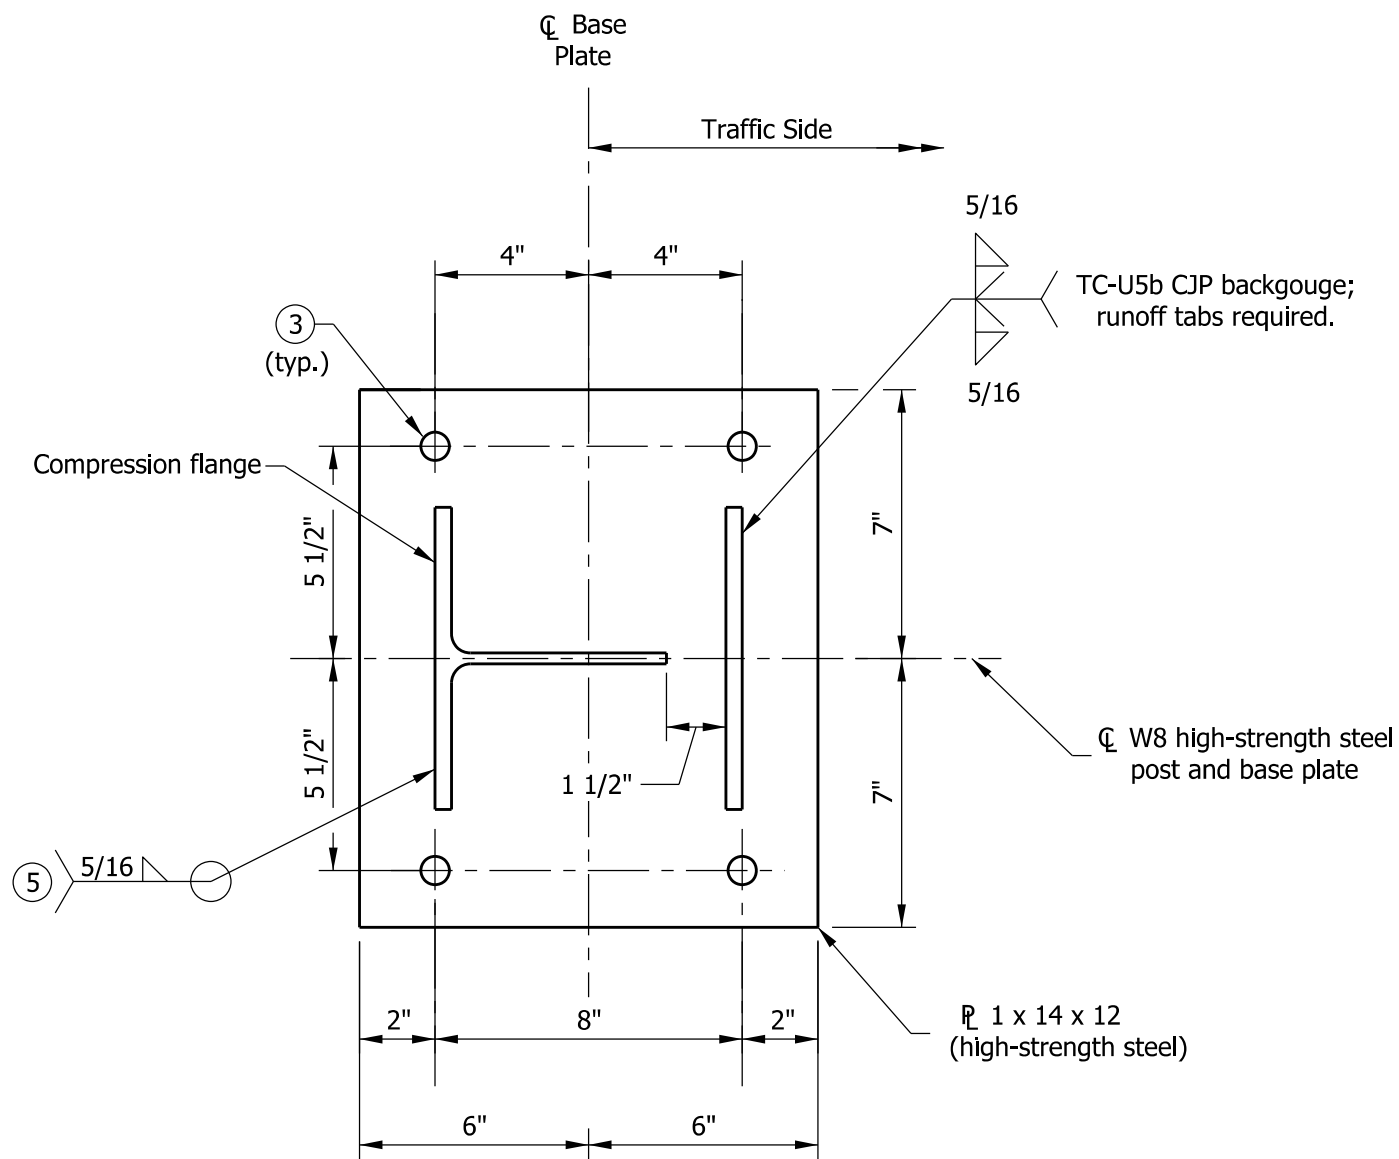
TYPICAL SECTION

QUANTITIES FOR ONE RUNNING FOOT OF RAILING	
Concrete, class C	2.92 CFT
Reinforcing bars	11.0 LBS

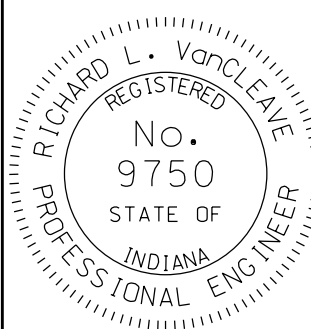
INDIANA DEPARTMENT OF TRANSPORTATION	
RAILING, TF-2	
SEPTEMBER 2012	
STANDARD DRAWING NO.	E 706-BRTF-01
	/s/ Richard L. VanCleave 09/04/12
	SUPERVISOR, ROADWAY STANDARDS DATE
	/s/ Mark A. Miller 09/04/12
	CHIEF ENGINEER DATE

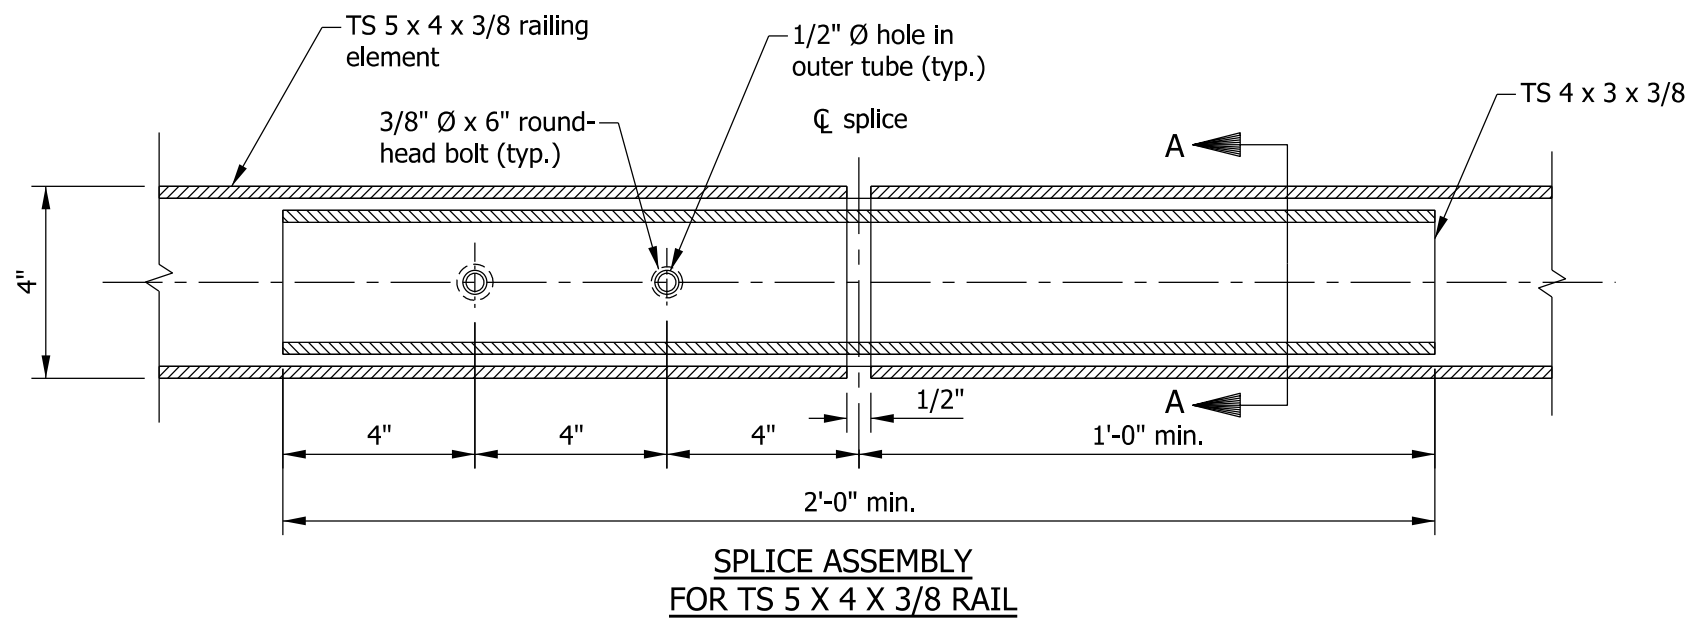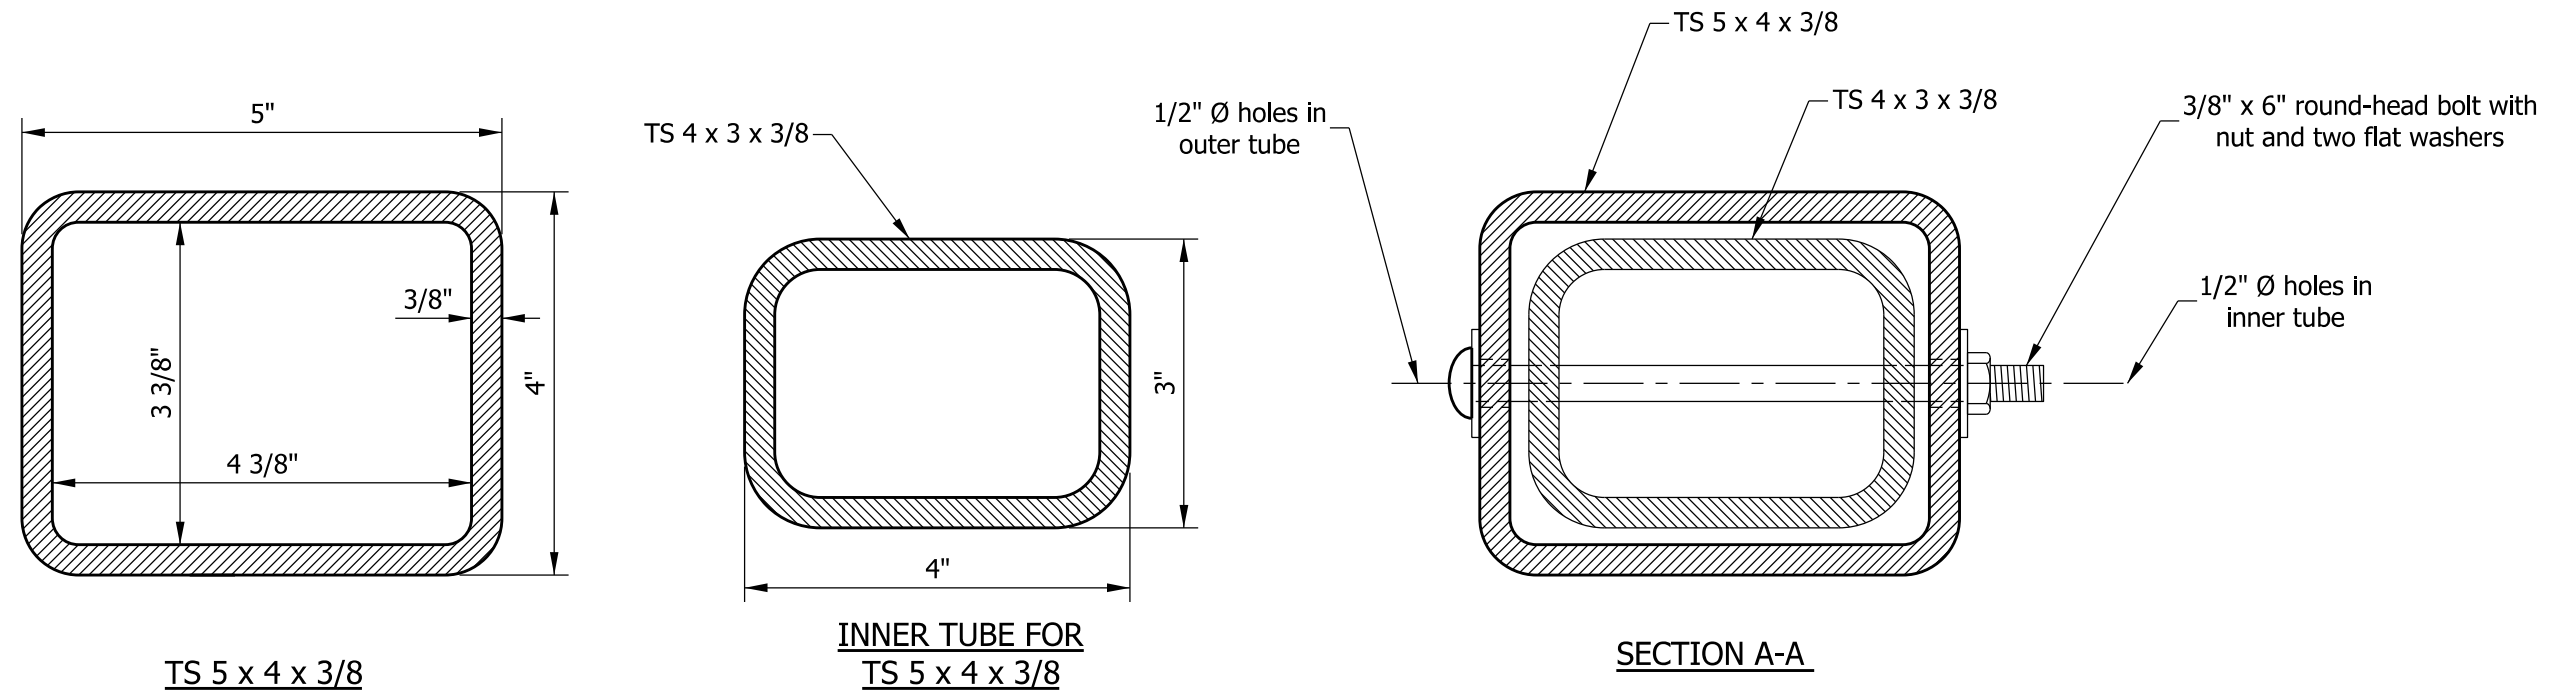

INDIANA DEPARTMENT OF TRANSPORTATION		
RAILING, TF-2 RAIL SPLICE DETAILS SEPTEMBER 2012		
STANDARD DRAWING NO.		E 706-BRTF-02
	/s/ <i>Richard L. VanCleave</i>	09/04/12
	SUPERVISOR, ROADWAY STANDARDS	DATE
	/s/ <i>Mark A. Miller</i>	09/04/12
	CHIEF ENGINEER	DATE




**BASE PLATE DETAIL**

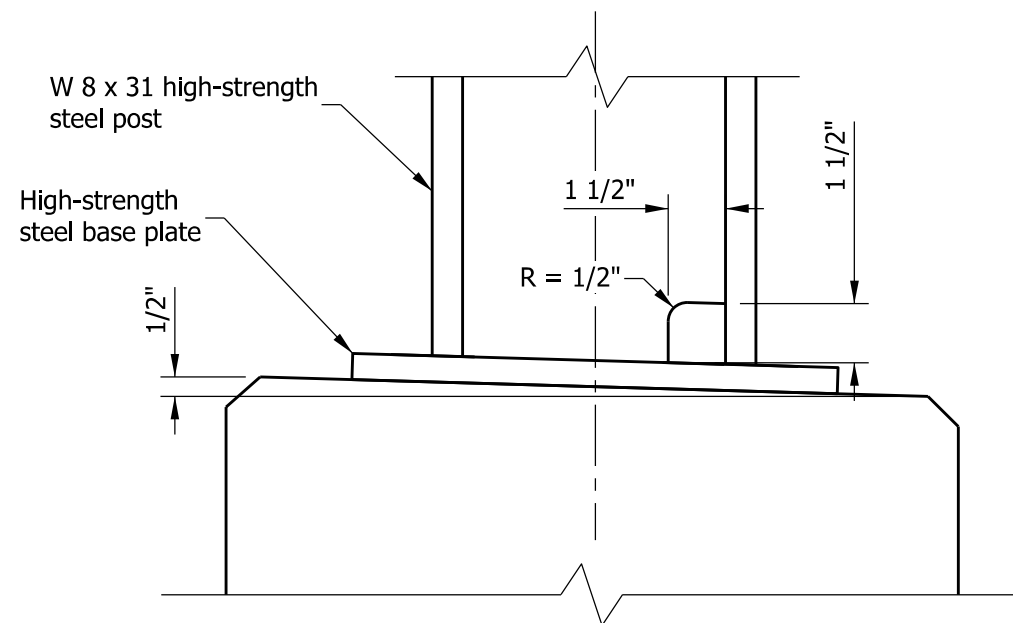

**WELD-ACCESS HOLE DETAIL**

**NOTES**

1. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
2. All chamfered edges shall be 3/4".
- 3 1 3/8" Ø holes for 1 1/8" anchor bolts.
4. All reinforcing bars designated E shall be epoxy coated.
- 5 Mill to bear flush with base plate prior to welding to ensure that the final position of the post is vertical.

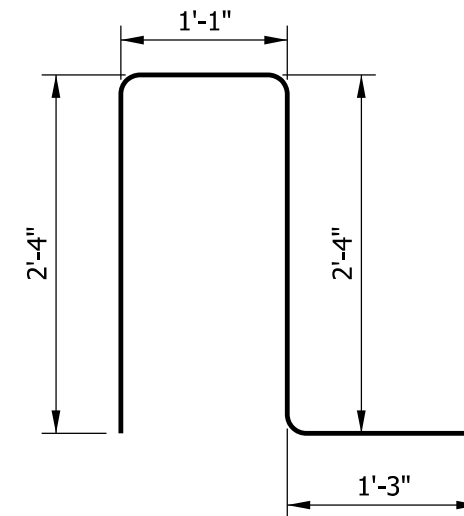


**4700E x 7'-0"**

INDIANA DEPARTMENT OF TRANSPORTATION

RAILING, TF-2  
DETAILS

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTF-03




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE



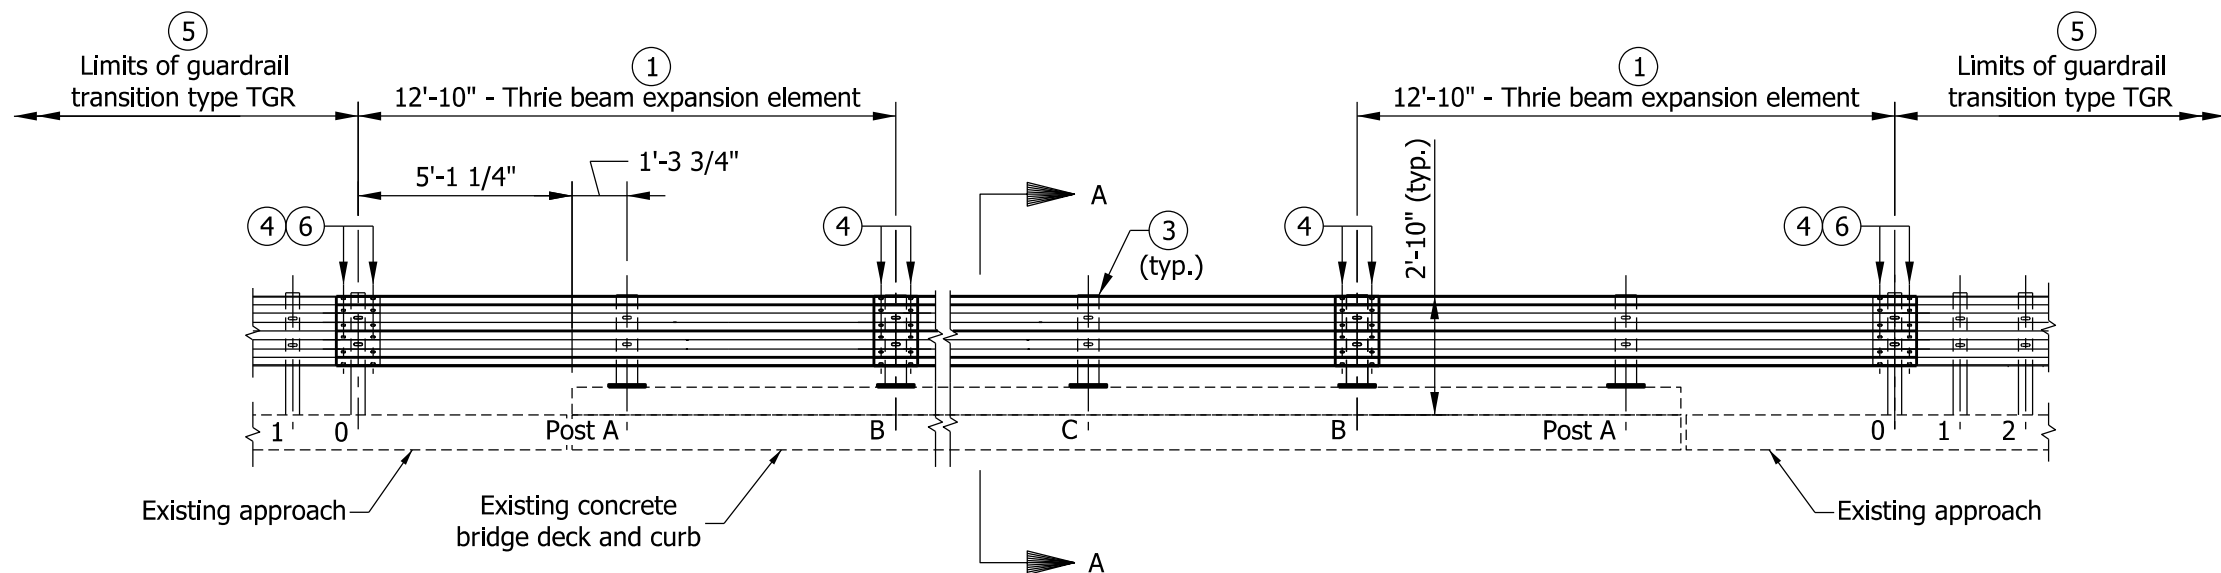

ELEVATION VIEW

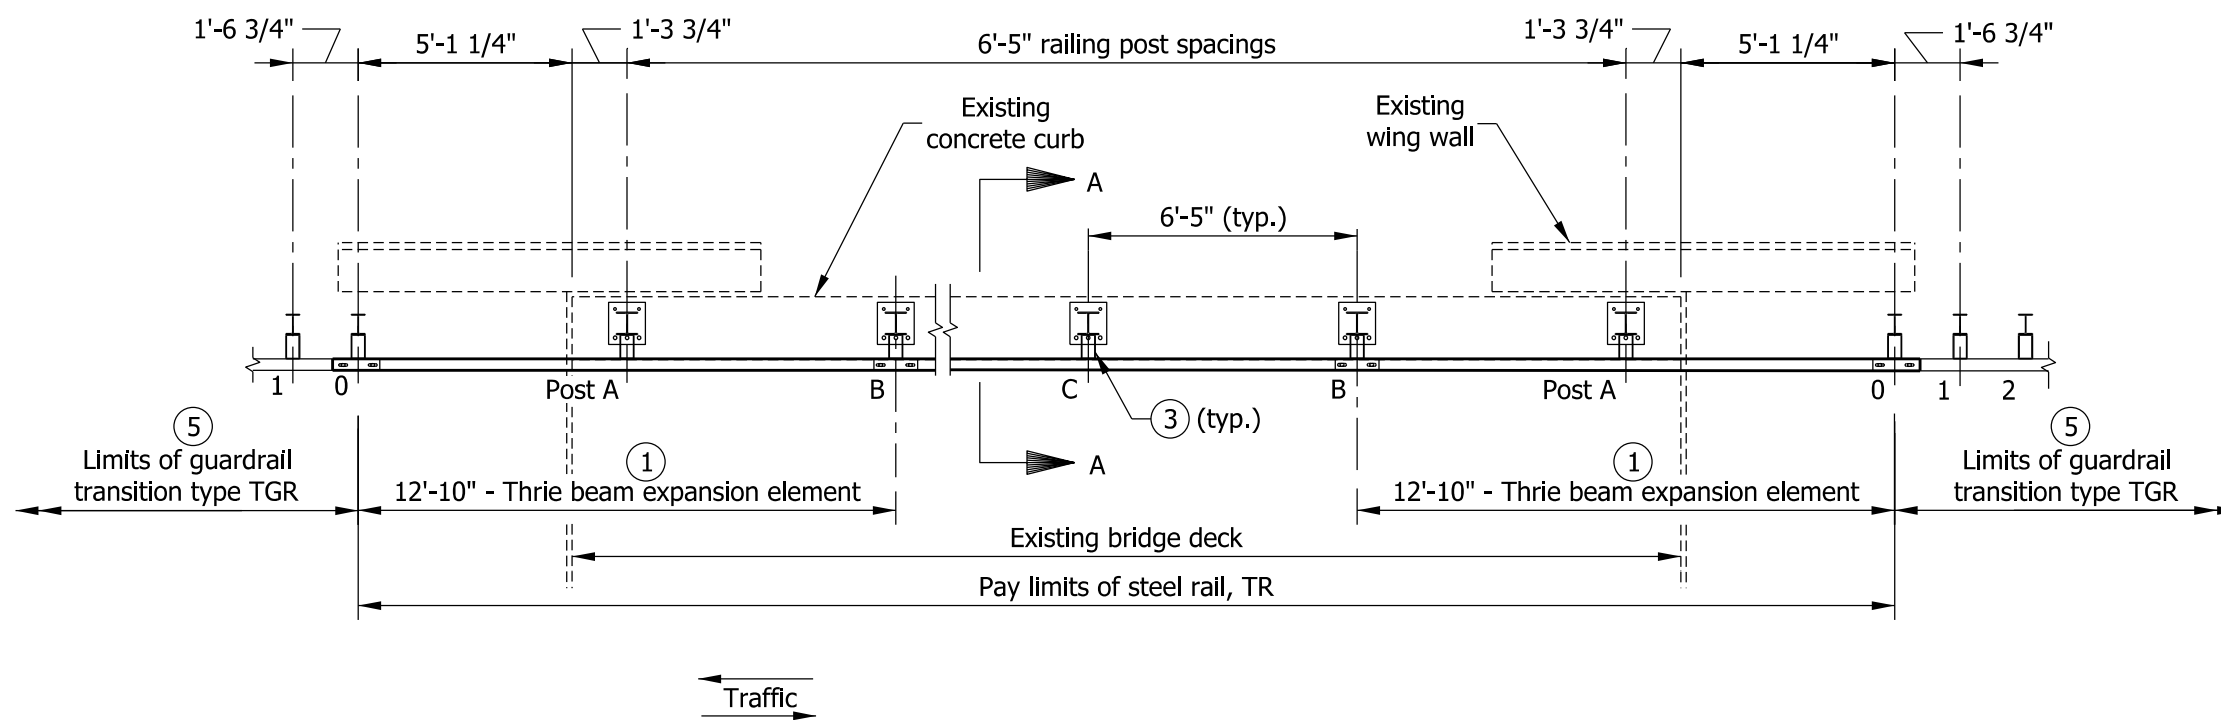

PLAN VIEW

## NOTES


- ① See Standard Drawing E 706-BRTR-04 for thrie beam expansion element.
2. See Standard Drawing E 706-BRTR-02 for Section A-A.
- ③ Bridge railing post/blockout assembly. See Standard Drawing E 706-BRTR-03 for post and blockout details. Attach rail using two 5/8" Ø x 2" std. button head bolts with rectangular plate washers, round washers, and recess nuts.
- ④ Twelve 5/8" Ø std. button head bolts with round washers and recess nuts.
- ⑤ See Standard Drawing E 706-BRTR-05 for thrie beam guardrail transition type TGR.
- ⑥ Hand tighten post bolts on thrie beam expansion element and burr bolt threads.

INDIANA DEPARTMENT OF TRANSPORTATION

RETROFIT THRIE BEAM  
BRIDGE RAILING TR

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTR-01

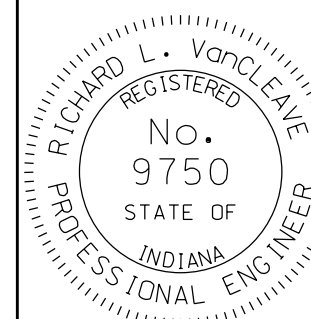


/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

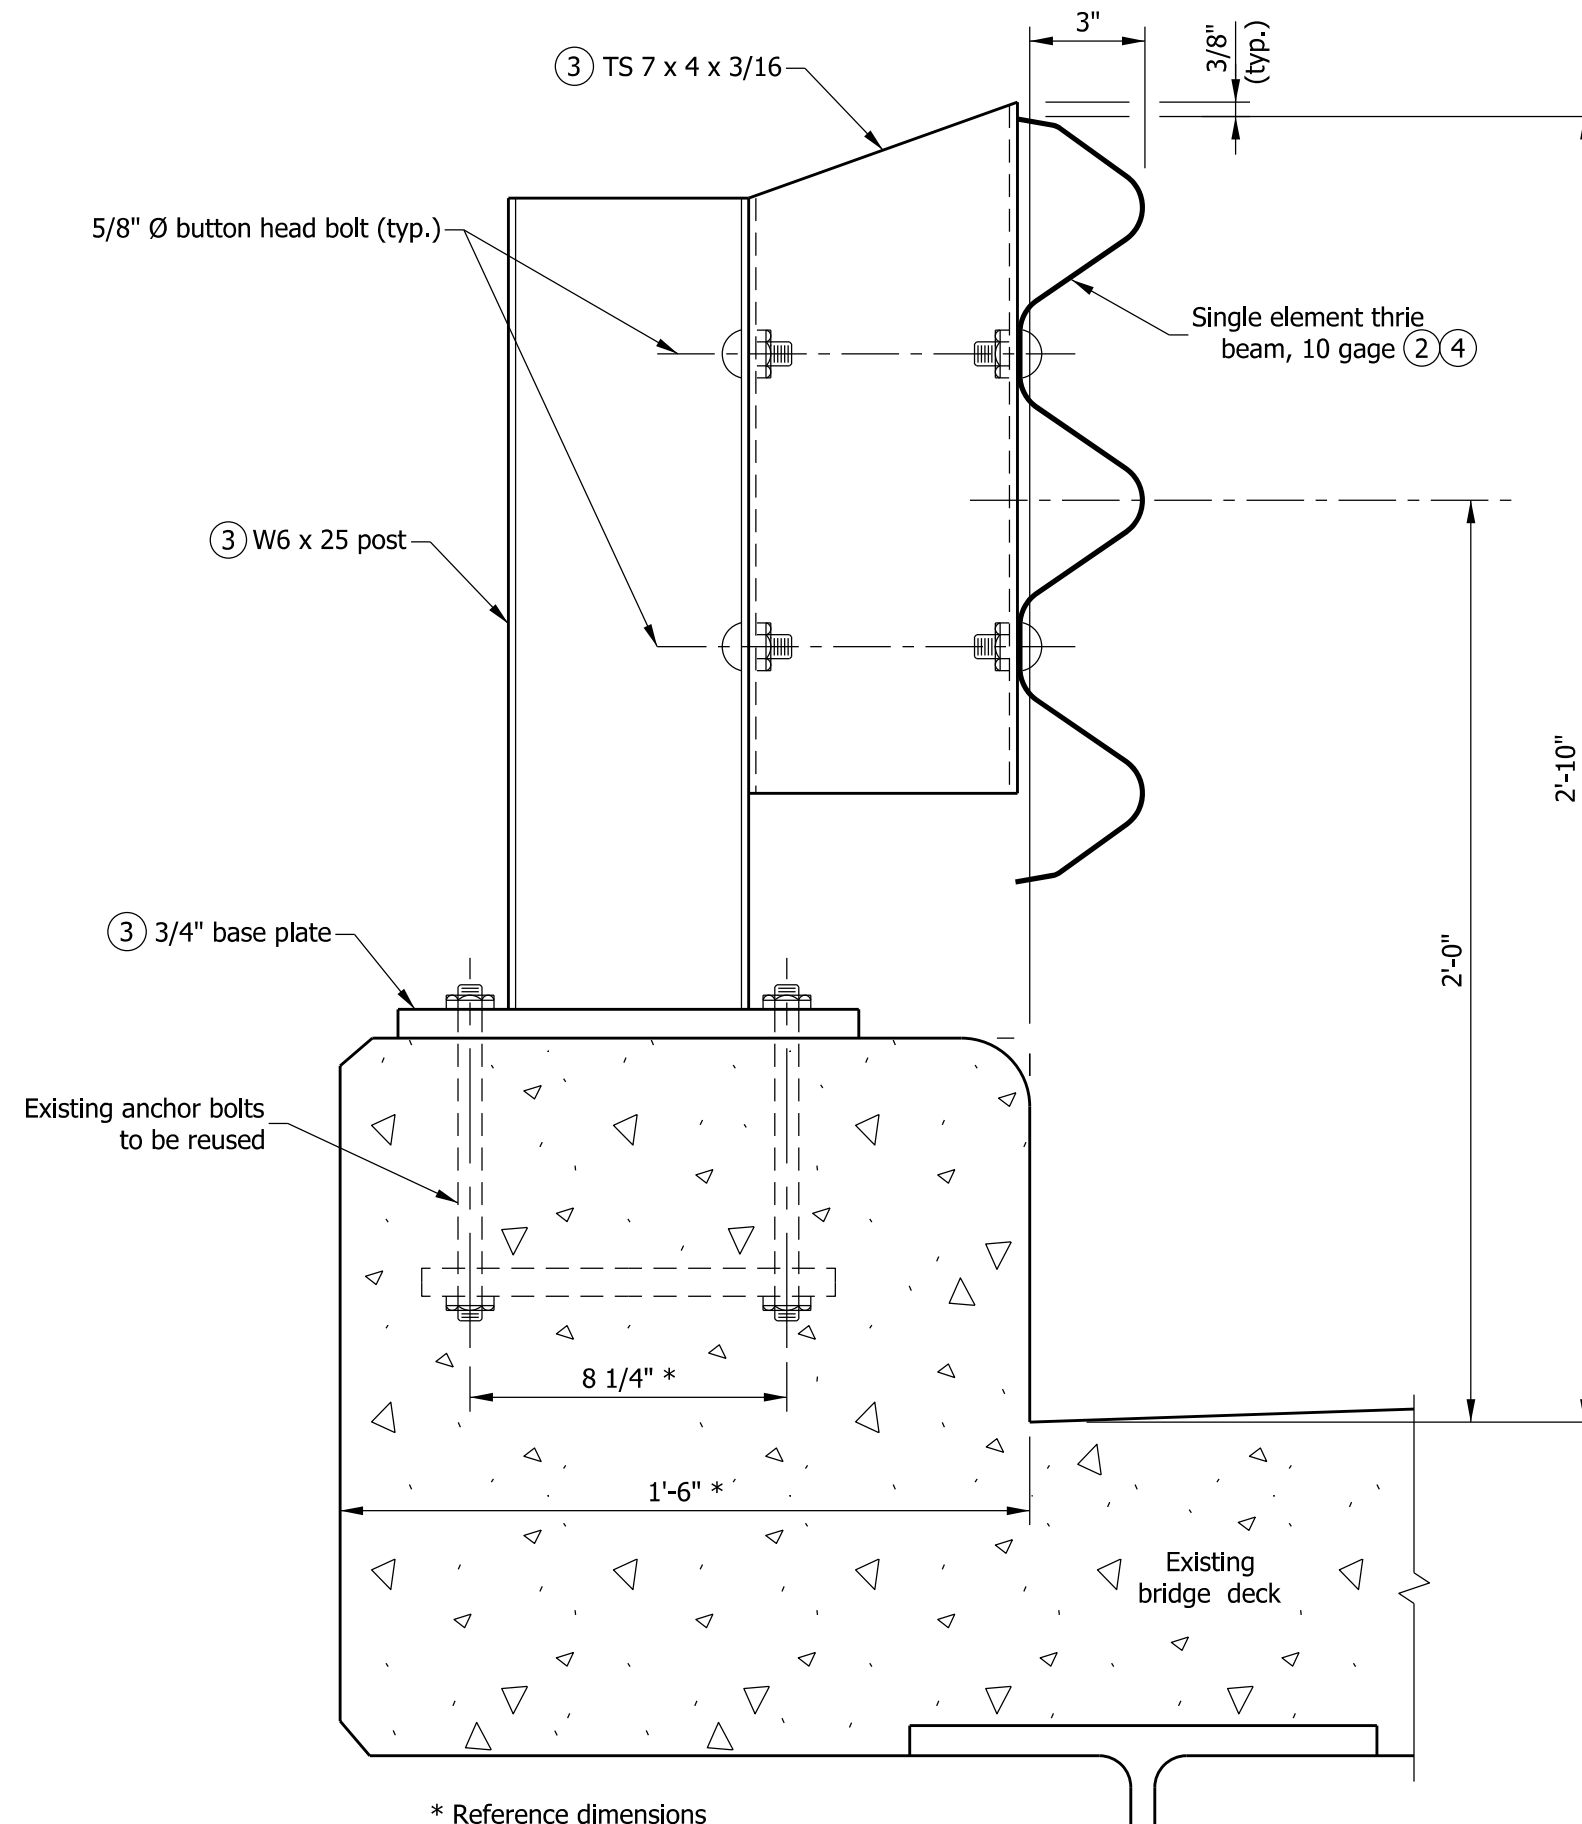

**SECTION A-A**

**NOTES**


1. See Standard Drawing E 706-BRTR-01 for plan view.
- (2) See Standard Drawing E 601-TBGC-01 for thrie beam section.
- (3) See Standard Drawing E 706-BRTR-03 for post, blockout, and base plate details.
- (4) See Standard Drawing E 706-BRTR-04 for thrie beam bridge railing elements.

INDIANA DEPARTMENT OF TRANSPORTATION

RETROFIT THRIE BEAM  
BRIDGE RAILING TR


SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTR-02







/s/ Richard L. VanCleave 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12  
CHIEF ENGINEER DATE

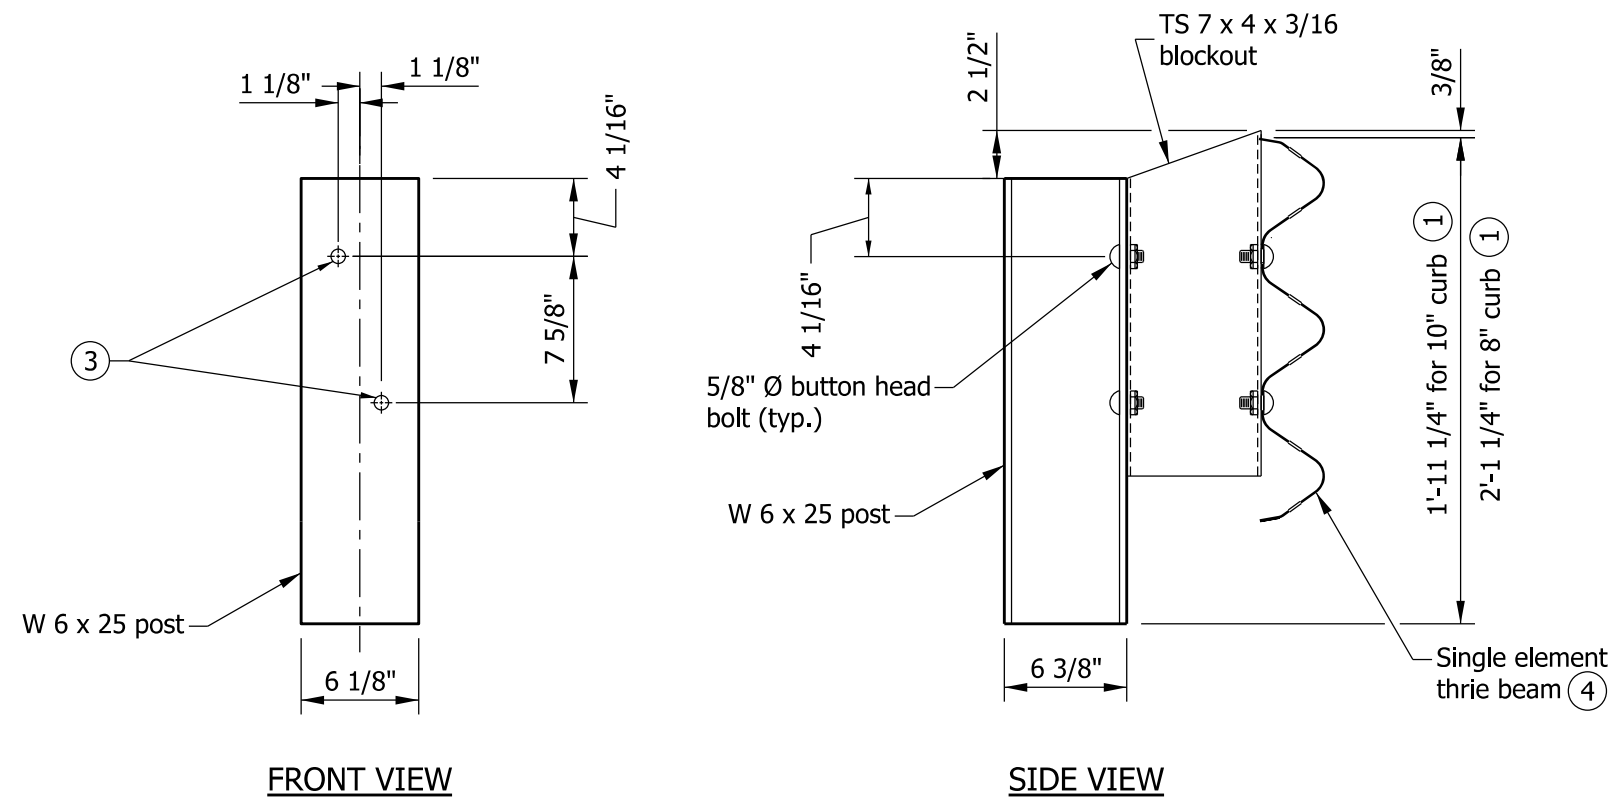


W 6 x 25 POST DETAILS FOR CURB MOUNTED POSTS

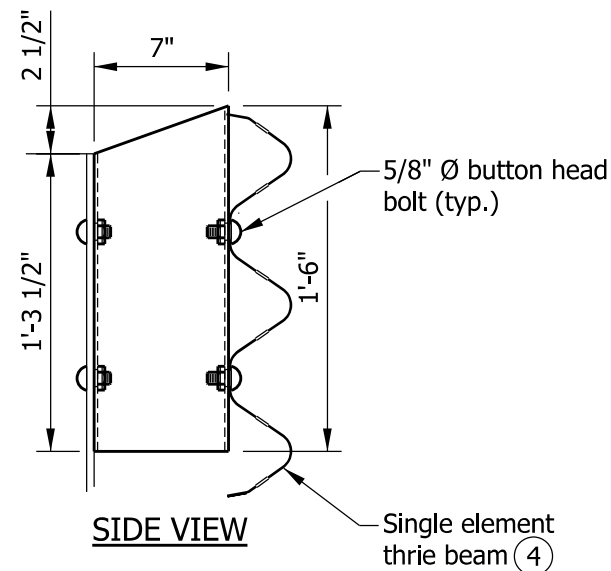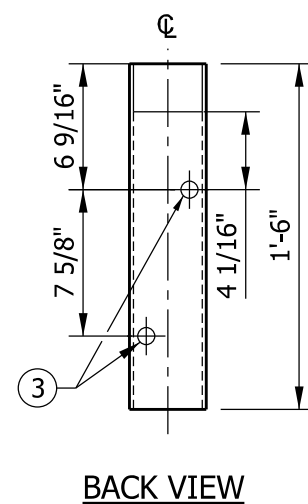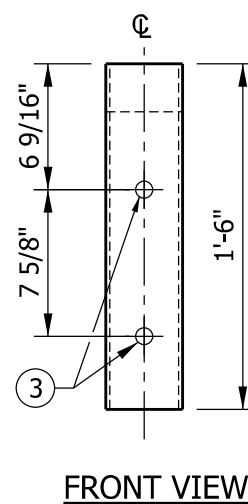


TS 7 x 4 x 3/16 BLOCKOUT DETAILS FOR CURB MOUNTED POSTS

## NOTES

- Adjust the post length for thrie beam height above the deck.
- Locations of bolt holes on base plate shall match locations of existing anchor bolts.
- All holes drilled or punched to 3/4" Ø.
- See Standard Drawing E 706-BRTR-04 for thrie beam elements. See Standard Drawing E 601-TBGC-01 for thrie beam rail section.

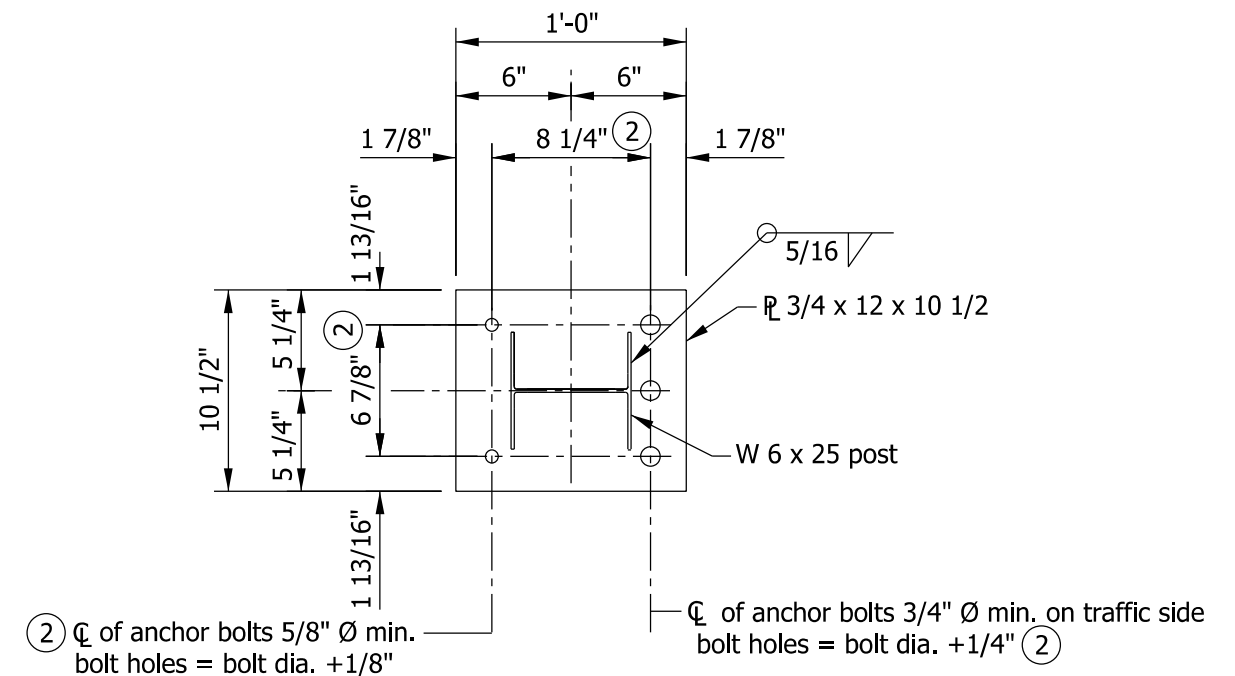


INDIANA DEPARTMENT OF TRANSPORTATION			
RETROFIT THRIE BEAM BRIDGE RAILING TR COMPONENTS SEPTEMBER 2012			
STANDARD DRAWING NO.		E 706-BRTR-03	
	/s/ Richard L. VanCleave		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ Mark A. Miller		09/04/12
	CHIEF ENGINEER		DATE

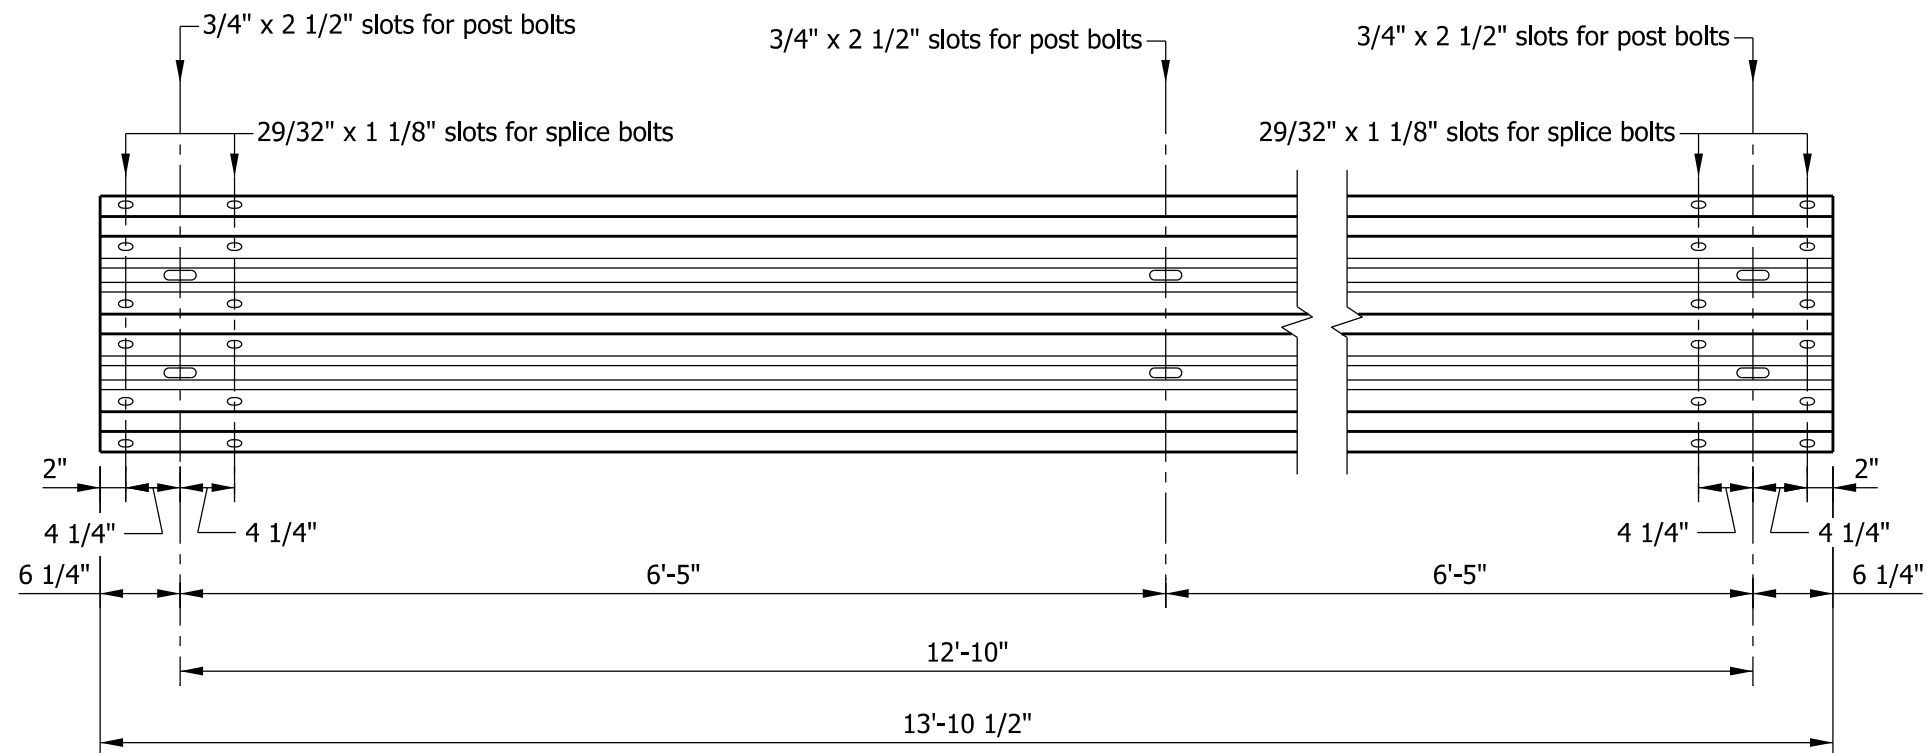

THRIE BEAM ELEVATION

NOTES

- ① See Standard Drawing E 706-BRTR-01 for post locations.

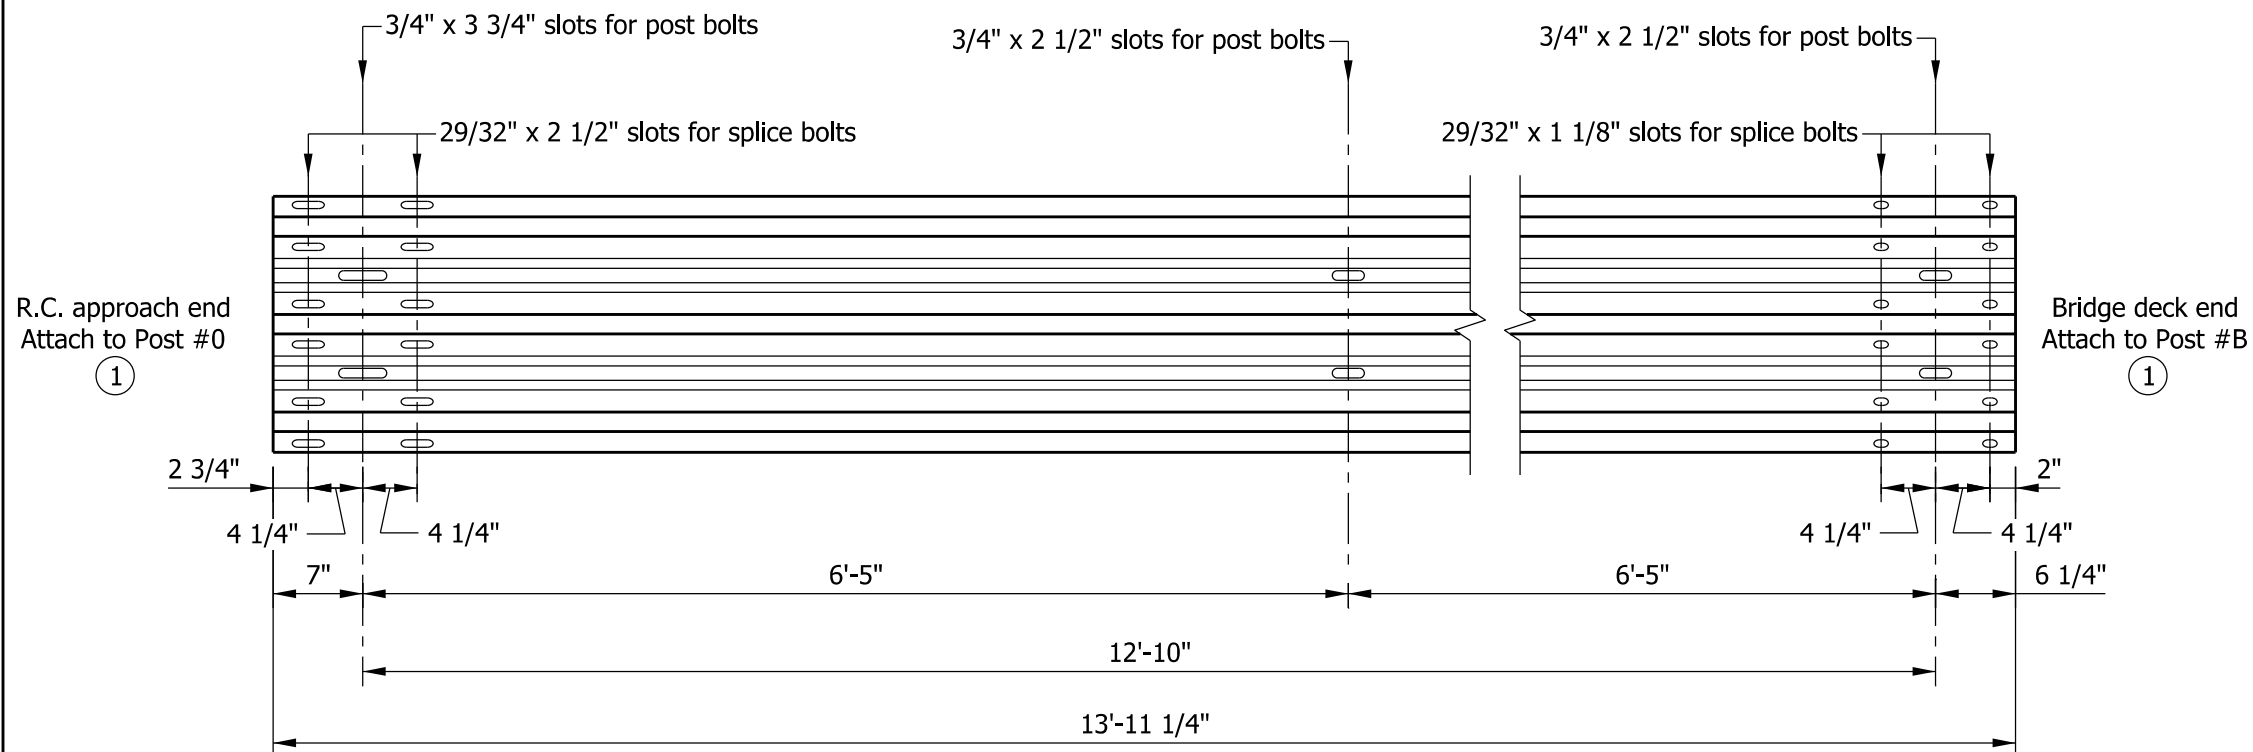


THRIE BEAM EXPANSION ELEMENT ELEVATION

INDIANA DEPARTMENT OF TRANSPORTATION

RETROFIT THRIE BEAM  
BRIDGE RAILING TR  
COMPONENTS  
SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTR-04




/s/ *Richard L. VanCleave* 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ *Mark A. Miller* 09/04/12

CHIEF ENGINEER DATE

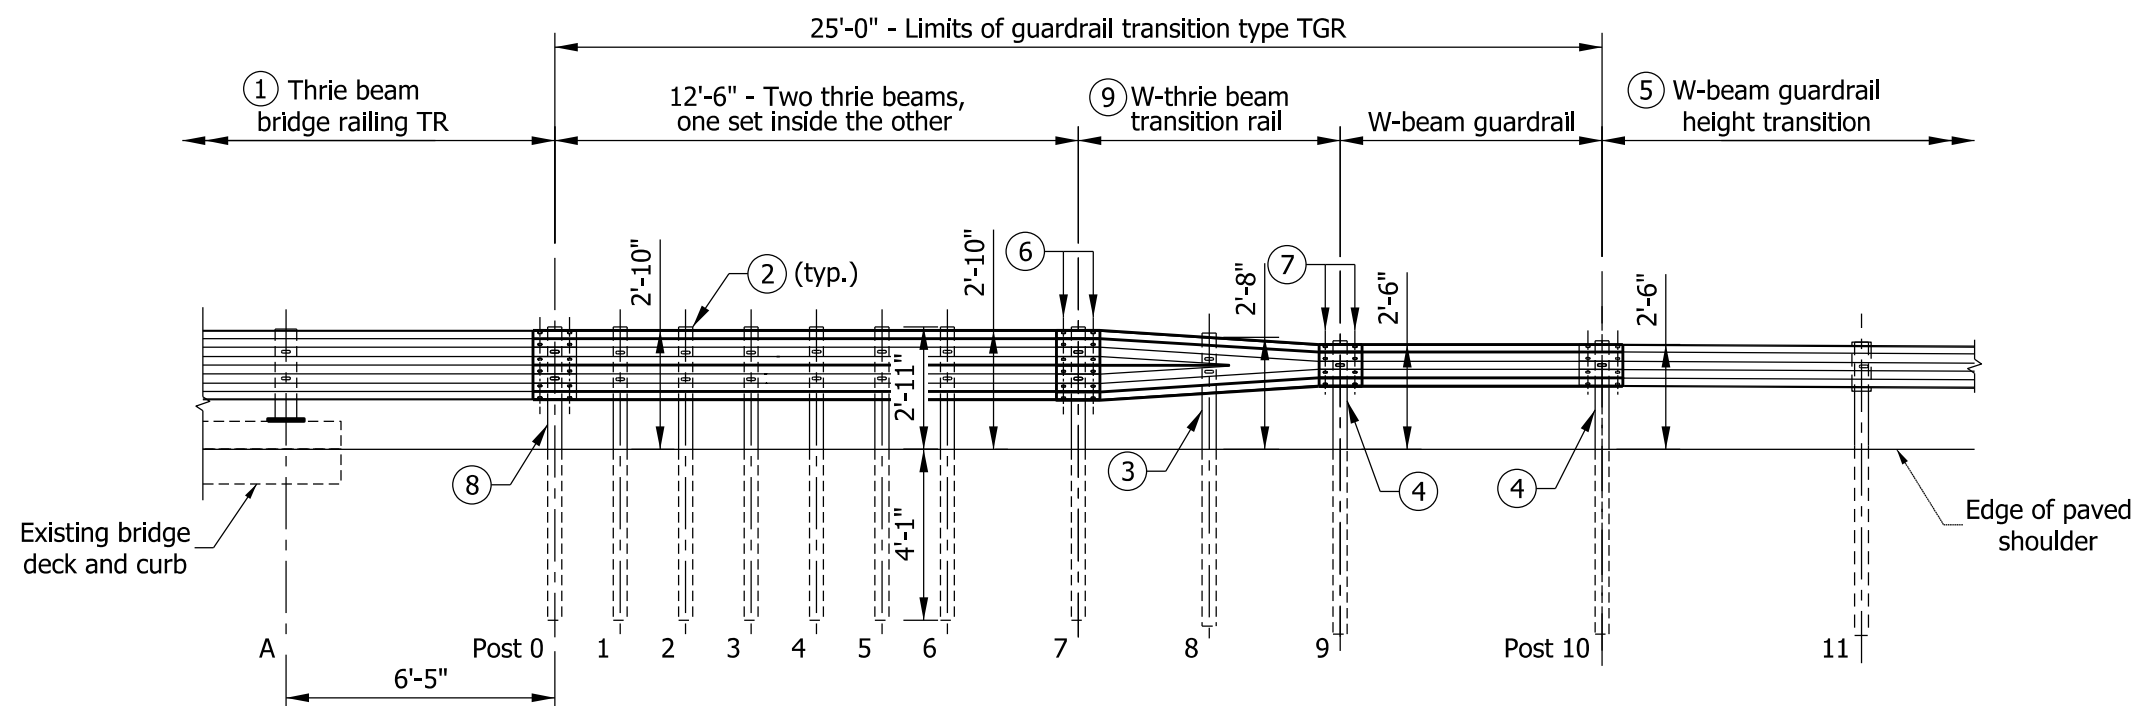

ELEVATION

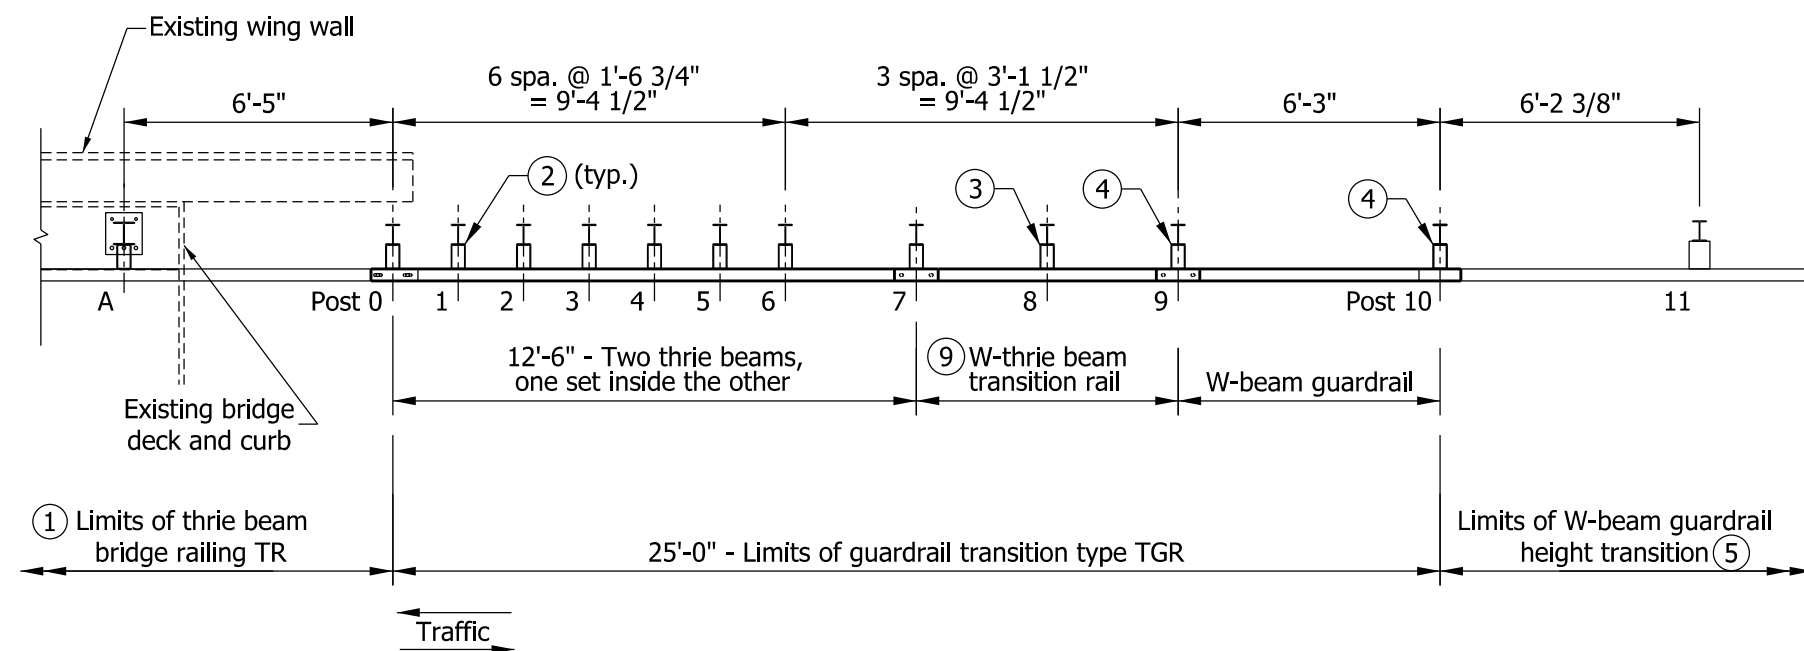

PLAN VIEW

## NOTES


- ① See Standard Drawing E 706-BRTR-01 for thrie beam bridge railing TR.
- ② TGB transition post/blockout assembly. See Standard Drawing E 601-TTGB-03 for post and blockout details. Adjust post height to accommodate guardrail heights indicated on this sheet. Attach rail using two 5/8" Ø x 2" std. button head bolts with rectangular plate washers, round washers, and recess nuts.
- ③ W-thrie beam transition post/blockout assembly. See Standard Drawing E 601-TTGB-04 for post and blockout details. Adjust post height to accommodate guardrail heights indicated on this sheet. Attach rail using two 5/8" Ø x 2" std. button head bolts with rectangular plate washers, round washers, and recess nuts.
- ④ W-beam post/blockout assembly. See Standard Drawing E 601-TTGB-05 for post and blockout details. Adjust post height to accommodate guardrail heights indicated on this sheet. Attach rail using one 5/8" Ø x 1 1/4" std. button head bolt with rectangular plate washer, round washer, and recess nut.
- ⑤ See Standard Drawing E 706-BRTR-06 for W-beam guardrail height transition.
- ⑥ Twelve 5/8" Ø x 2" std. button head bolts with round washers and recess nuts, through rail sections.
- ⑦ Eight 5/8" Ø x 1 1/4" std. button head bolts with round washers and recess nuts.
- ⑧ Hand tighten post bolts on thrie beam expansion element and burr bolt threads.
- ⑨ See Standard Drawing E 601-TBGC-01 for W-thrie beam transition rail.

## INDIANA DEPARTMENT OF TRANSPORTATION

### RETROFIT THRIE BEAM GUARDRAIL TRANSITION TYPE TGR

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTR-05




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

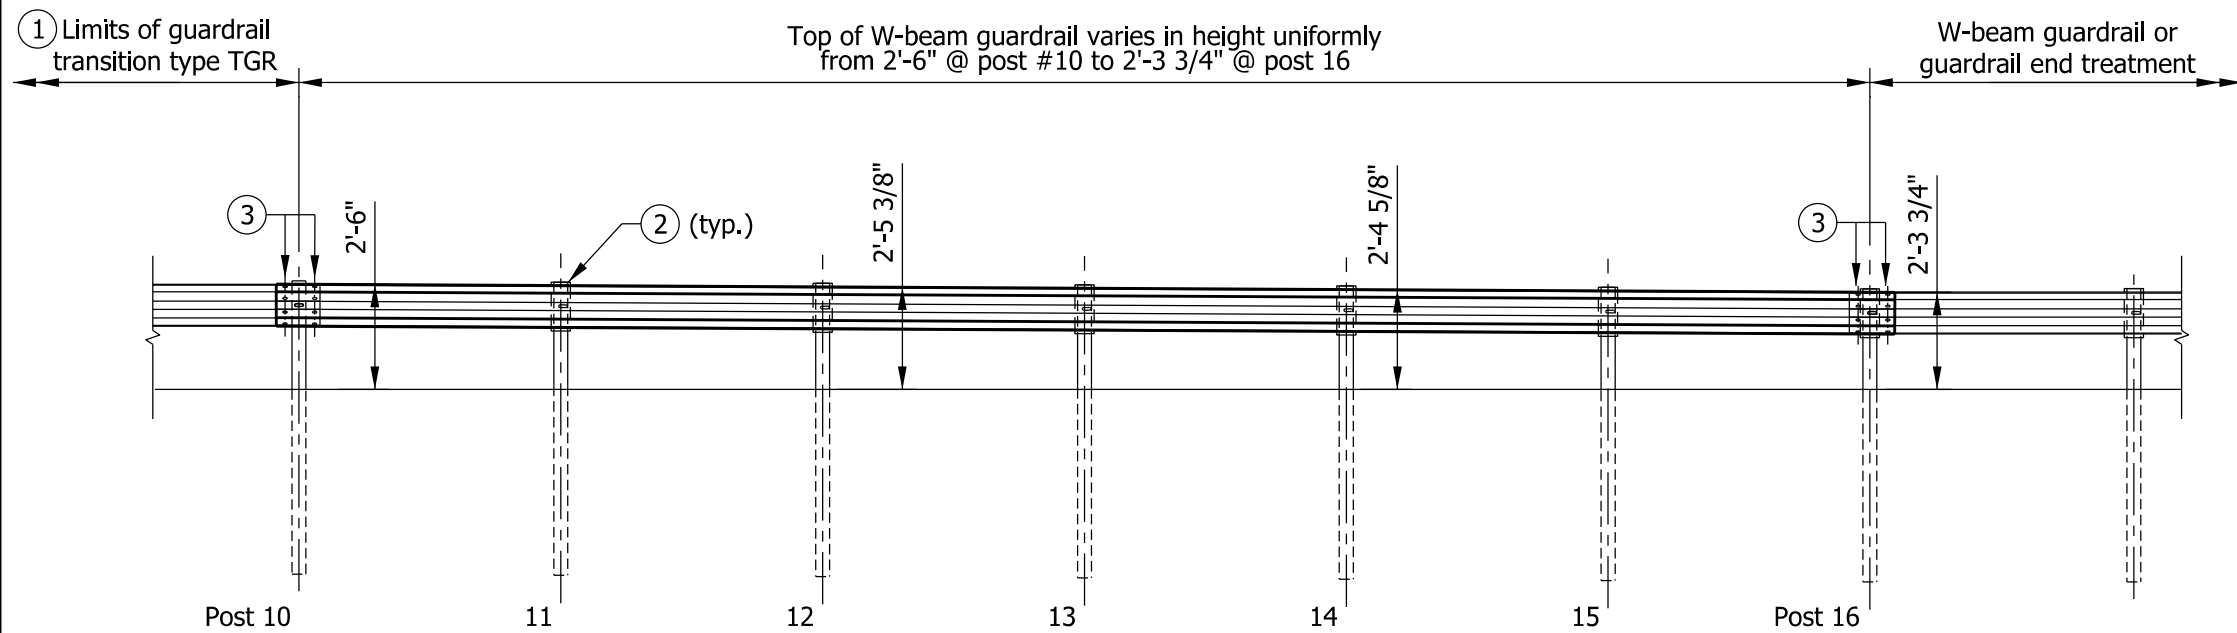

ELEVATION

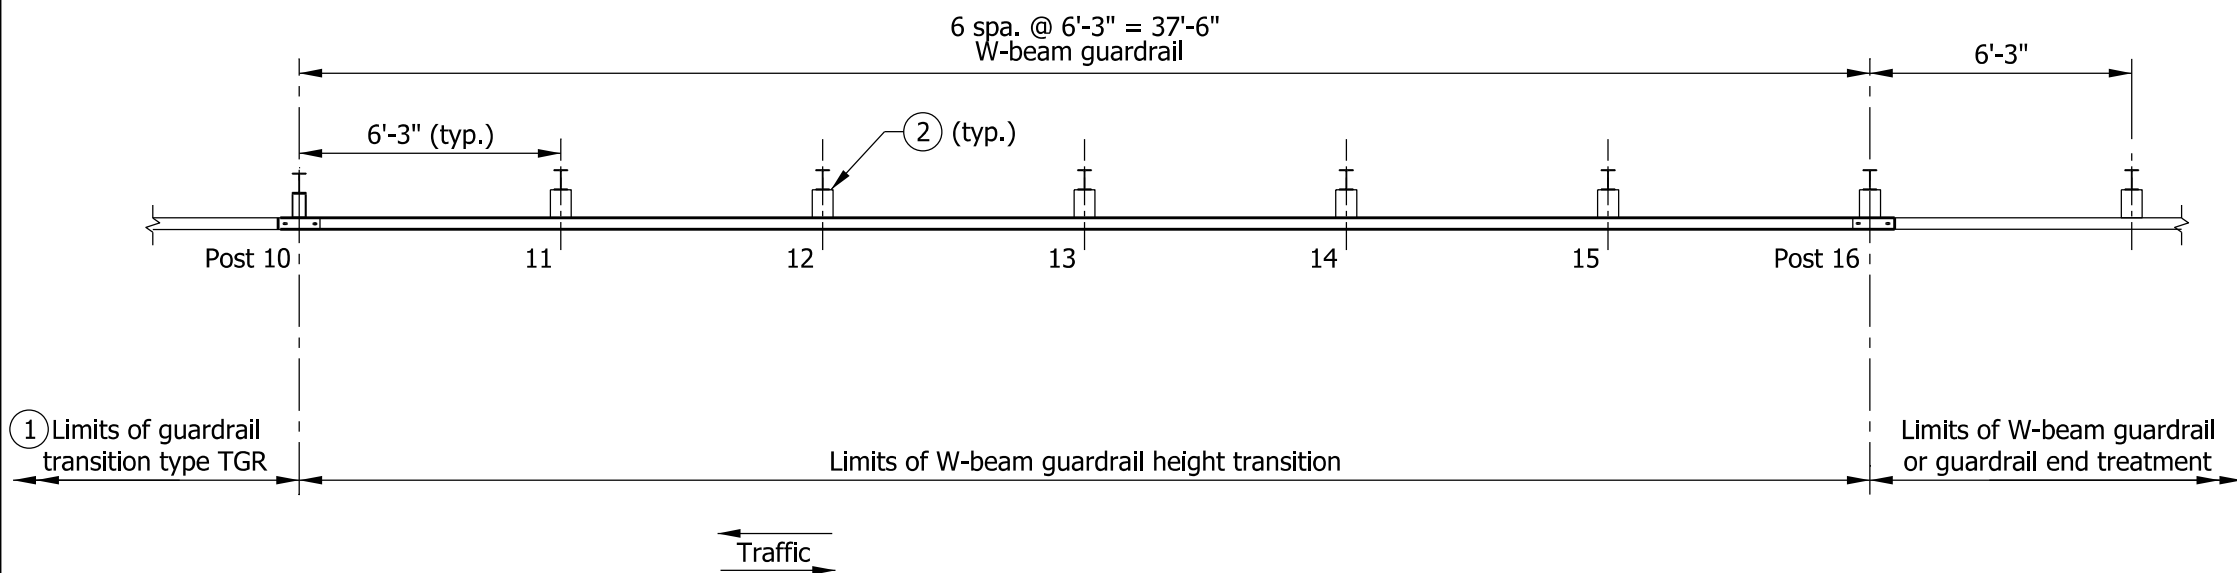

PLAN VIEW

NOTES


- ① See Standard Drawing E 706-BRTR-05 for thrie beam guardrail transition type TGR.
- ② W-beam post/blockout assembly. See Standard Drawing E 601-WGBA-01 for post and blockout details. Adjust post height to accommodate guardrail heights indicated on this sheet. Attach rail using one 5/8" Ø x 1 1/4" std. button head bolt with rectangular plate washer, round washer, and recess nut.
- ③ Eight 5/8" Ø x 1 1/4" std. button head bolts with round washers and recess nuts.

INDIANA DEPARTMENT OF TRANSPORTATION

RETROFIT THRIE BEAM  
GUARDRAIL HEIGHT TRANSITION

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTR-06






/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

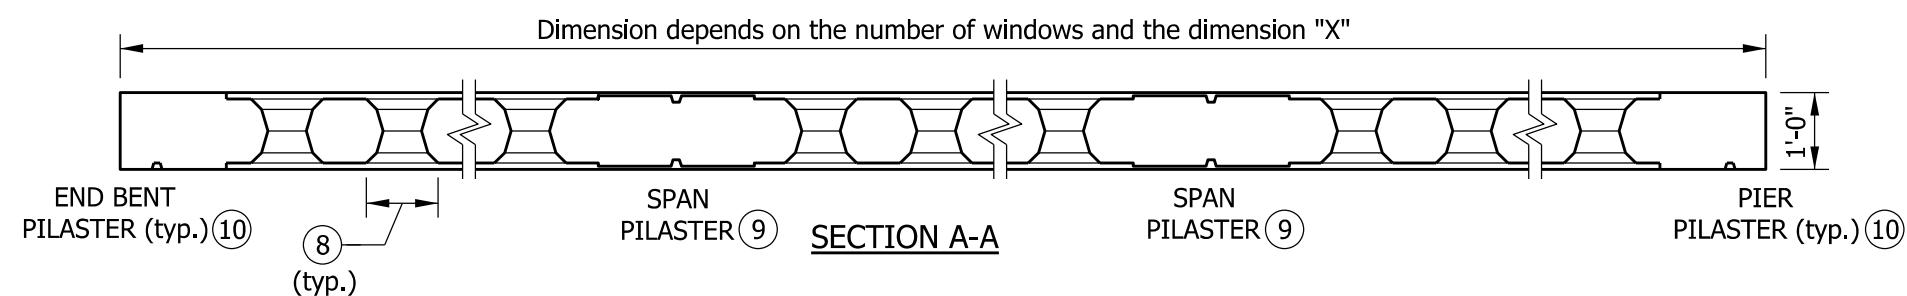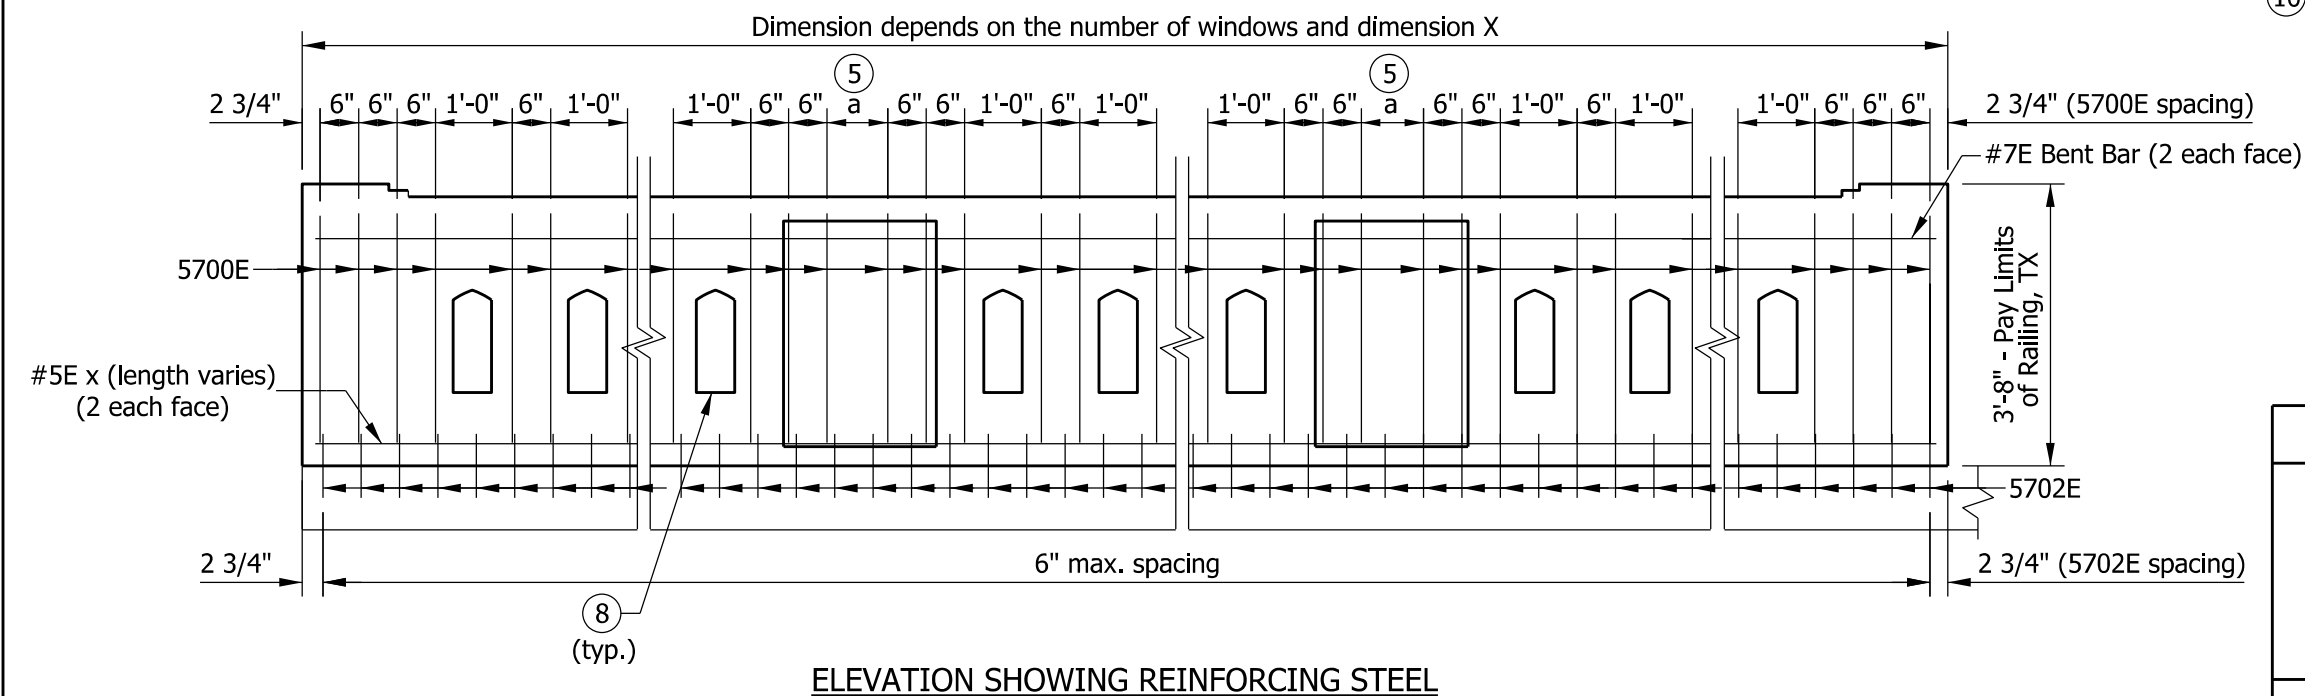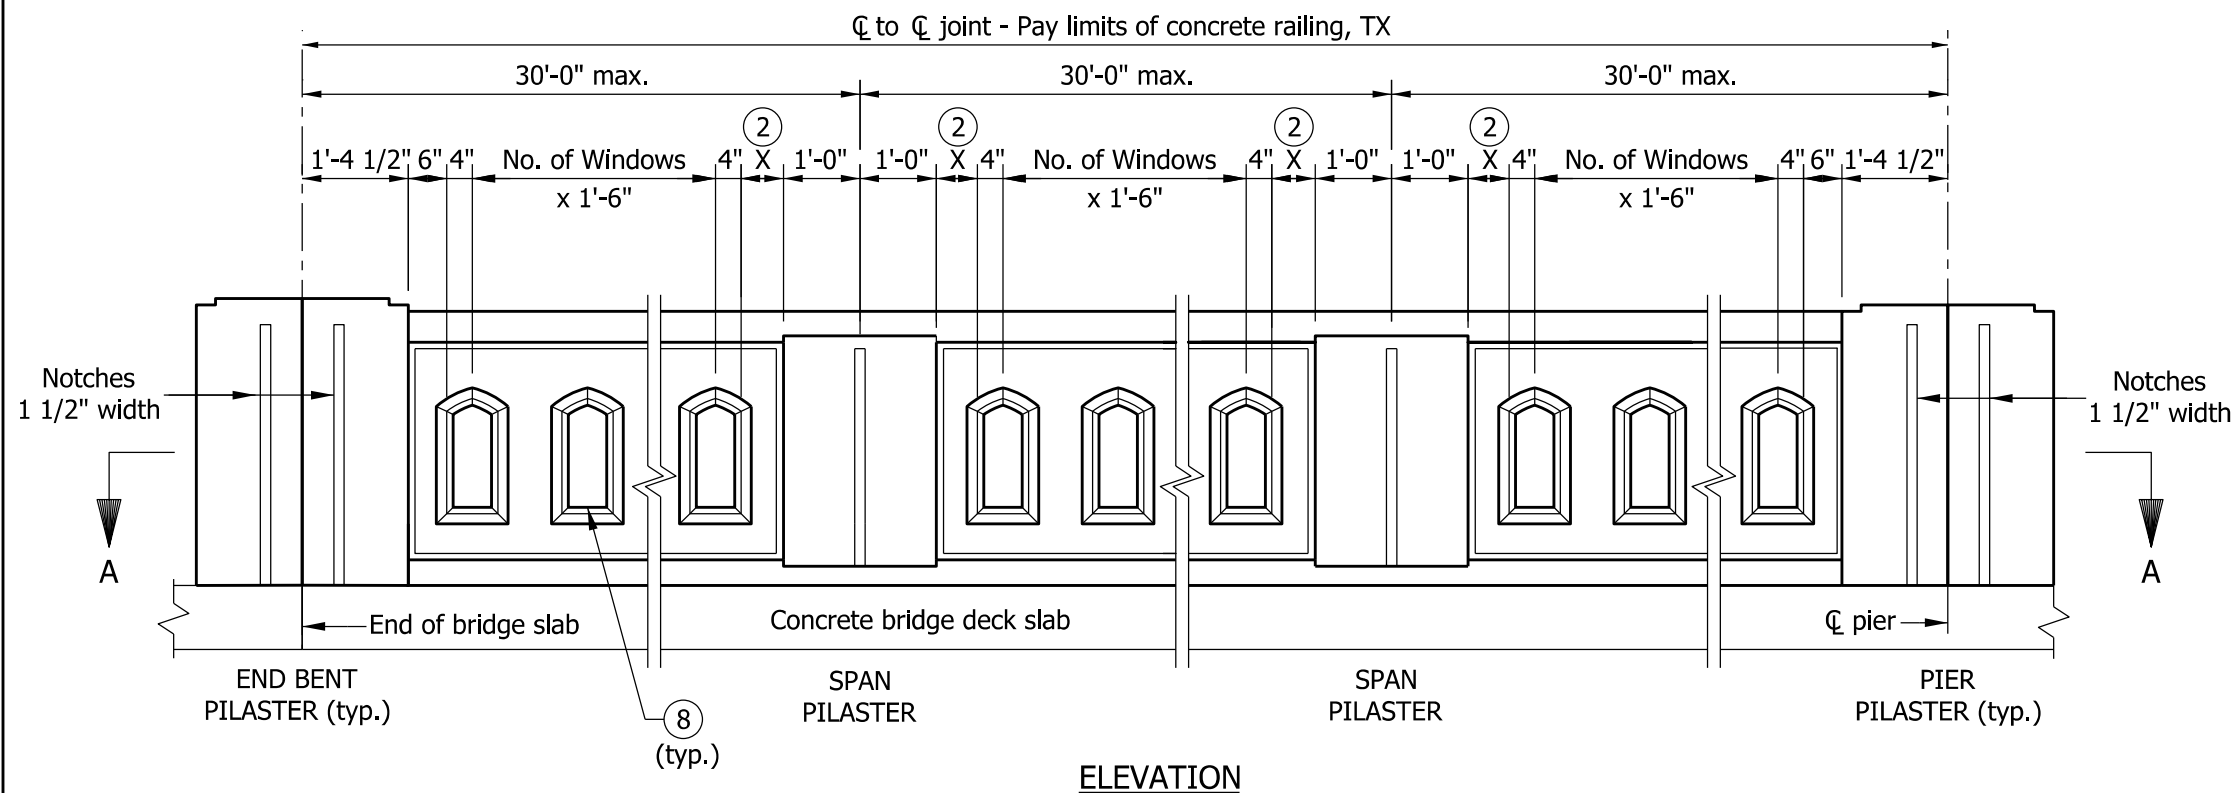

## NOTES


- See Standard Drawing E 706-BRTX-02, -03, and -04 for sections.
- Select the number of windows and adjust dimension X to fit the span length.
- Span pilasters may be omitted for a short span with  $X \leq 2'-0"$ .
- Span pilasters are for aesthetic purposes only. Omitting span pilasters does not decrease the integrity of the railing.
- Dimension  $a = 2X + 3 \frac{1}{2}"$ . Space bars within dimension  $a$  equally  $\leq 6"$ .
- See Standard Drawing E 706-TTXX-01 for Concrete Bridge Railing Transition, TTXX.
- All reinforcing bars designated E shall be epoxy coated.
- Window opening. See Standard Drawing E 706-BRTX-02 for details.
- See Standard Drawing E 706-BRTX-03 for span pilaster details.
- See Standard Drawing E 706-BRTX-04 for pier and end bent pilaster details.

INDIANA DEPARTMENT OF TRANSPORTATION

RAILING, TX  
TYPICAL PANEL

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTX-01






/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

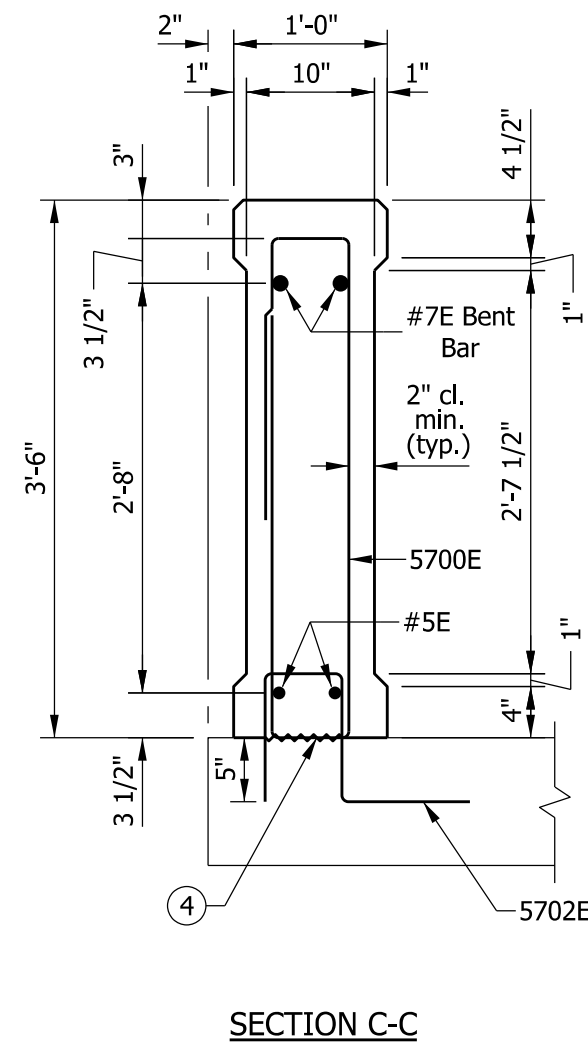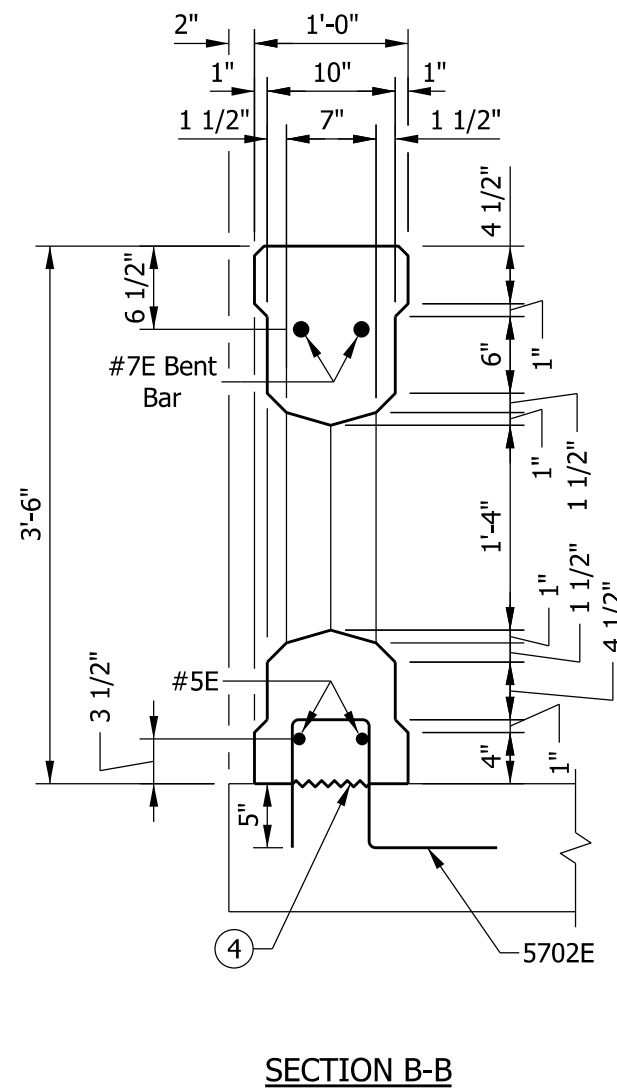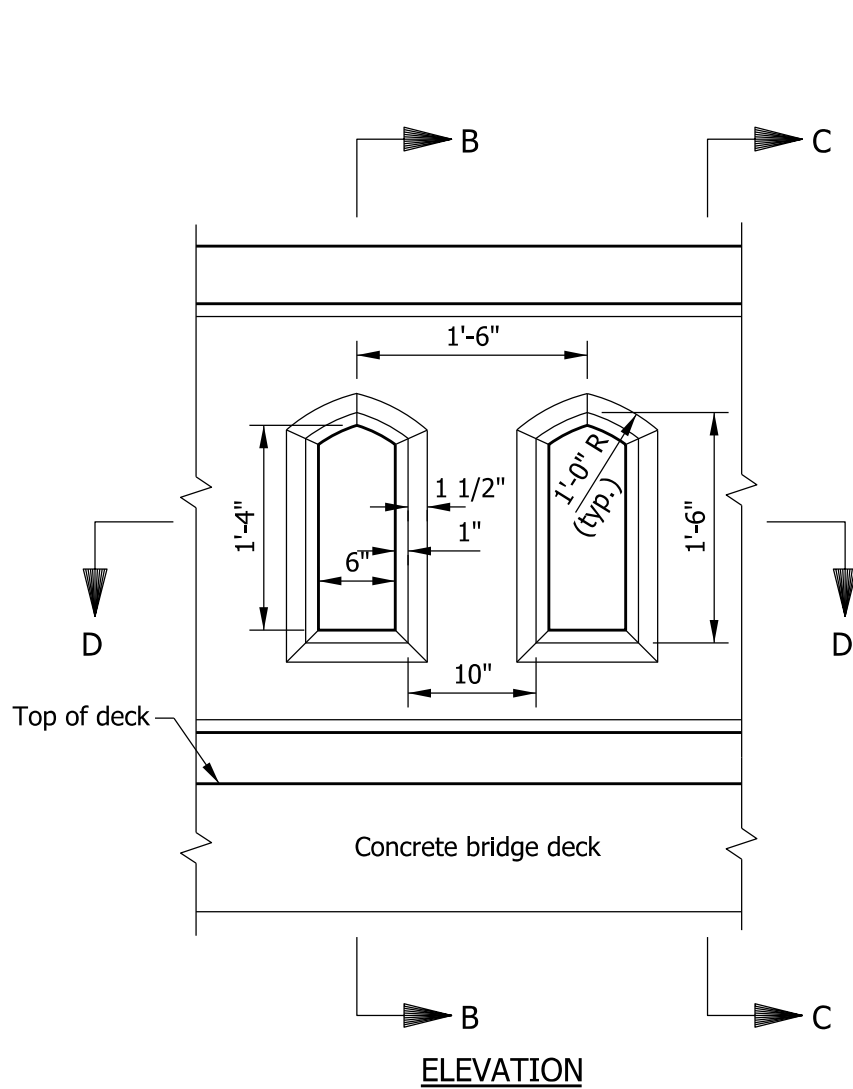

# NOTES

1. All reinforcing bars designated E shall be epoxy coated.
2. All chamfered edges shall be 3/4".
3. See Standard Drawing E 706-BRTX-04 for reinforcing-bar diagrams.
- ④ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

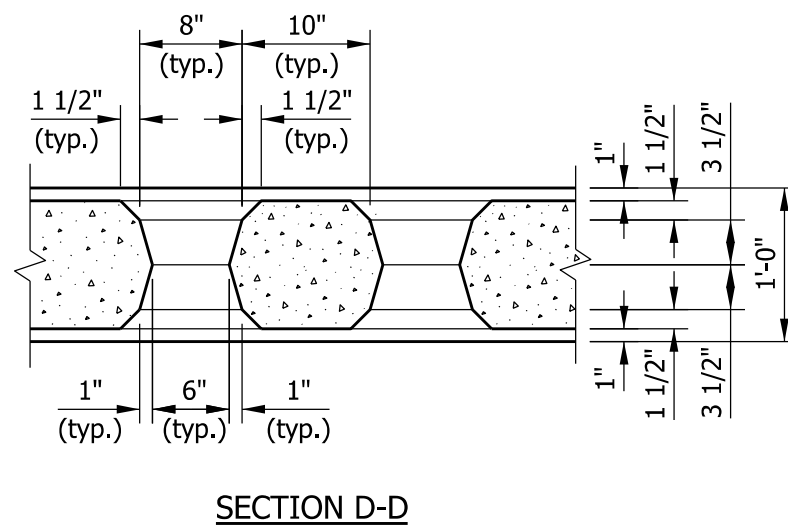


INDIANA DEPARTMENT OF TRANSPORTATION

RAILING, TX  
WINDOW DETAILS

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTX-02






/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE



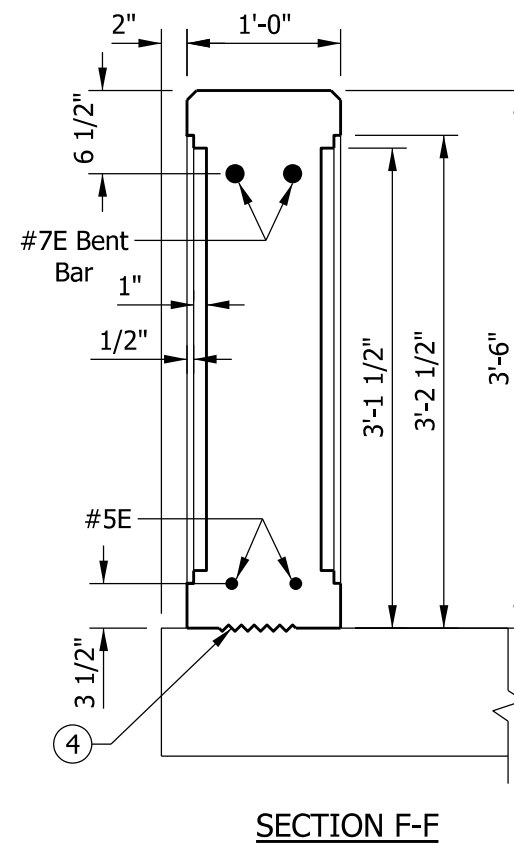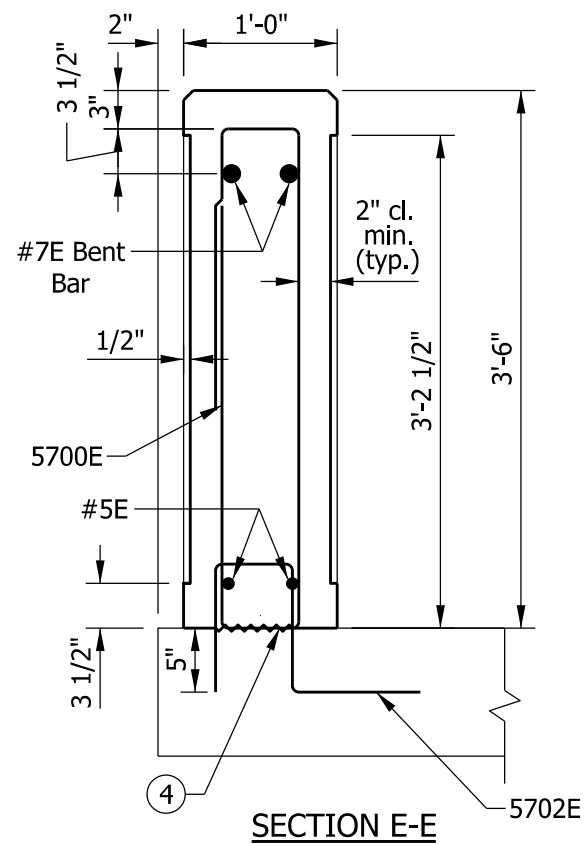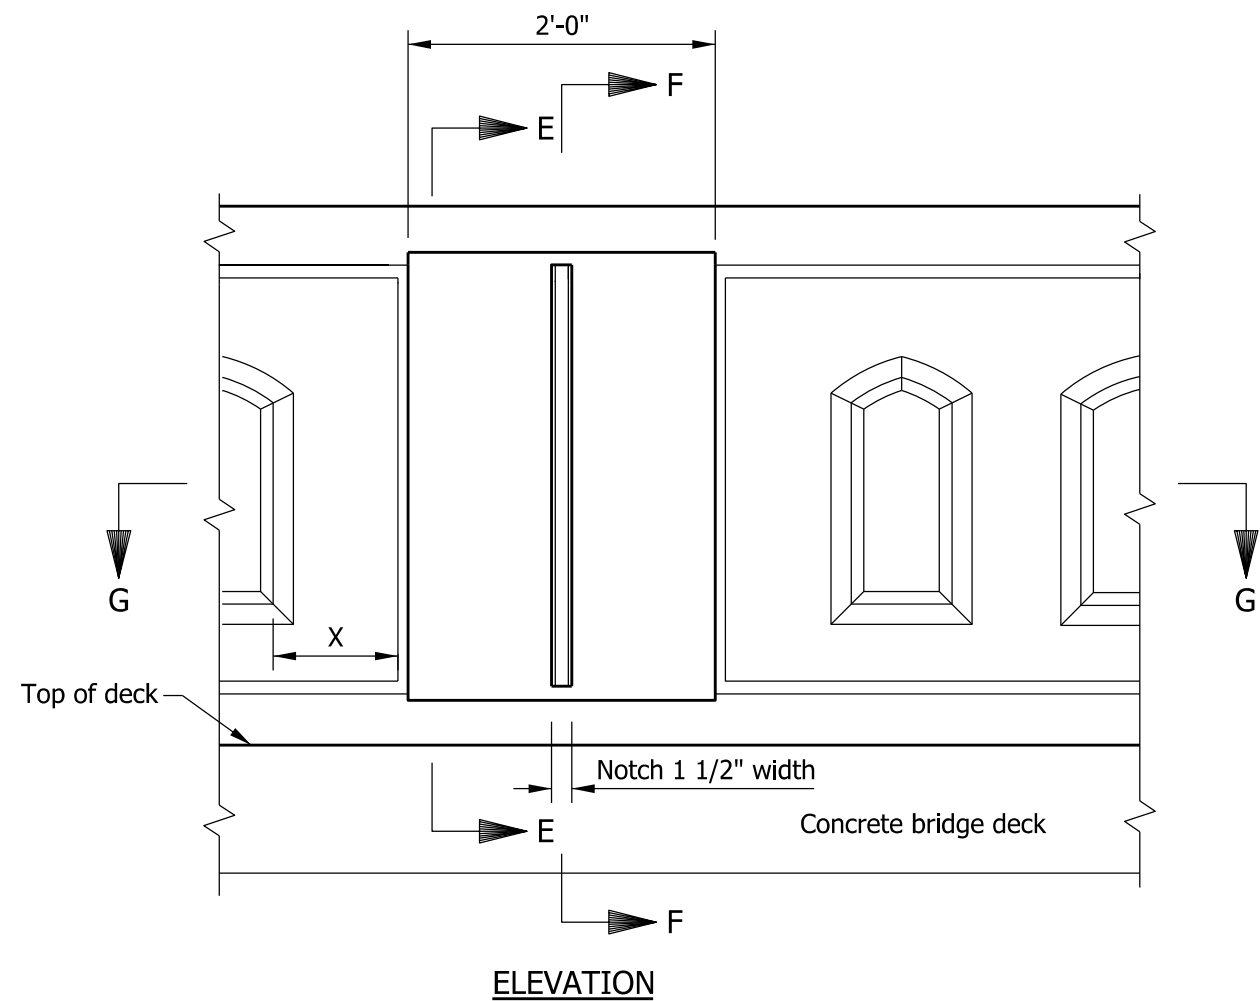


# NOTES


1. All reinforcing bars designated E shall be epoxy coated.
2. All chamfered edges shall be 3/4".
3. See Standard Drawing E 706-BRTX-04 for reinforcing-bar diagrams.
- ④ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
- ⑤ Adjust dimension X to fit the span length, depending upon the number of window openings.

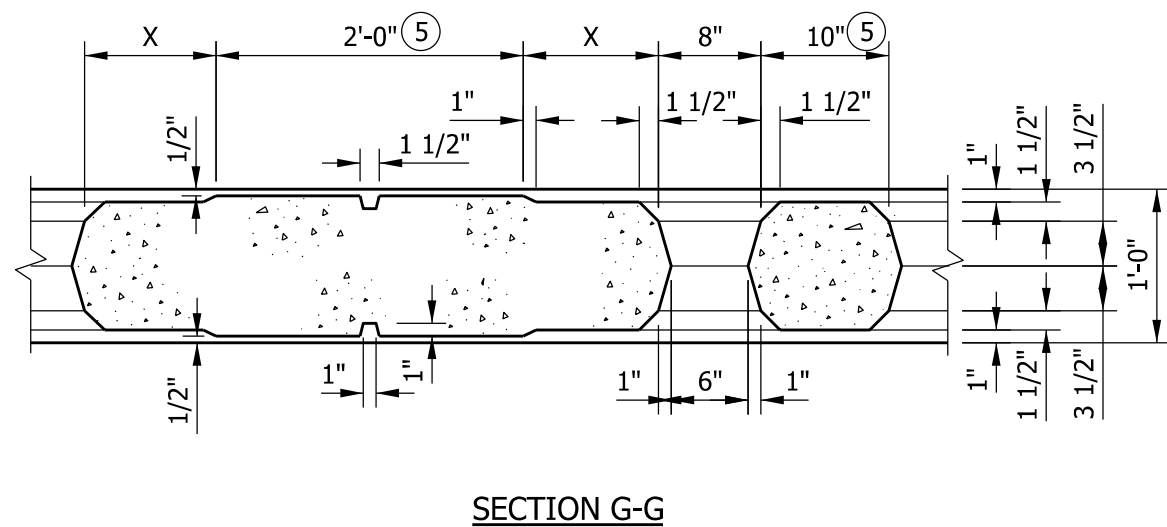


INDIANA DEPARTMENT OF TRANSPORTATION			
RAILING, TX SPAN PILASTER			
SEPTEMBER 2012			
STANDARD DRAWING NO.		E 706-BRTX-03	
	/s/ <i>Richard L. VanCleave</i>		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ <i>Mark A. Miller</i>		09/04/12
	CHIEF ENGINEER		DATE

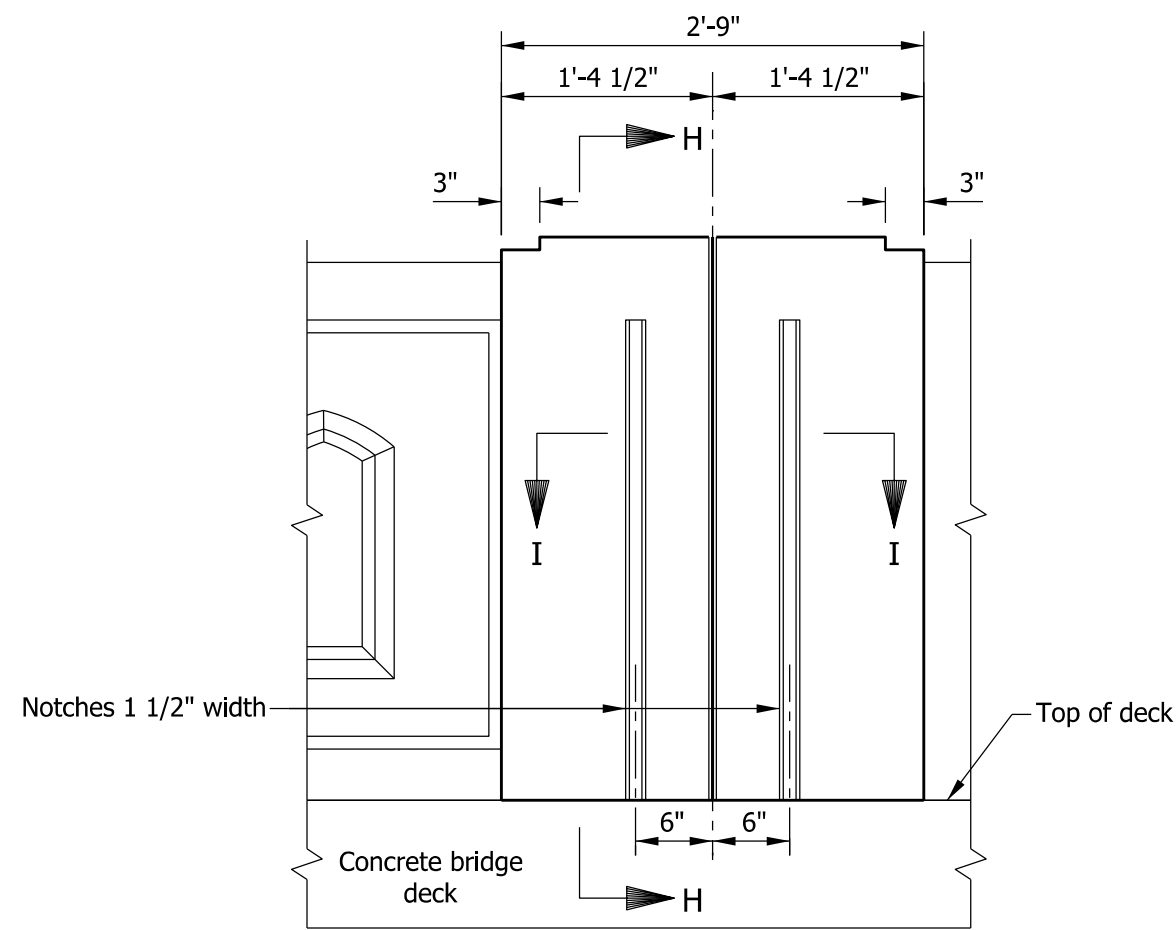


ELEVATION

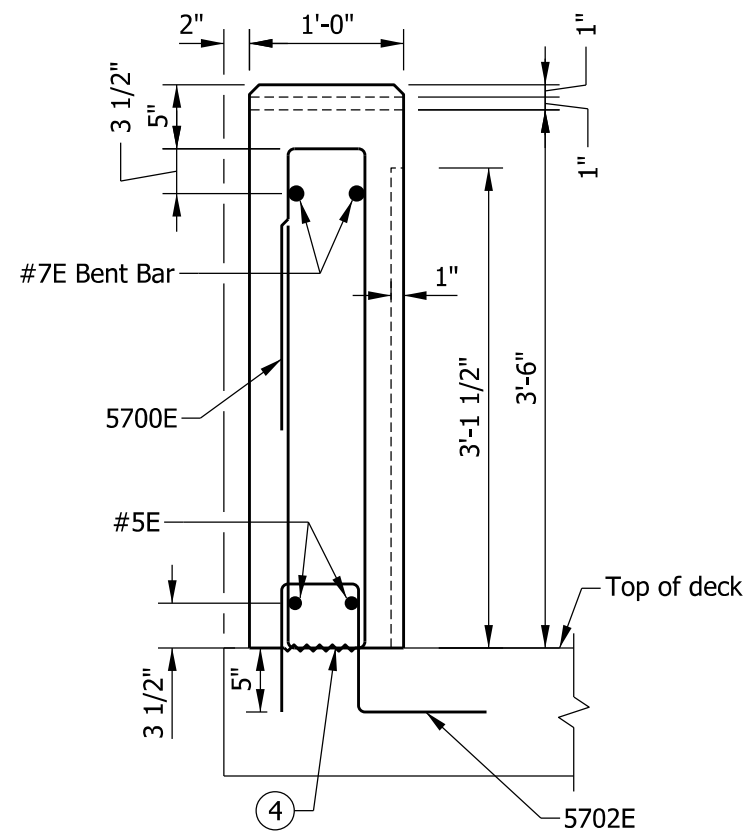


SECTION H-H

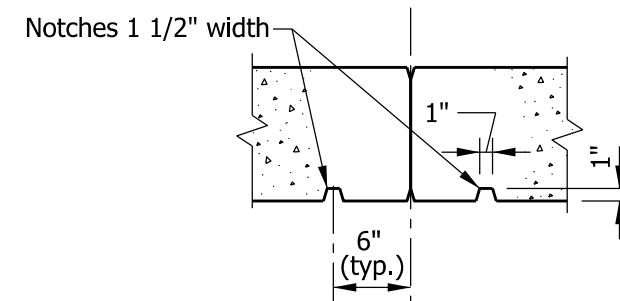


SECTION I-I

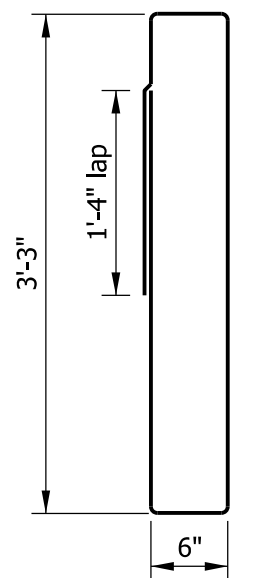

5700E x 8'-10"



5702E x 2'-2"

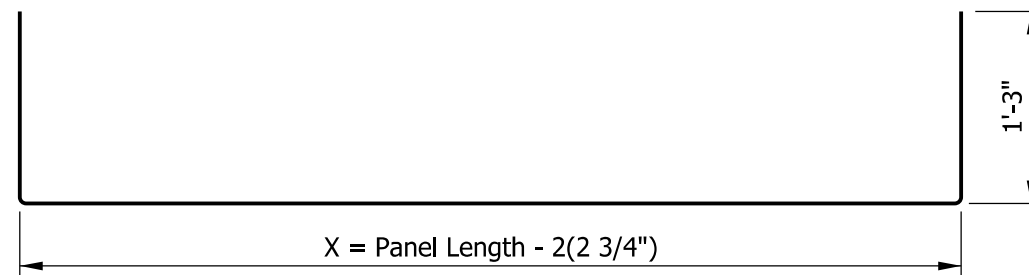

#7E BENT BAR x (X + 2'-6")

NOTES


1. All reinforcing bars designated E shall be epoxy coated.
2. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
3. All chamfered edges shall be 3/4".
4. Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

RAILING, TX  
PIER OR END BENT PILASTER

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTX-04




/s/ *Richard L. VanCleave* 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ *Mark A. Miller* 09/04/12

CHIEF ENGINEER DATE

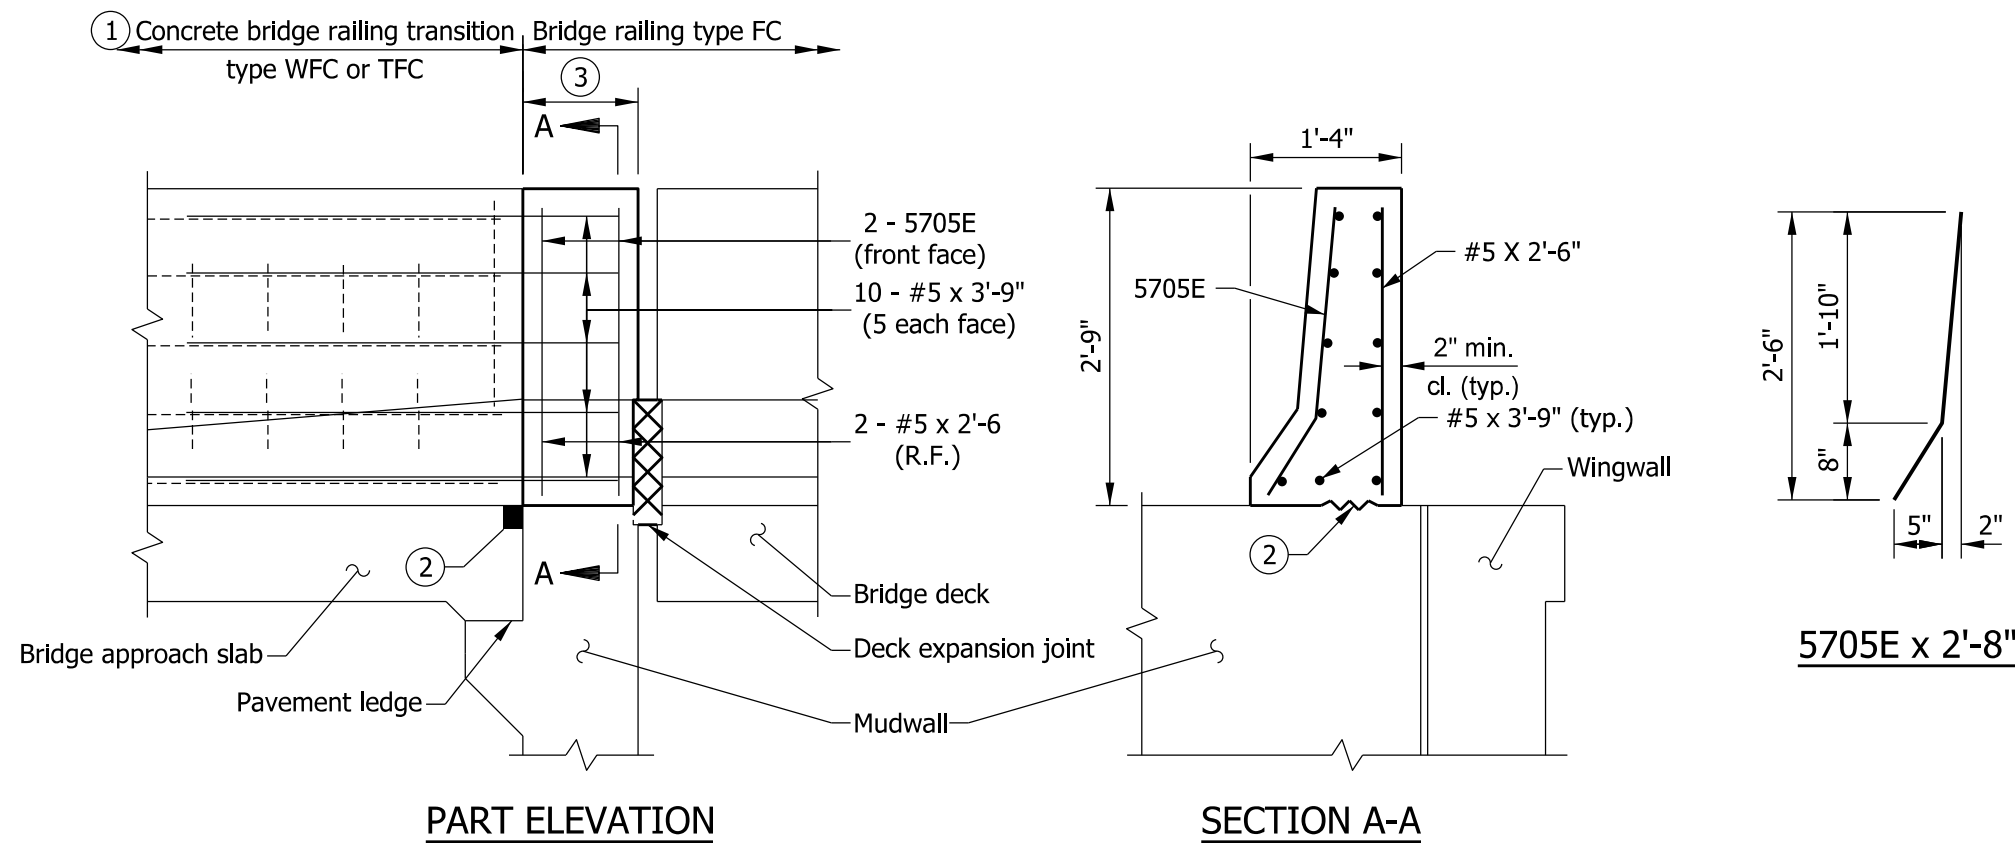

## NOTES

- ① See Standard Drawings E 706-TWFC-01 through -03 for concrete bridge railing transition type WFC. See Standard Drawings E 706-TTFC-01 through -03 for concrete bridge railing transition type TFC.
- ② See Standard Drawing E 609-BRJT-01 for joint type I-A.
- ③ This shall be part of the concrete bridge railing, but it shall be poured with the concrete bridge-railing transition. The minimum length shall be equal to the width of the mudwall. See Standard Drawing E 706-BRSF-01 for bridge railing type FC dimensions.
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

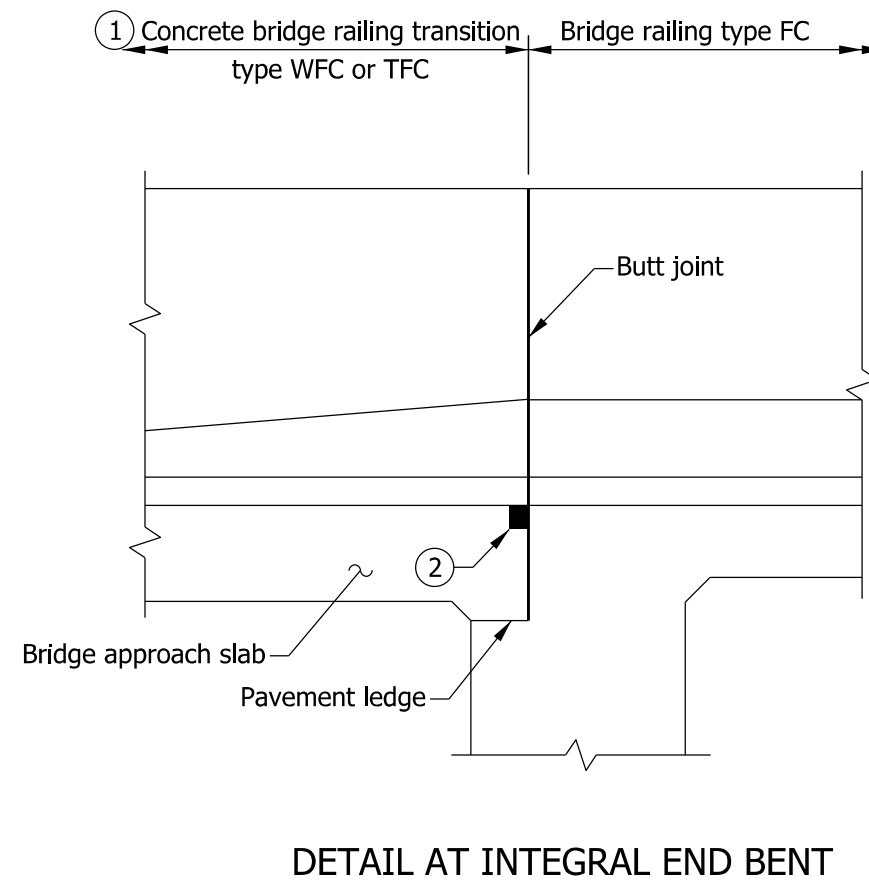


INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING TRANSITION WFC  
OR TFC DETAILS AT END BENT

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-CBRT-01





/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

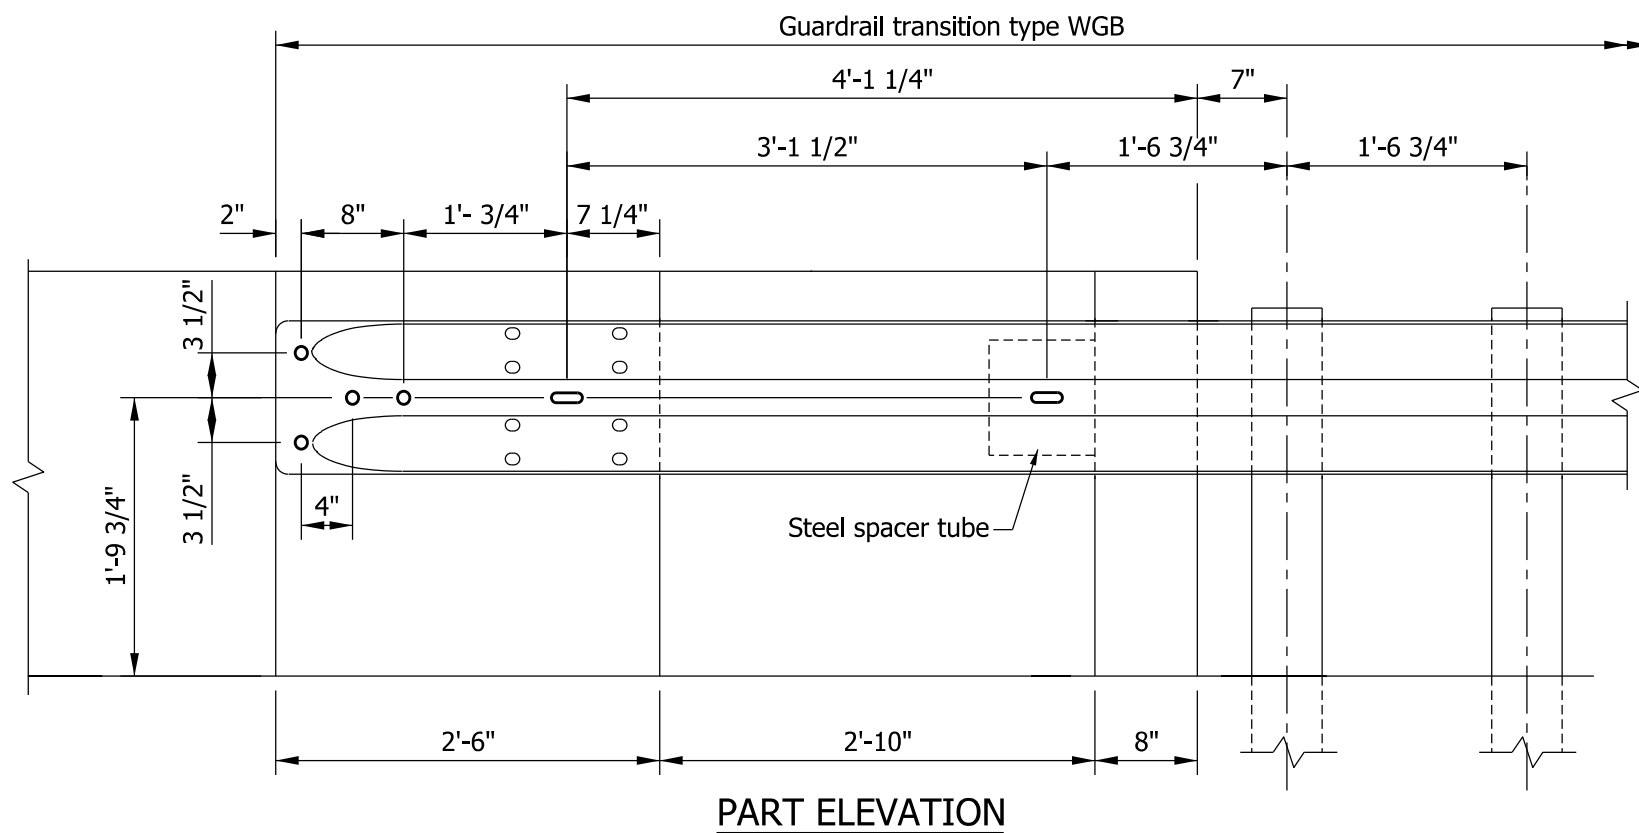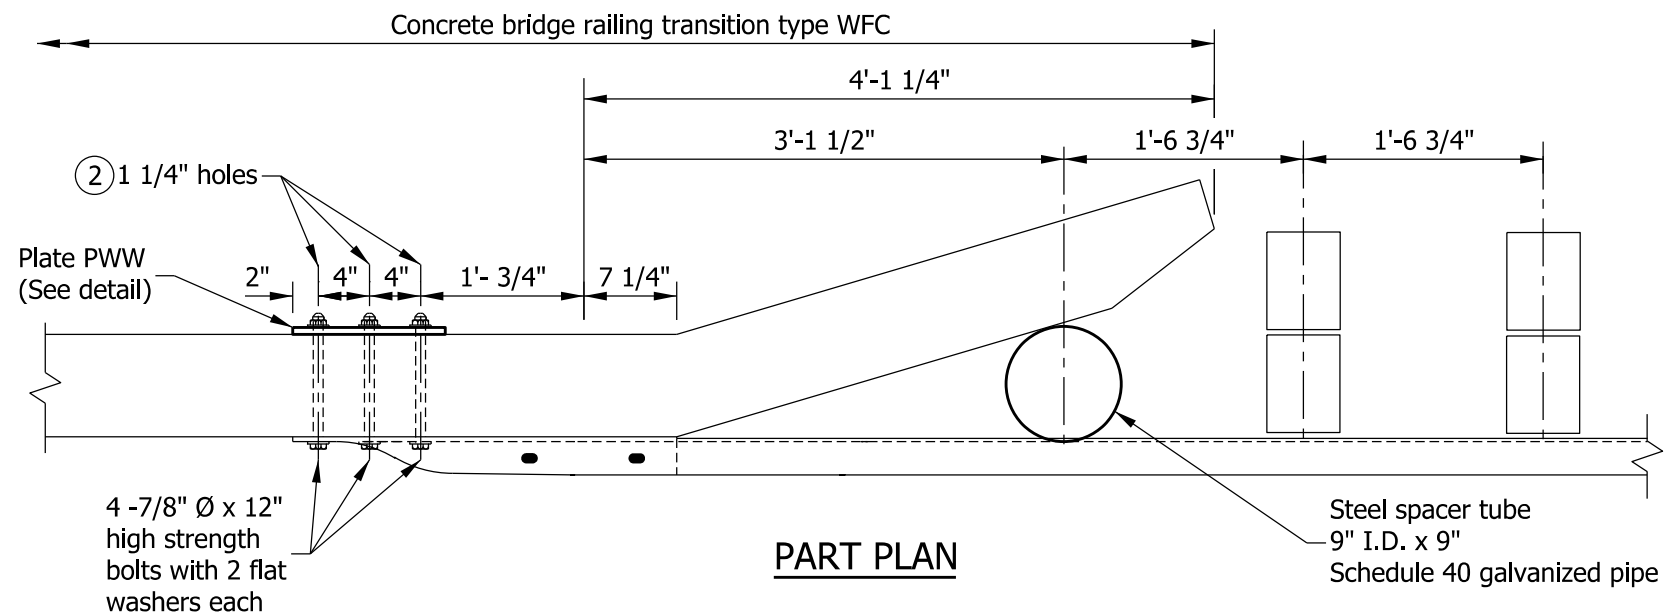

## NOTES

1. See Standard Drawing E 706-TWFC-01 through -03 for concrete bridge railing transition type WFC. See Standard Drawings E 601-TWGB-01 through -03 for guardrail transition type WGB .

2. Preformed holes, for connection of the guardrail transition type WGB to the end of the concrete bridge railing transition type WFC.

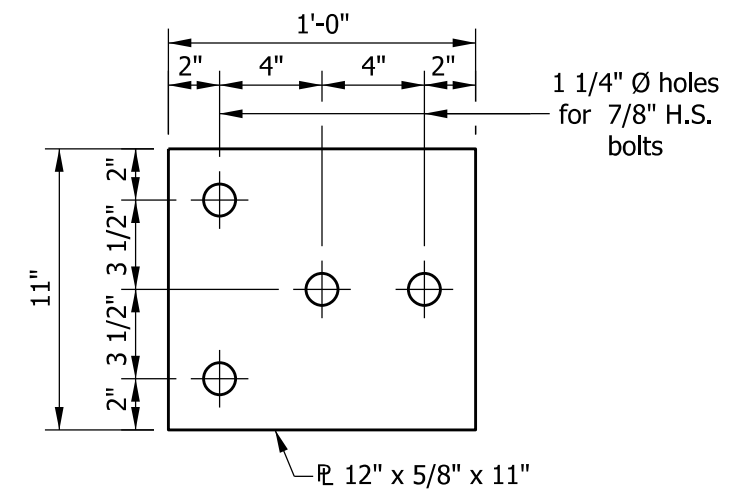


INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING TRANSITION WFC  
ATTACHMENT OF GUARDRAIL


SEPTEMBER 2012

STANDARD DRAWING NO. E 706-CBRT-02




/s/ Richard L. VanCleave 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12  
CHIEF ENGINEER DATE

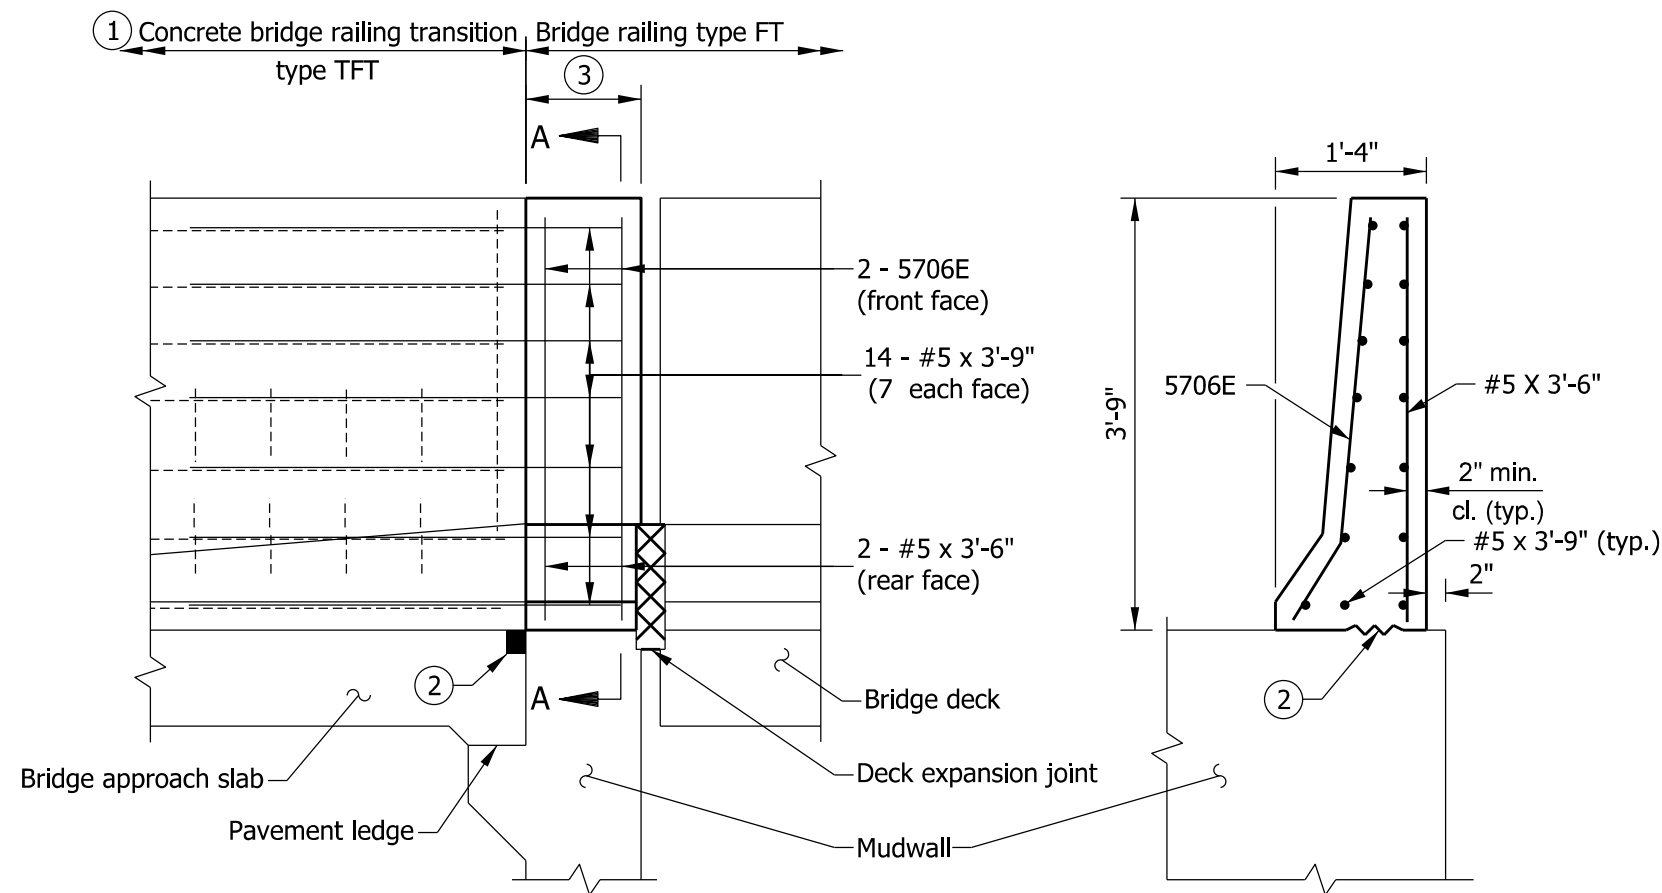


**PART ELEVATION**

**SECTION A-A**

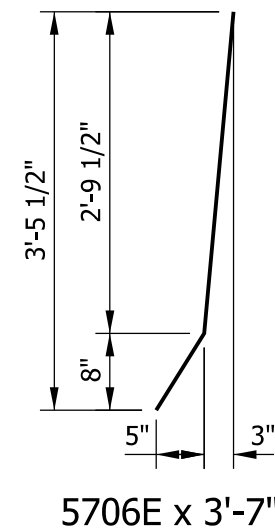

**NOTES**

- ① See Standard Drawings E 706-TTFT-01 through -03 for concrete bridge railing transition type TFT details.
- ② See Standard Drawing E 609-BRJT-01 for joint type I-A.
- ③ This shall be part of the concrete bridge railing, but it shall be poured with the concrete bridge-railing transition. The minimum length shall be equal to the width of the mudwall. See Standard Drawing E 706-BRSF-02 for bridge railing type FT dimensions.
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending diagrams and notes.

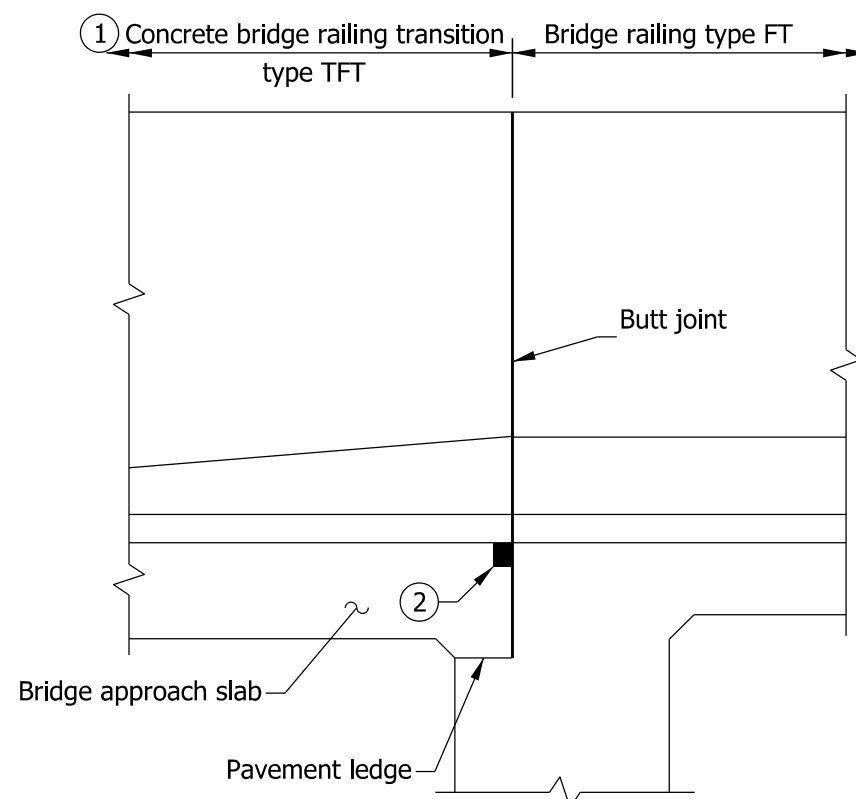


**DETAIL AT INTEGRAL END BENT**

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING TRANSITION TFT  
DETAILS AT END BENT

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-CBRT-03





/s/ *Richard L. VanCleave* 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ *Mark A. Miller* 09/04/12

CHIEF ENGINEER DATE

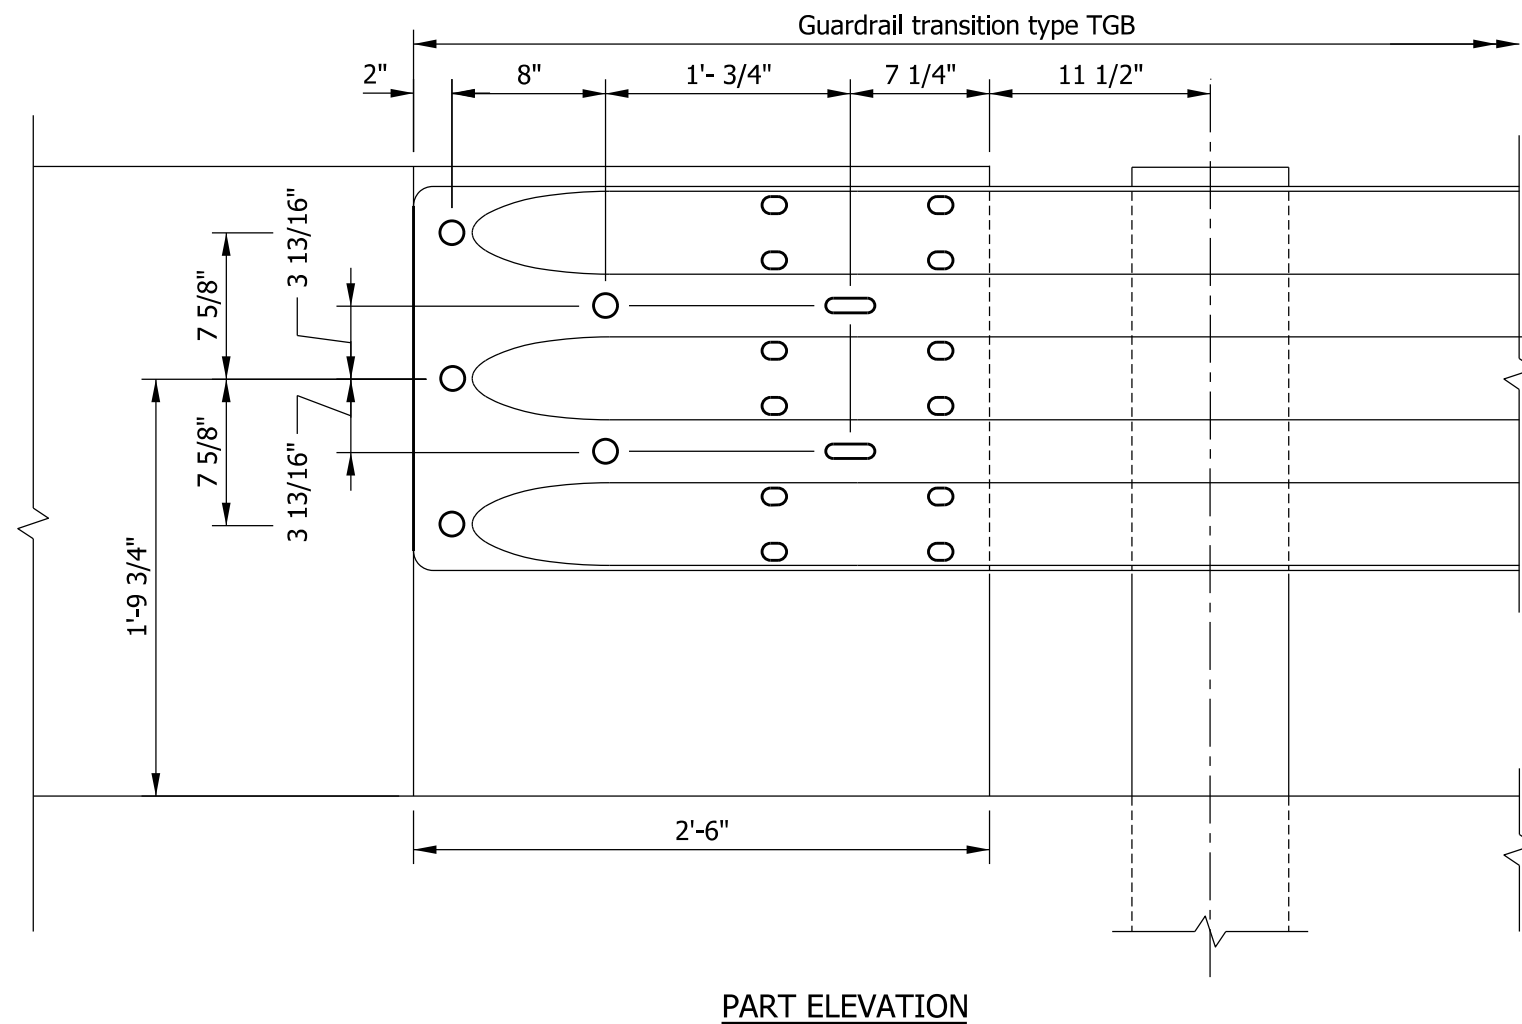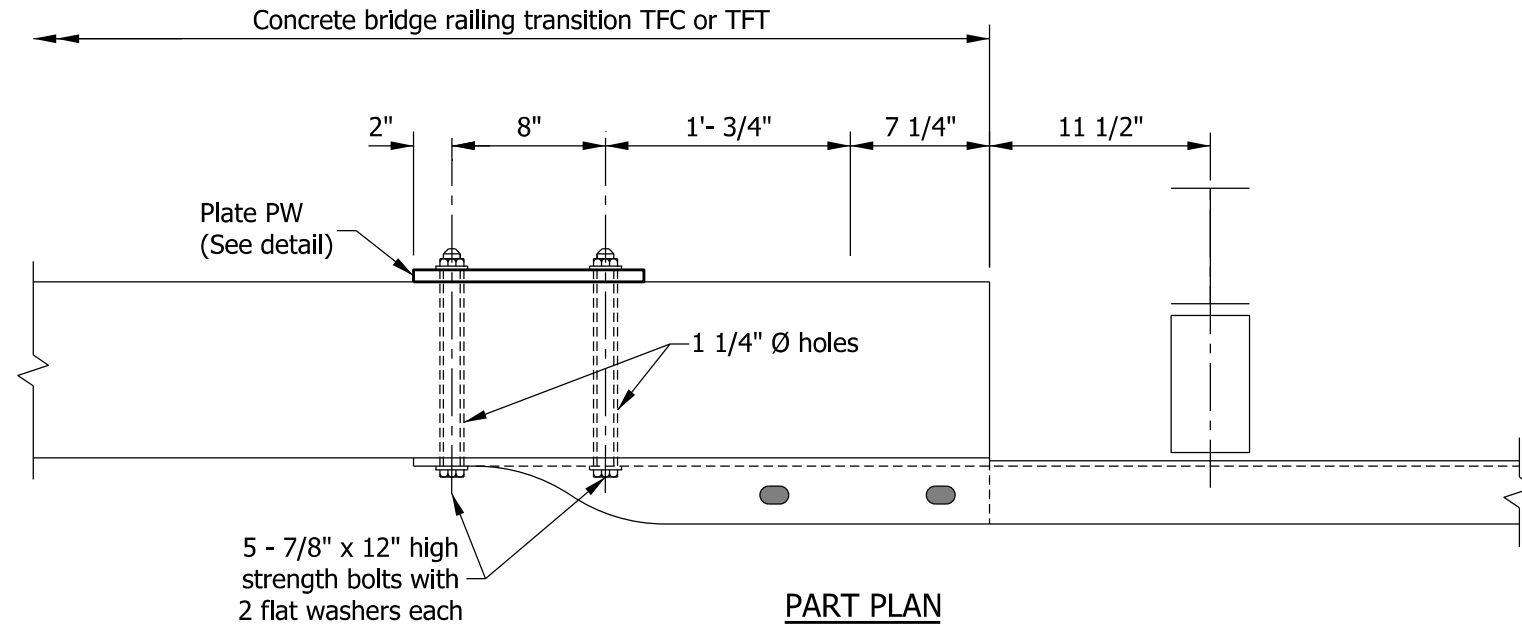

## NOTES

- See Standard Drawings E 706-TTFC-01 through -03 for concrete bridge railing transition type TFC. See Standard Drawings E 706-TTFT-01 through -03 for concrete bridge railing transition type TFT. See Standard Drawings E 601-TTGB-01 through -05 for guardrail transition type TGB.
- Preformed holes, for connection of the guardrail transition type TGB to the end of the concrete bridge railing transition type TFC or TFT.

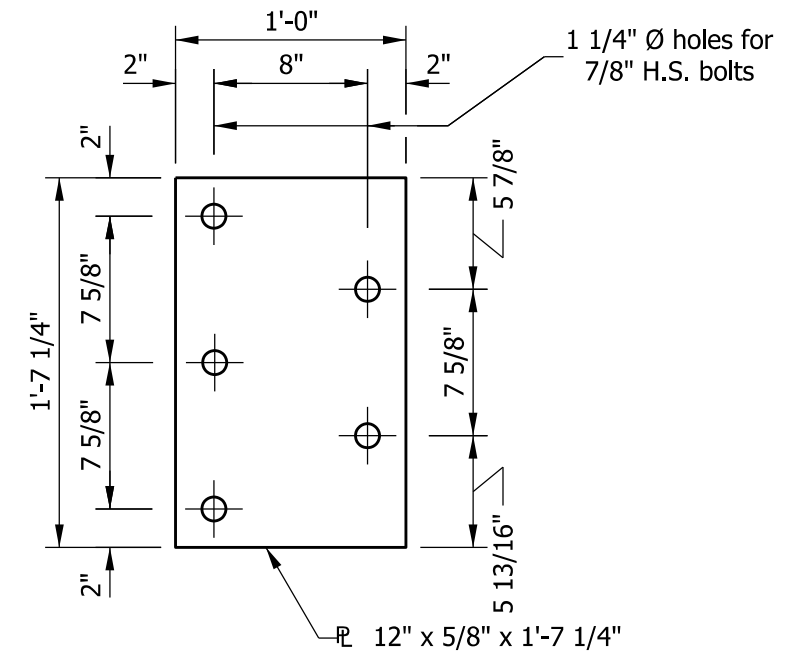


**PLATE PW**

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING TRANSITION TFC OR  
TFT ATTACHMENT OF GUARDRAIL

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-CBRT-04




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

## NOTES

1. See Standard Drawing E 706-MSRW-10 for reinforcing-bar diagrams and General Notes .
2. See Standard Drawing E 706-BRSF-01 for concrete railing type FC details.
3. Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

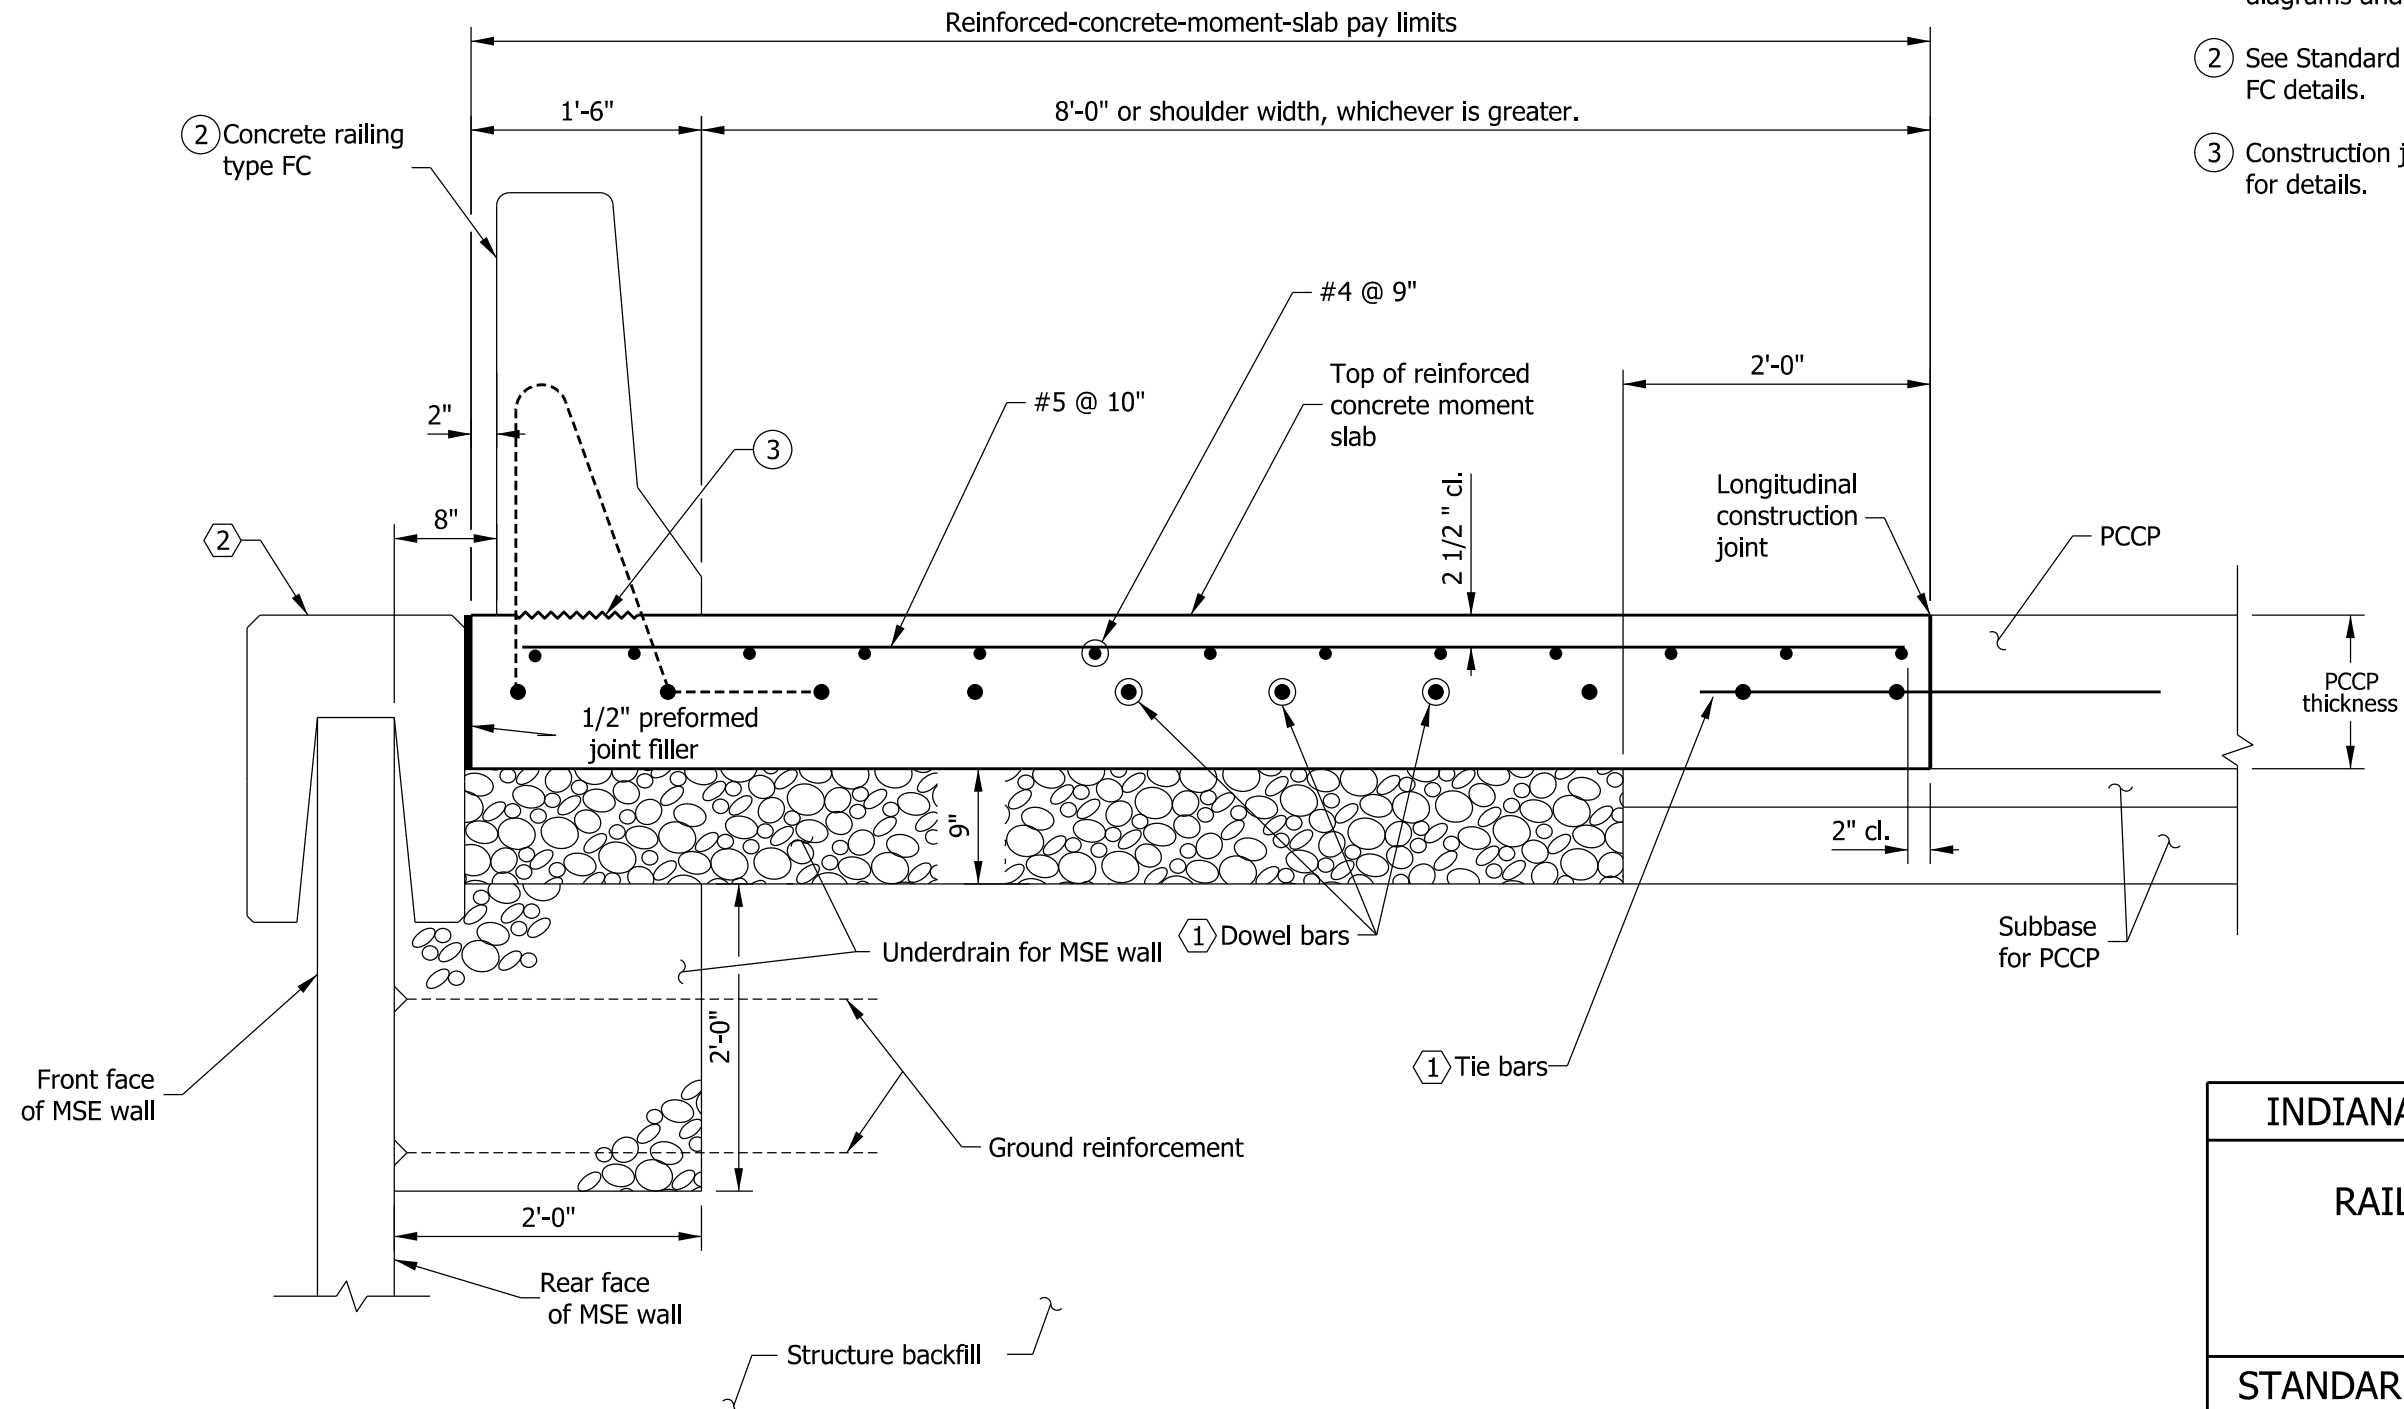


INDIANA DEPARTMENT OF TRANSPORTATION

### RAILING TYPE FC AND MOMENT SLAB ASIDE MSE WALL - PCCP

SEPTEMBER 2012

STANDARD DRAWING NO.	E 706-MSRW-01
----------------------	---------------



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS      DATE


/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER	DATE
----------------	------





## NOTES

1. See Standard Drawing E 706-MSRW-10 for reinforcing-bar diagrams and General Notes .
2. See Standard Drawing E 706-BRSF-01 for concrete railing type FC details.
3. Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

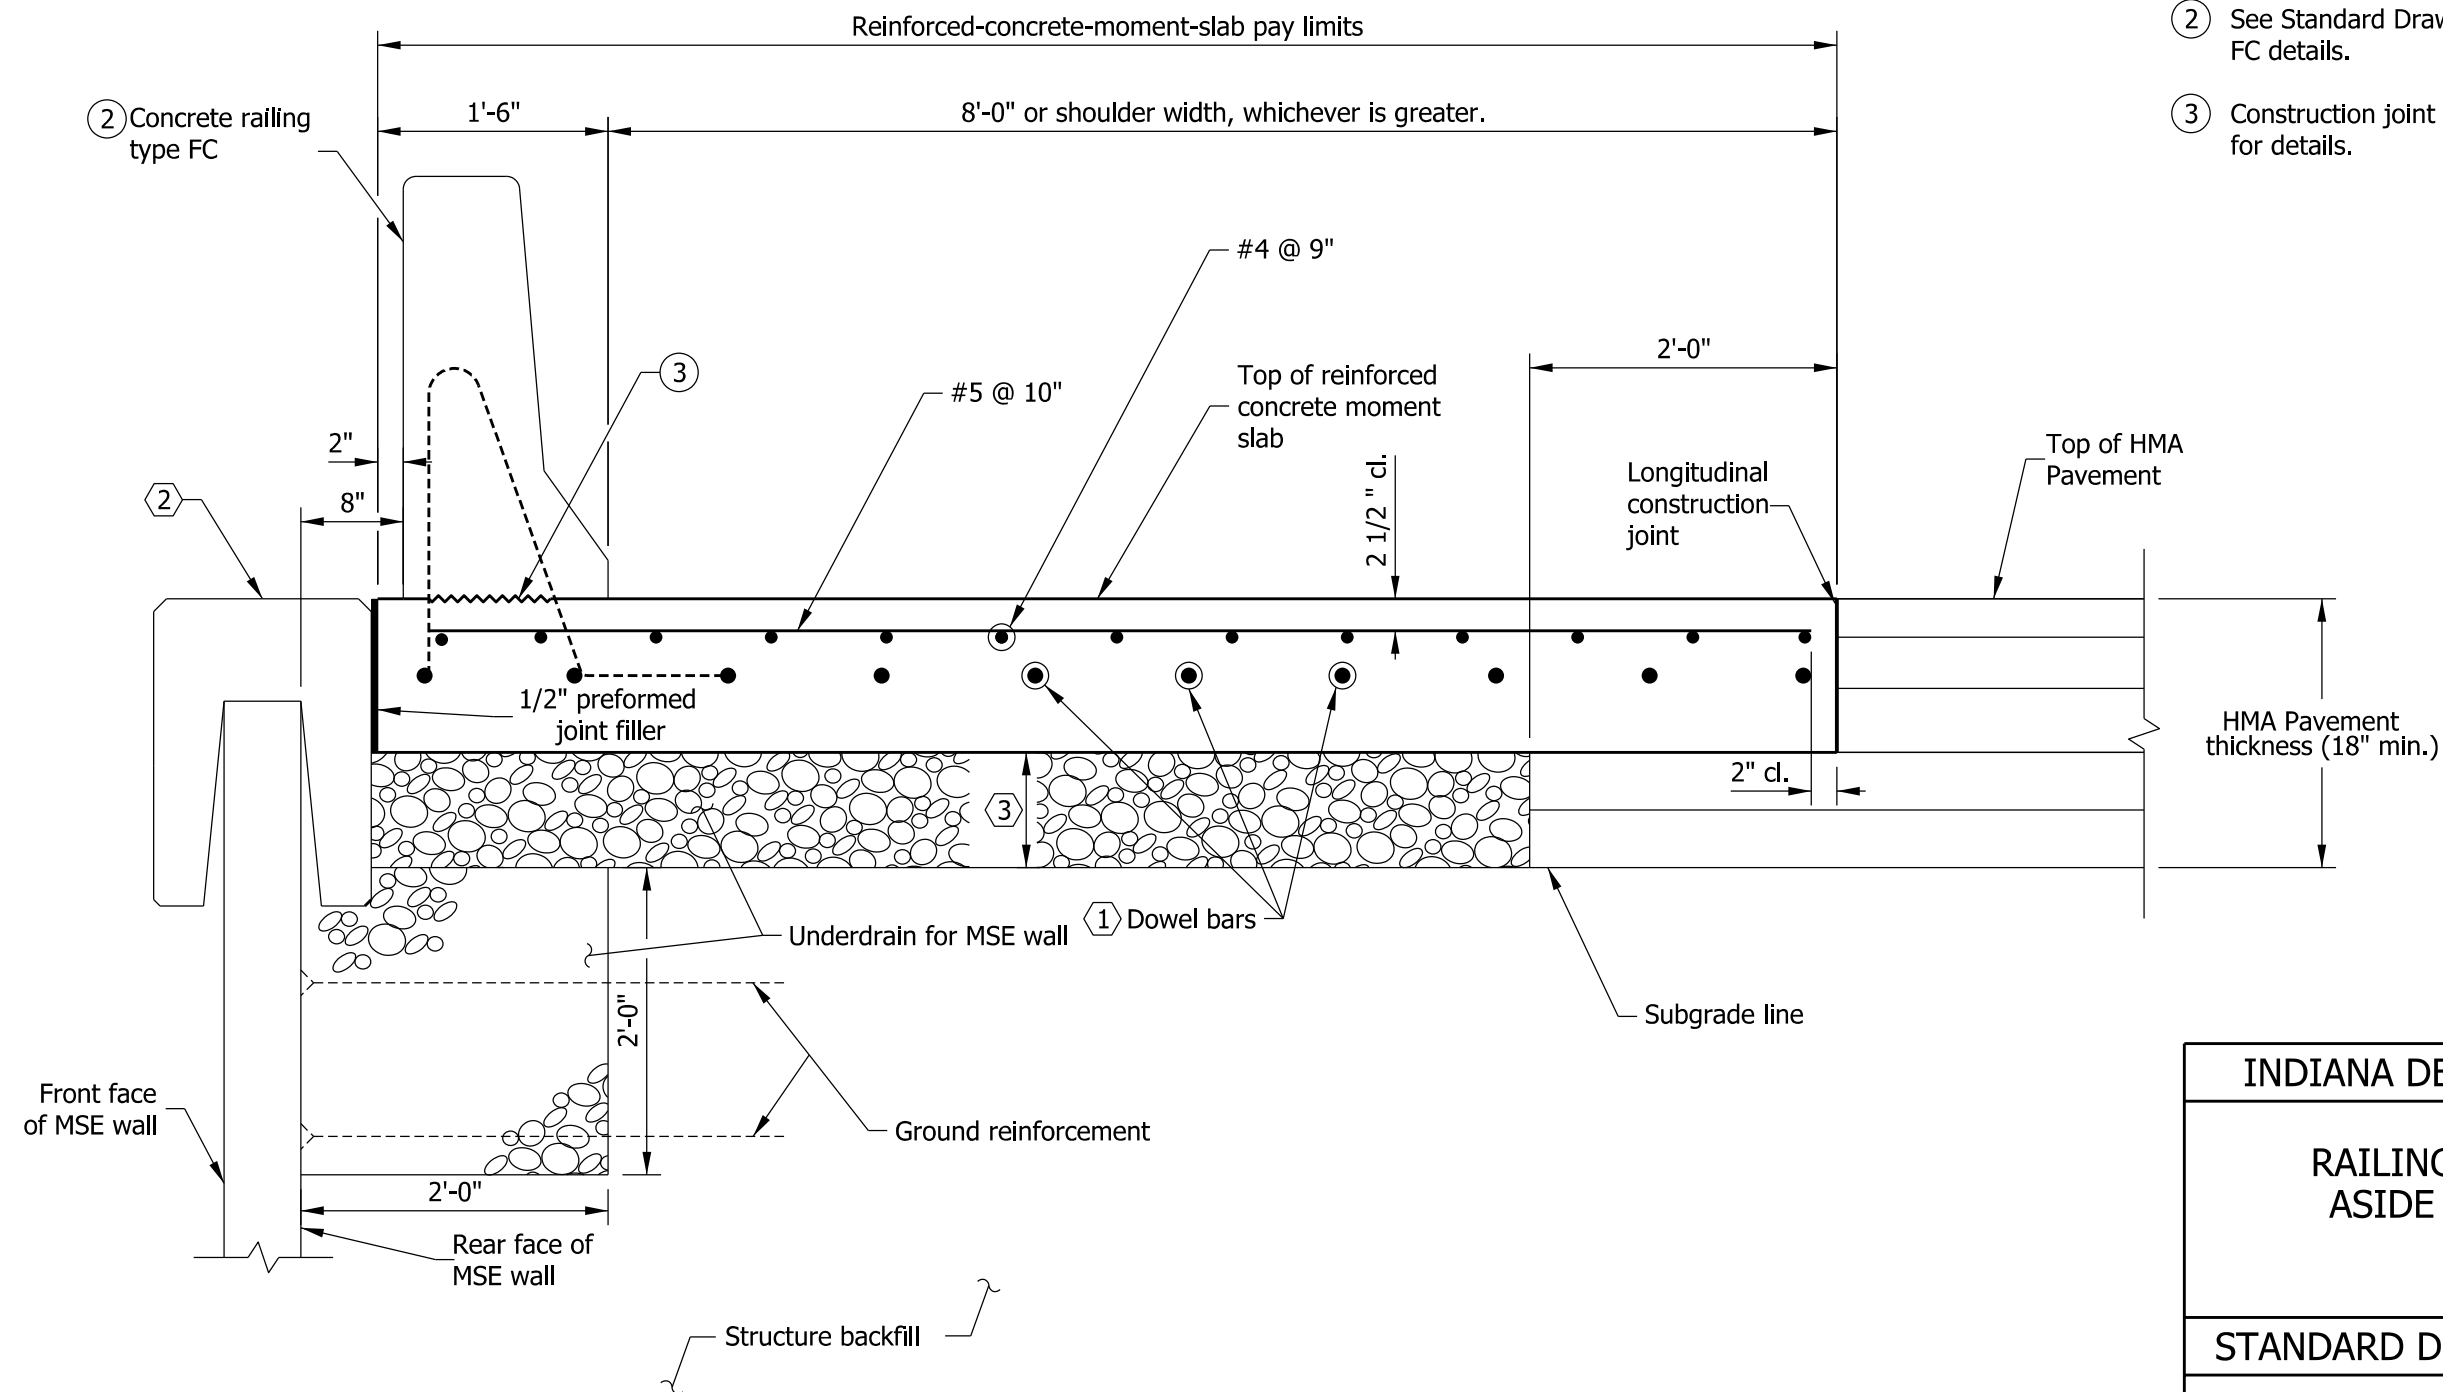


INDIANA DEPARTMENT OF TRANSPORTATION

### RAILING TYPE FC AND MOMENT SLAB ASIDE MSE WALL - HMA PAVEMENT

SEPTEMBER 2012

STANDARD DRAWING NO.	E 706-MSRW-03
----------------------	---------------



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS      DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER	DATE
----------------	------








## NOTES

- ① See Standard Drawing E 706-MSRW-10 for reinforcing-bar diagrams and General Notes .
- ② See Standard Drawing E 706-BRSF-01 for concrete railing type FC details.
- ③ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.

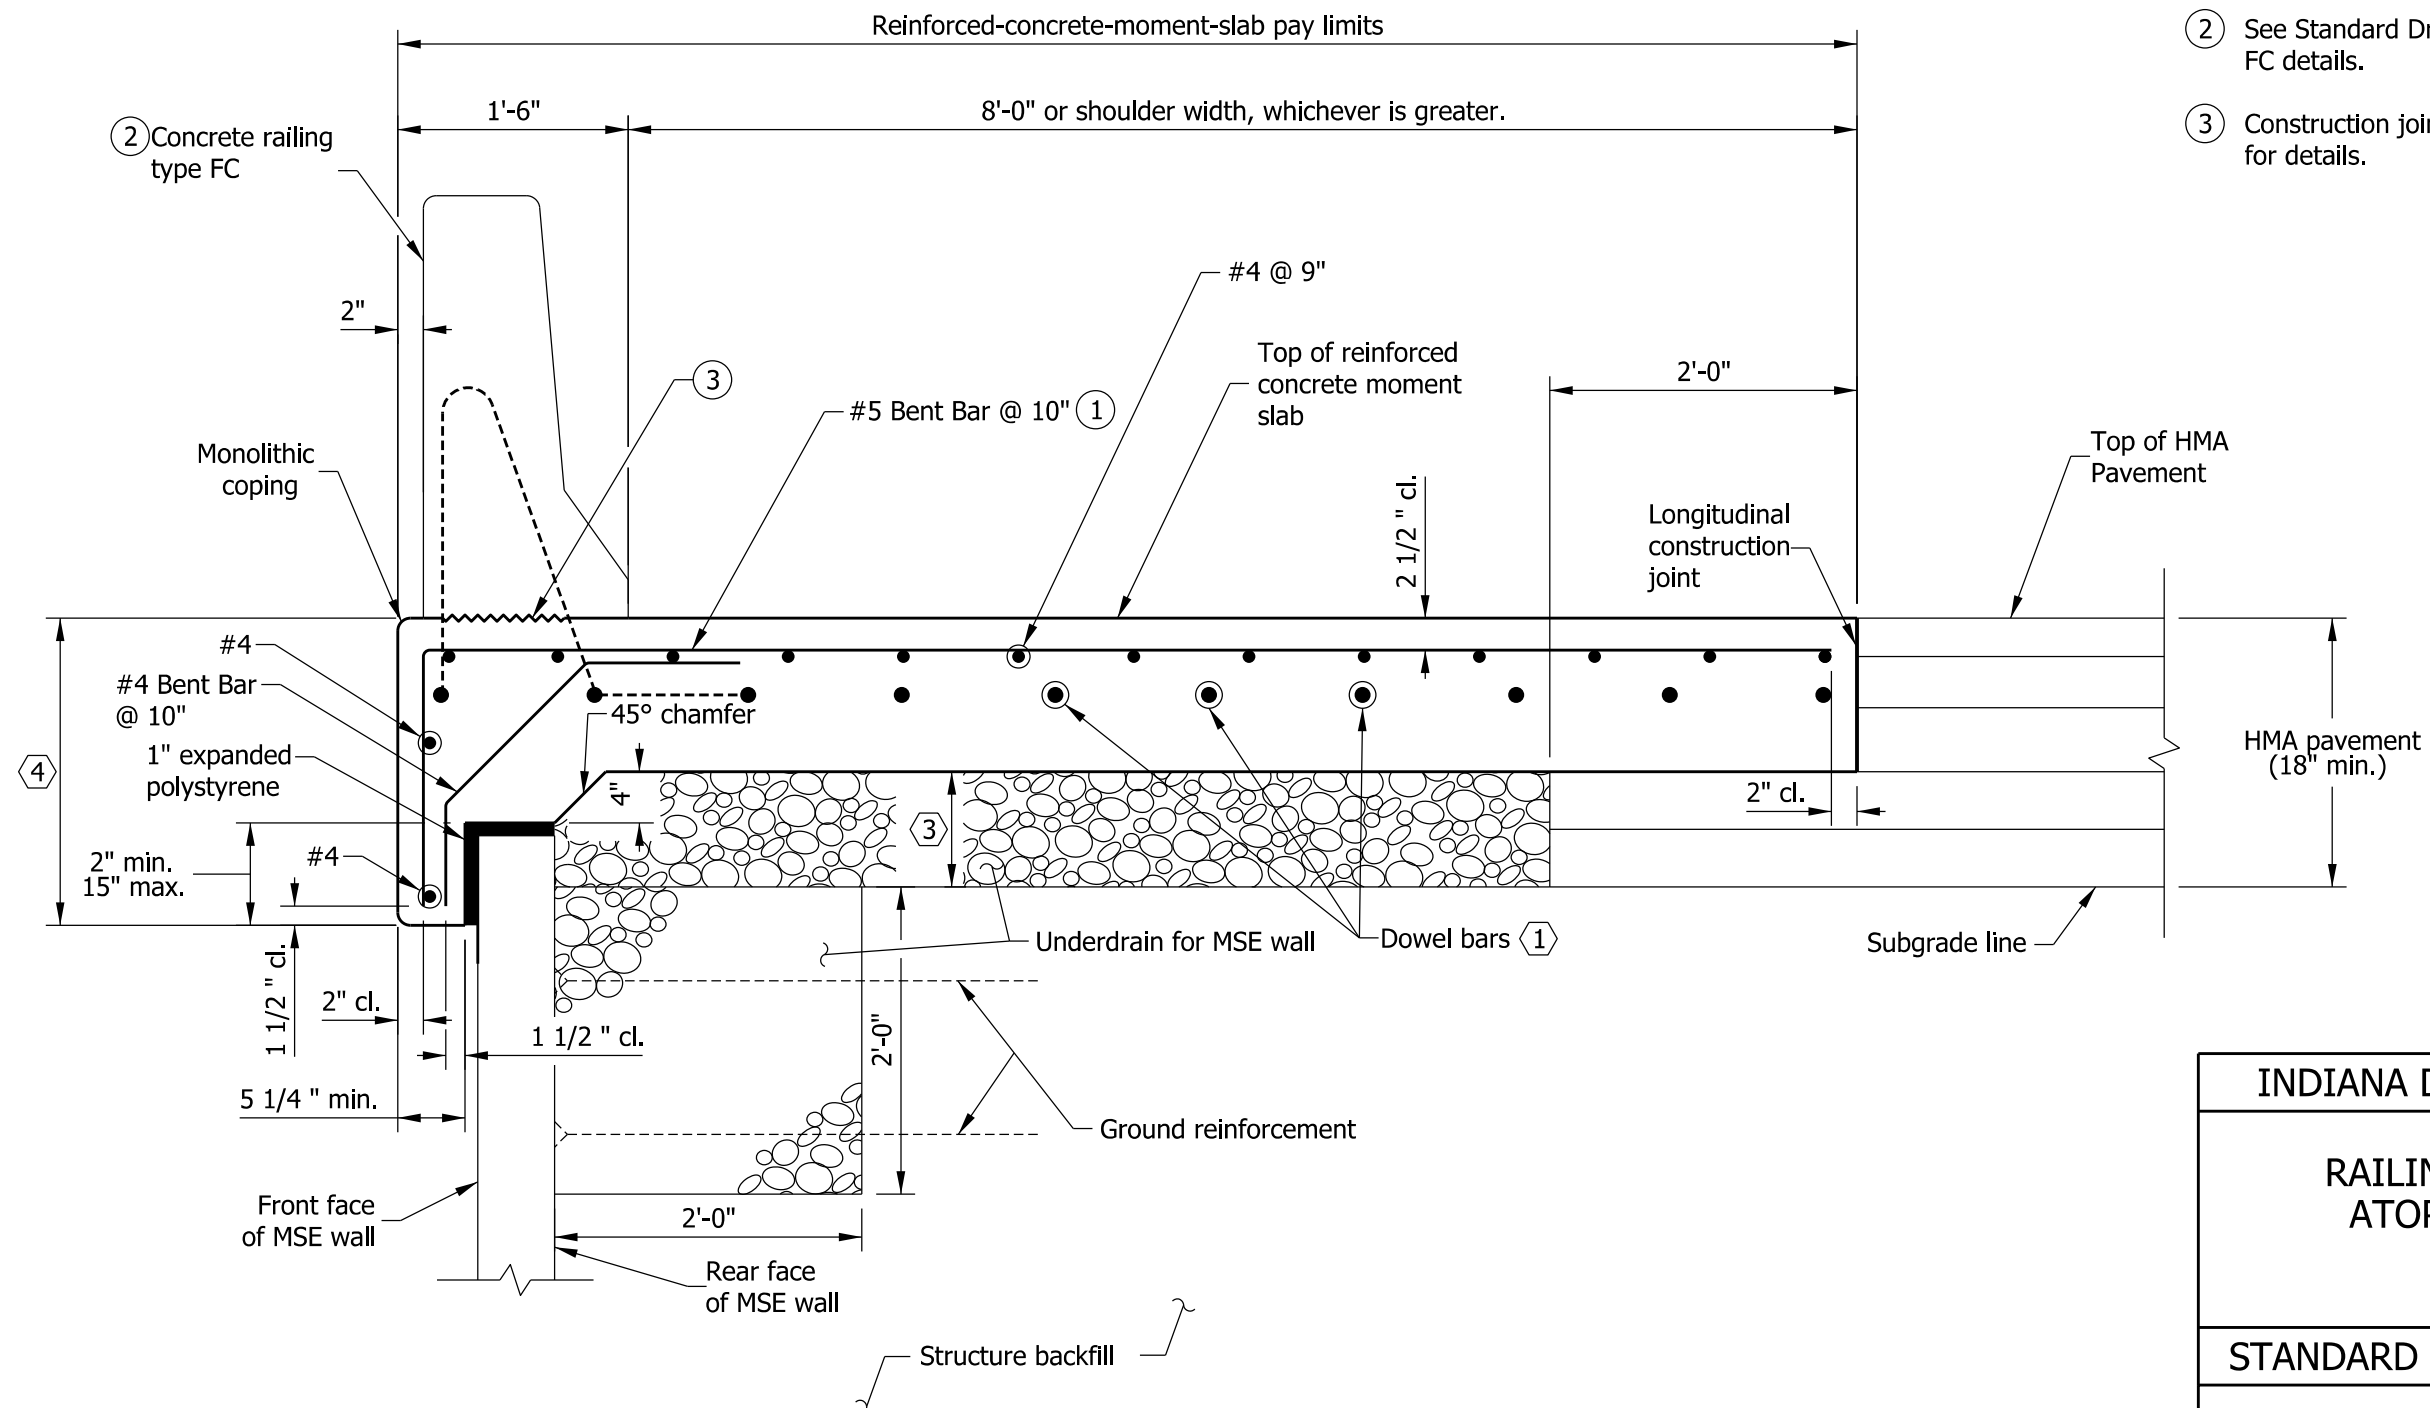


INDIANA DEPARTMENT OF TRANSPORTATION

### RAILING TYPE FC AND MOMENT SLAB ATOP MSE WALL - HMA PAVEMENT

SEPTEMBER 2012

STANDARD DRAWING NO.	E 706-MSRW-07
----------------------	---------------




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS \_\_\_\_\_ DATE \_\_\_\_\_


/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER	DATE
----------------	------



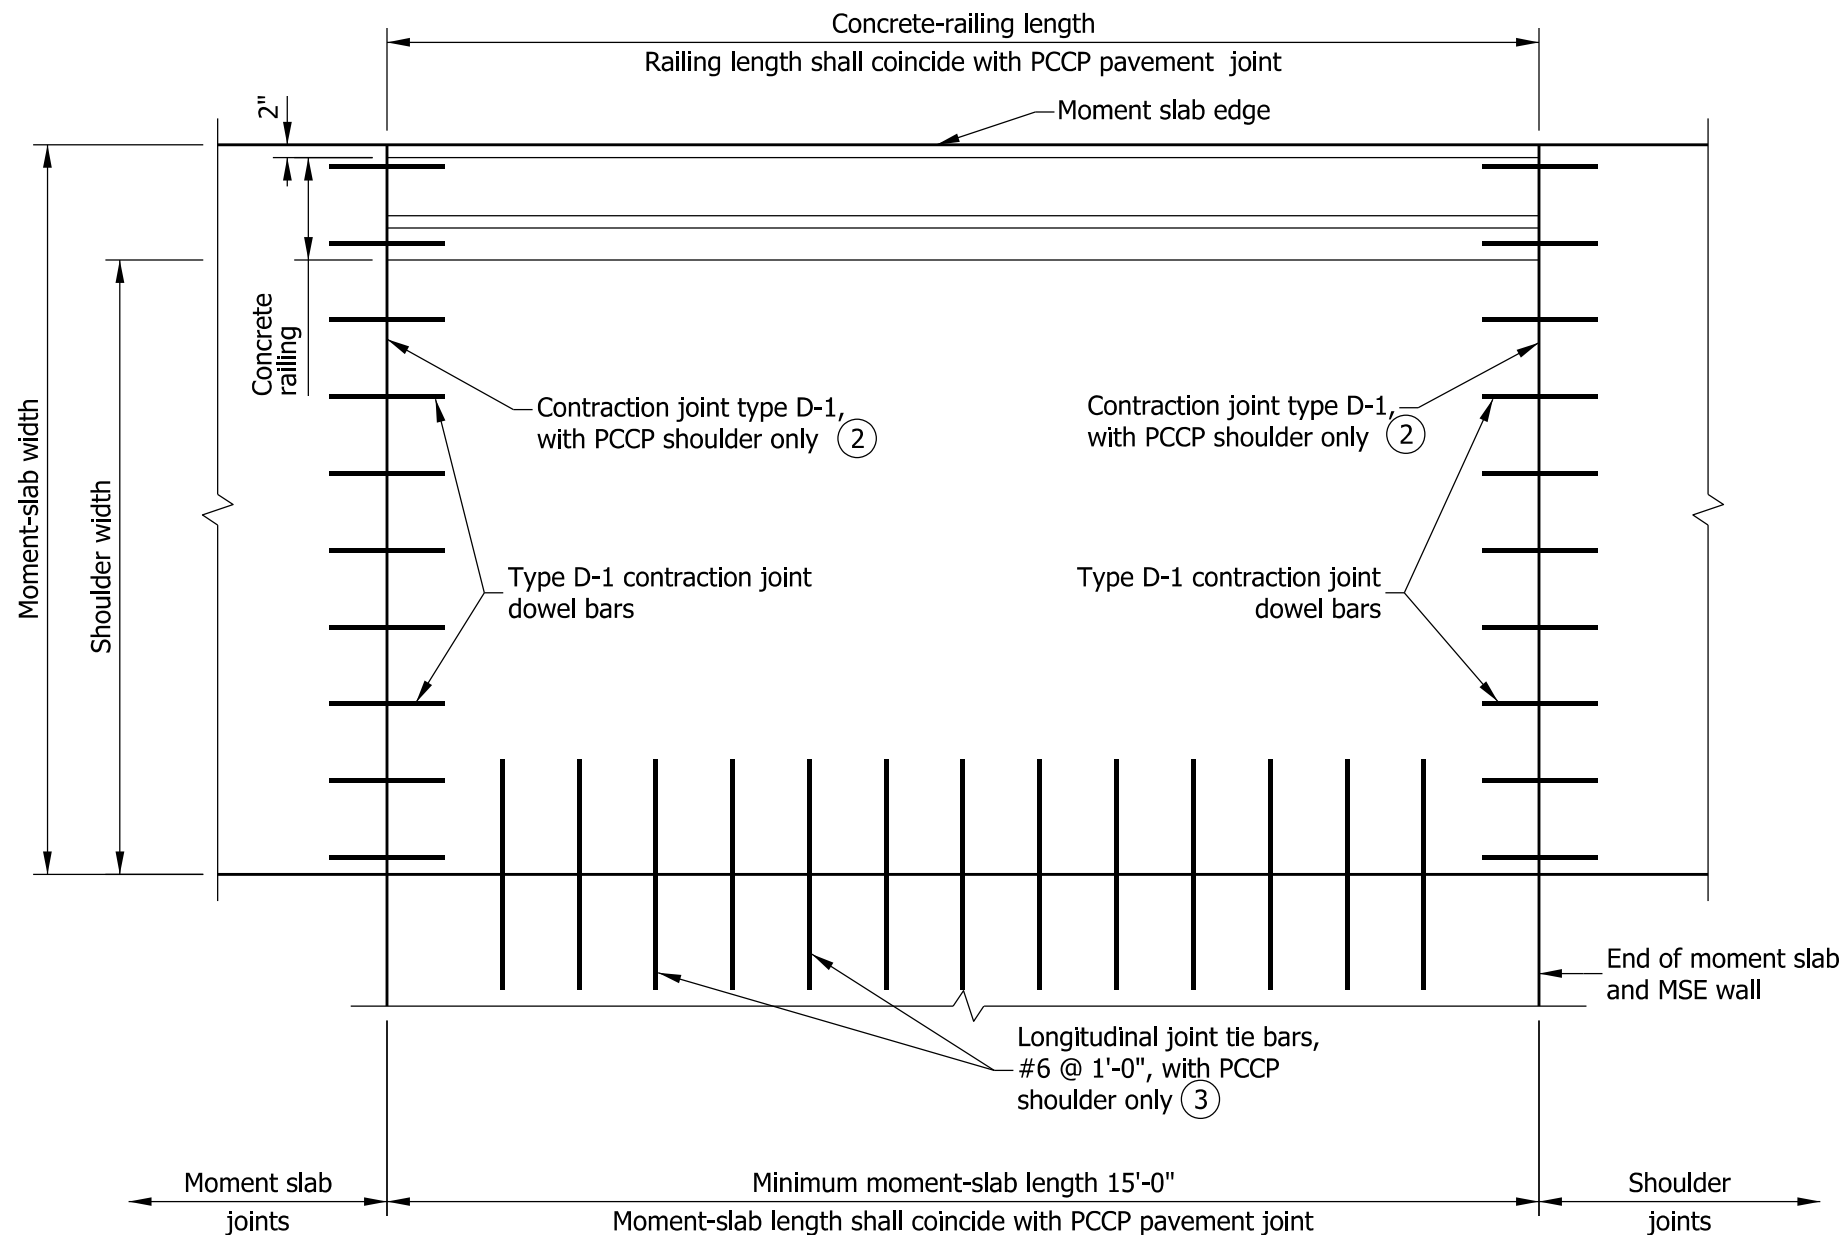

**PLAN - REINFORCED CONCRETE MOMENT SLAB JOINTS**

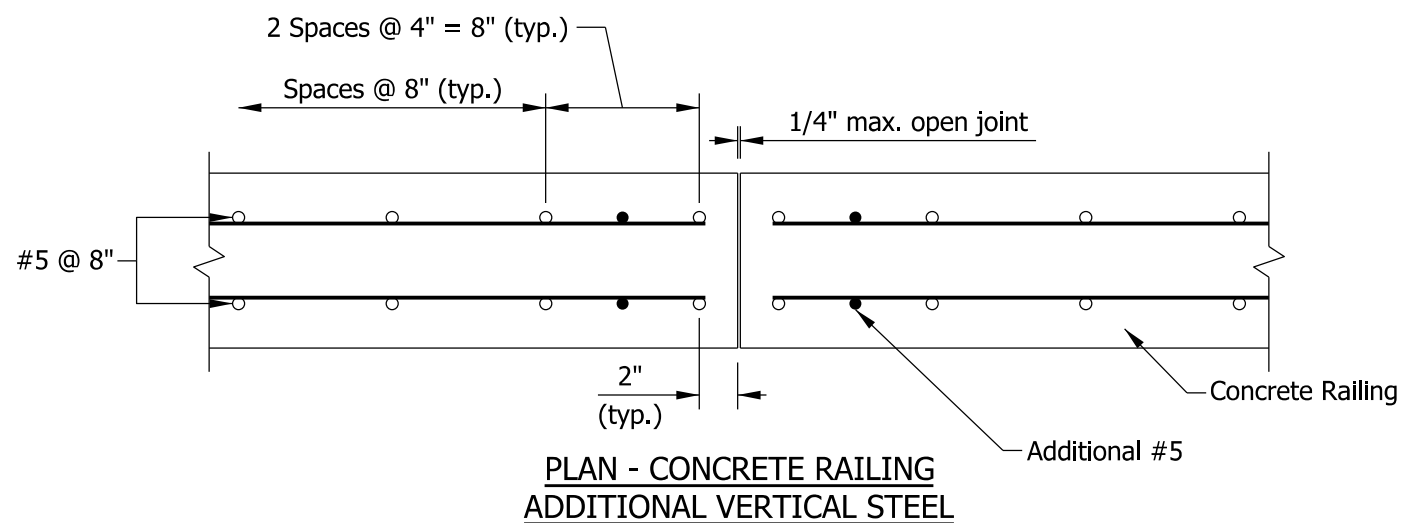

**NOTES**


1. Where used with HMA mainline pavement, concrete railing and moment-slab lengths shall coincide and be spaced at 18'-0".
- ② See Standard Drawing E 503-CCPJ-01 for contraction joint type D-1 details.
- ③ See Standard Drawing E 503-CCPJ-02 for joint tie bars details.

INDIANA DEPARTMENT OF TRANSPORTATION

MOMENT SLAB JOINTS

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-MSRW-09



/s/ Richard L. VanCleave 09/04/12



SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE


GENERAL NOTES

- ① See Standard Drawing E 706-MSRW-09 for plan view and additional reinforcing bars in the railing at the railing joints.
- ② See Standard Drawing E 731-MSEW-01 for coping details.
- ③ The thickness of the coarse aggregate No. 8 shall be equal to the combined thicknesses of the first two lifts of HMA, but not less than 6 in.
- ④ For moment slab thickness  $\leq$  15 in., this shall be 2'-0".  
For moment slab thickness > 15 in., this shall be moment-slab thickness plus 12 in.
5. The moment slab shall be used only within the limits of the MSE wall.
6. Reinforcing bars in the moment slab shall be epoxy coated.
7. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending diagrams and notes.

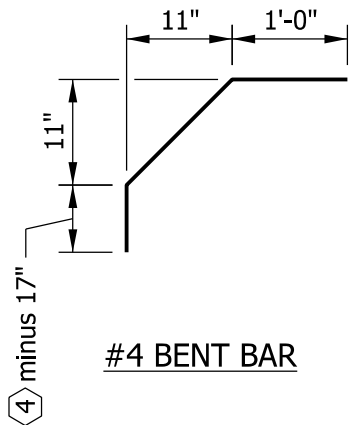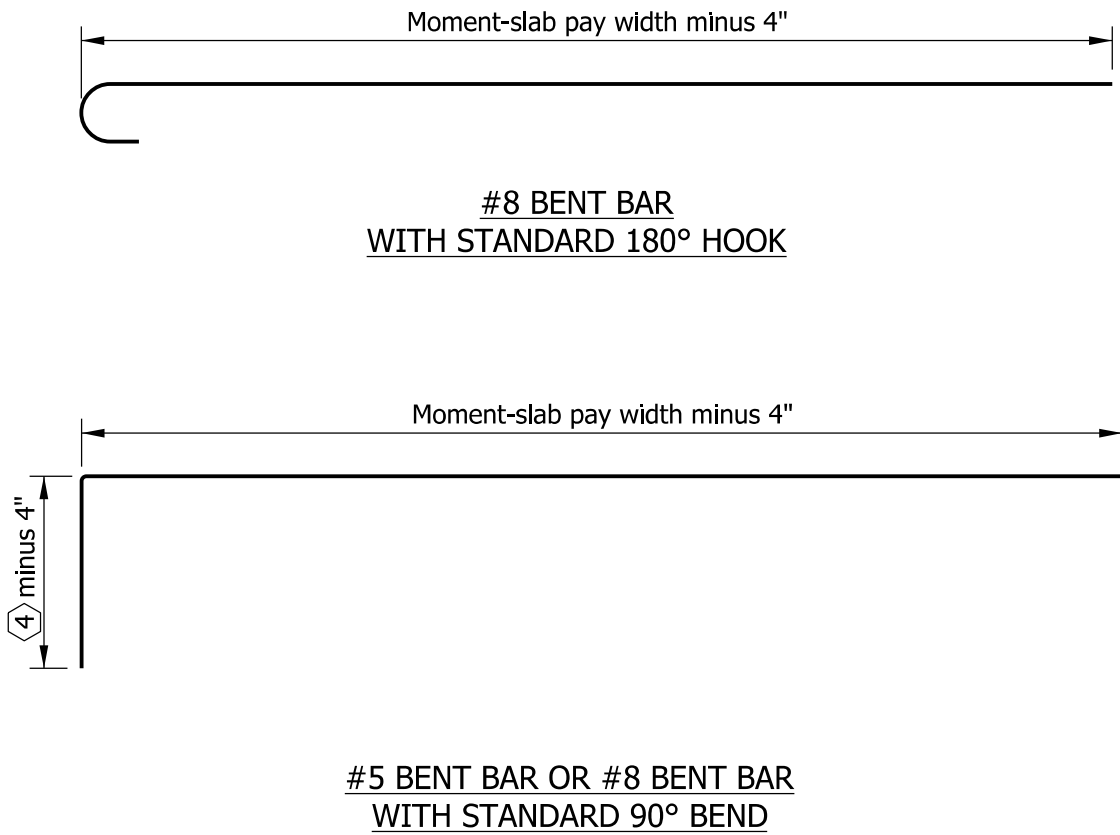


INDIANA DEPARTMENT OF TRANSPORTATION			
RAILING AND MOMENT SLAB AT MSE WALL			
SEPTEMBER 2012			
STANDARD DRAWING NO.		E 706-MSRW-10	
	<i>/s/ Richard L. VanCleave</i>		<i>09/04/12</i>
	SUPERVISOR, ROADWAY STANDARDS		DATE
	<i>/s/ Mark A. Miller</i>		<i>09/04/12</i>
	CHIEF ENGINEER		DATE



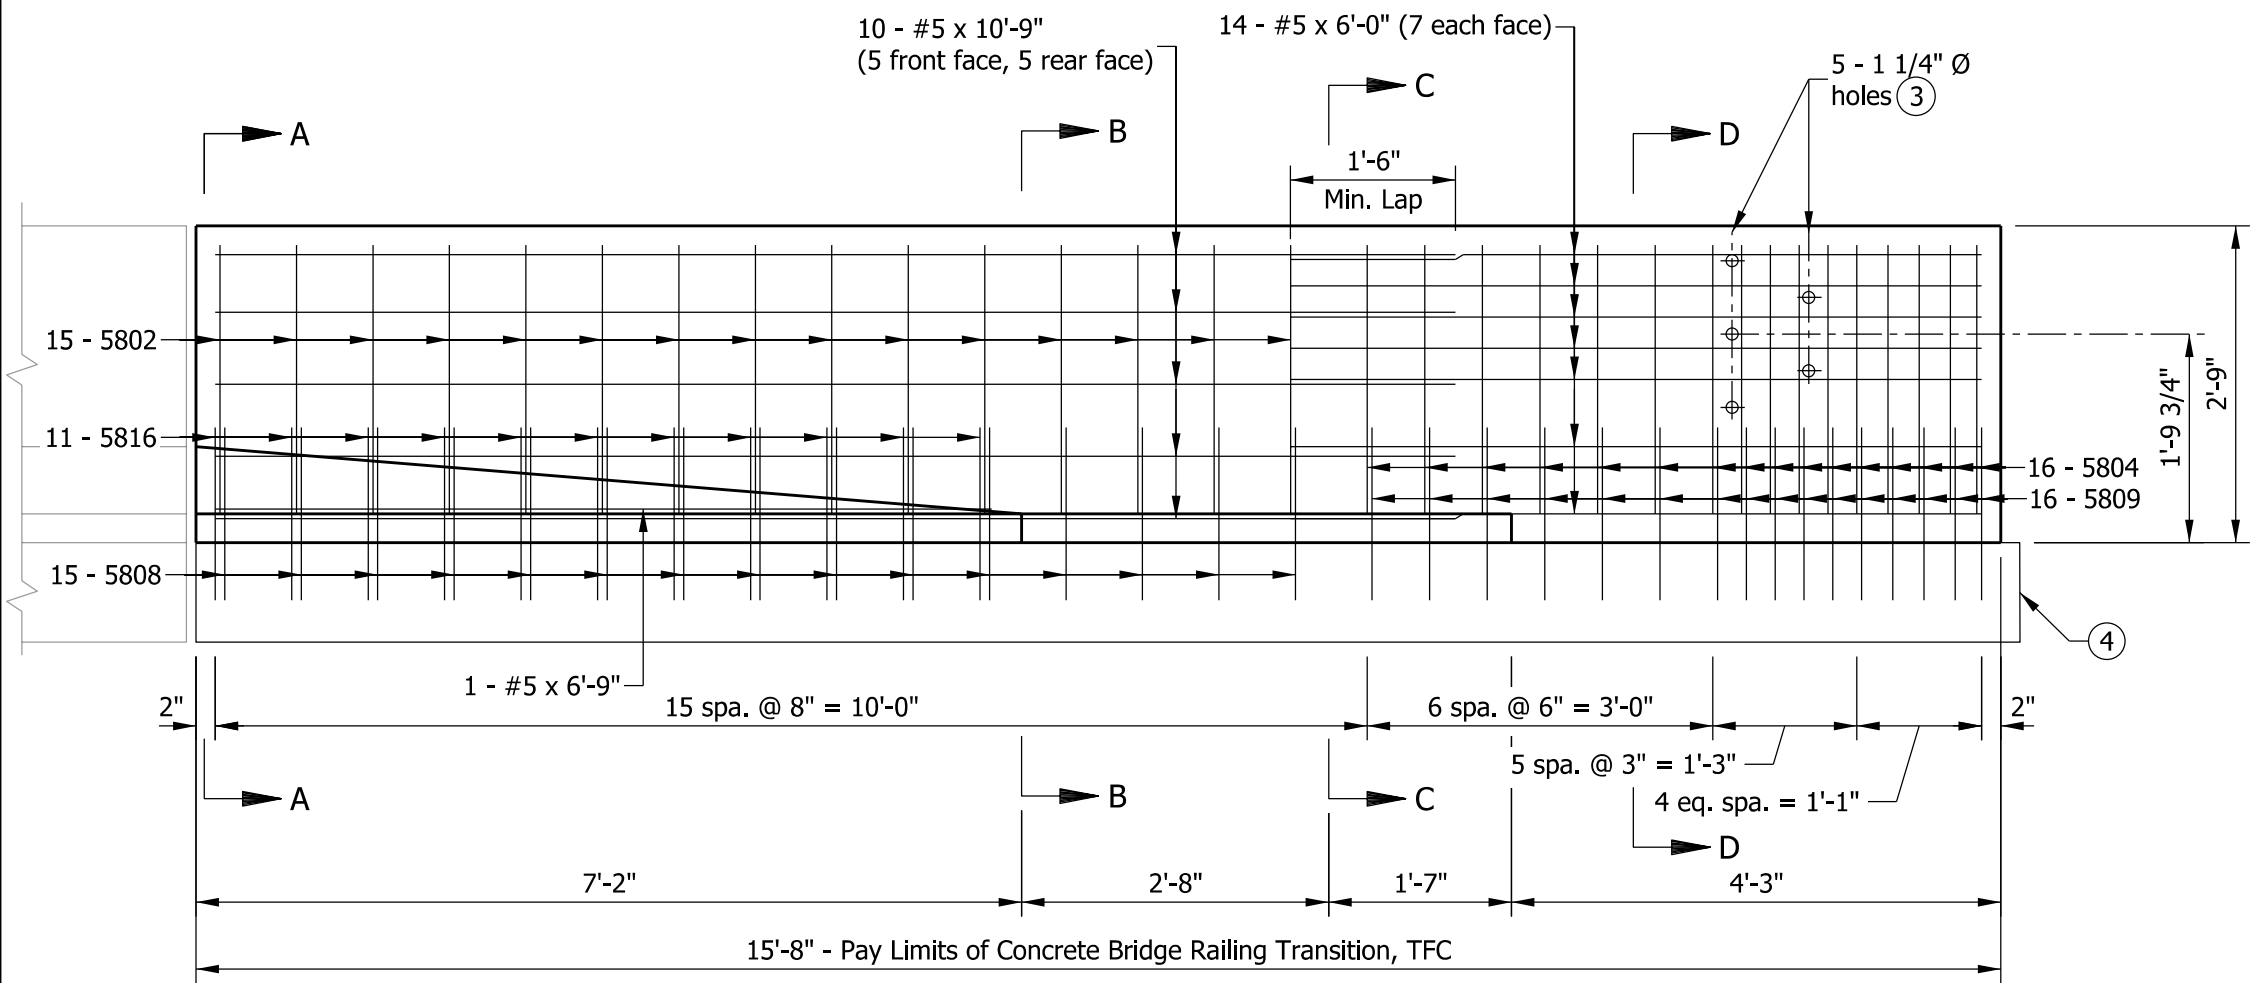


**ELEVATION**

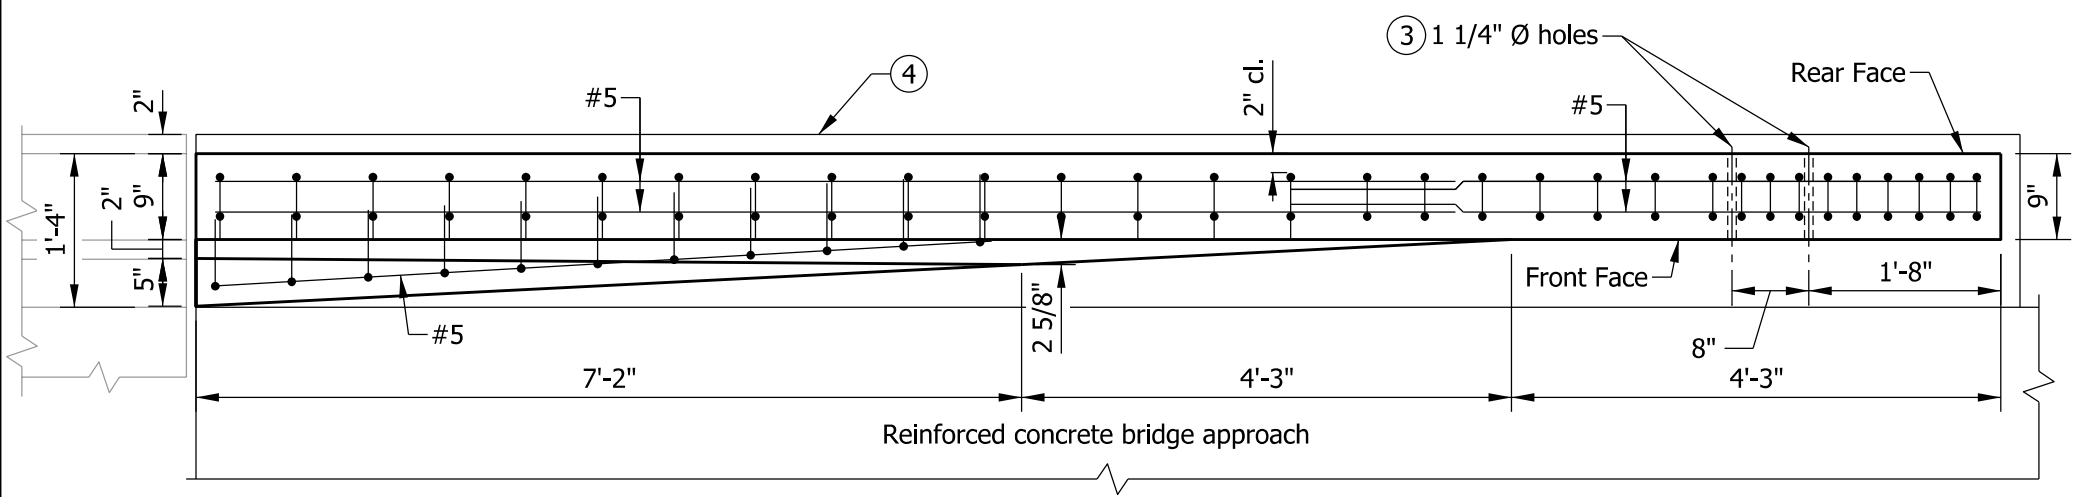


**PLAN**


**NOTES**

1. See Standard Drawing E 706-TTFC-02 for sections.
2. See Standard Drawing E 706-TTFC-03 for reinforcing-bar diagrams and bill of materials.
- ③ Holes for attachment of guardrail transition type TGB. See Standard Drawing E 706-CBRT-04 for details.
- ④ RCBA extension for bridge railing transition type TFC. See Standard Drawing E 609-TBAE-01 for details.

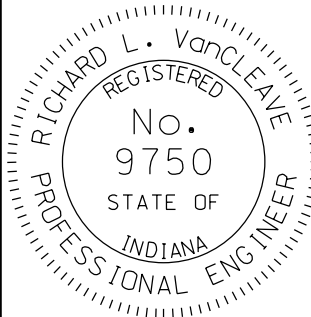
INDIANA DEPARTMENT OF TRANSPORTATION		
CONCRETE BRIDGE RAILING TRANSITION TFC PLAN AND ELEVATION SEPTEMBER 2012		
STANDARD DRAWING NO. E 706-TTFC-01		
	/s/ <i>Richard L. VanCleave</i>	09/04/12
	SUPERVISOR, ROADWAY STANDARDS	DATE
	/s/ <i>Mark A. Miller</i>	09/04/12
	CHIEF ENGINEER	DATE

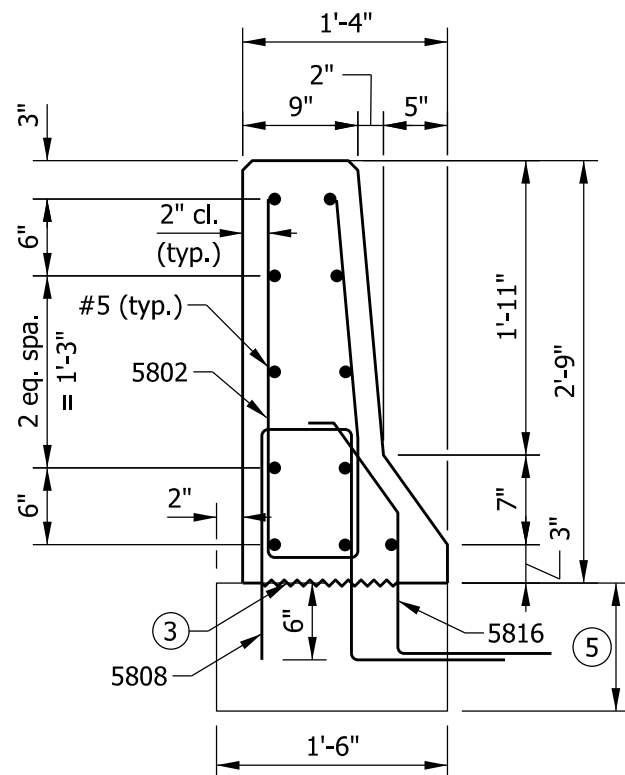


SECTION A-A

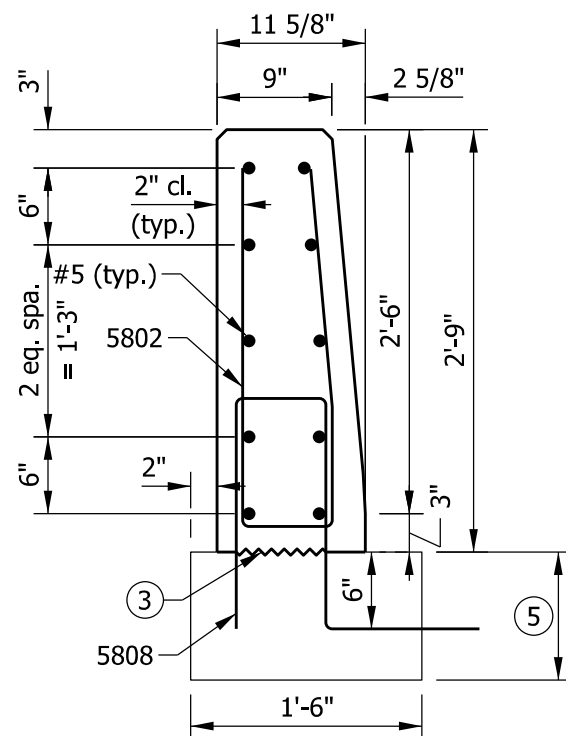

SECTION B-B

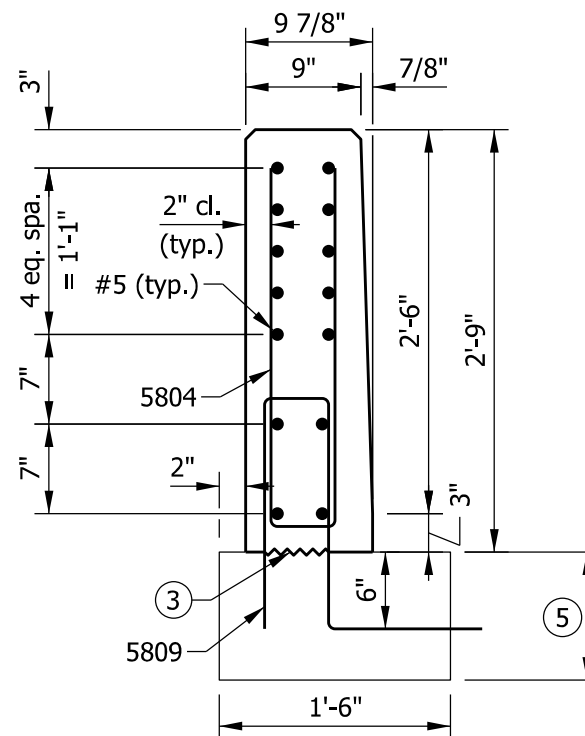

SECTION C-C

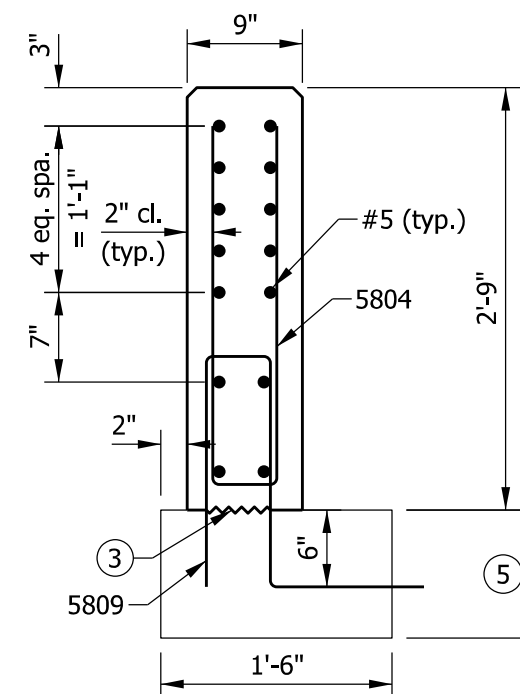

SECTION D-D


## NOTES

- See Standard Drawing E 706-TTFC-01 for elevation and plan.
- All chamfered edges shall be 3/4".
- Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
- See Standard Drawing E 706-TTFC-03 for reinforcing-bar diagrams.
- RCBA extension for bridge railing type TFC. See Standard Drawing E 609-TBAE-01 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TFC  
SECTIONS  
SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTFC-02




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

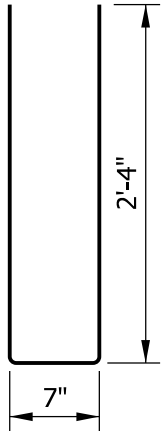


5802 x 5'-3"




5804 x 5'-1"

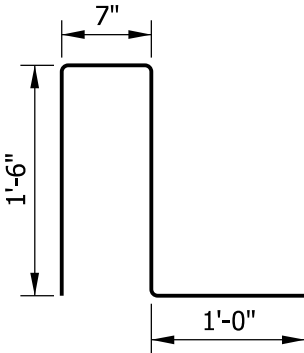

5808 x 4'-7"

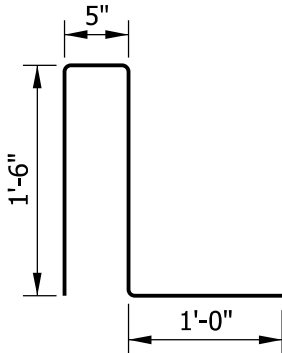

5809 x 4'-5"

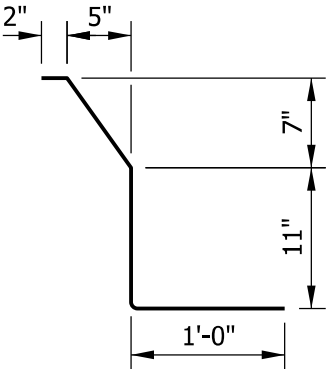



5816 x 2'-10"

NOTE


1. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TFC			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5802	15	5'-3"	
5804	16	5'-1"	
5808	15	4'-7"	
5809	16	4'-5"	
5816	11	2'-10"	
#5	10	10'-9"	
#5	1	6'-9"	
#5	14	6'-0"	
Total Epoxy-Coated Reinforcing Steel			552 LBS
MISCELLANEOUS			
Concrete, Class C			1.2 CYS
Surface Seal			100 SFT

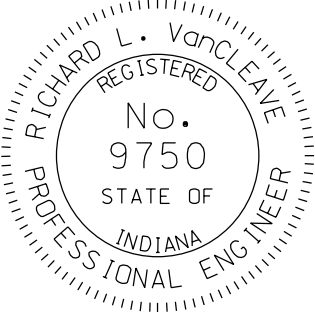INDIANA DEPARTMENT OF TRANSPORTATION	
CONCRETE BRIDGE RAILING TRANSITION, TFC	
SEPTEMBER 2012	
STANDARD DRAWING NO. E 706-TTFC-03	
	<div><div>/s/ <i>Richard L. VanCleave</i>09/04/12</div><div>SUPERVISOR, ROADWAY STANDARDSDATE</div><div>/s/ <i>Mark A. Miller</i>09/04/12</div><div>CHIEF ENGINEERDATE</div></div>

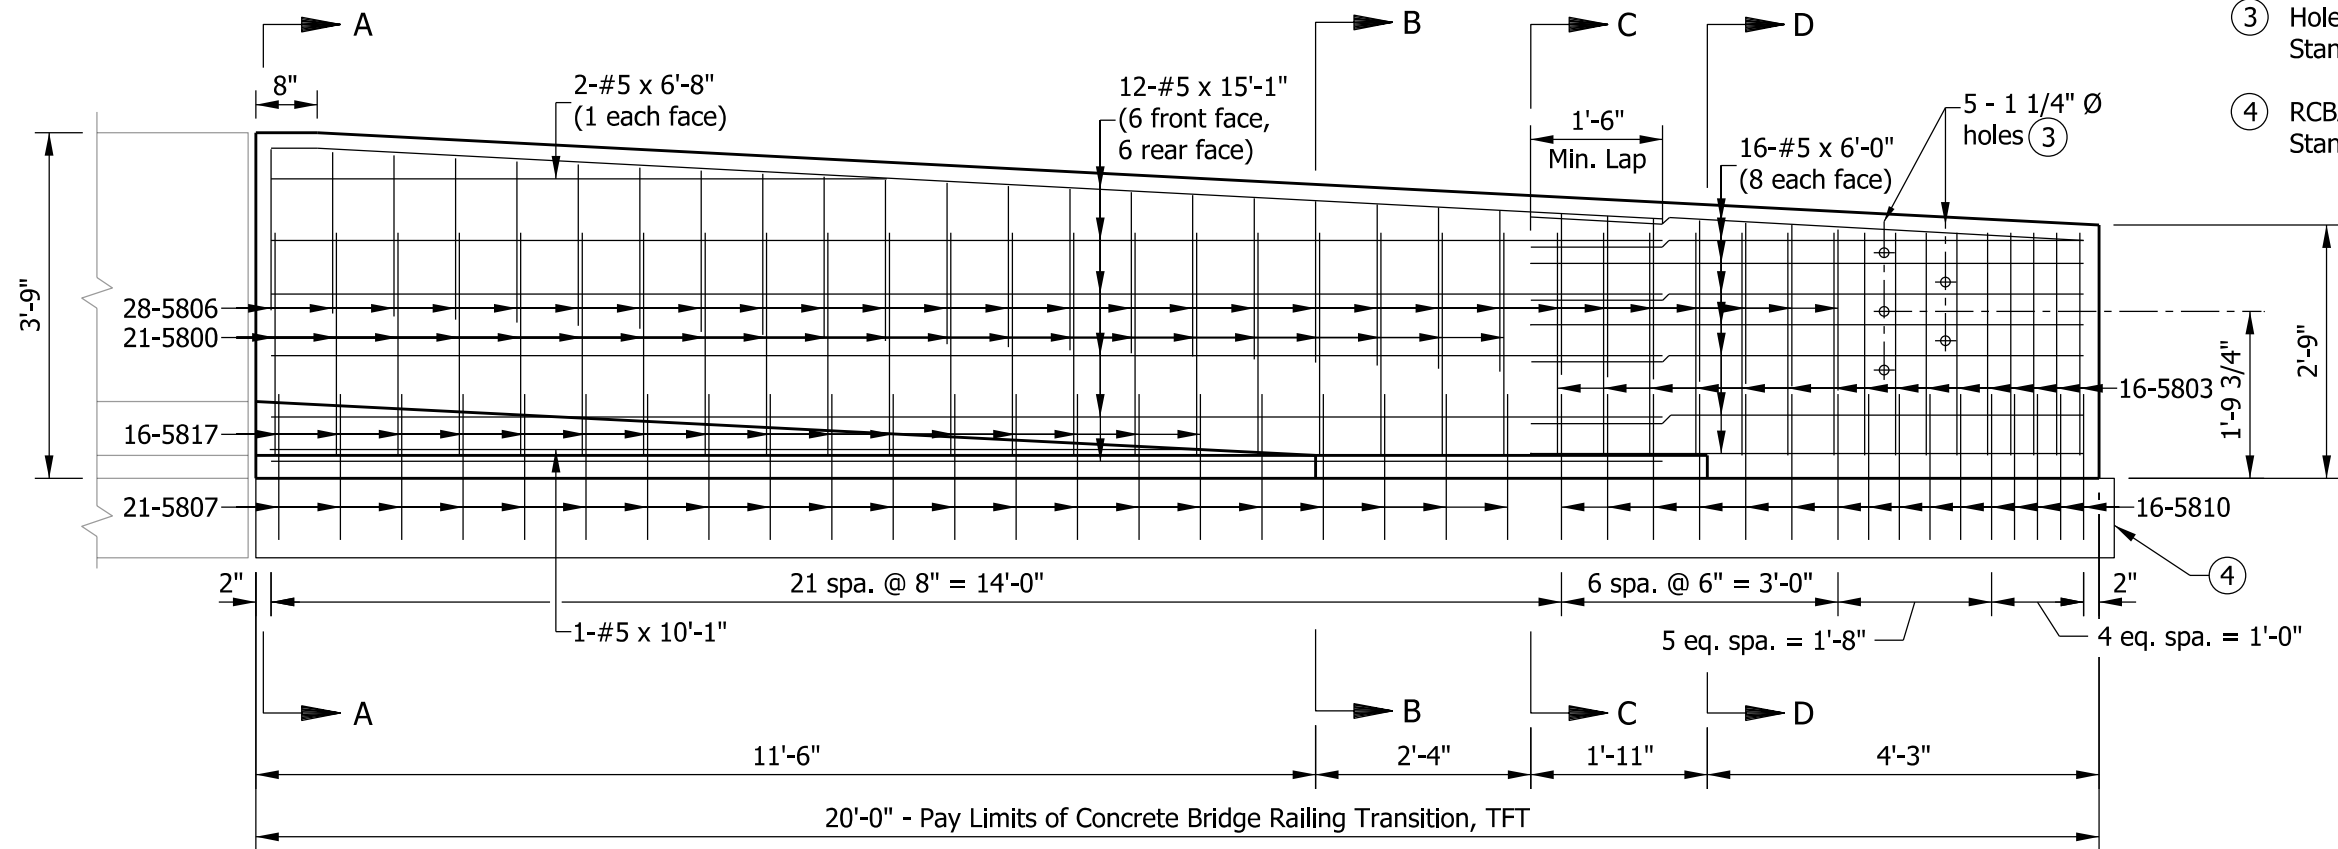

**ELEVATION**

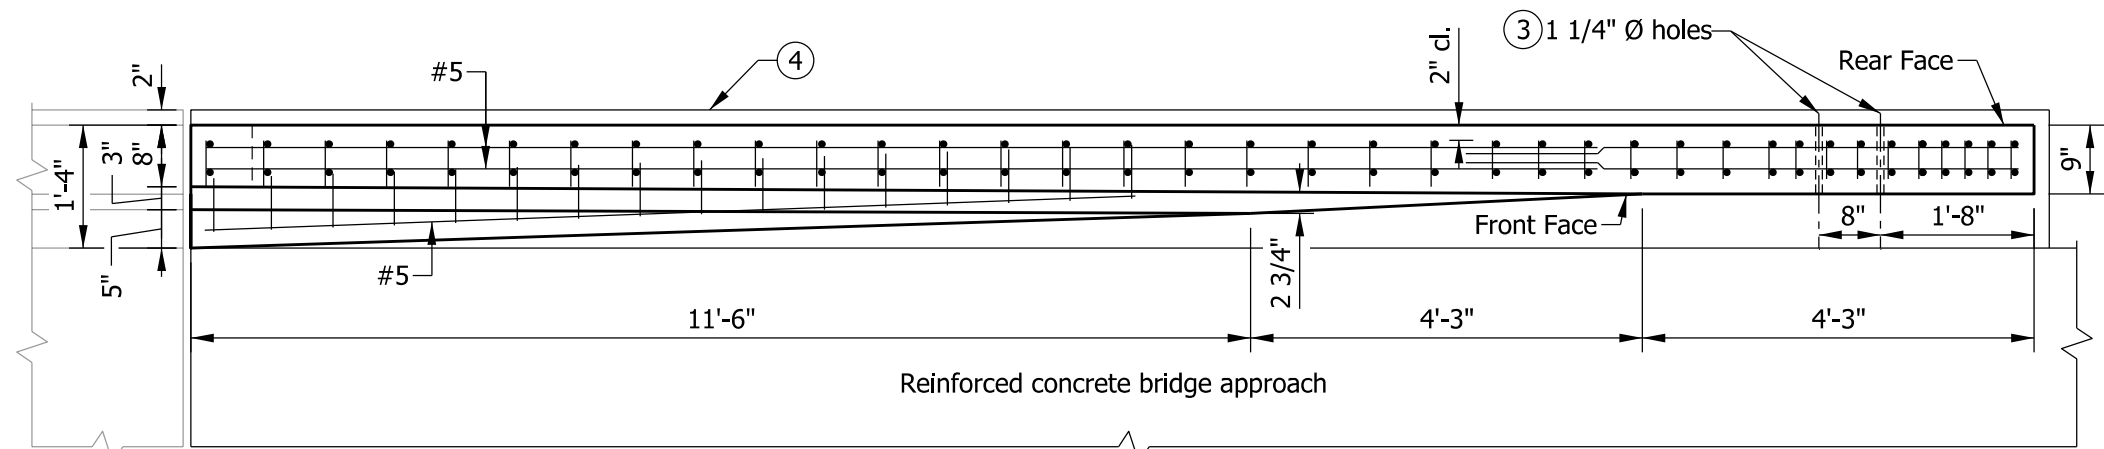

**PLAN**


**NOTES**

- See Standard Drawing E 706-TTFT-02 for sections.
- See Standard Drawing E 706-TTFT-03 for reinforcing-bar diagrams and bill of materials.
- Holes for attachment of guardrail transition type TGB. See Standard Drawing E 601-TTGB-01 for details.
- RCBA extension for bridge railing transition type TFT. See Standard Drawing E 609-TBAE-02 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION TFT  
PLAN AND ELEVATION  
SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTFT-01




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

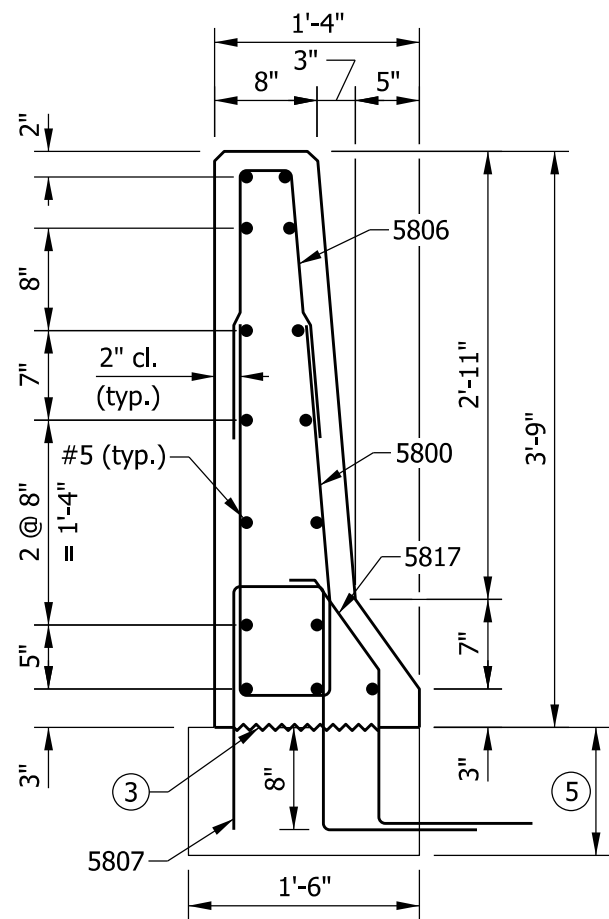


SECTION A-A

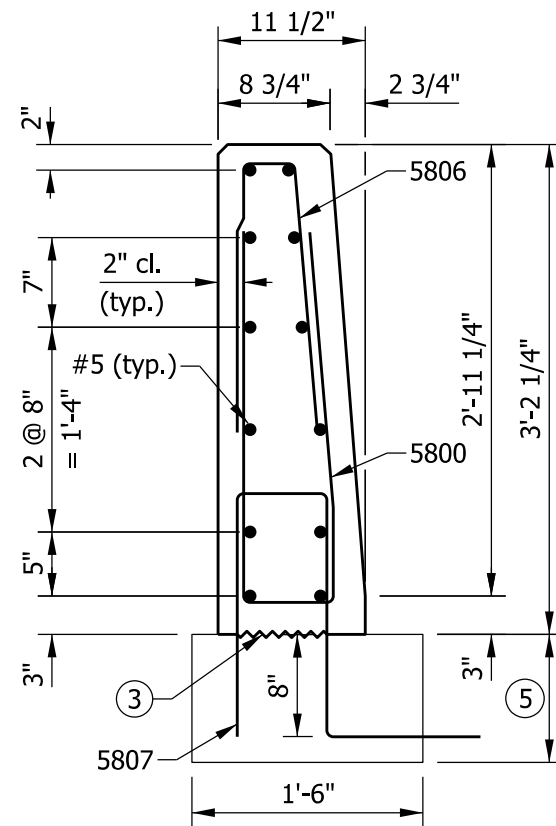

SECTION B-B

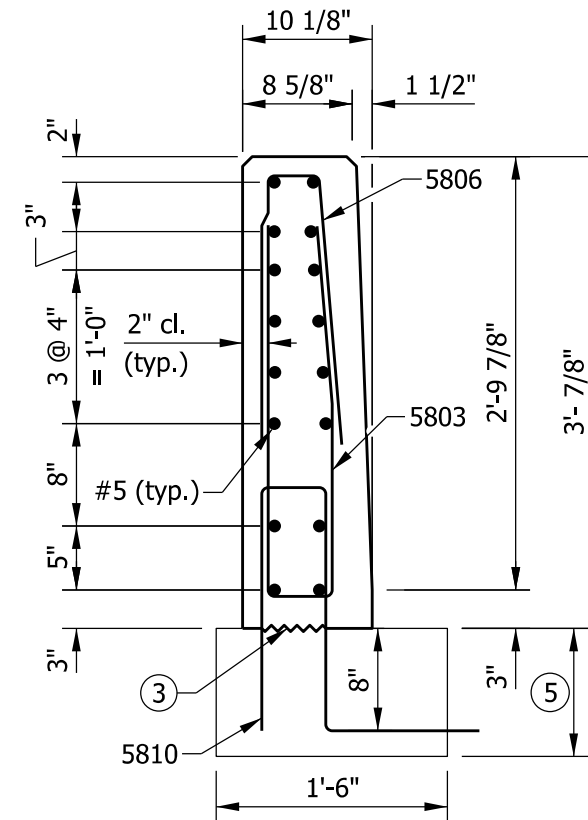

SECTION C-C

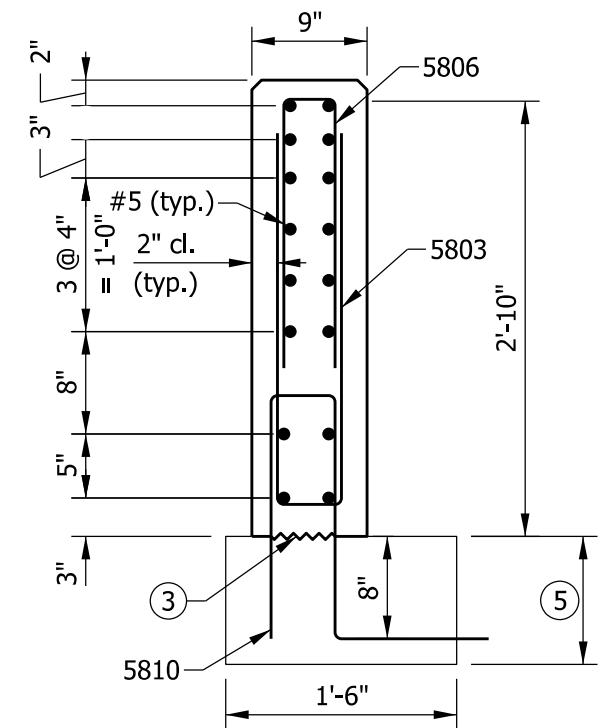

SECTION D-D

## NOTES


- See Standard Drawing E 706-TTFT-01 for elevation and plan.
- All chamfered edges shall be 3/4".
- Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
- See Standard Drawing E 706-TTFT-03 for reinforcing-bar diagrams.
- RCBA extension for bridge railing transition type TFT. See Standard Drawing E 609-TBAE-02 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TFT

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTFT-02




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

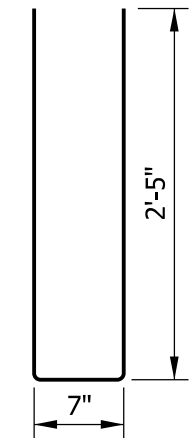


5800 x 5'-5"




5803 x 5'-3"




5806 x 3'-10"

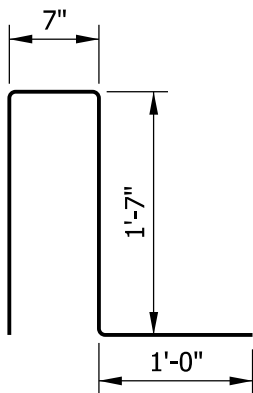

5807 x 4'-9"

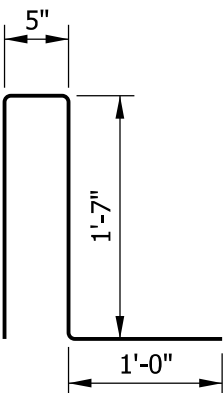

5810 x 4'-7"

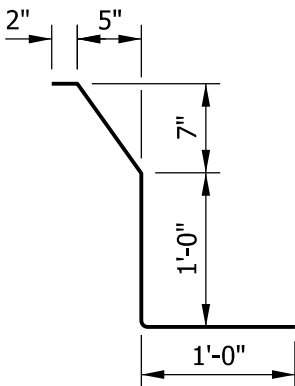



5817 x 3'-0"

NOTE


1. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TFT			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5800	21	5'-5"	
5803	16	5'-3"	
5806	28	3'-10"	
5807	21	4'-9"	
5810	16	4'-7"	
5817	16	3'-0"	
#5	12	15'-1"	
#5	1	10'-1"	
#5	2	6'-8"	
#5	16	6'-0"	
Total Epoxy-Coated Reinforcing Steel			862 LBS
MISCELLANEOUS			
Concrete, Class C			2.0 CYS
Surface Seal			13.4 SYS

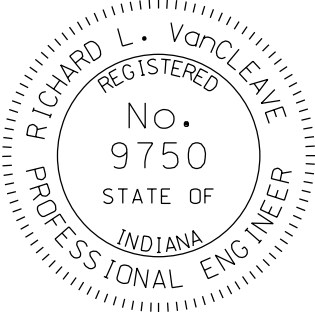INDIANA DEPARTMENT OF TRANSPORTATION	
CONCRETE BRIDGE RAILING TRANSITION TYPE TFT	
SEPTEMBER 2012	
STANDARD DRAWING NO.	E 706-TTFT-03
	<div><div>/s/ Richard L. VanCleave09/04/12</div><div>SUPERVISOR, ROADWAY STANDARDSDATE</div><div>/s/ Mark A. Miller09/04/12</div><div>CHIEF ENGINEERDATE</div></div>

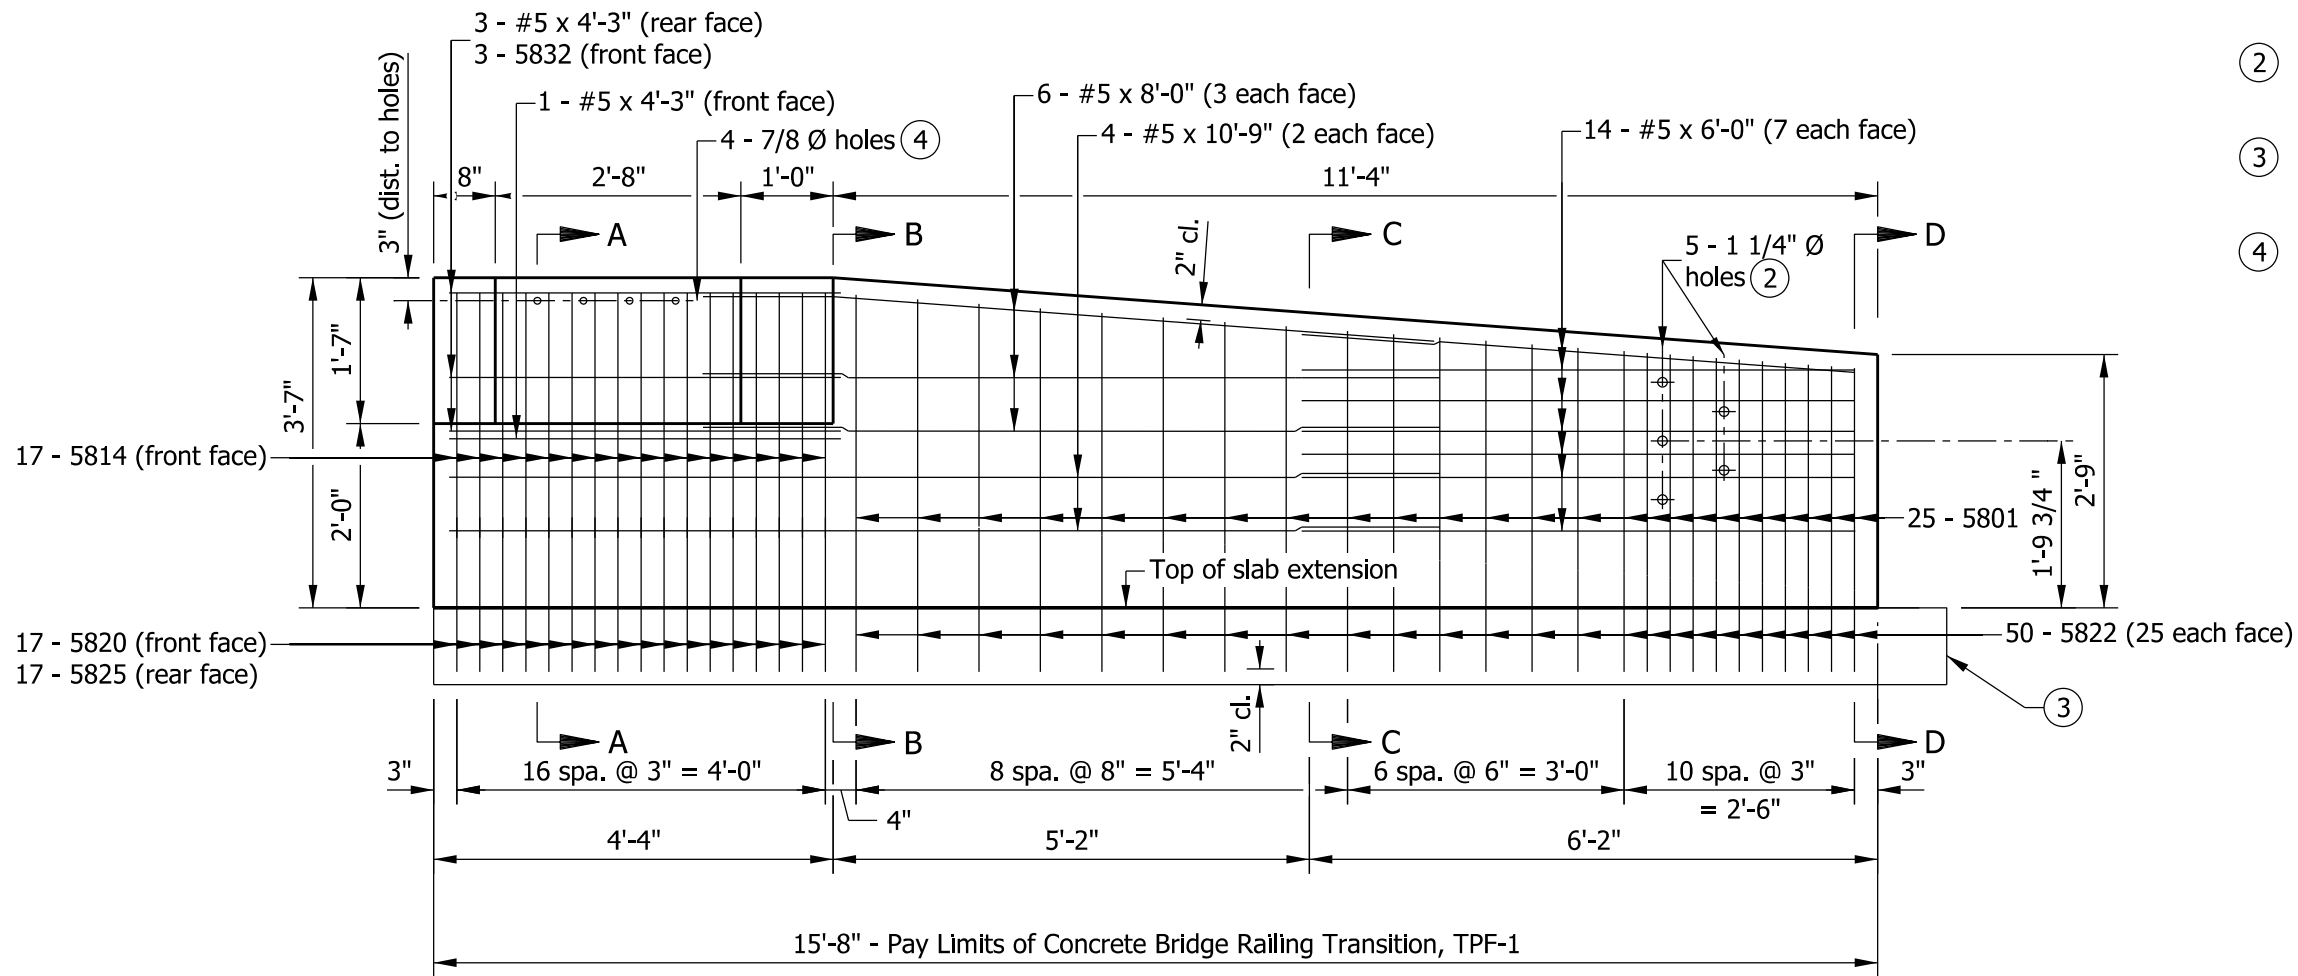

ELEVATION

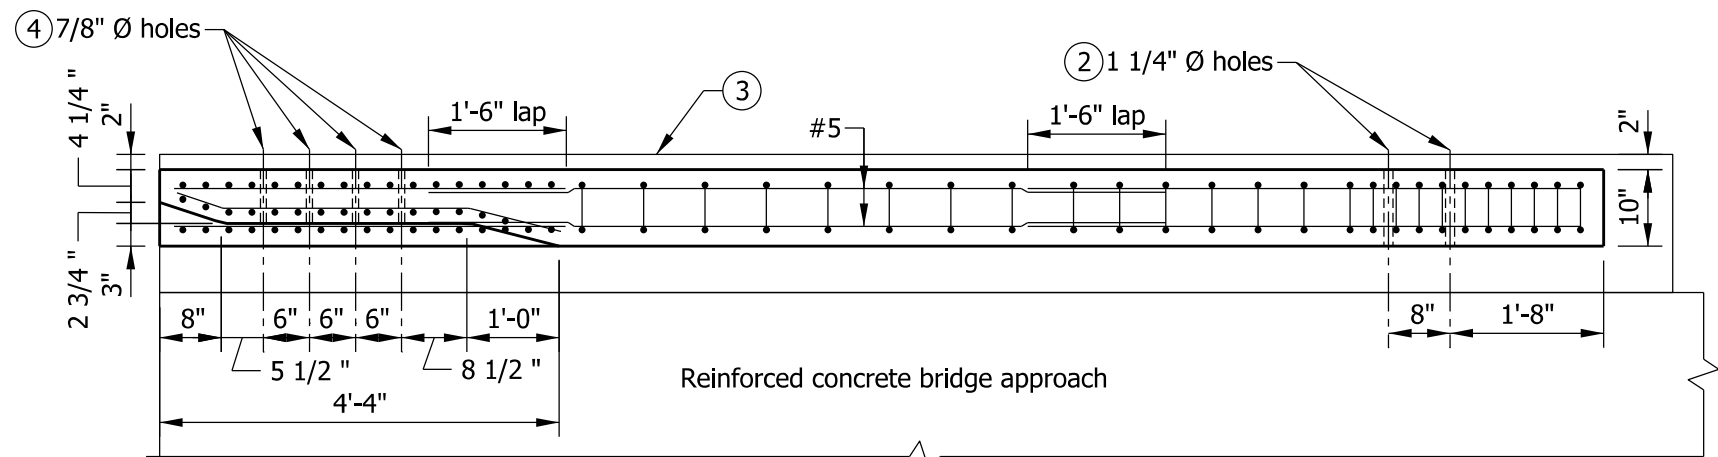

PLAN

NOTES

1. See Standard Drawing E 706-TTPP-02 for sections and reinforcing bar diagrams.
2. Holes for attachment of guardrail transition type TGB. See Standard Drawing E 706-CBRT-04 for details.
3. RCBA extension for bridge railing transition type TPF-1. See Standard Drawing E 609-TBAE-01 for details.
4. Holes for attachment of steel bridge railing type PF-1. See Standard Drawing E 706-BRPP-01 for details.


BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TPF-1.			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5801	25	5'-4"	
5814	17	3'-0"	
5820	17	3'-1"	
5822	50	3'-7"	
5825	17	4'-8"	
5832	3	4'-3"	
#5	4	10'-9"	
#5	6	8'-0"	
#5	14	6'-0"	
#5	4	4'-3"	
Total Epoxy-Coated Reinforcing Steel			730 LBS
MISCELLANEOUS			
Concrete, Class C			1.5 CYS
Surface Seal			119 SFT

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TPF-1

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-01




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

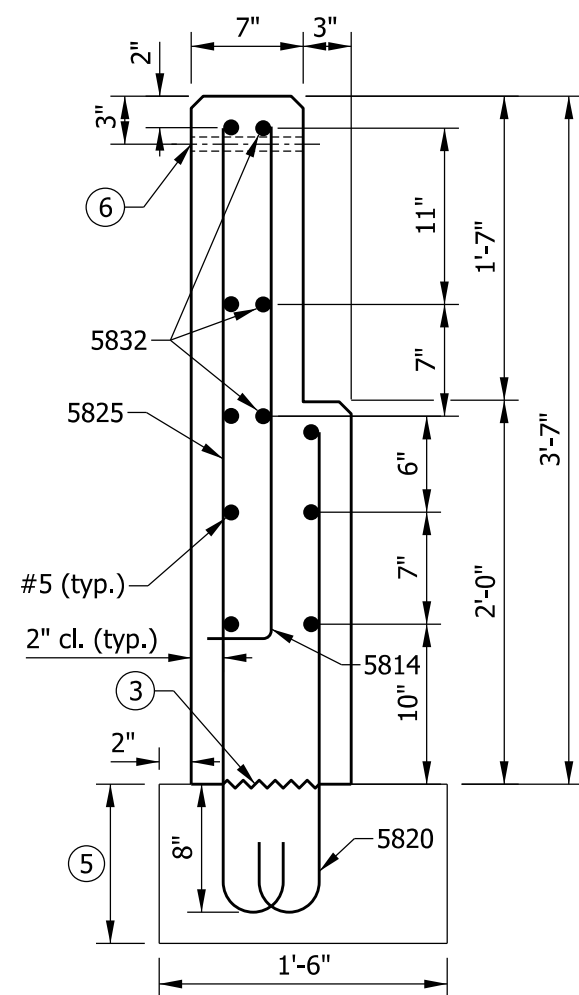


SECTION A-A

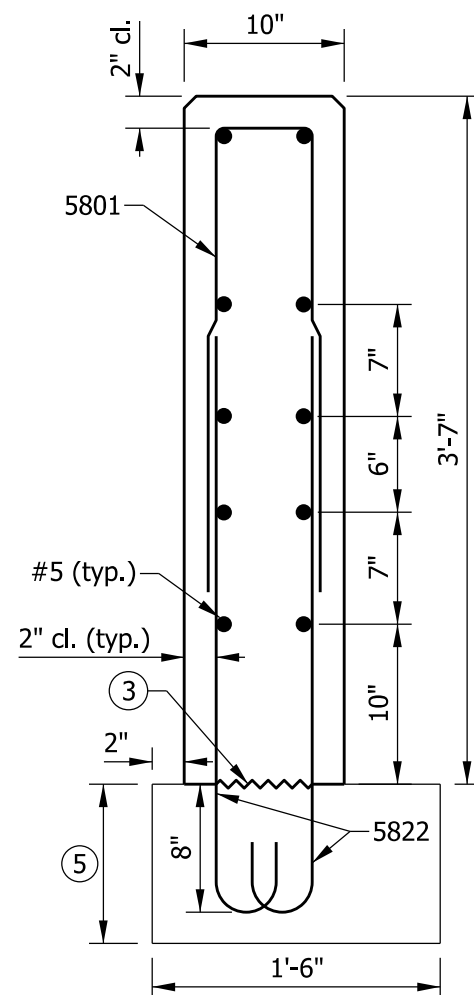

SECTION B-B

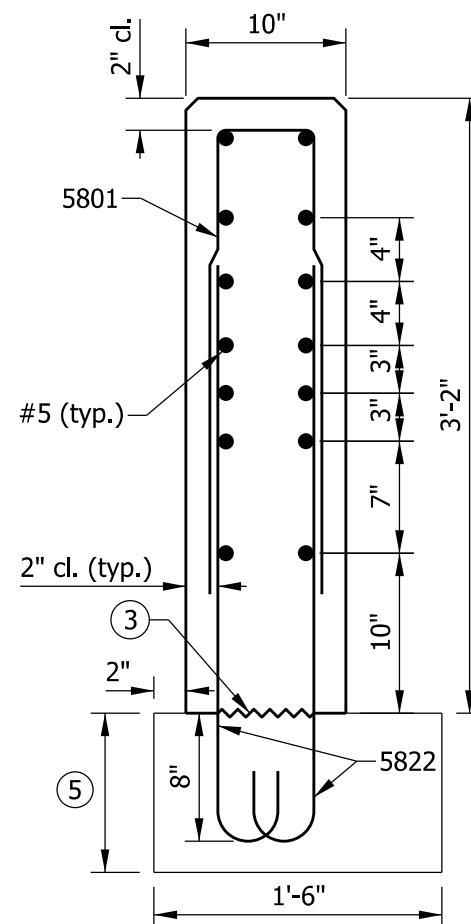




SECTION C-C

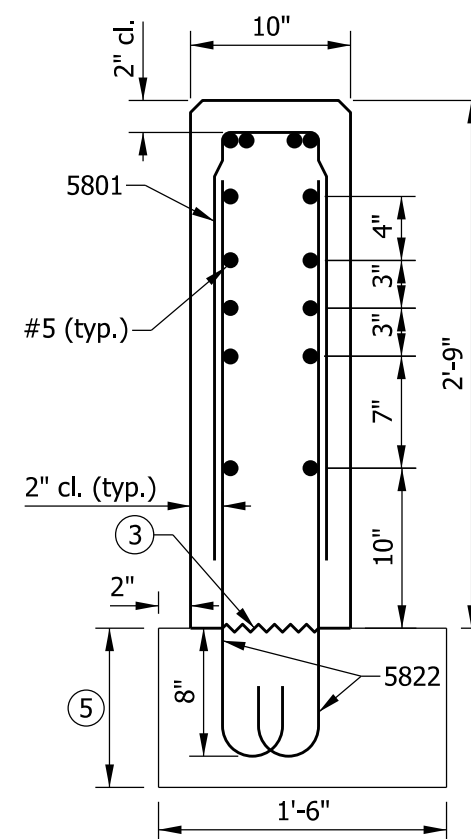

SECTION D-D

## NOTES

1. See Standard Drawing E 706-TTPP-01 for elevation and plan.
2. All chamfered edges shall be 3/4".
3. Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
5. RCBA extension for bridge railing transition type TPF-1. See Standard Drawing E 609-TBAE-01 details.
6. 7/8" Ø hole for attachment of steel bridge railing type PF-1. See Standard Drawing E 706-BRPP-01 for details.

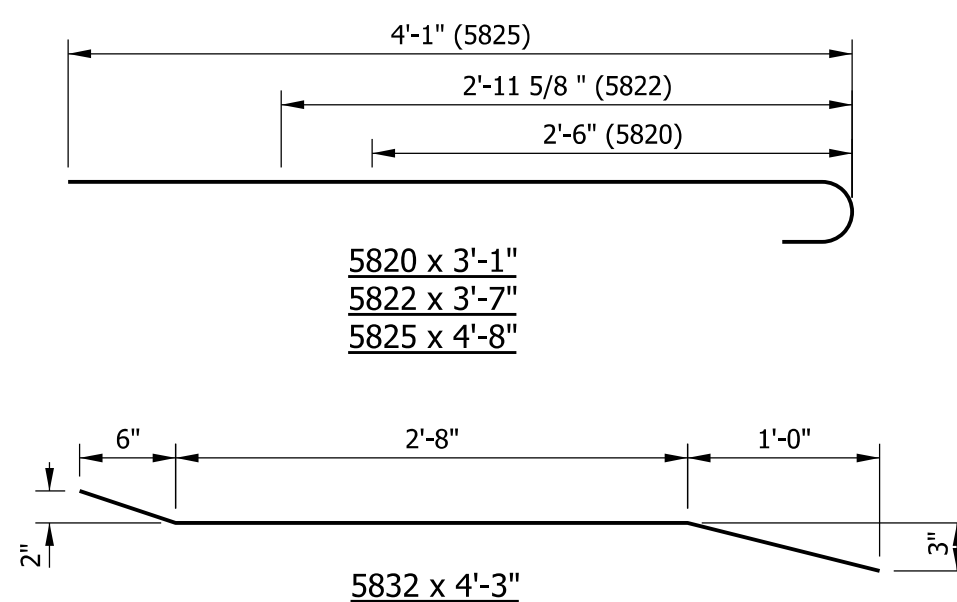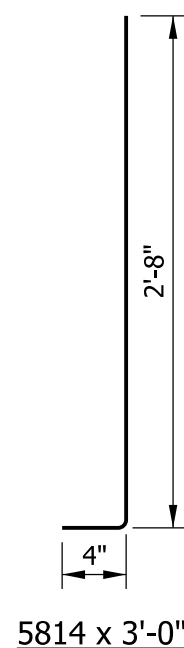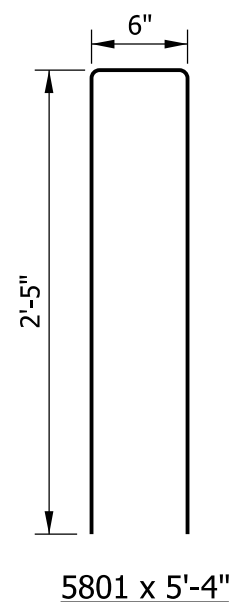


INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TPF-1

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-02







/s/ Richard L. VanCleave 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12  
CHIEF ENGINEER DATE





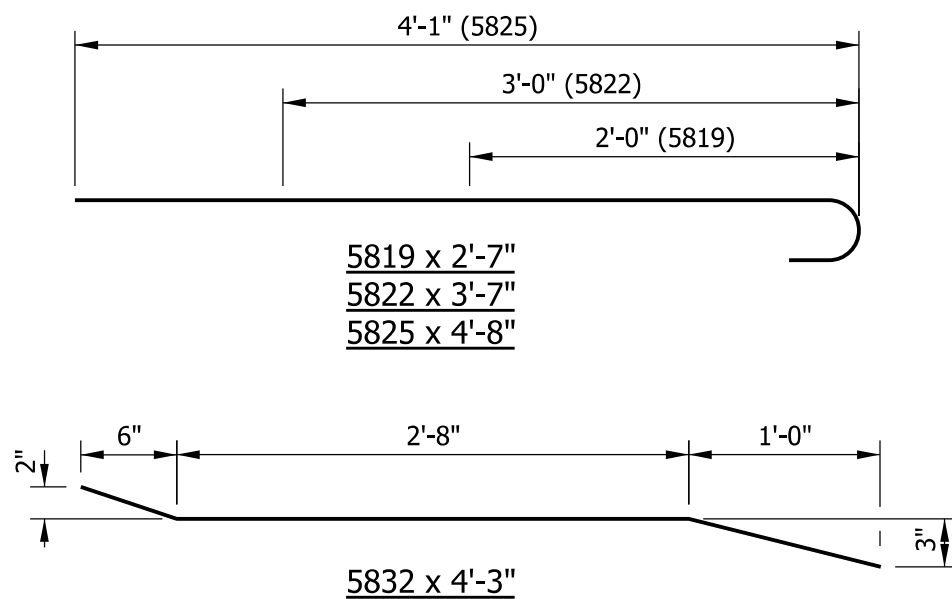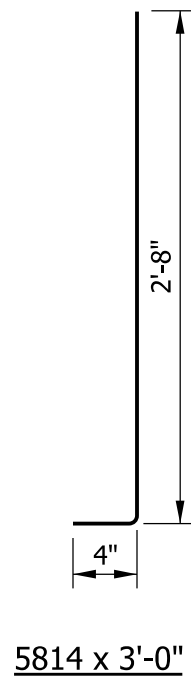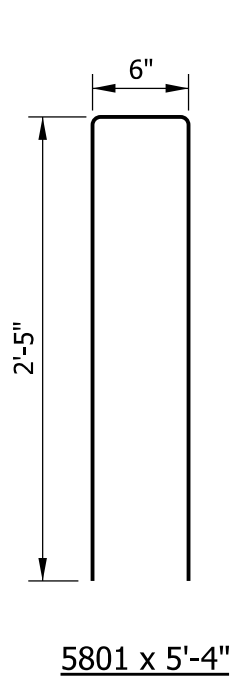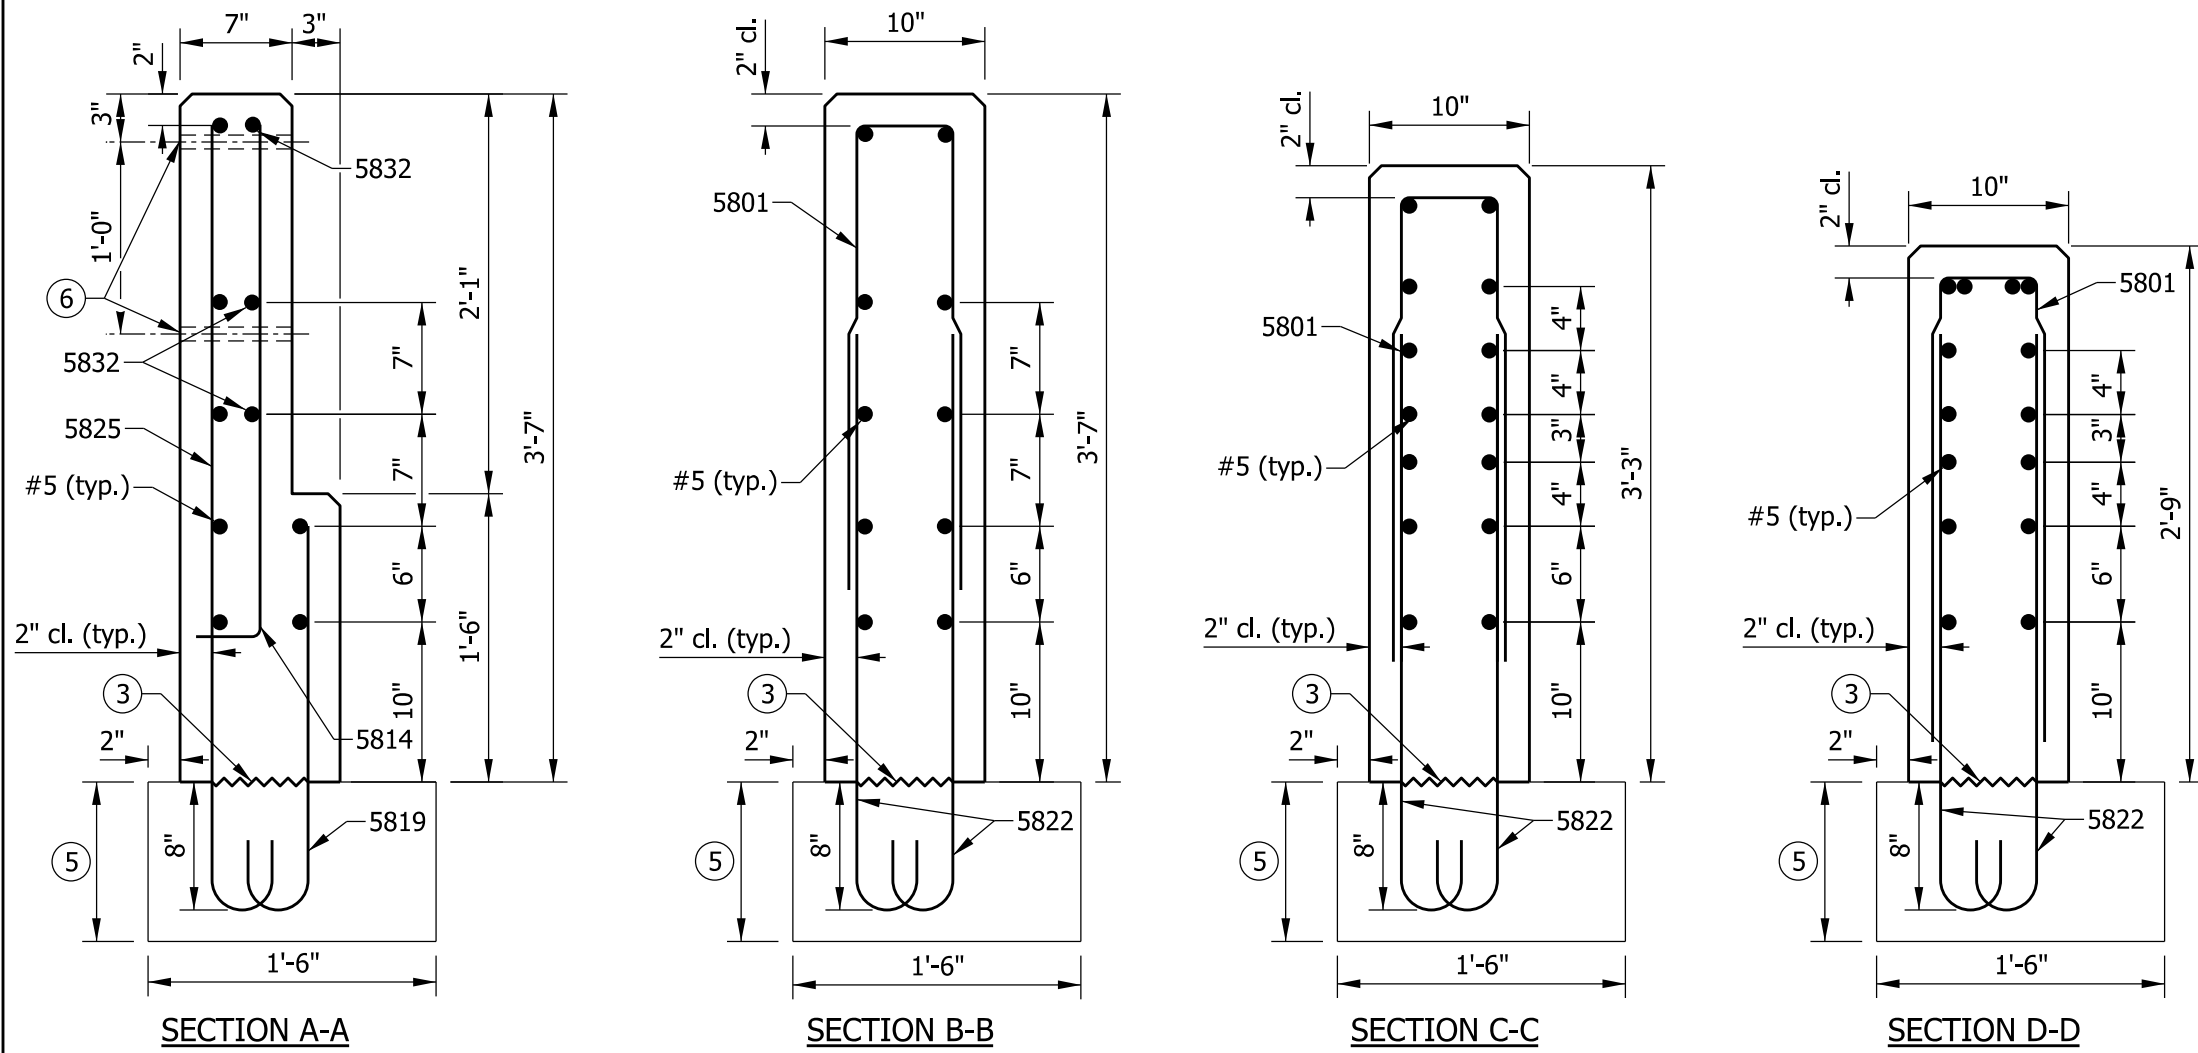

## NOTES


1. See Standard Drawing E 706-TTPP-03 for elevation and plan.
2. All chamfered edges shall be 3/4".
- ③ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
- ⑤ RCBA extension for bridge railing transition type TPF-2. See Standard Drawing E 609-TBAE-01 for details.
- ⑥ 7/8" Ø hole for attachment of steel bridge railing type PF-2. See Standard Drawing E 706-BRPP-02 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TPF-2


SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-04




/s/ Richard L. VanCleave 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12  
CHIEF ENGINEER DATE

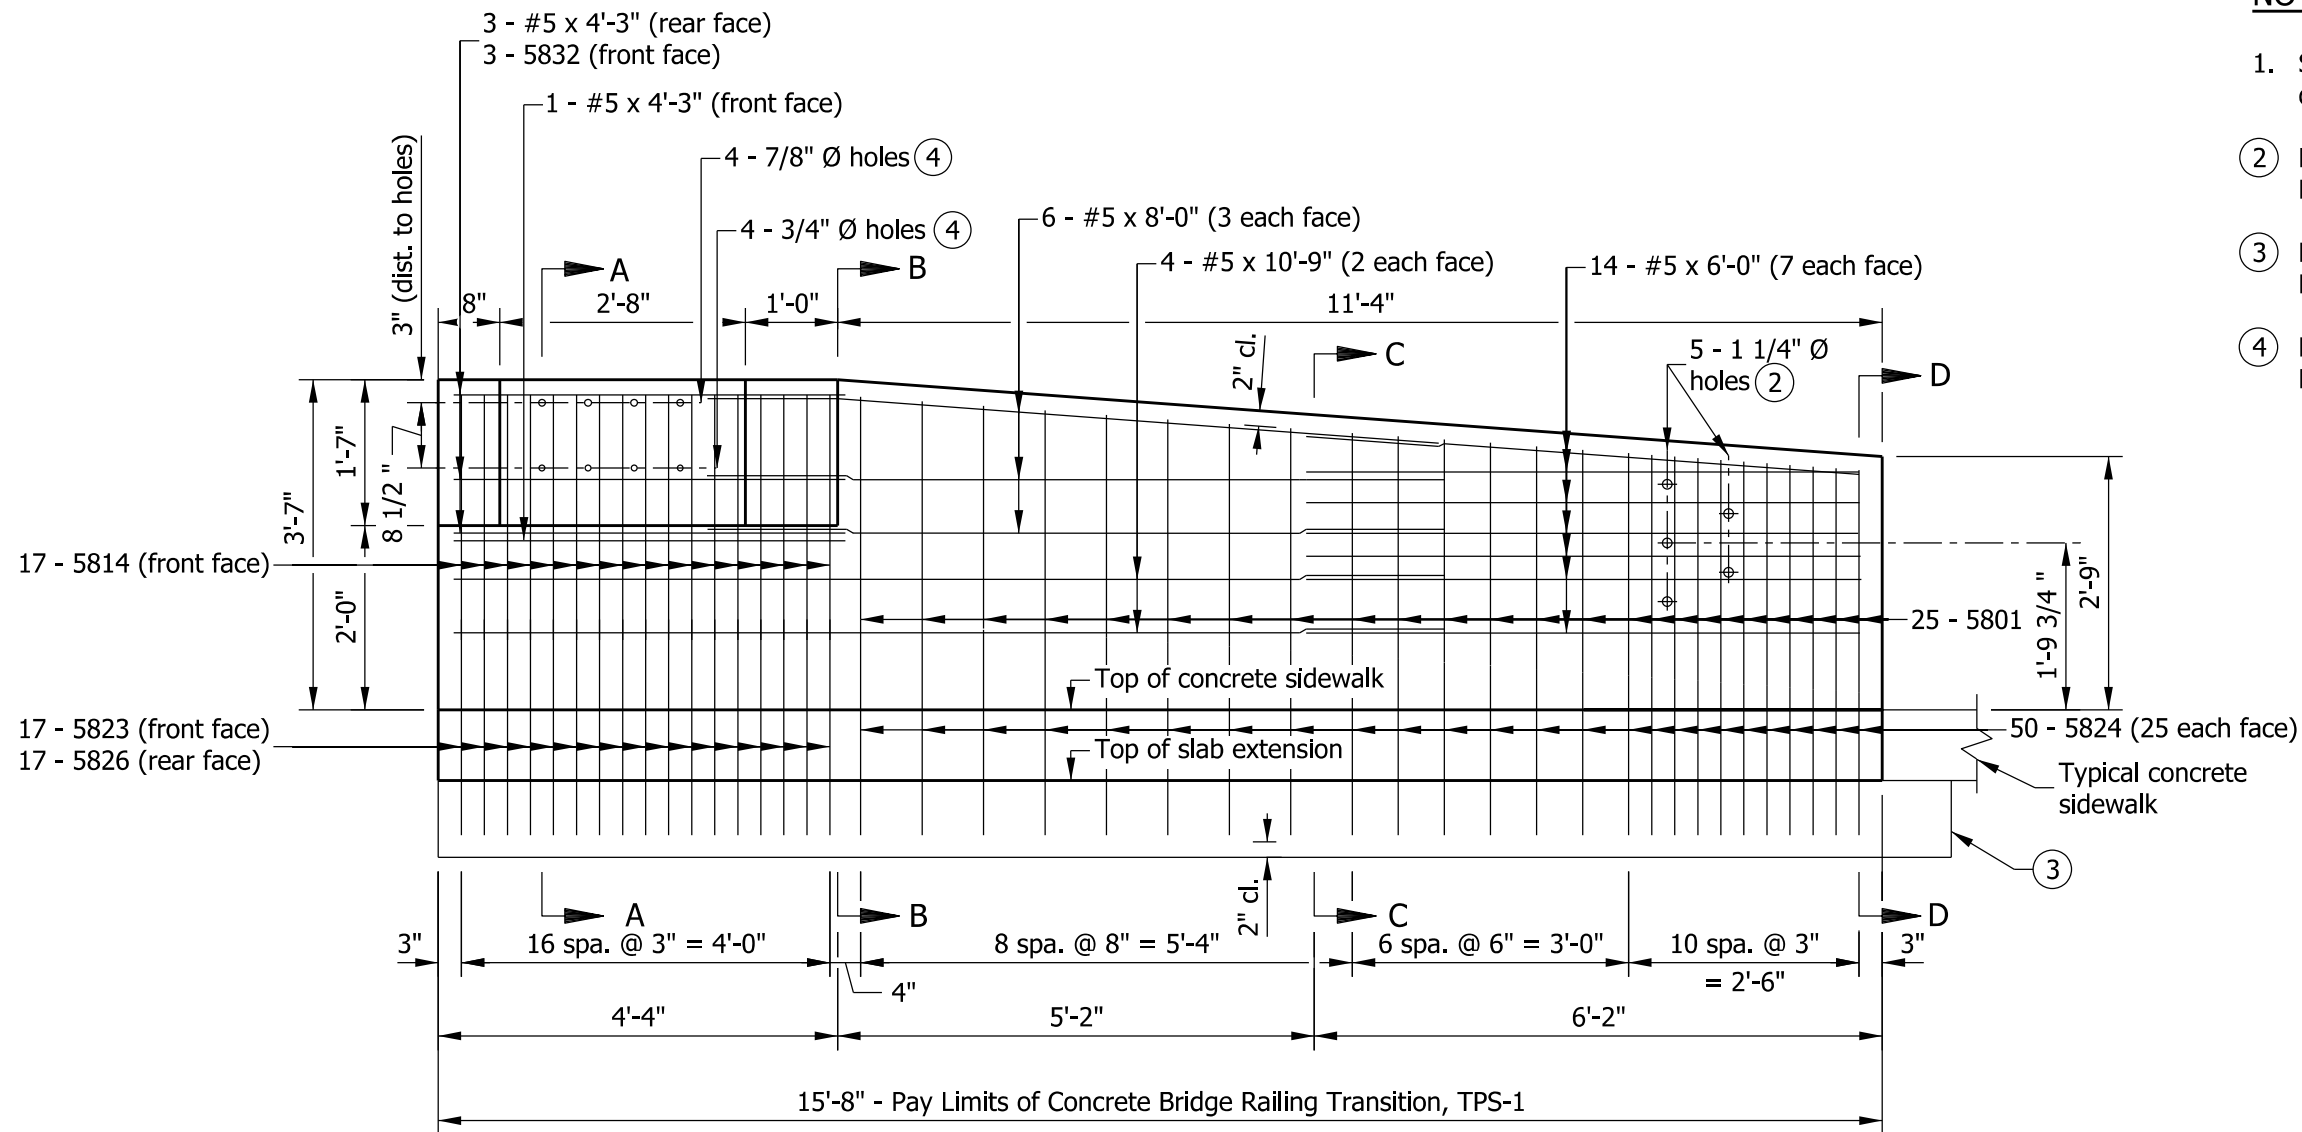

ELEVATION

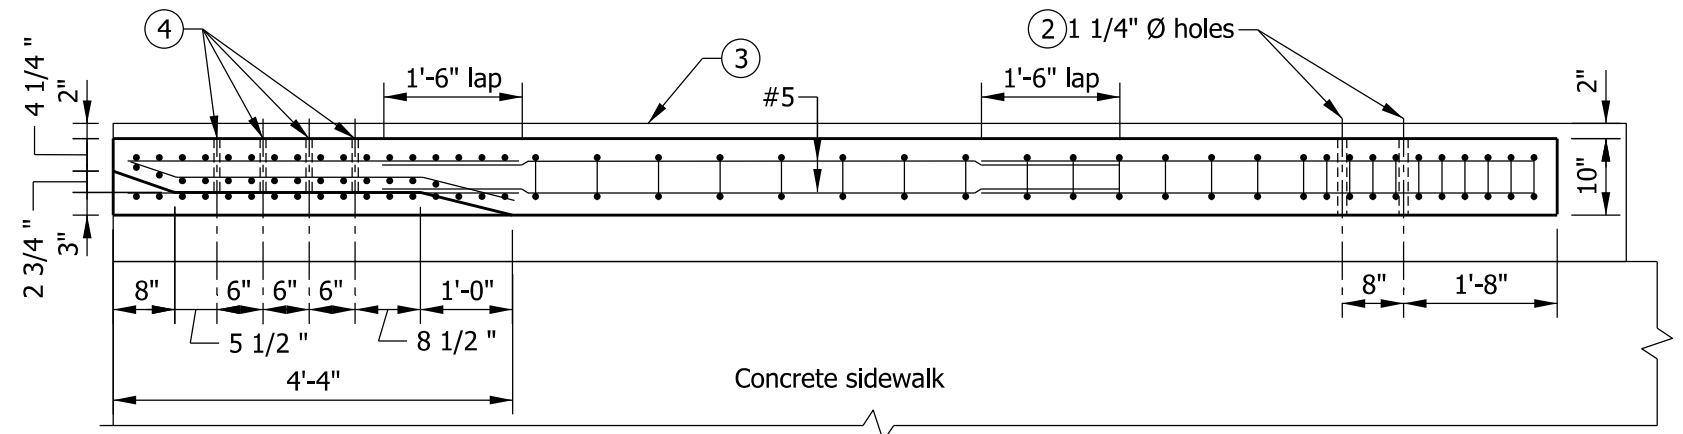

PLAN

NOTES

- 1. See Standard Drawing E 706-TTPP-06 for sections and reinforcing bar diagrams.
- 2 Holes for attachment of guardrail transition type TGB. See Standard Drawing E 706-CBRT-04 for details.
- 3 RCBA extension for bridge railing transition type TPS-1. See Standard Drawing E 609-TBAE-01 for details.
- 4 Holes for attachment of steel bridge railing type PS-1. See Standard Drawing E 706-BRPP-03 for details.

BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TPS-1.			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5801	25	5'-4"	
5814	17	3'-0"	
5823	17	3'-9"	
5824	50	4'-3"	
5826	17	5'-4"	
5832	3	4'-3"	
#5	4	10'-9"	
#5	6	8'-0"	
#5	14	6'-0"	
#5	4	4'-3"	
Total Epoxy-Coated Reinforcing Steel			789 LBS
MISCELLANEOUS			
Concrete, Class C			1.9 CYS
Surface Seal			131 SFT

INDIANA DEPARTMENT OF TRANSPORTATION


CONCRETE BRIDGE RAILING TRANSITION, TPS-1

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-05






/s/ Richard L. VanCleave 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE  
/s/ Mark A. Miller 09/04/12  
CHIEF ENGINEER DATE

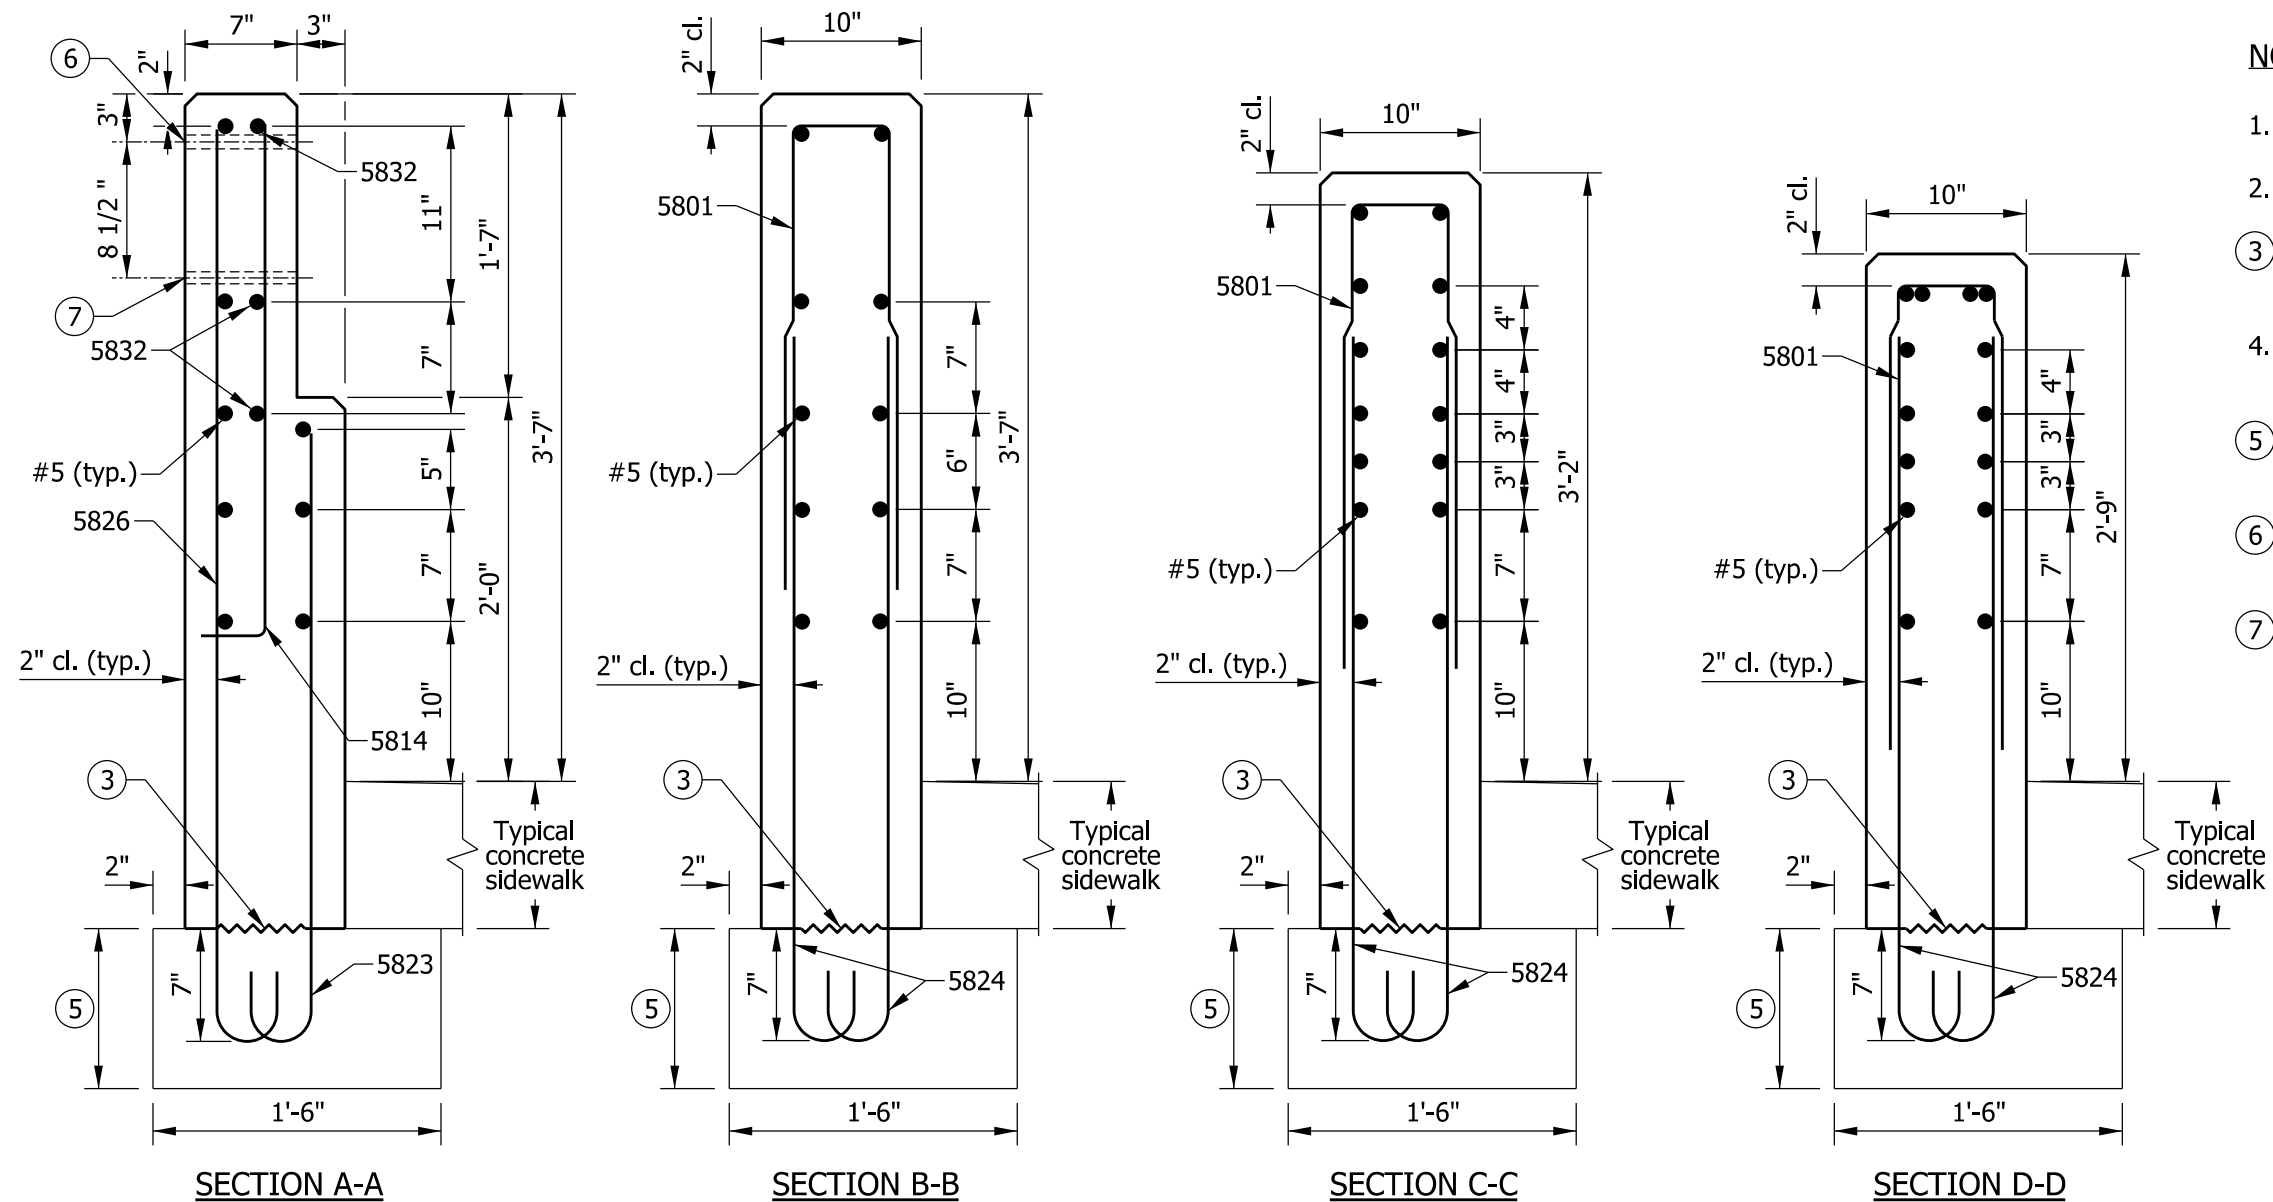

## NOTES

1. See Standard Drawing E 706-TTPP-05 for elevation and plan.
2. All chamfered edges shall be 3/4".
- 3 Construction joing type A. See Standard Drawing E 702-CJTA-01 for details.
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
- 5 RCBA extension for bridge railing transition type TPS-1. See Standard Drawing E 609-TBAE-01 for details.
- 6 7/8" Ø hole for attachment of steel bridge railing type PS-1, large rail. See Standard Drawing E 706-BRPP-03 for details.
- 7 3/4" Ø hole for attachment of steel bridge railing type PS-1, small rail. See Standard Drawing E 706-BRPP-03 for details.

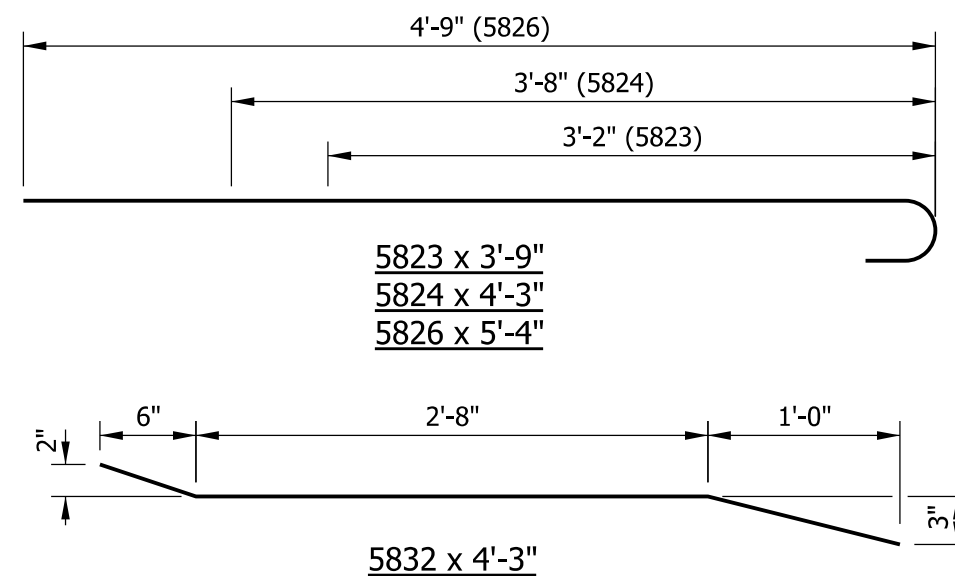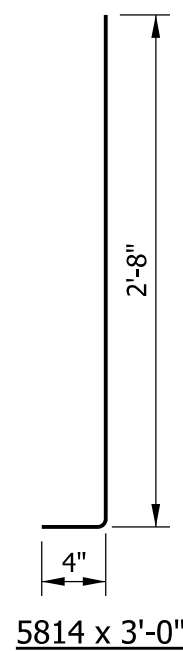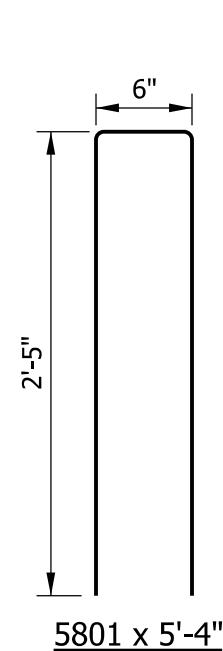


INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TPS-1

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-06



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE


NOTES

1. See Standard Drawing E 706-TTPP-08 for sections and reinforcing bar diagrams.
2. Holes for attachment of guardrail transition type TGB. See Standard Drawing E 706-CBRT-04 for details.
3. RCBA extension for bridge railing transition type TPS-2. See Standard Drawing E 609-TBAE-01 for details.
4. Holes for attachment of steel bridge railing type PS-2. See Standard Drawing E 706-BRPP-04 for details.

BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TPS-2.			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5801	25	5'-4"	
5814	17	3'-0"	
5821	17	3'-3"	
5824	50	4'-3"	
5826	17	5'-4"	
5832	3	4'-3"	
#5	4	10'-9"	
#5	6	8'-0"	
#5	14	6'-0"	
#5	3	4'-3"	
Total Epoxy-Coated Reinforcing Steel			775 LBS
MISCELLANEOUS			
Concrete, Class C			1.9 CYS
Surface Seal			131 SFT

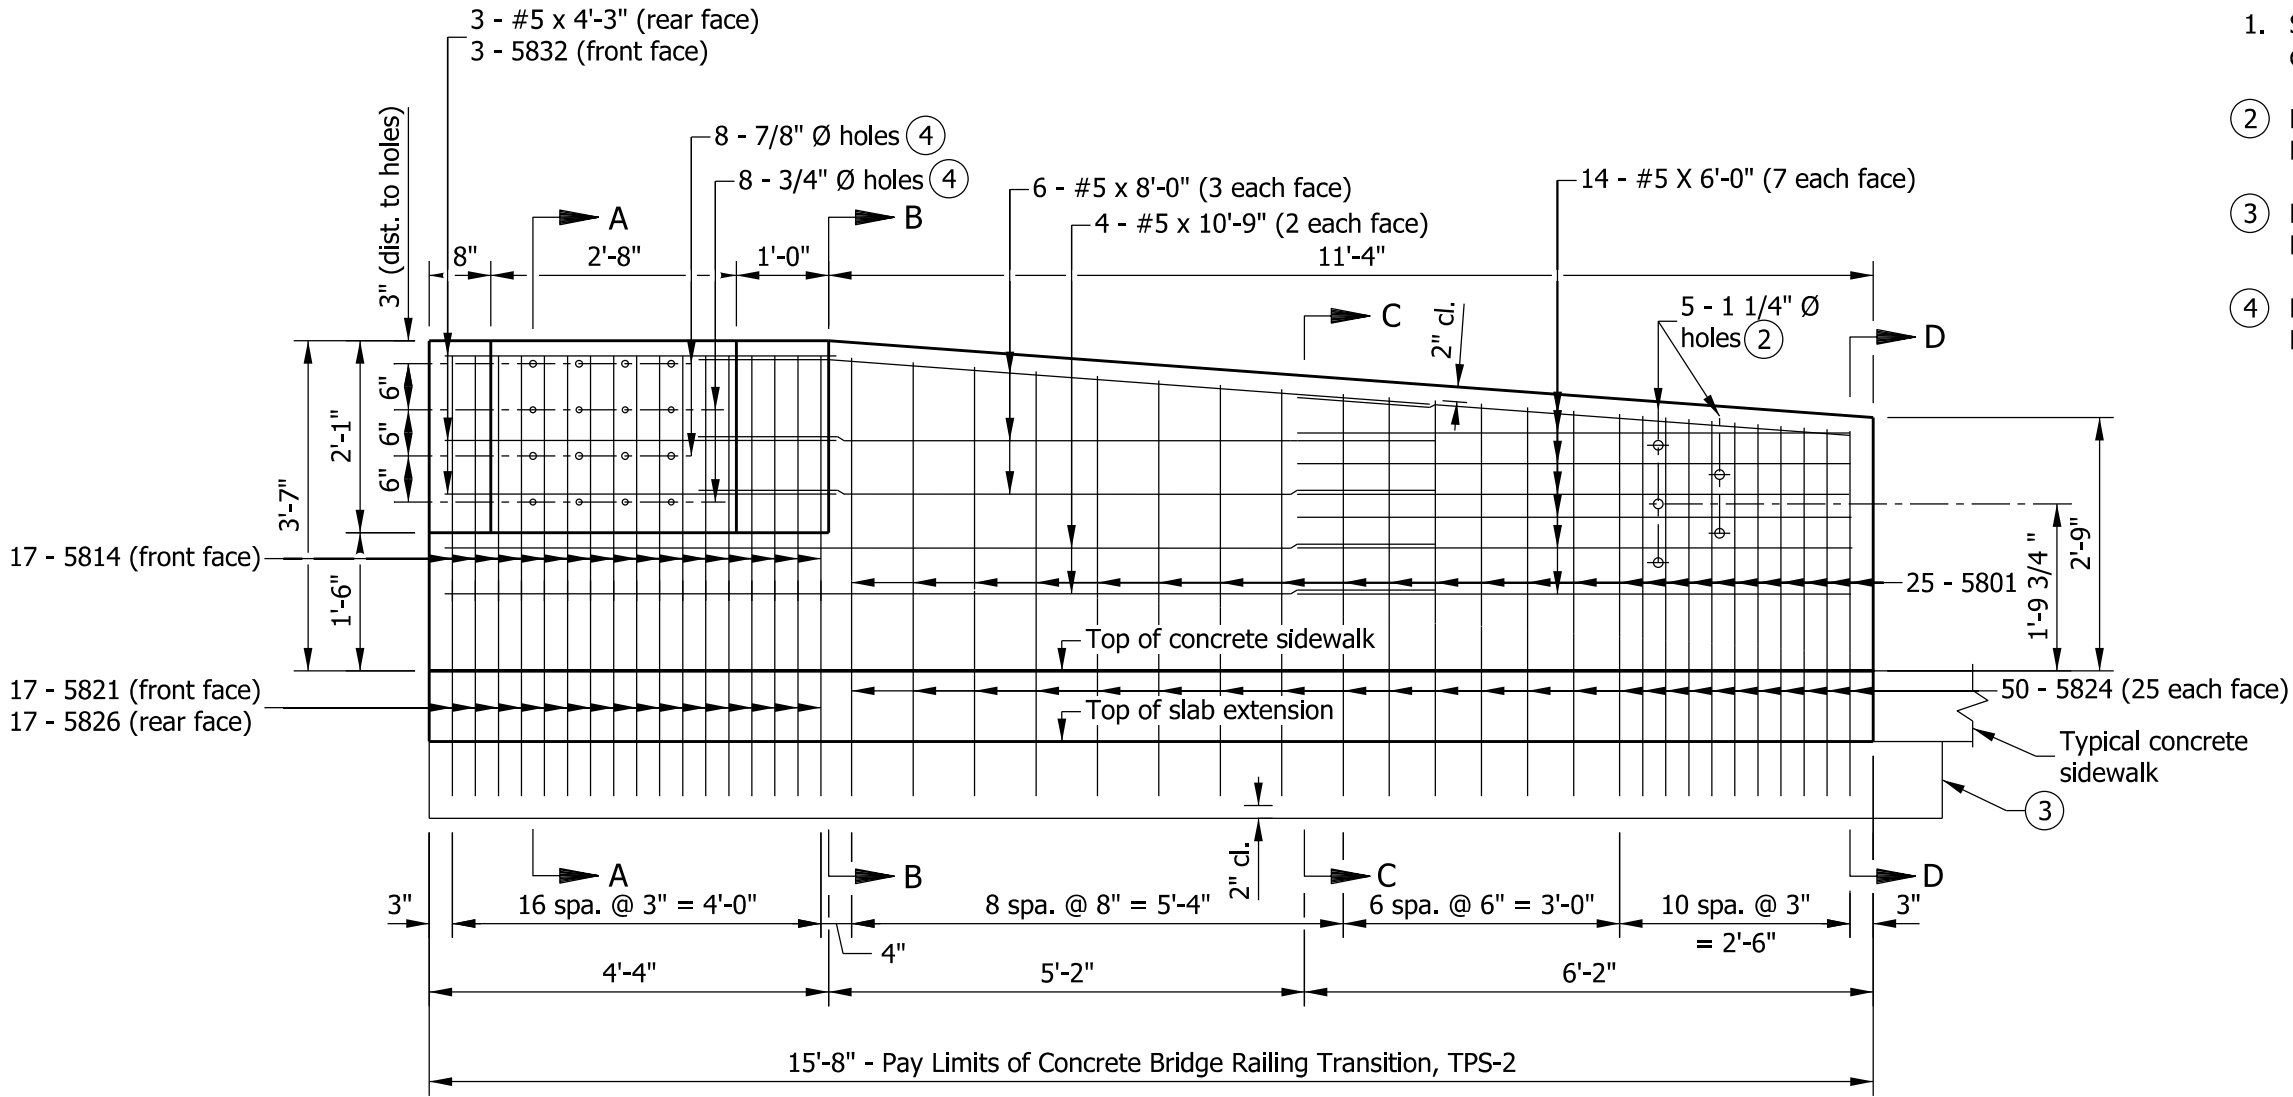

ELEVATION

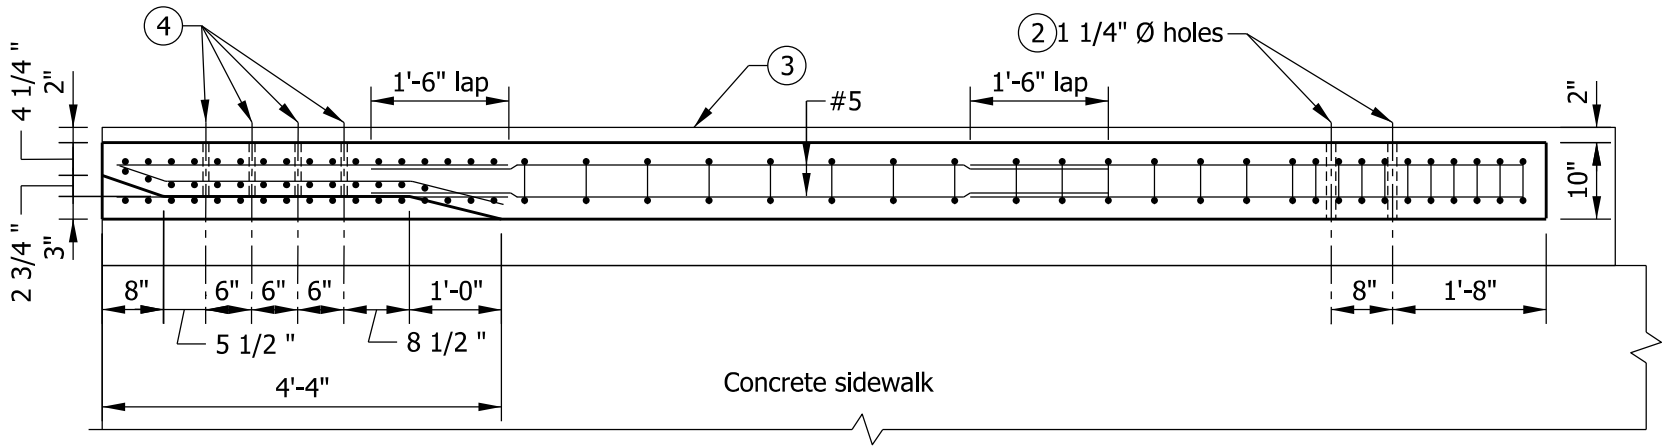

PLAN

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TPS-2

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-07




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

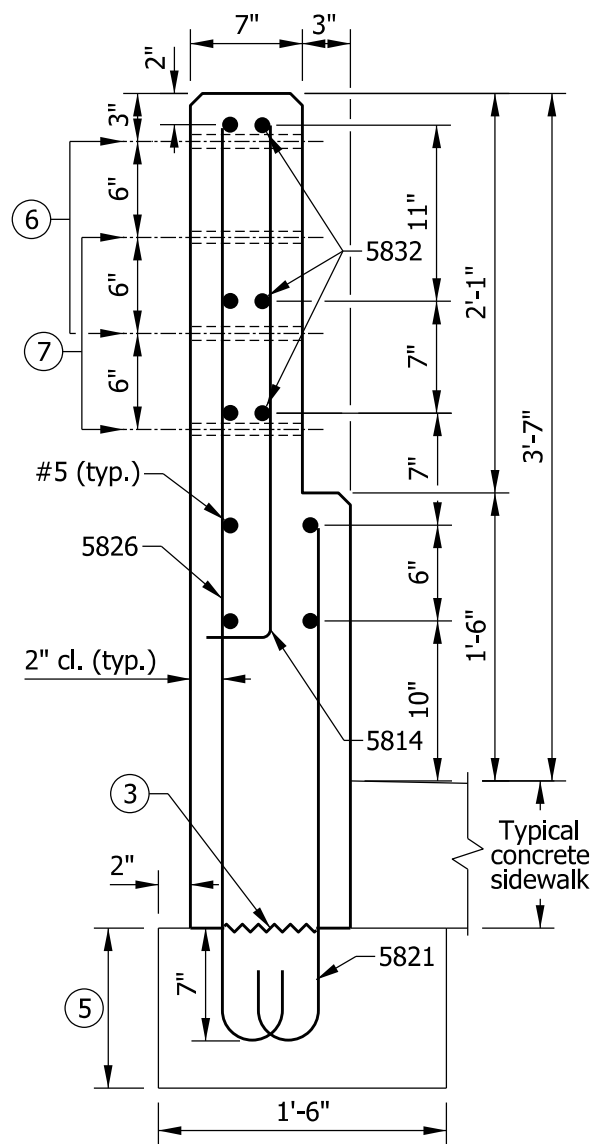


SECTION A-A

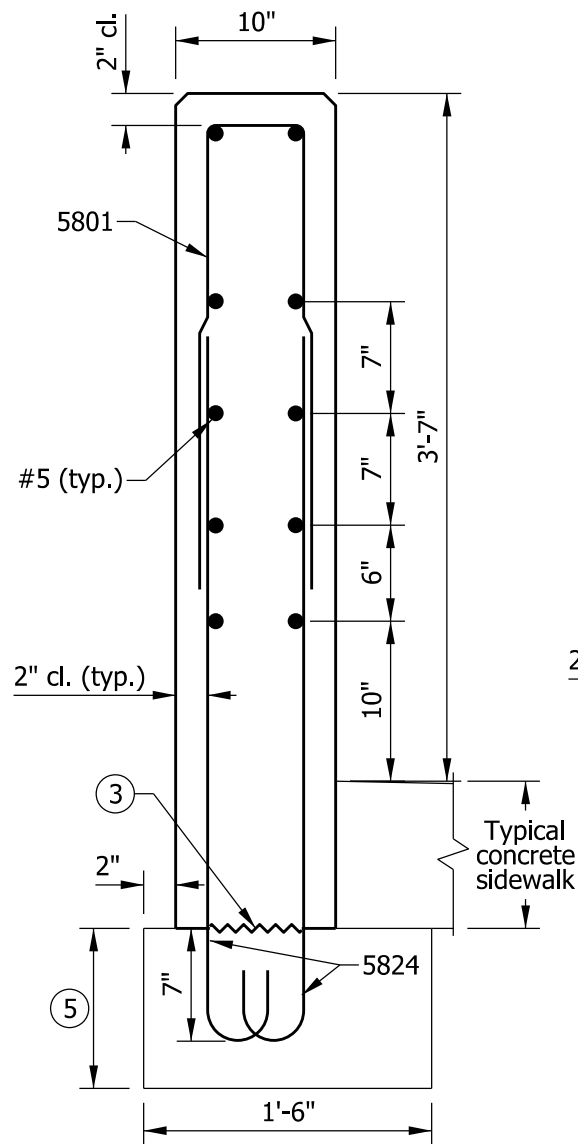

SECTION B-B

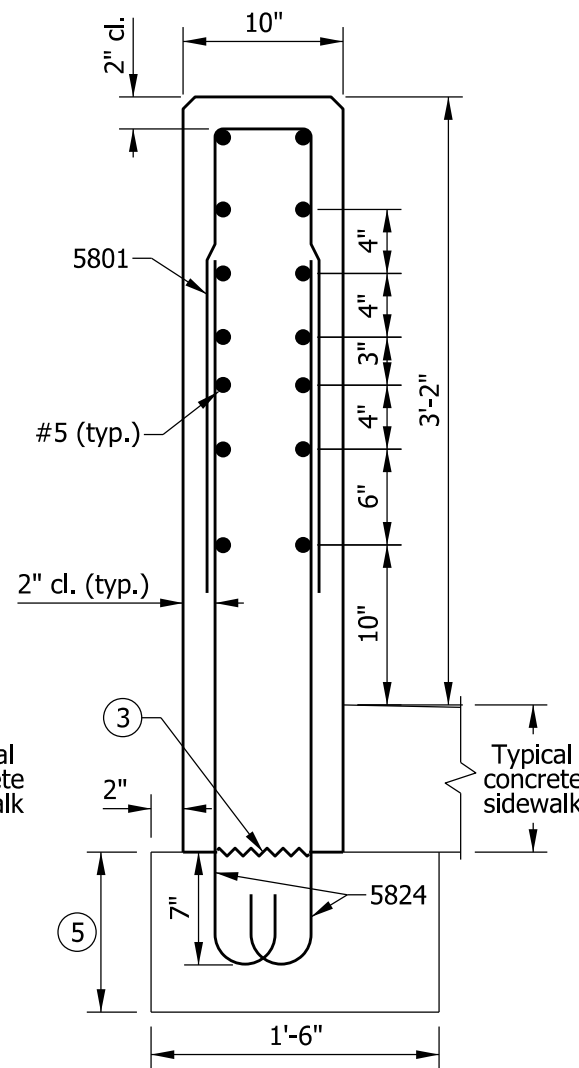


SECTION C-C

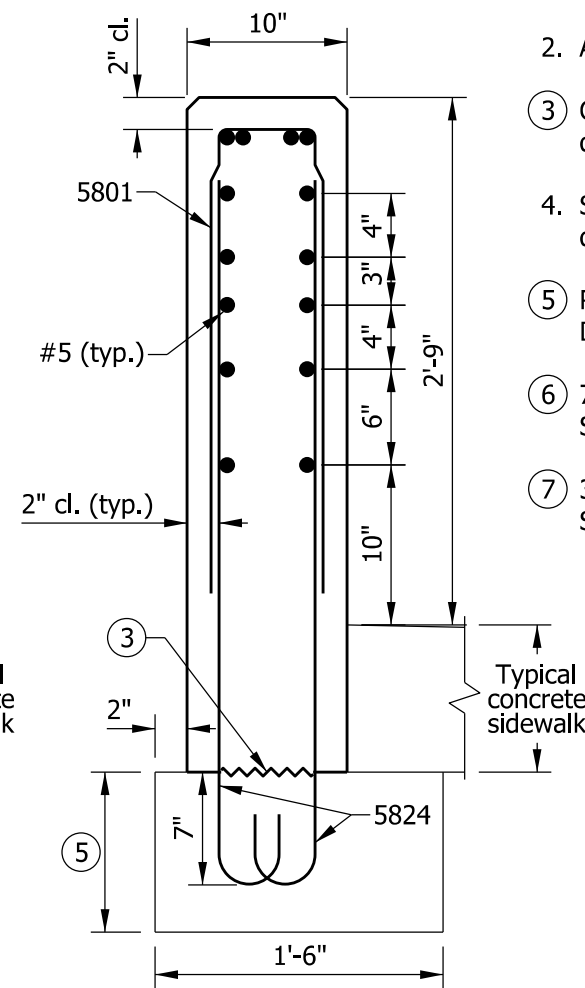


SECTION D-D

## NOTES


1. See Standard Drawing E 706-TTPP-07 for elevation and plan.
2. All chamfered edges shall be 3/4".
- 3 Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.
- 5 RCBA extension for bridge railing transition type TPS-2. See Standard Drawing E 609-TBAE-01 for details.
- 6 7/8" Ø hole for attachment of steel bridge railing type PS-2, large rail. See Standard Drawing E 706-BRPP-04 for details.
- 7 3/4" Ø hole for attachment of steel bridge railing type PS-2, small rail. See Standard Drawing E 706-BRPP-04 for details.

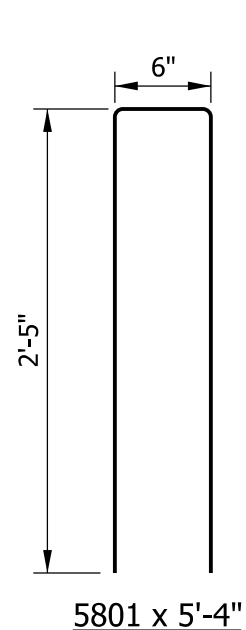

5801 x 5'-4"

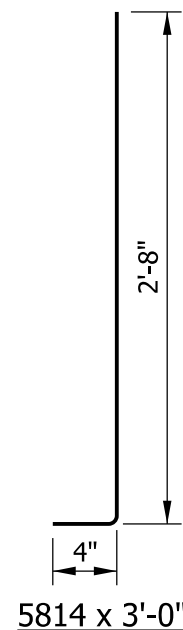

5814 x 3'-0"

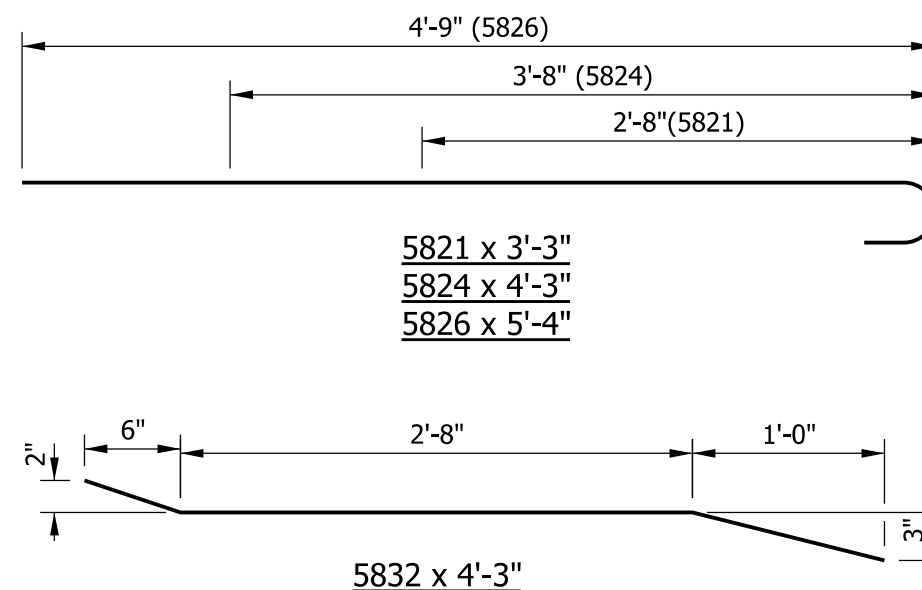


5832 x 4'-3"

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TPS-2

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTPP-08




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

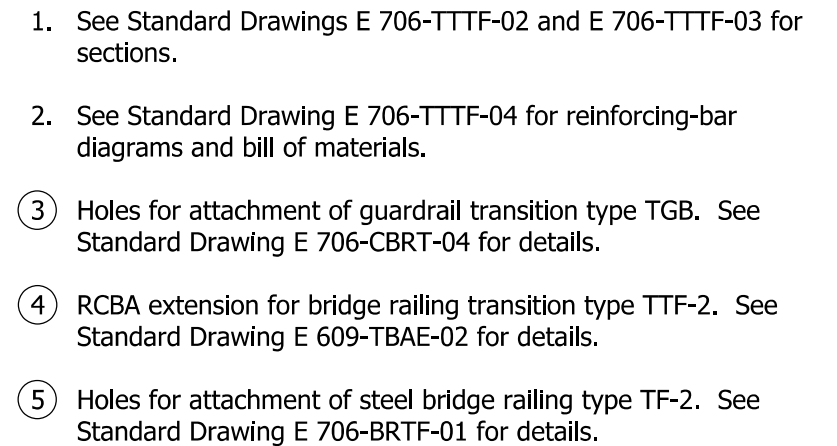


PLAN VIEW

CHIEF ENGINEER	DATE
----------------	------

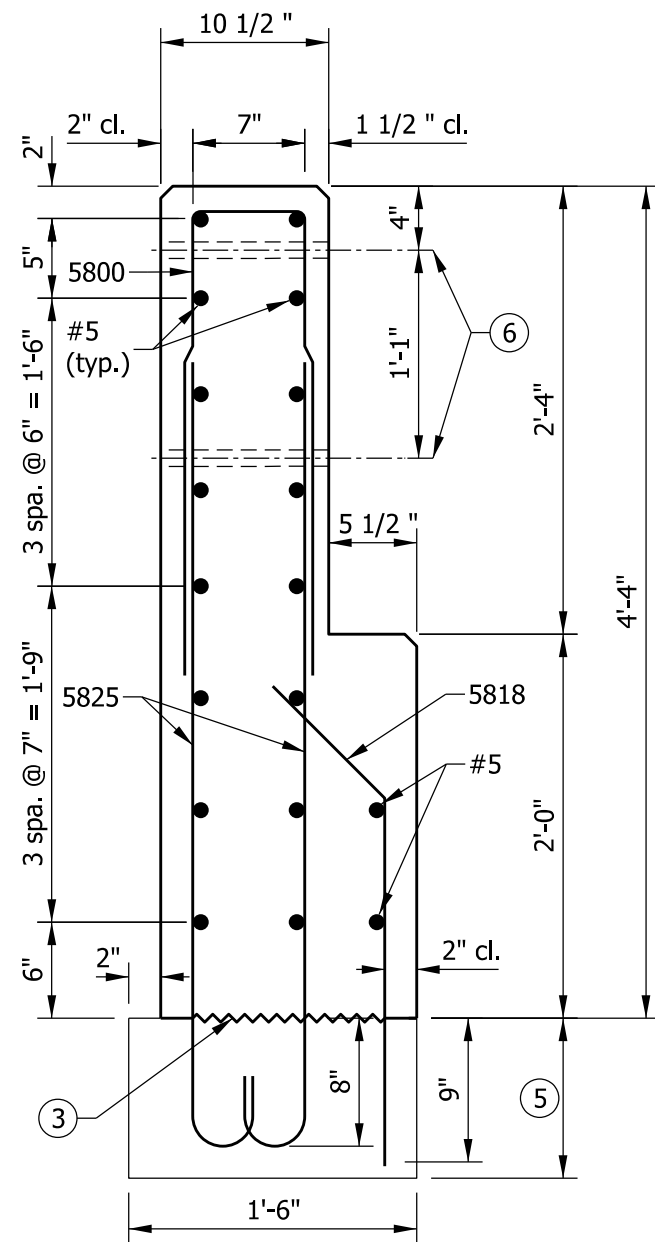

SECTION A-A

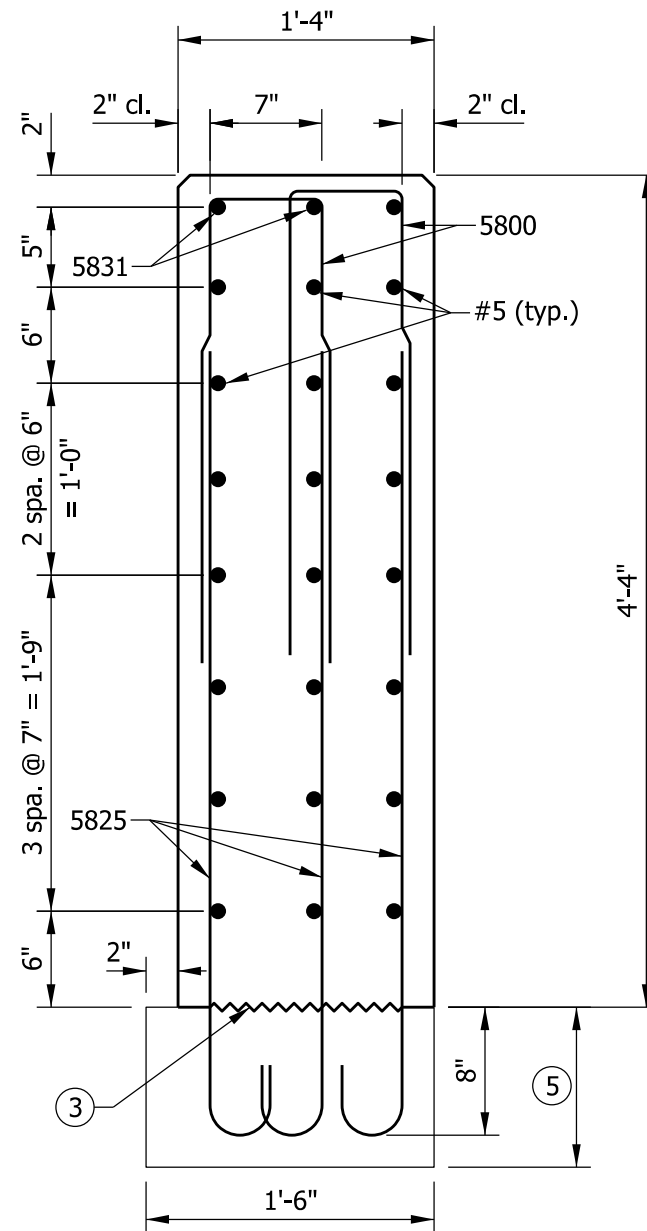

SECTION B-B

## NOTES


1. See Standard Drawing E 706-TTTF-01 for elevation and plan.
2. All chamfered edges shall be 3/4".
- ③ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
4. See Standard Drawing E 706-TTTF-04 for reinforcing-bar diagrams.
- ⑤ RCBA extension for bridge railing transition type TTF-2. See Standard Drawing E 609-TBAE-02 for details.
- ⑥ 1" Ø hole for attachment of steel bridge railing type TF-2. See Standard Drawing E 706-BRTF-01 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TTF-2

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTTF-02




/s/ *Richard L. VanCleave* 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE


/s/ *Mark A. Miller* 09/04/12

CHIEF ENGINEER DATE




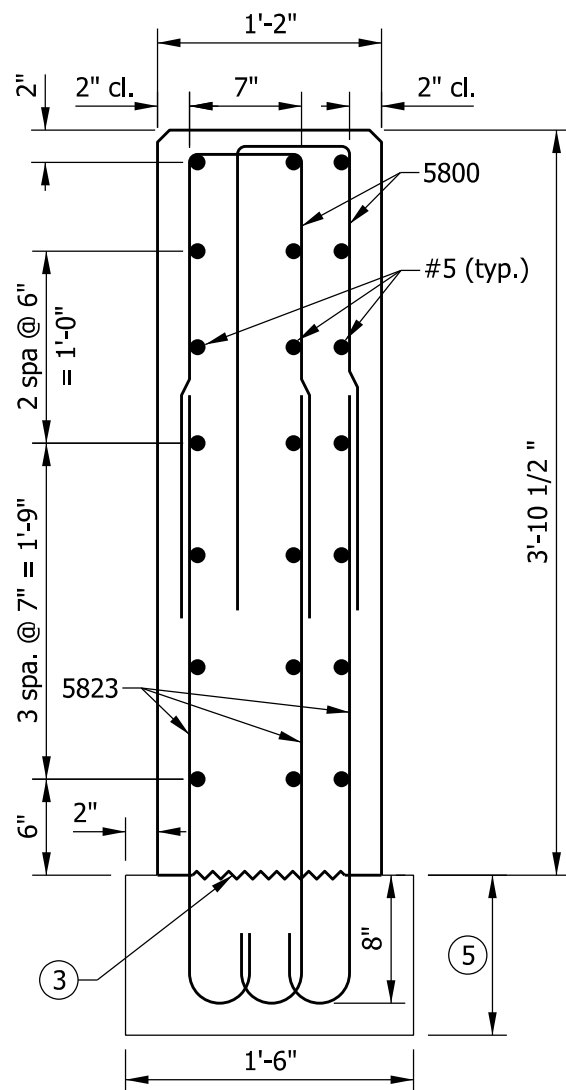

SECTION C-C

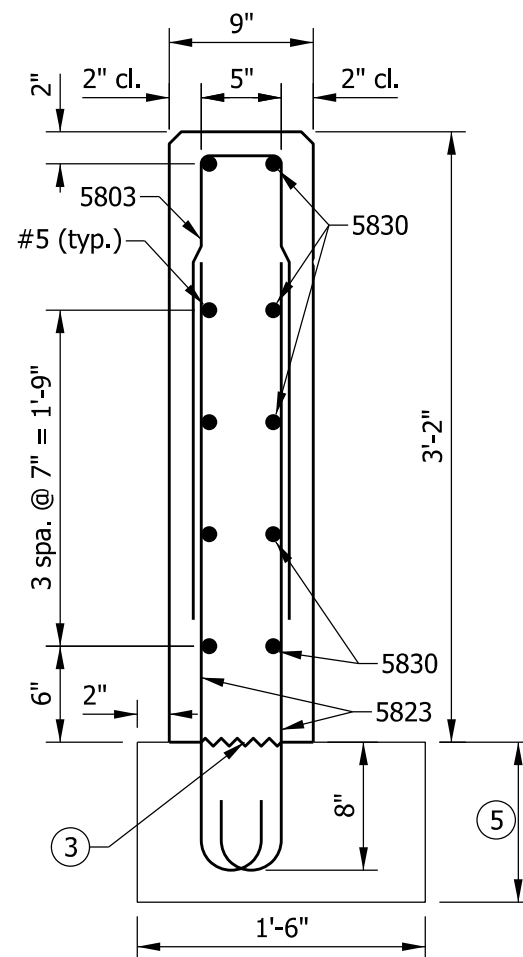

SECTION D-D

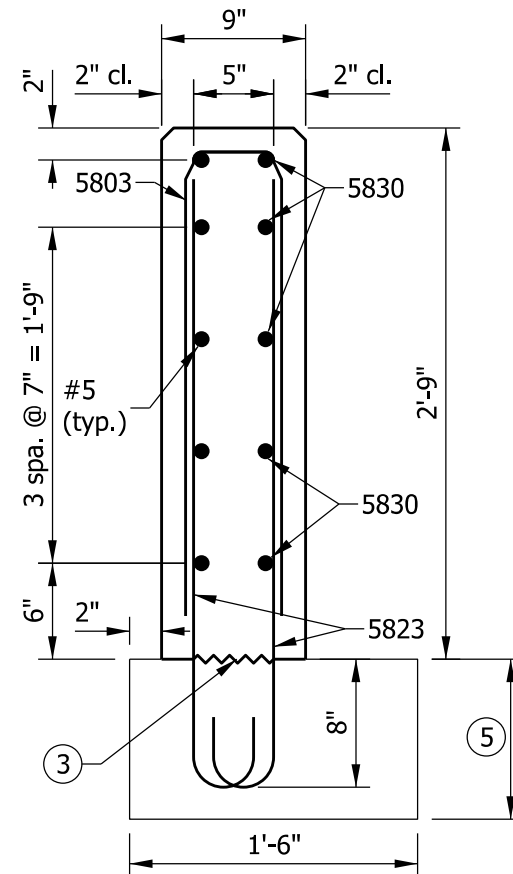

SECTION E-E

## NOTES


1. See Standard Drawing E 706-TTTF-01 for elevation and plan.
2. All chamfered edges shall be 3/4".
- ③ Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
4. See Standard Drawing E 706-TTTF-04 for reinforcing-bar diagrams.
- ⑤ RCBA extension for bridge railing transition type TTF-2. See Standard Drawing E 609-TBAE-02 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TTF-2

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTTF-03




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

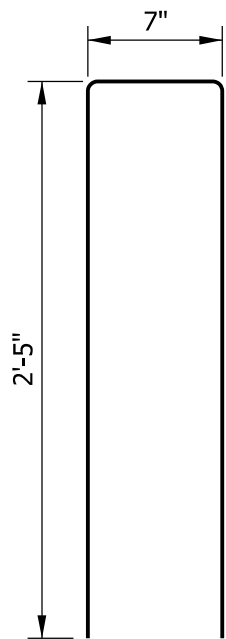


5800 x 5'-5"

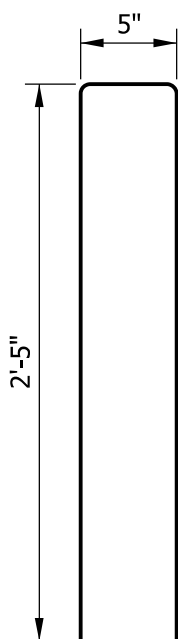


5803 x 5'-3"

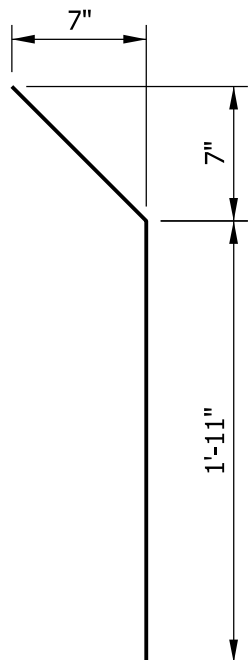


5818 x 2'-9"




5823 x 3'-9"

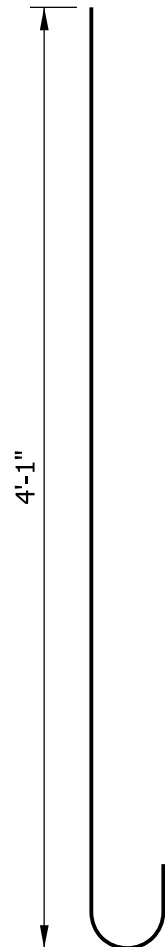

5825 x 4'-8"

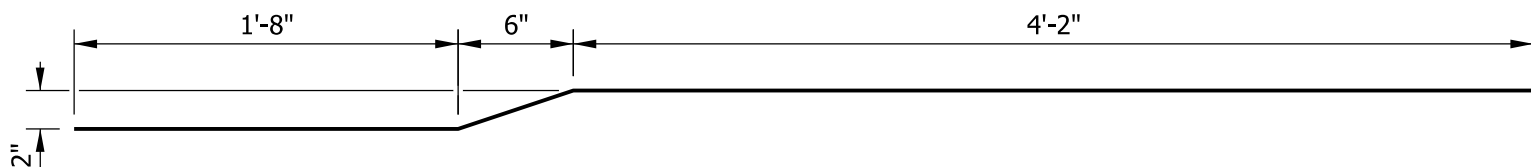

5830 x 6'-4"

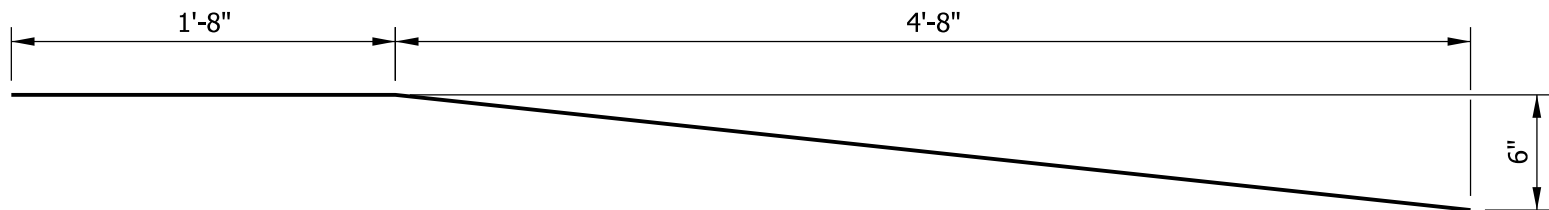

5831 x 6'-4"

NOTE

1. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.


BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TTF-2			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5800	38	5'-5"	
5803	13	5'-3"	
5818	7	2'-9"	
5823	54	3'-9"	
5825	35	4'-8"	
5830	5	6'-4"	
5831	2	6'-4"	
#5	10	15'-0"	
#5	2	13'-1"	
#5	6	11'-0"	
#5	4	8'-0"	
#5	5	6'-4"	
#5	4	4'-0"	
Total Epoxy-Coated Reinforcing Steel			1072 LBS
MISCELLANEOUS			
Concrete, Class C			2.9 CYS
Surface Seal			182 SFT

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TTF-2

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TTTF-04




/s/ Richard L. VanCleave09/04/12

SUPERVISOR, ROADWAY STANDARDSDATE


/s/ Mark A. Miller09/04/12

CHIEF ENGINEERDATE

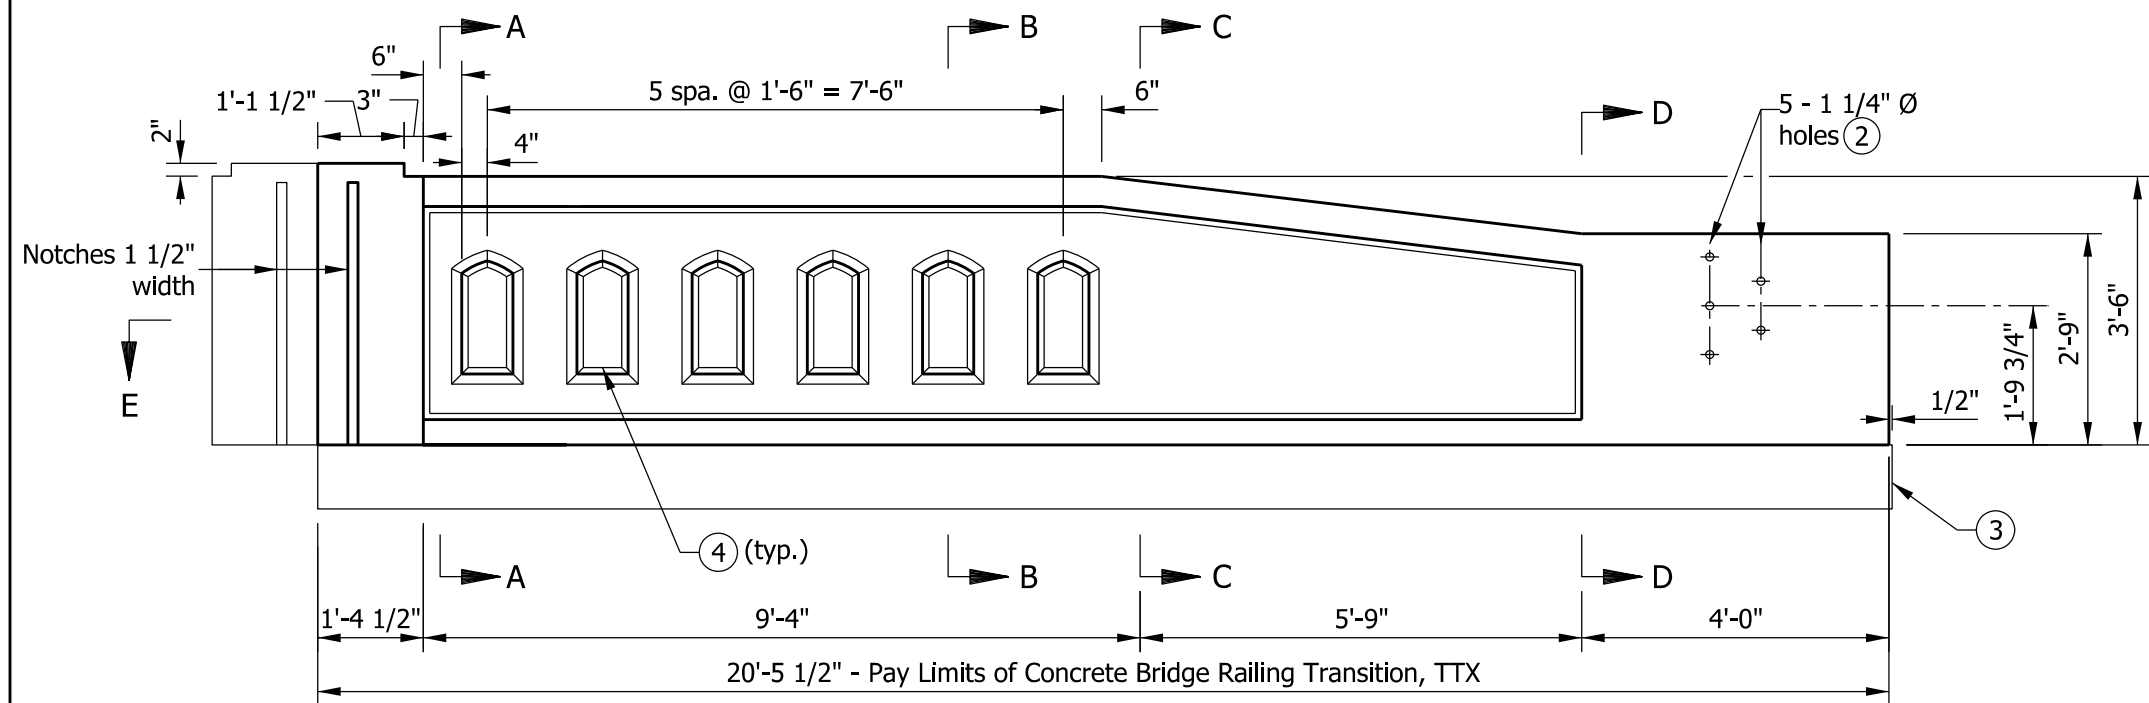


END BENT  
PILASTER (typ.)

ELEVATION

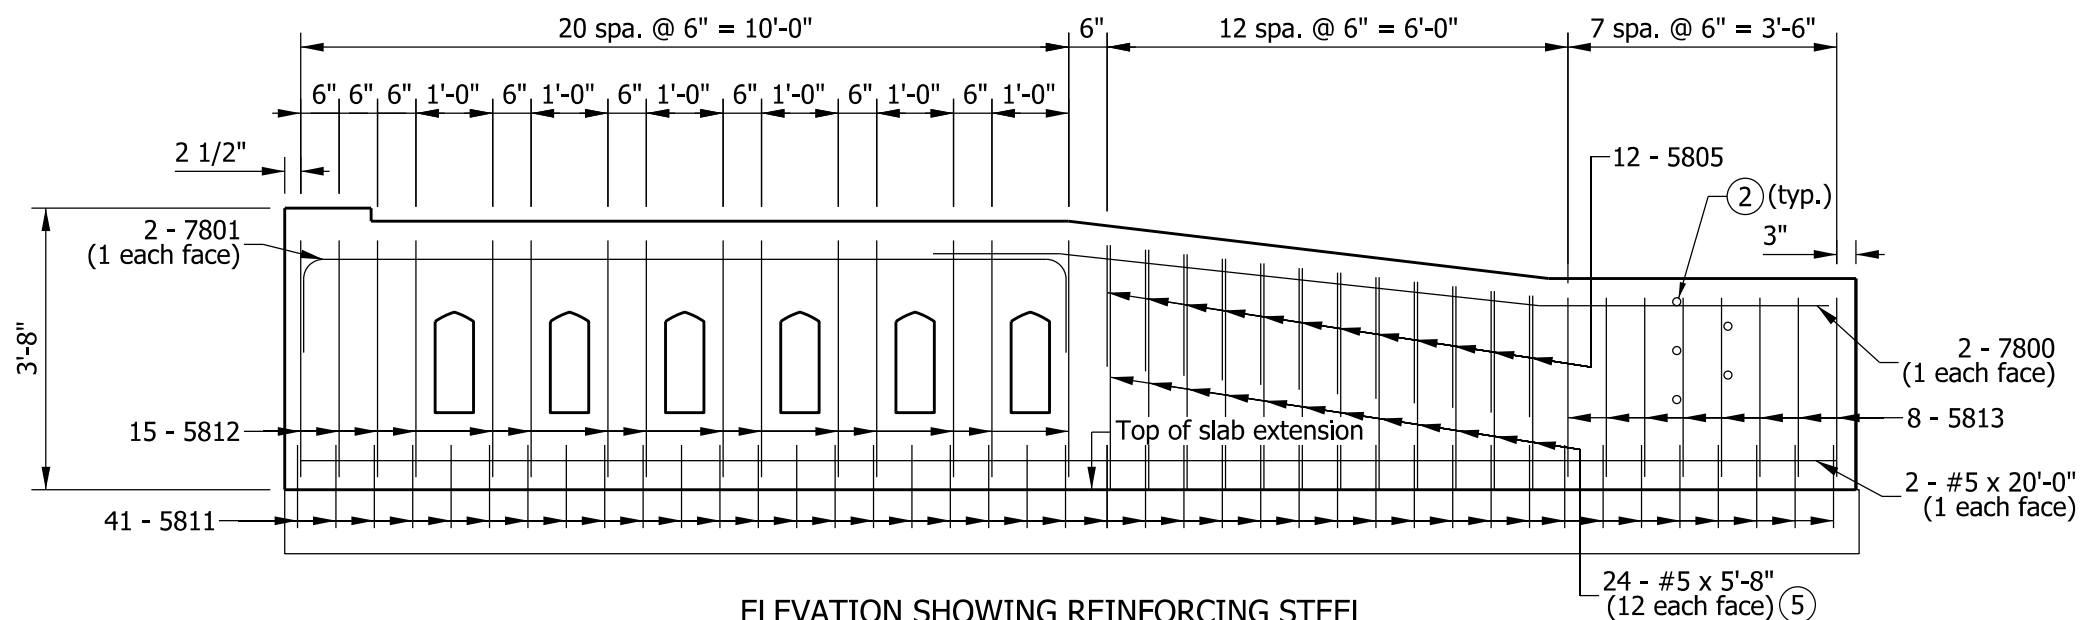

ELEVATION SHOWING REINFORCING STEEL

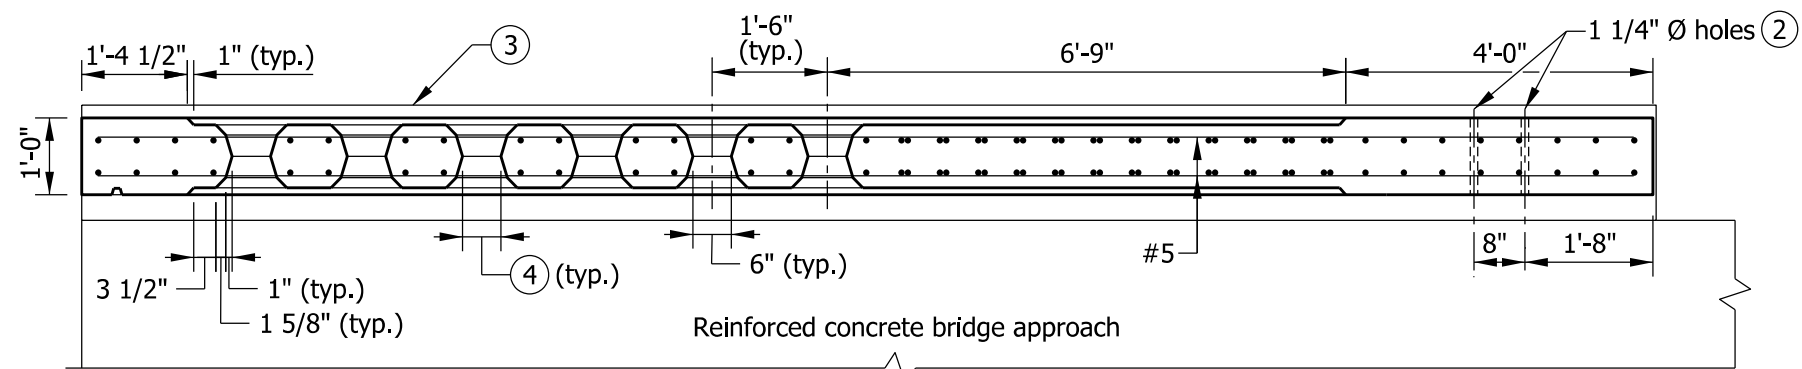

SECTION E-E

NOTES

1. See Standard Drawing E 706-TTXX-02 for sections and reinforcing-bar diagrams.
- ② Holes for attachment of guardrail transition type TGB. See Standard Drawing E 706-CBRT-04 for details.
- ③ RCBA extension for bridge railing transition type TTX. See Standard Drawing E 609-TBAE-02 for details.
- ④ Window opening. See Standard Drawing E 706-BRTX-02 for details.
- ⑤ See Standard Drawing E 706-TTXX-02 for reinforcing-bar cutting diagram.


BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type TTX			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
7800	2	11'-9"	
7801	2	12'-4"	
Total #7			98 LBS
5805	12	4'-8"	
5811	41	4'-0"	
5812	15	8'-6"	
5813	8	7'-0"	
#5	2	20'-0"	
#5	12	5'-8"	
Total #5			538 LBS
Total Epoxy-Coated Reinforcing Steel			636 LBS
MISCELLANEOUS			
Concrete, Class C			2.0 CYS
Surface Seal			149 SFT

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION, TTX

SEPTEMBER 2012


STANDARD DRAWING NO. E 706-TTXX-01




/s/ *Richard L. VanCleave* 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

/s/ *Mark A. Miller* 09/04/12  
CHIEF ENGINEER DATE



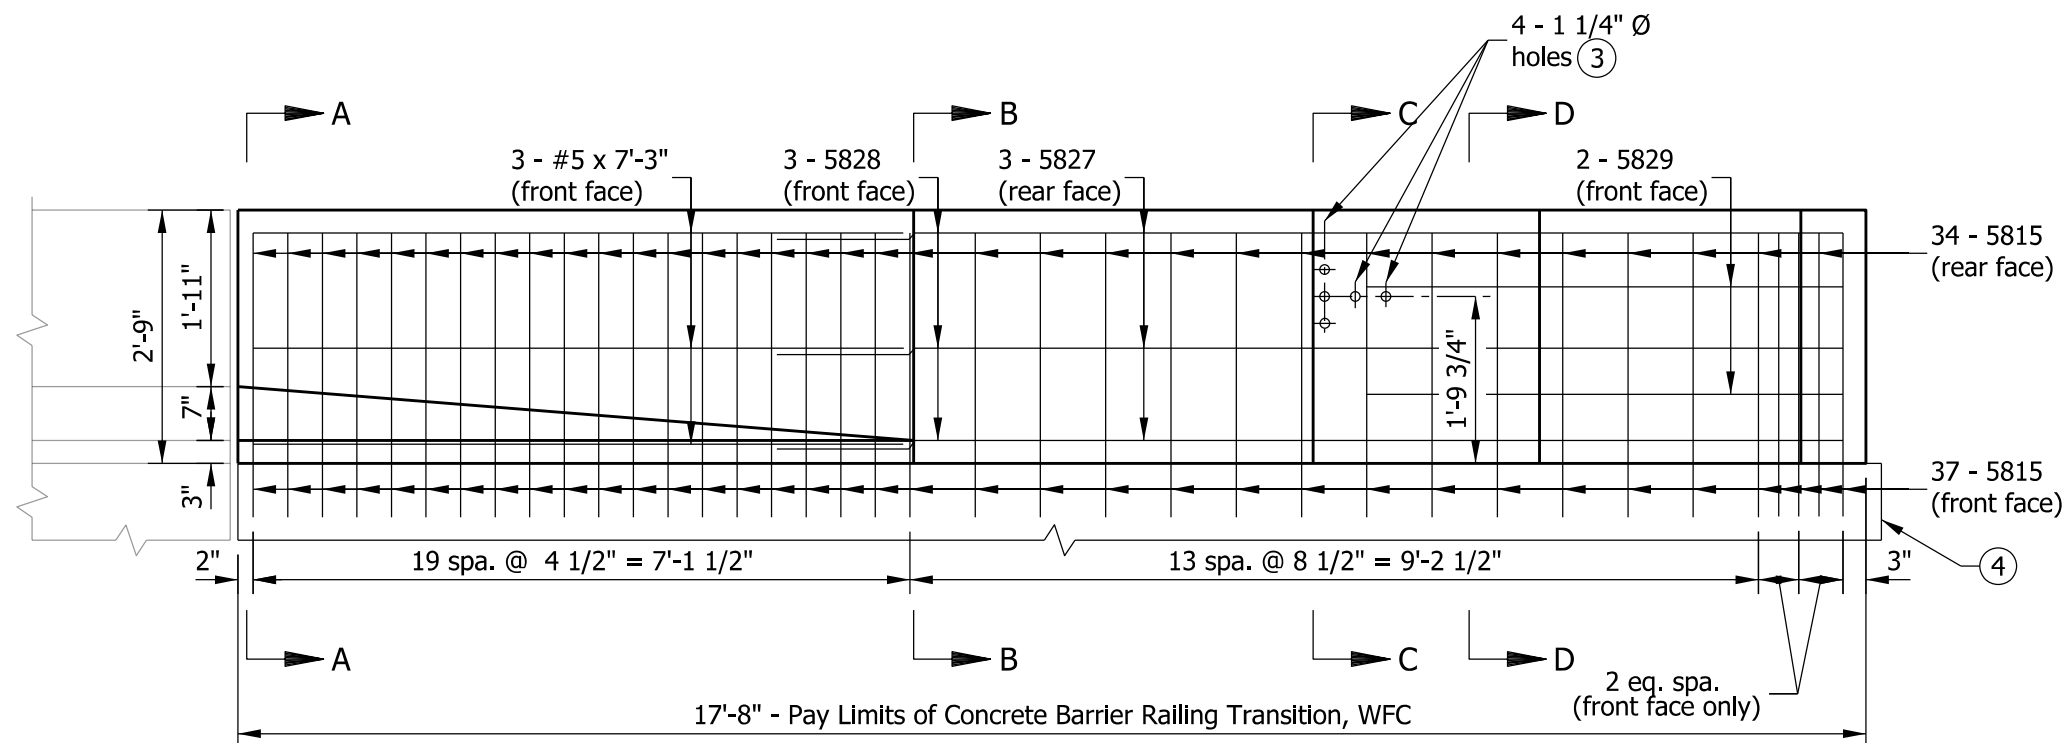

**ELEVATION**

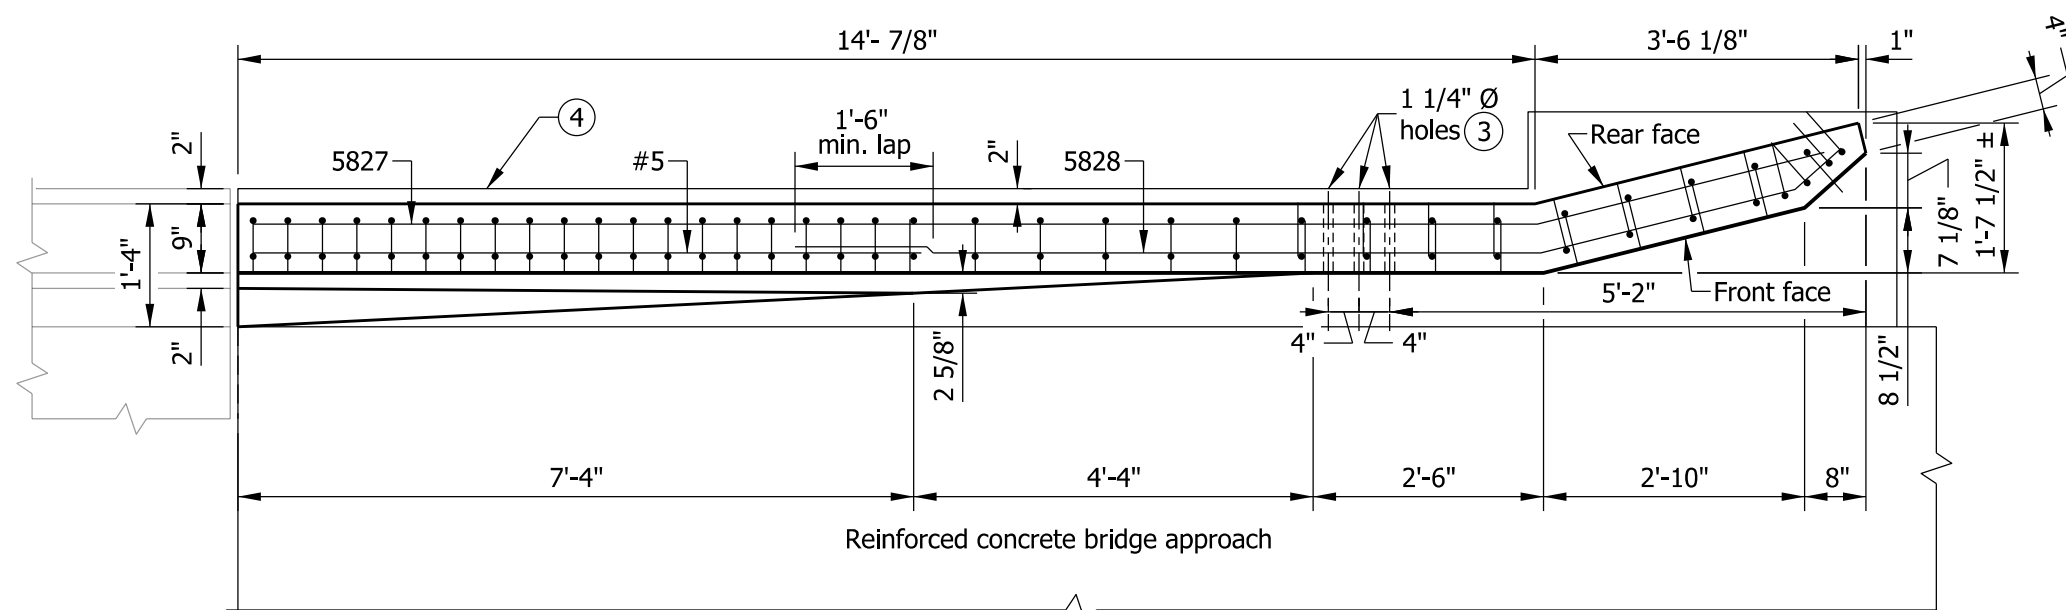

**PLAN**

**NOTES**


1. See Standard Drawing E 706-TWFC-02 for sections.
2. See Standard Drawing E 706-TWFC-03 for reinforcing-bar diagrams and bill of materials.
- ③ Holes for attachment of guardrail transition type WGB. See Standard Drawing E 706-CBRT-02 for details.
- ④ RCBA extension for bridge railing transition type WFC. See Standard Drawing E 609-TBAE-03 for details.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION TYPE WFC

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TWFC-01




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE

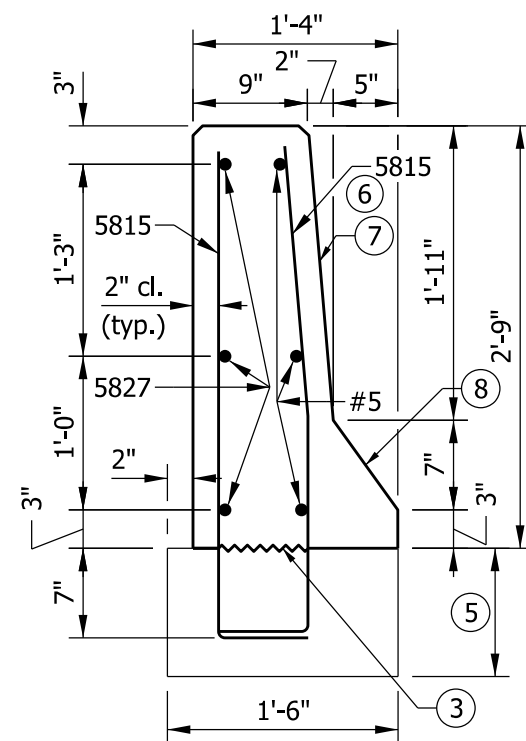


SECTION A-A

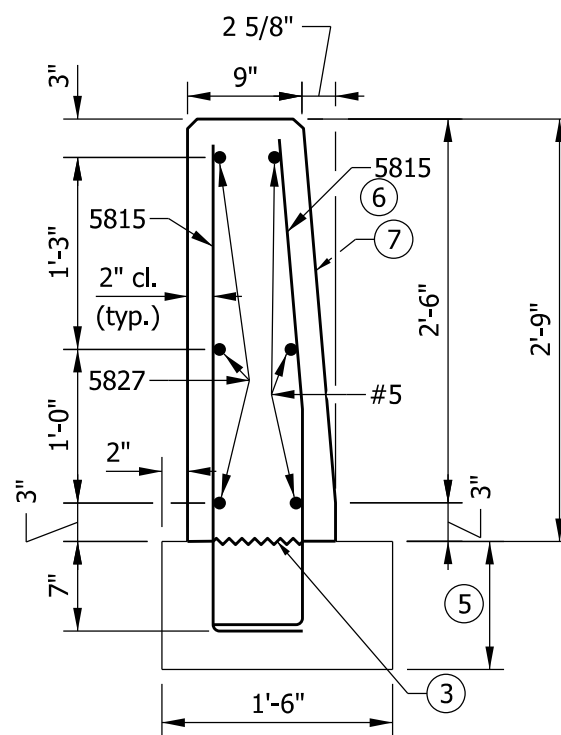

SECTION B-B

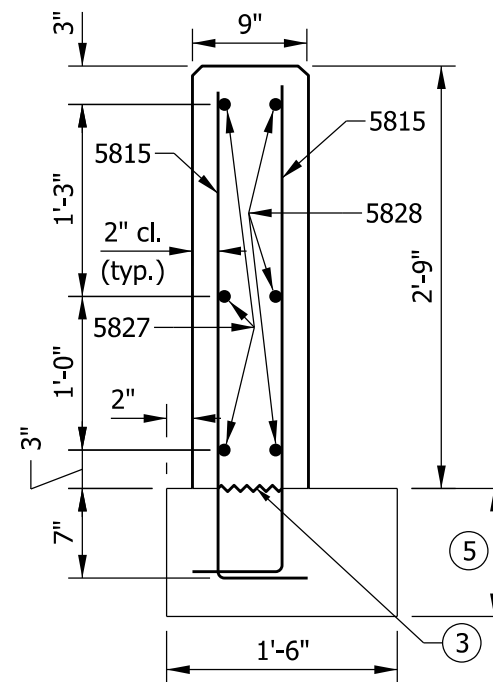

SECTION C-C

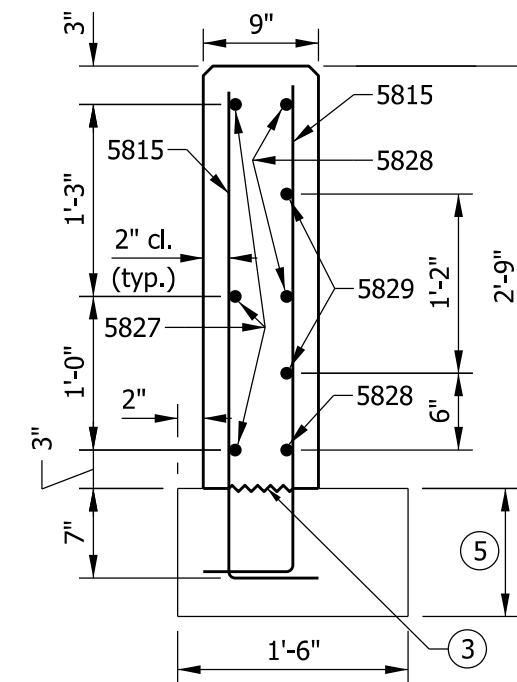

SECTION D-D

## NOTES


- See Standard Drawing E 706-TWFC-01 for elevation and plan.
- All chamfered edges shall be 3/4".
- Construction joint type A. See Standard Drawing E 702-CJTA-01 for details.
- See Standard Drawing E 706-TWFC-03 for reinforcing-bar diagrams.
- RCBA extension for bridge railing transition type WFC. See Standard Drawing E 609-TBAE-03 for details.
- These bars shall be field bent to provide 2" clearance along the front face batter.
- Constant 1:11 batter.
- Constant 5:7 batter.

INDIANA DEPARTMENT OF TRANSPORTATION

CONCRETE BRIDGE RAILING  
TRANSITION TYPE WFC

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-TWFC-02




/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER DATE



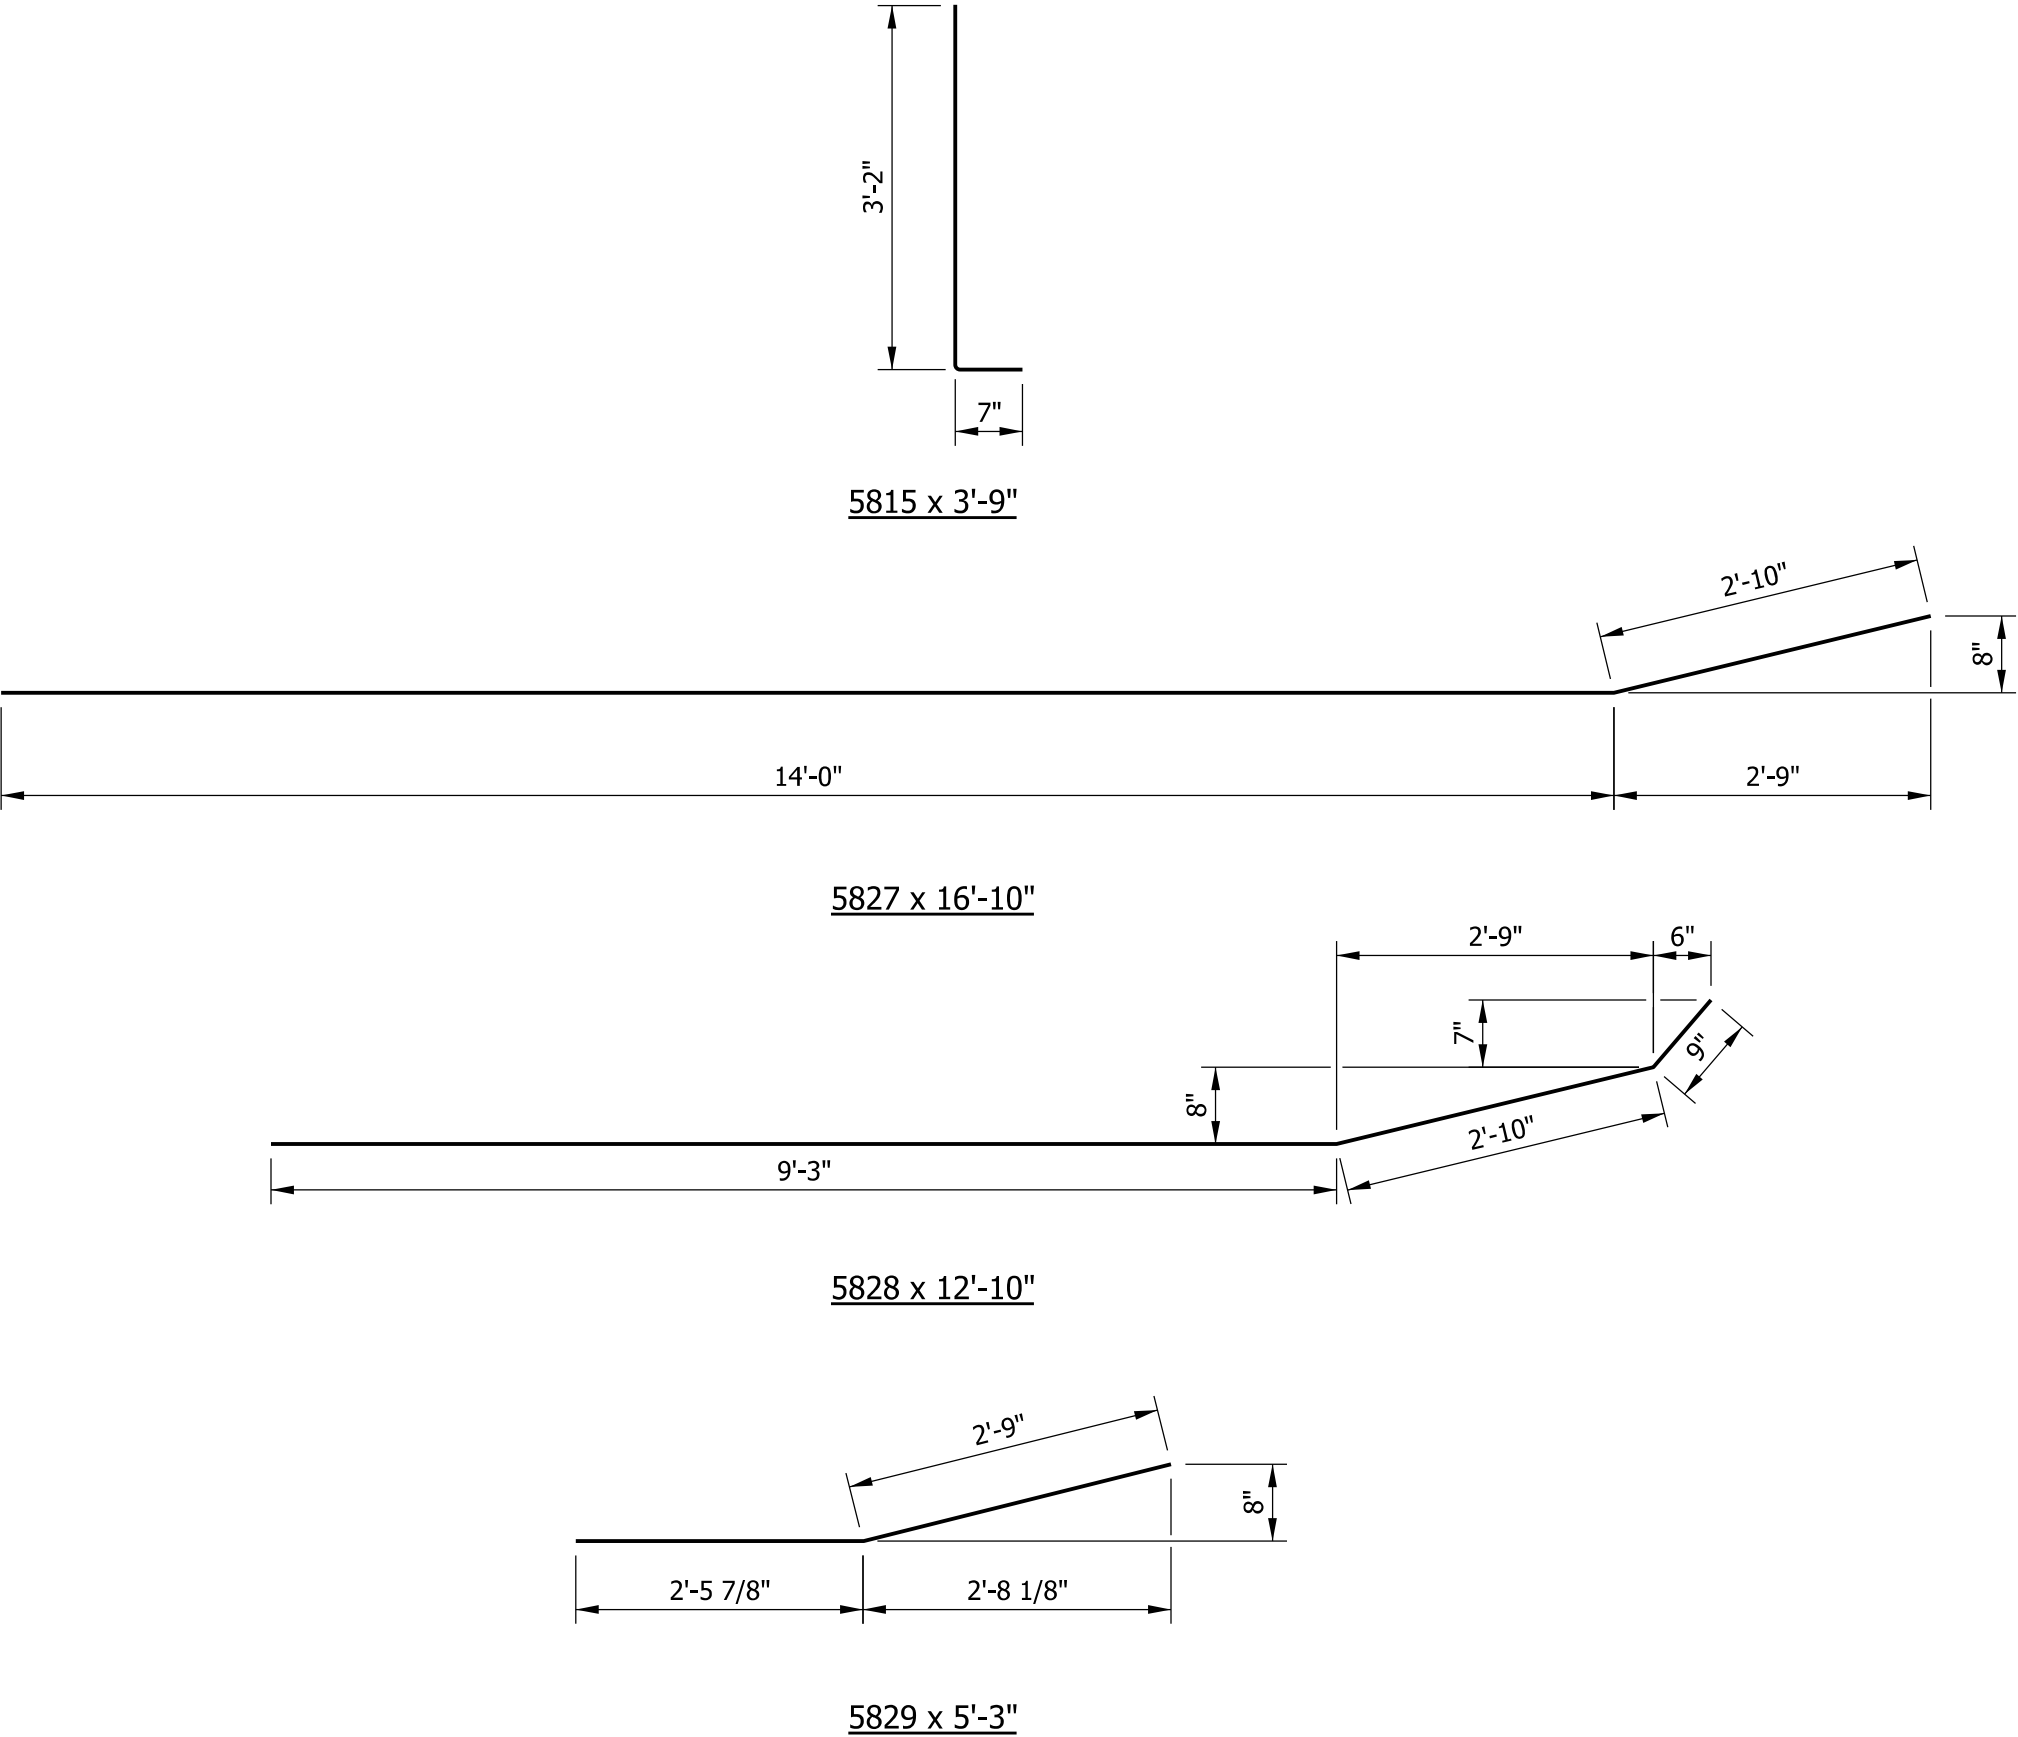


NOTE

1. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

BILL OF MATERIALS			
Quantities are for one concrete bridge railing transition type WFC			
EPOXY-COATED REINFORCING STEEL			
MARK OR SIZE	NO. OF BARS	LENGTH	WEIGHT
5815	71	3'-9"	
5827	3	16'-10"	
5828	3	12'-10"	
5829	2	5'-3"	
#5	3	7'-3"	
Total Epoxy-Coated Reinforcing Steel			404 LBS
MISCELLANEOUS			
Concrete, Class C			1.6 CYS
Surface Seal			113 SYS

INDIANA DEPARTMENT OF TRANSPORTATION	
CONCRETE BRIDGE RAILING TRANSITION TYPE WFC	
SEPTEMBER 2012	
STANDARD DRAWING NO.	E 706-TWFC-03
	<div><div>/s/ <i>Richard L. VanCleave</i>09/04/12</div><div>SUPERVISOR, ROADWAY STANDARDSDATE</div><div>/s/ <i>Mark A. Miller</i>09/04/12</div><div>CHIEF ENGINEERDATE</div></div>

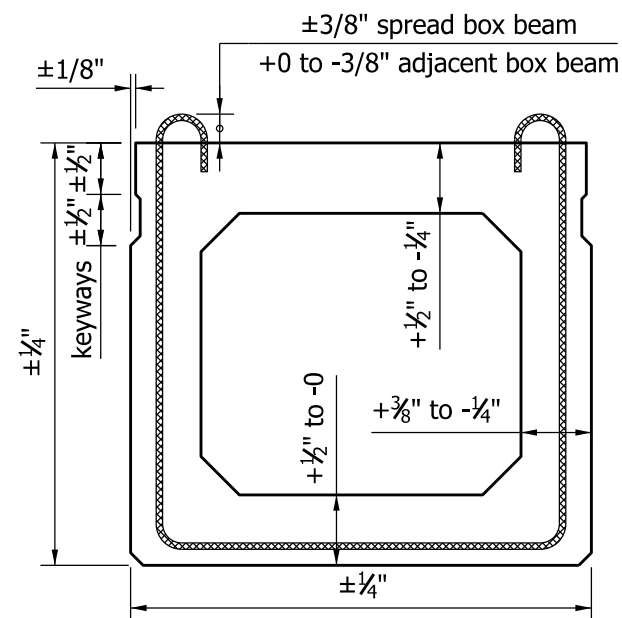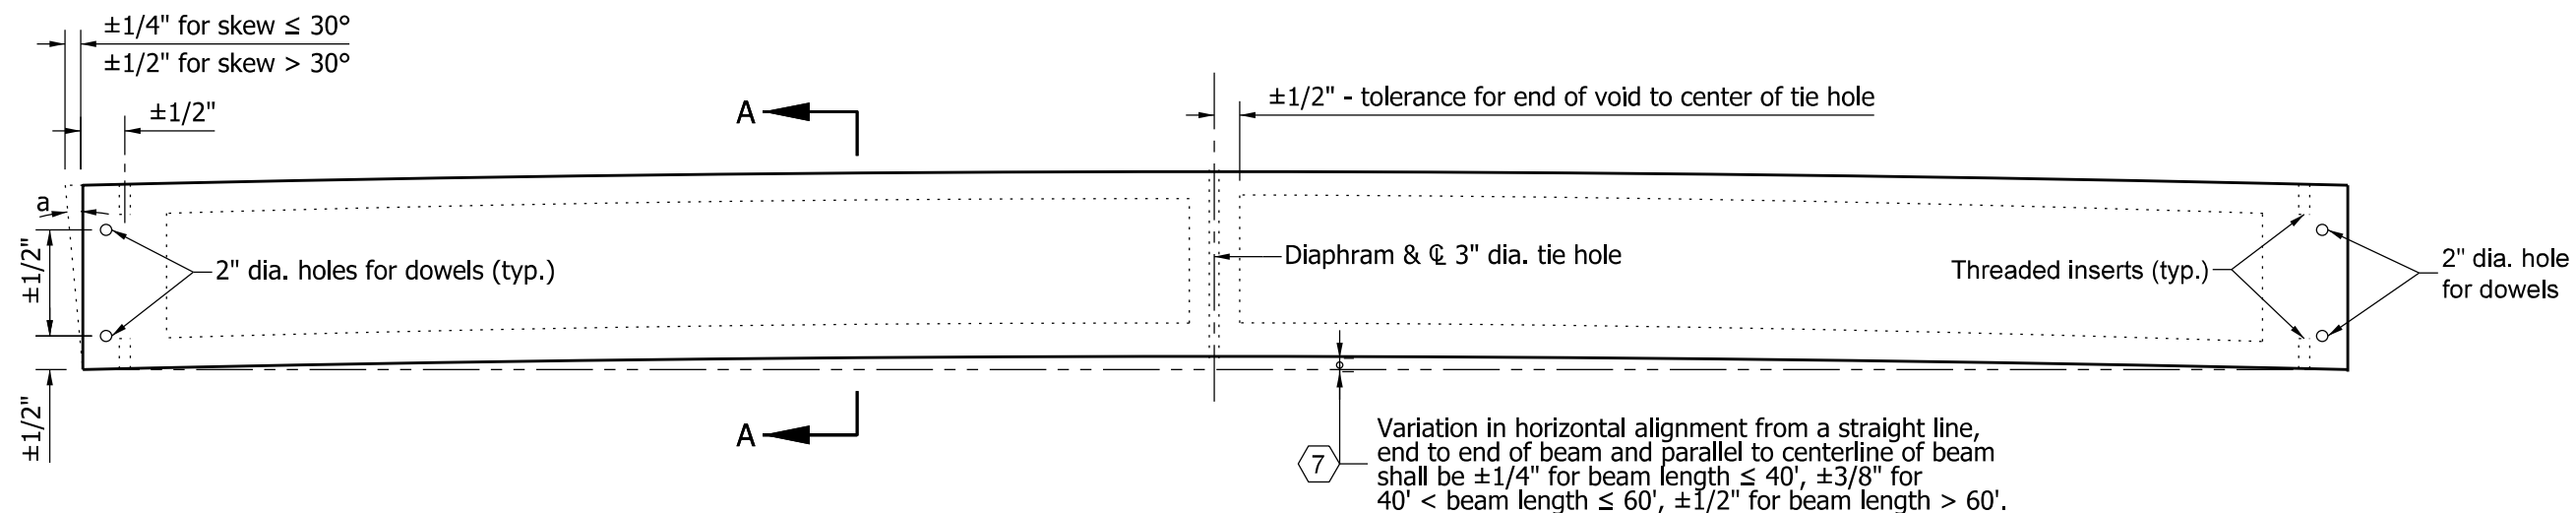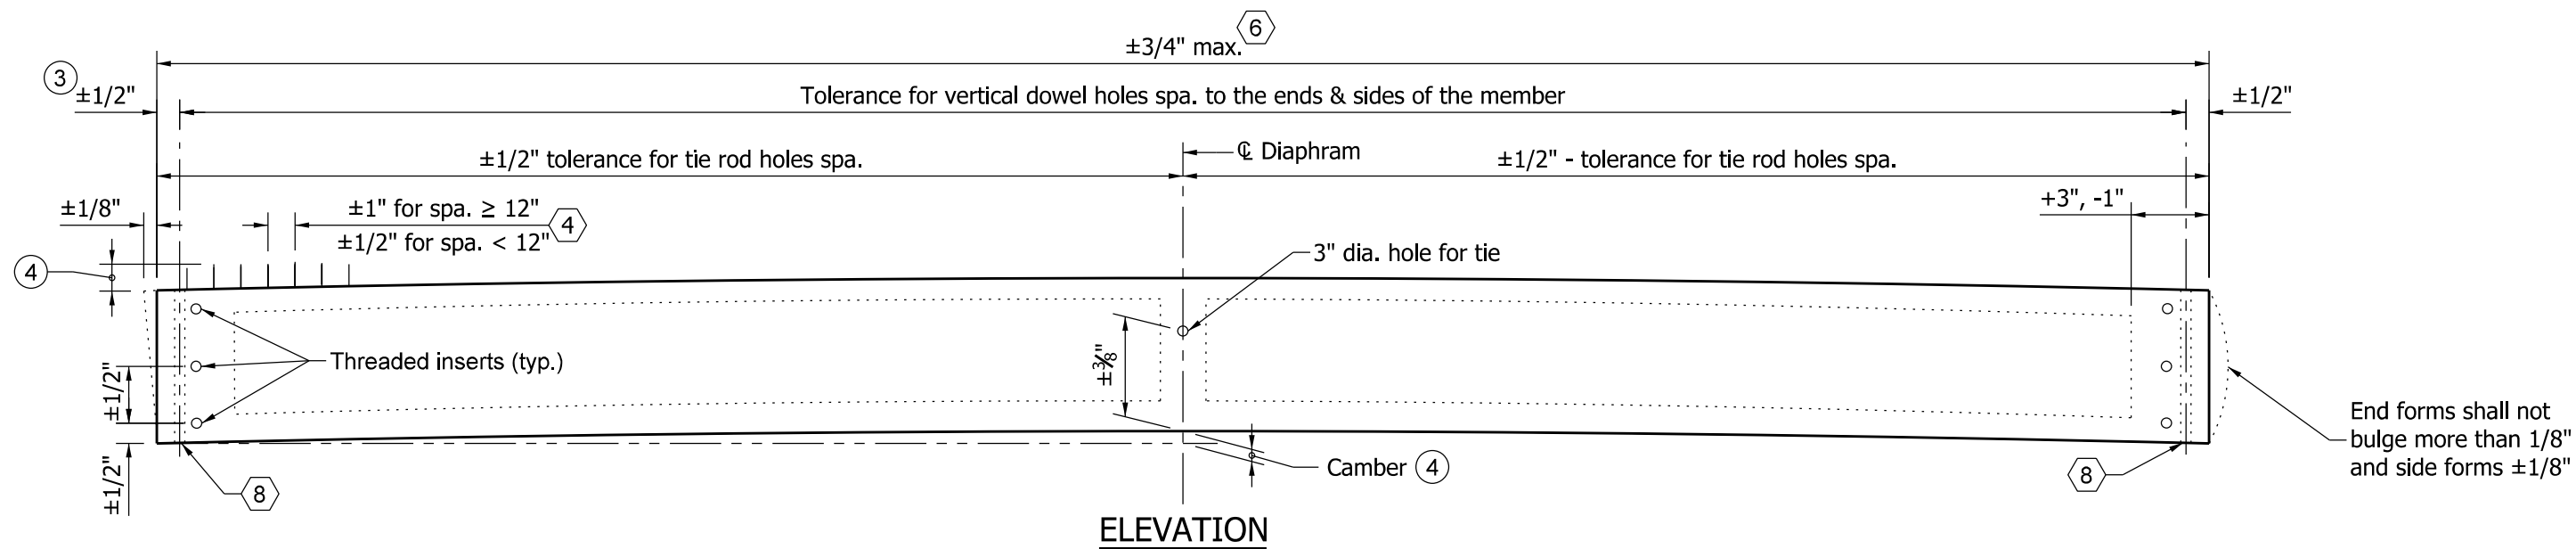

#### NOTES:


- See Standard Drawing E 707-BPBF-04 for General Notes.
- The top surface of the beam shall not vary more than 1/8" in 10' as measured from a straightedge.
- (3) Tolerance of beam ends for deviation from a true vertical with respect to top and bottom surfaces.
- (4) Projection above top of spread box beam shall be ±3/8". Projection above top of adjacent box beam +0 to -3/8".

INDIANA DEPARTMENT OF TRANSPORTATION

FABRICATION TOLERANCES  
PRESTRESSED BOX BEAM

SEPTEMBER 2012

STANDARD DRAWING NO. E 707-BPBF-01





/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE



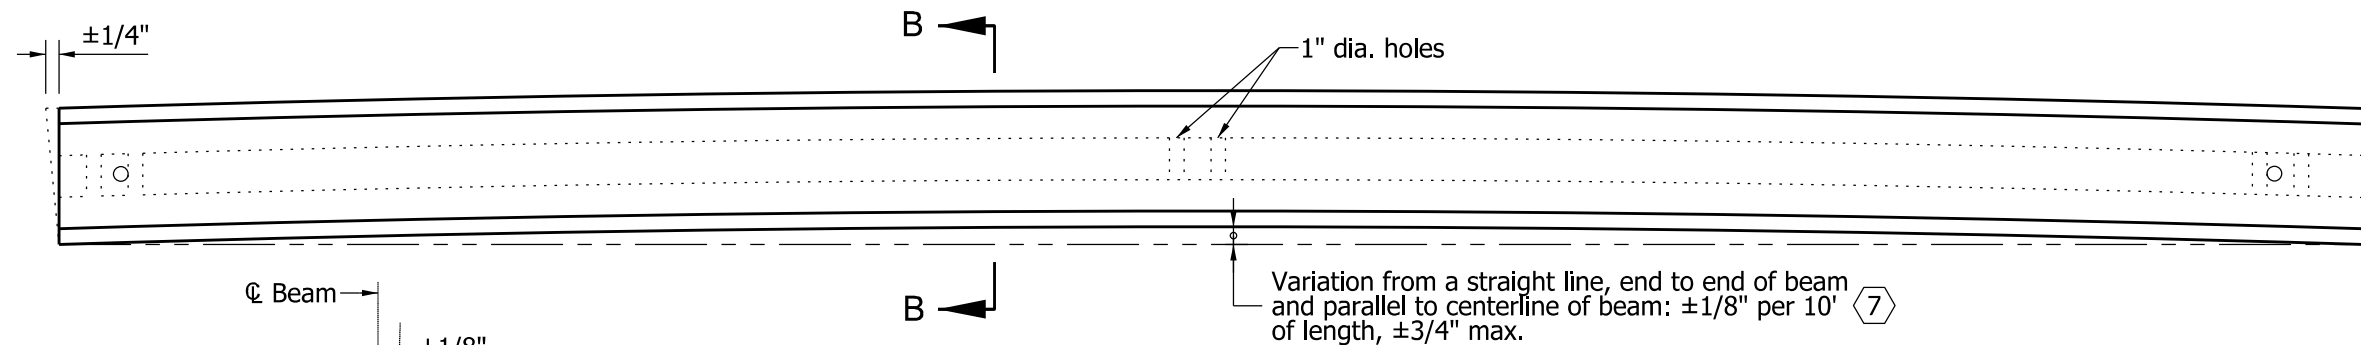


1. See Standard Drawing E 707-BPBF-04 for General Notes.
2. Center of gravity of depressed-strands group at the end of beam shall not be more than  $\pm 1/2"$ .
3. Tolerance of position of post-tensioning duct shall be  $\pm 1/4"$ .
- ④ 4. Horizontal tolerance of beam ends for deviation from a true vertical with respect to top and bottom surfaces. Vertical tolerance shall be  $\pm 1/8"$  per 12" of beam height.

INDIANA DEPARTMENT OF TRANSPORTATION

## FABRICATION TOLERANCES PRESTRESSED I BEAM

SEPTEMBER 2012

STANDARD DRAWING NO.	E 707-BPBF-02
----------------------	---------------




/s/ Richard L. VanCleave 09/04/12


SUPERVISOR, ROADWAY STANDARDS      DATE

/s/ Mark A. Miller 09/04/12


CHIEF ENGINEER	DATE
----------------	------

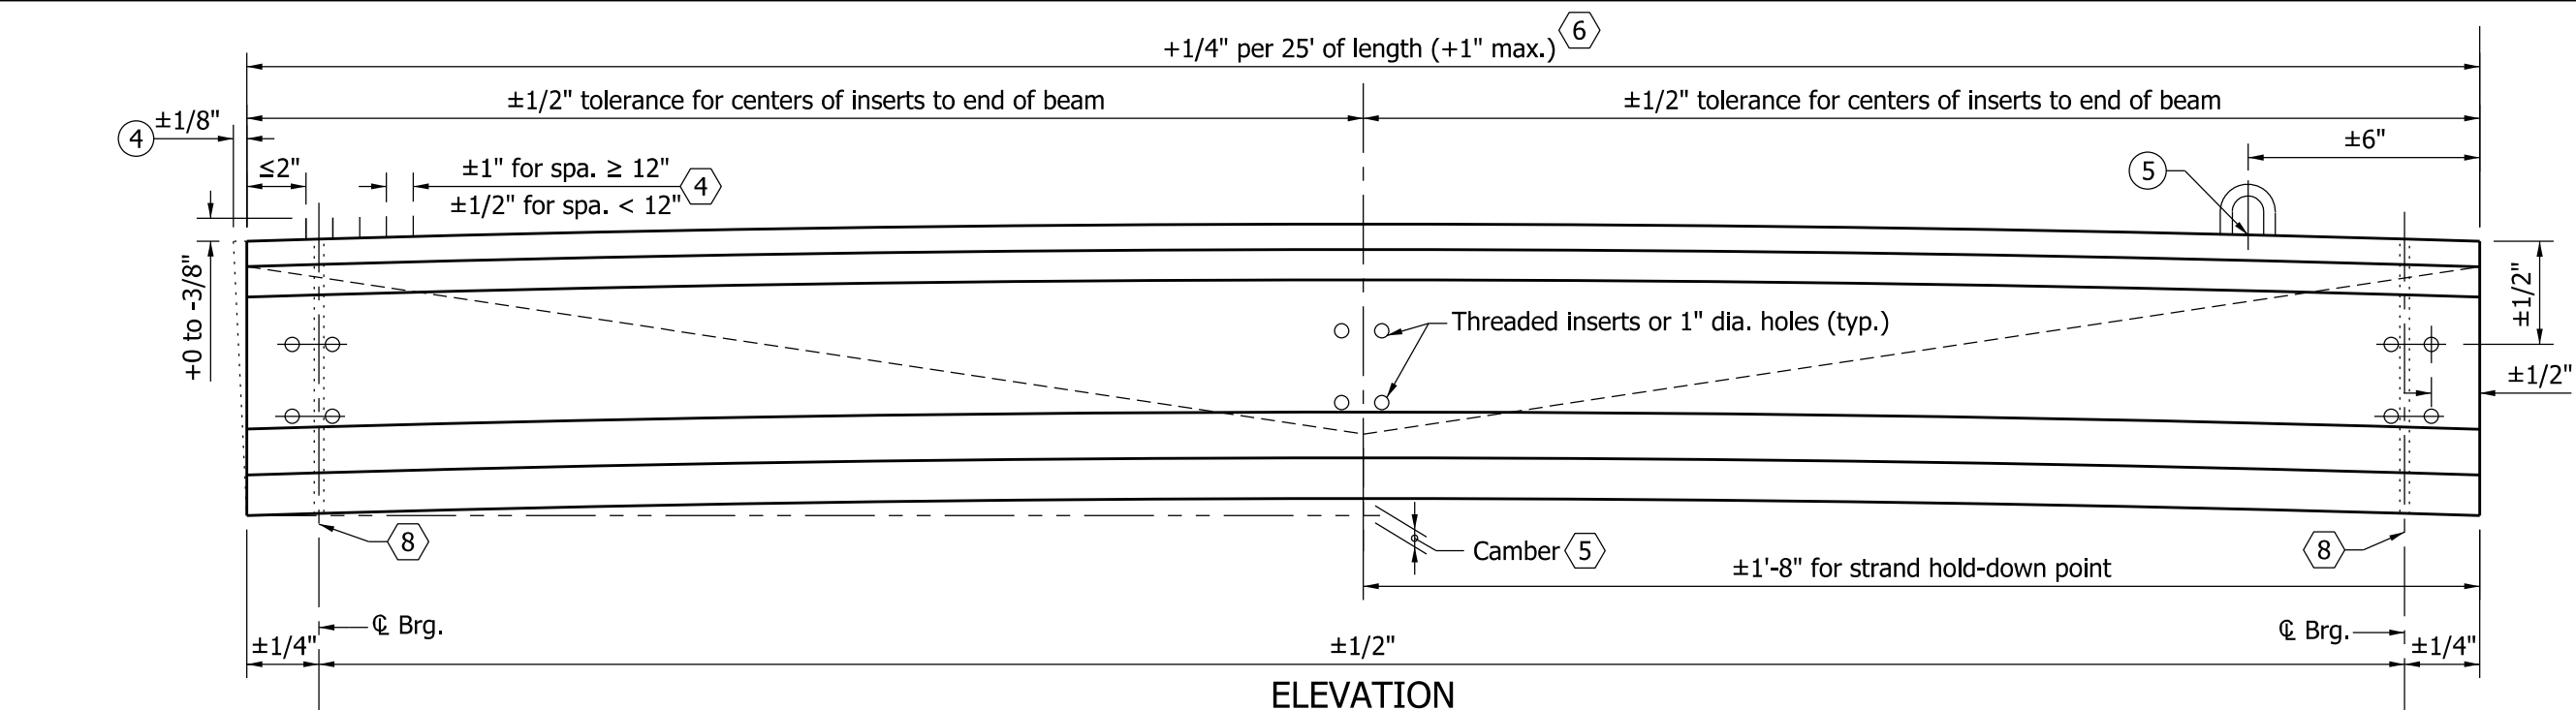

ELEVATION

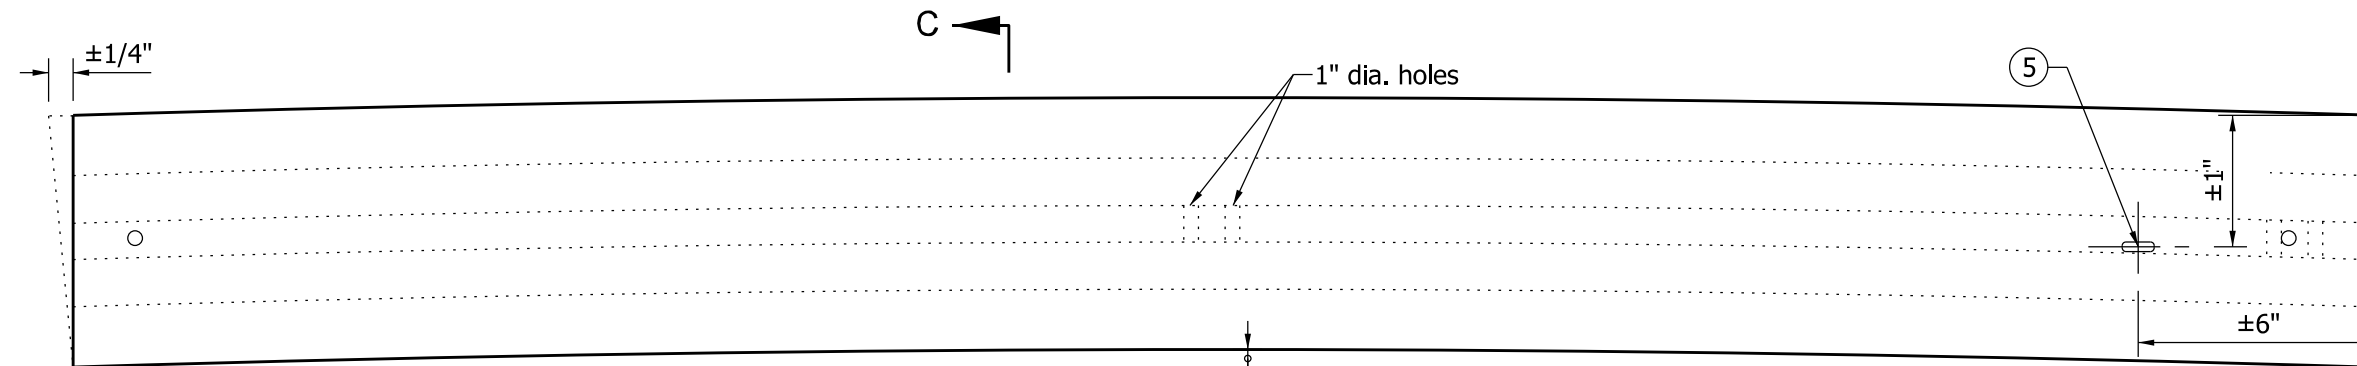

PLAN

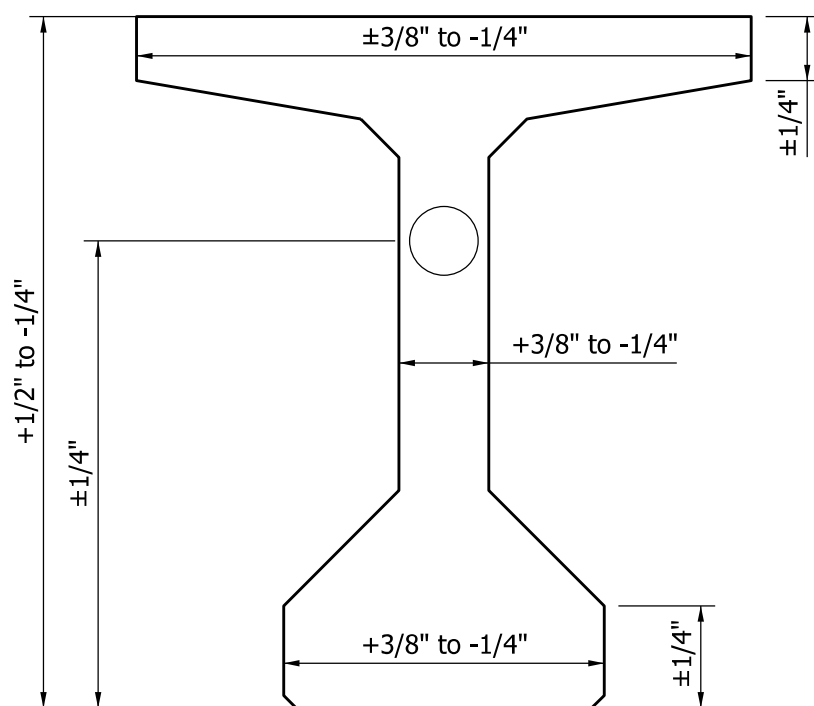

SECTION C-C

NOTES:


1. See Standard Drawing E 707-BPBF-04 for General Notes.
2. Center of gravity of depressed-strands group at the end of beam shall not be more than  $\pm 1/2"$ .
3. Tolerance of position of post-tensioning duct shall be  $\pm 1/4"$ .
- (4) Horizontal tolerance of beam ends for deviation from a true vertical with respect to top and bottom surfaces. Vertical tolerance shall be  $\pm 1/8"$  per 12" of beam height.
- (5) Location of handling device.

INDIANA DEPARTMENT OF TRANSPORTATION

FABRICATION TOLERANCES  
PRESTRESSED BULB-TEE BEAM

SEPTEMBER 2012

STANDARD DRAWING NO. E 707-BPBF-03



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE

GENERAL NOTES :

1. Tolerances shown are maximum permissible variations from the dimensions shown on the plans or shop drawings. Tolerances shall not be considered cumulative. Longitudinal tolerances are based on design length. Casting length shall be adjusted to compensate for shrinkage and plastic flow.
2. End stirrup bars shall not be more than 2" from the end of the beam.
3. Mild reinforcing steel concrete cover tolerance shall be 1/8" to +3/8".

4 Tolerances for reinforcing bars for composite beam.


5 Variation of camber shall not be more than 1" on one span nor more than 1/2" between adjacent members to be measured at time of erection.


Permitted camber variation from design camber is as follows:

I-beam or bulb-tee beam:  $\pm 1/8"$  per 10'-0" length with  $\pm 1/2"$  maximum for member length of 80'-0" or less  
 $\pm 1"$  maximum for member length of greater than 80'-0"


Box beam:  $\pm 1/8"$  per 10'-0" length with  $\pm 1/2"$  mm maximum

- 6 Tolerance in length of beam shall be checked after the final curing phase and within three days prior to shipping.
- 7 Horizontal-alignment tolerance shall be checked immediately after removal of forms and strand release, and prior to removal from bed.
- 8 At concrete bearing area, deviation from plane surface when tested in all directions of the plane surface with a steel straightedge shall not be more than  $\pm 1/16"$ .

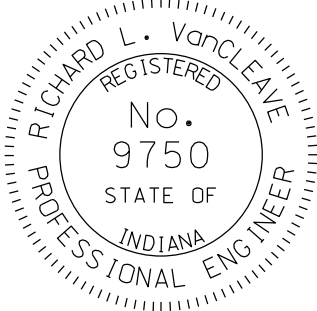INDIANA DEPARTMENT OF TRANSPORTATION									
FABRICATION TOLERANCES GENERAL NOTES SEPTEMBER 2011									
STANDARD DRAWING NO.      E 707-BPBF-04									
	<table><tr><td><u>/s/ Richard L. VanCleave</u></td><td><u>09/01/11</u></td></tr><tr><td>DESIGN STANDARDS ENGINEER</td><td>DATE</td></tr><tr><td><u>/s/ Mark A. Miller</u></td><td><u>09/01/11</u></td></tr><tr><td>CHIEF HIGHWAY ENGINEER</td><td>DATE</td></tr></table>	<u>/s/ Richard L. VanCleave</u>	<u>09/01/11</u>	DESIGN STANDARDS ENGINEER	DATE	<u>/s/ Mark A. Miller</u>	<u>09/01/11</u>	CHIEF HIGHWAY ENGINEER	DATE
<u>/s/ Richard L. VanCleave</u>	<u>09/01/11</u>								
DESIGN STANDARDS ENGINEER	DATE								
<u>/s/ Mark A. Miller</u>	<u>09/01/11</u>								
CHIEF HIGHWAY ENGINEER	DATE								
DESIGN STANDARDS ENGINEER									

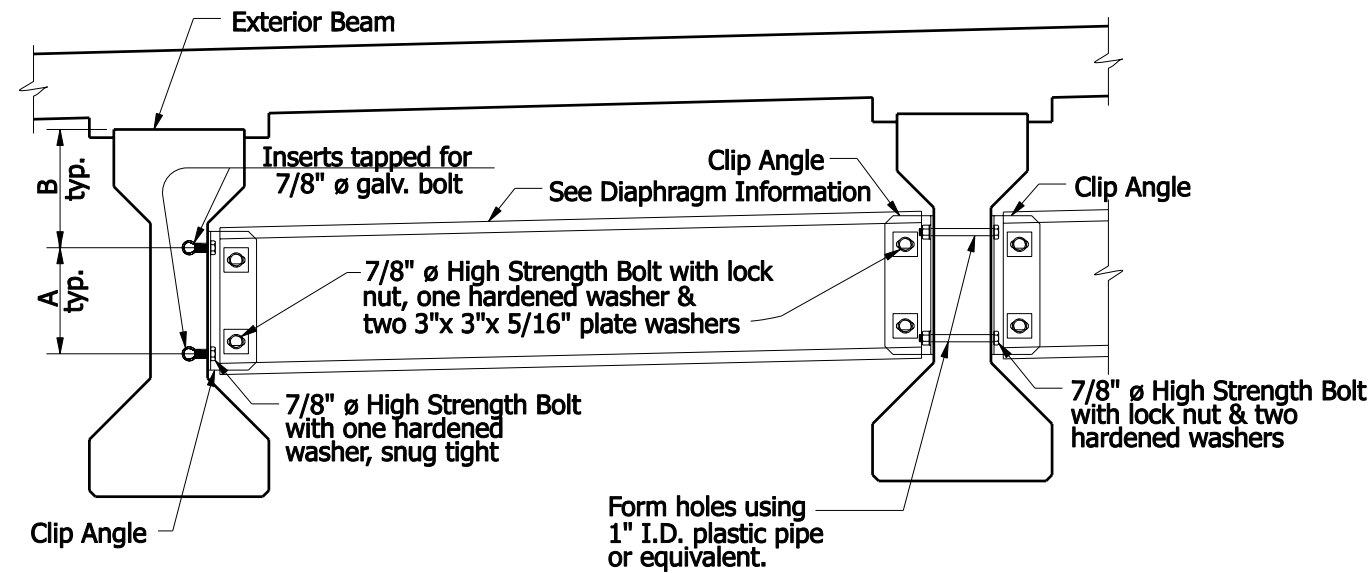

**INTERMEDIATE DIAPHRAGM**  
*Typical for Square Structure*

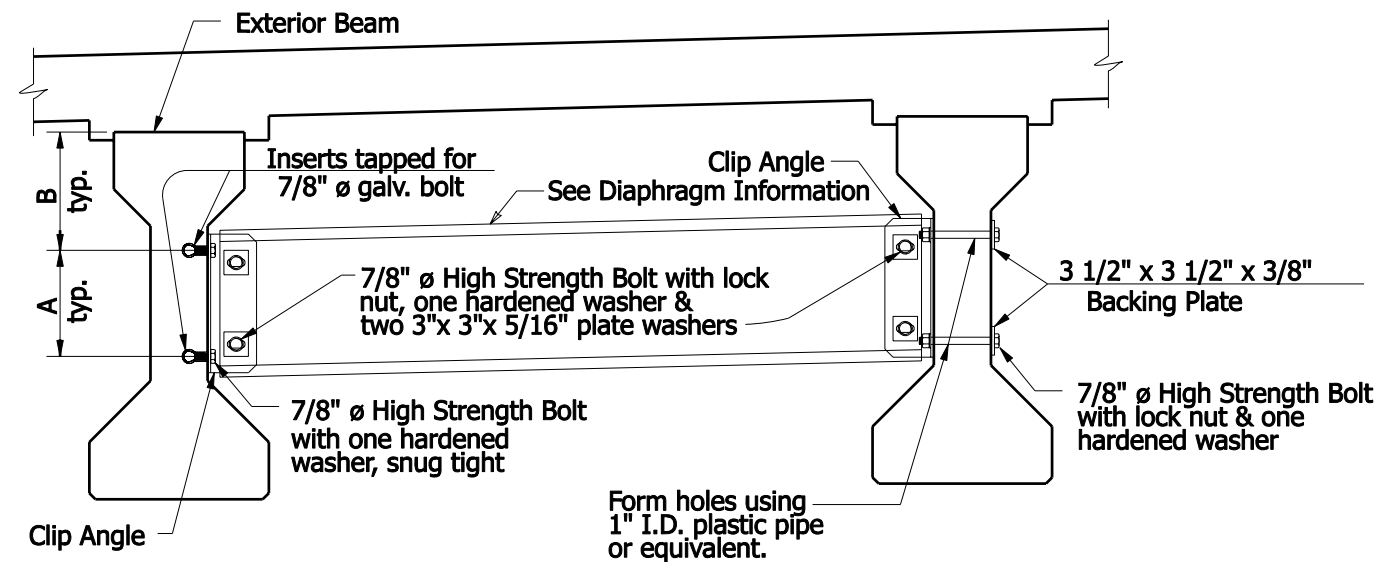

**INTERMEDIATE DIAPHRAGM**  
*Typical for Skewed Structure*

Diaphragm Information							
Beam Type	Dimension						Channel Type
	A	B	C	D	E	F	
Type II	9"	1'-0"	1'-1"	6"	3 1/2"	3"	C 12 x 20.7
Type III	1'-1"	1'-2 1/2"	1'-5"	10"	3 1/2"	4"	MC 18 x 42.7
Type IV	1'-4"	1'-5 1/2"	1'-8"	10"	5"	4"	MC 18 x 42.7

**NOTES:**


1. See Standard Drawing E 707-SDPC-02 for connection details.

INDIANA DEPARTMENT OF TRANSPORTATION

**STEEL DIAPHRAGMS  
AASHTO I-BEAMS**

**SEPTEMBER 2007**


**STANDARD DRAWING NO. E 707-SDPC-01**





DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave* 09/04/07  
DESIGN STANDARDS ENGINEER DATE


*/s/ Mark A. Miller* 09/04/07  
CHIEF HIGHWAY ENGINEER DATE

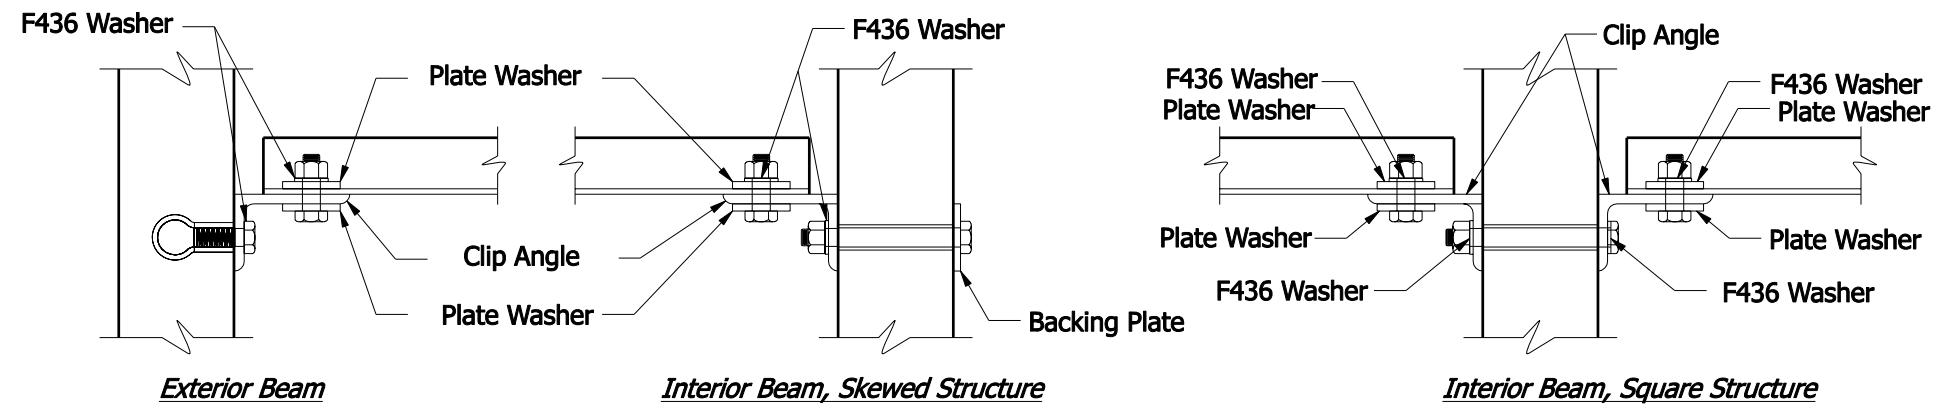


### CONNECTION DETAILS

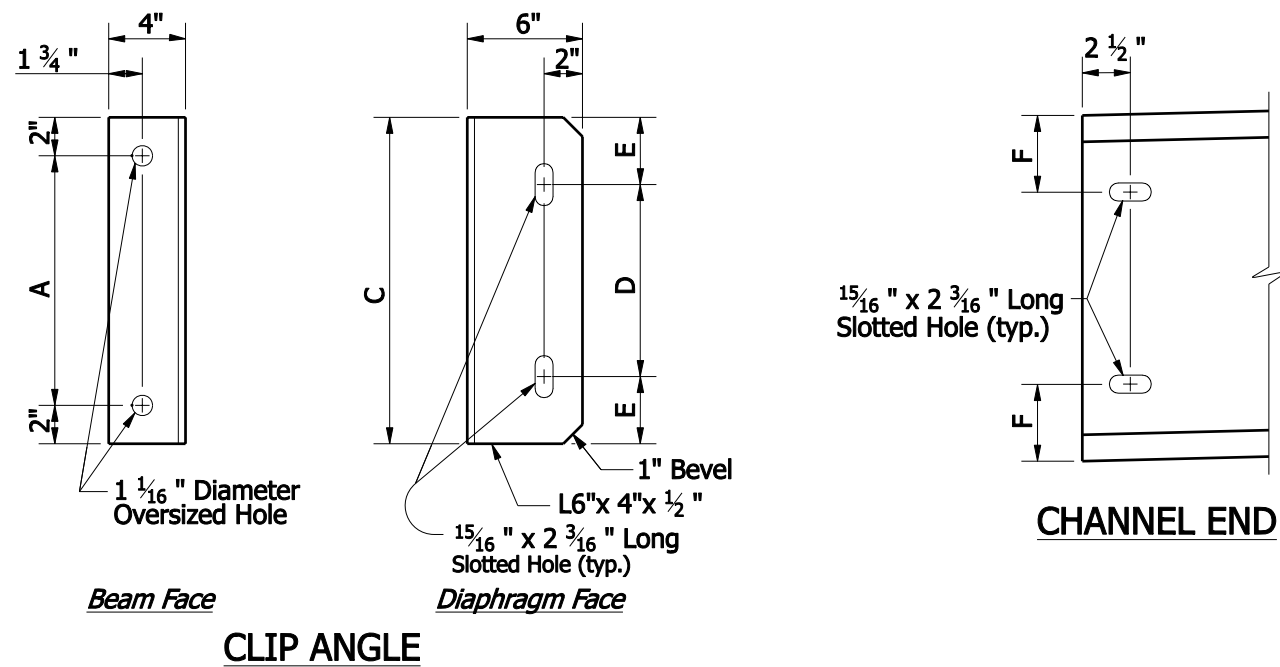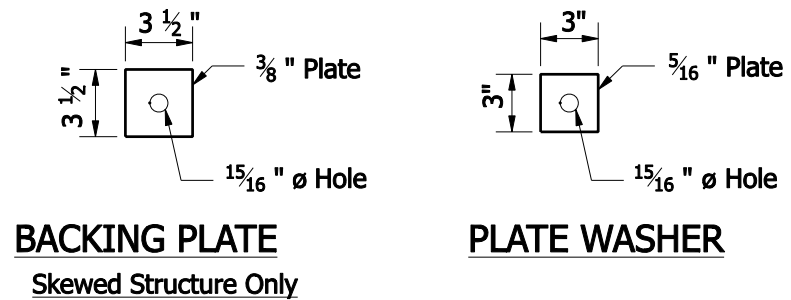

INDIANA DEPARTMENT OF TRANSPORTATION		
STEEL DIAPHRAGMS AASHTO I-BEAMS		
SEPTEMBER 2007		
STANDARD DRAWING NO. E 707-SDPC-02		
	/s/ <i>Richard L. vanCleave</i>	09/04/07
	DESIGN STANDARDS ENGINEER	DATE
DESIGN STANDARDS ENGINEER	/s/ <i>Mark a. Miller</i>	09/04/07
	CHIEF HIGHWAY ENGINEER	DATE

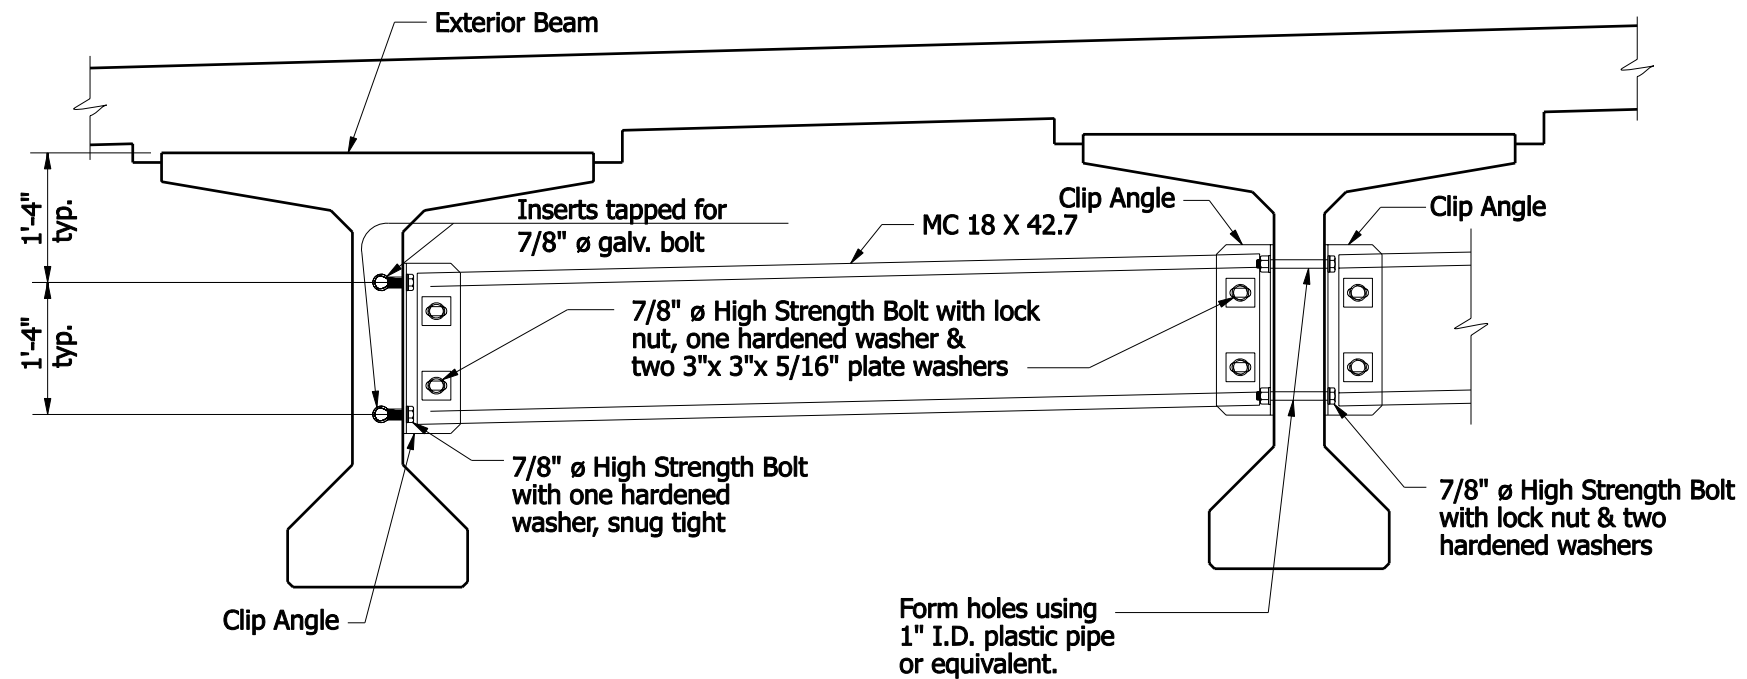

**INTERMEDIATE DIAPHRAGM**  
*Typical for Square Structure*

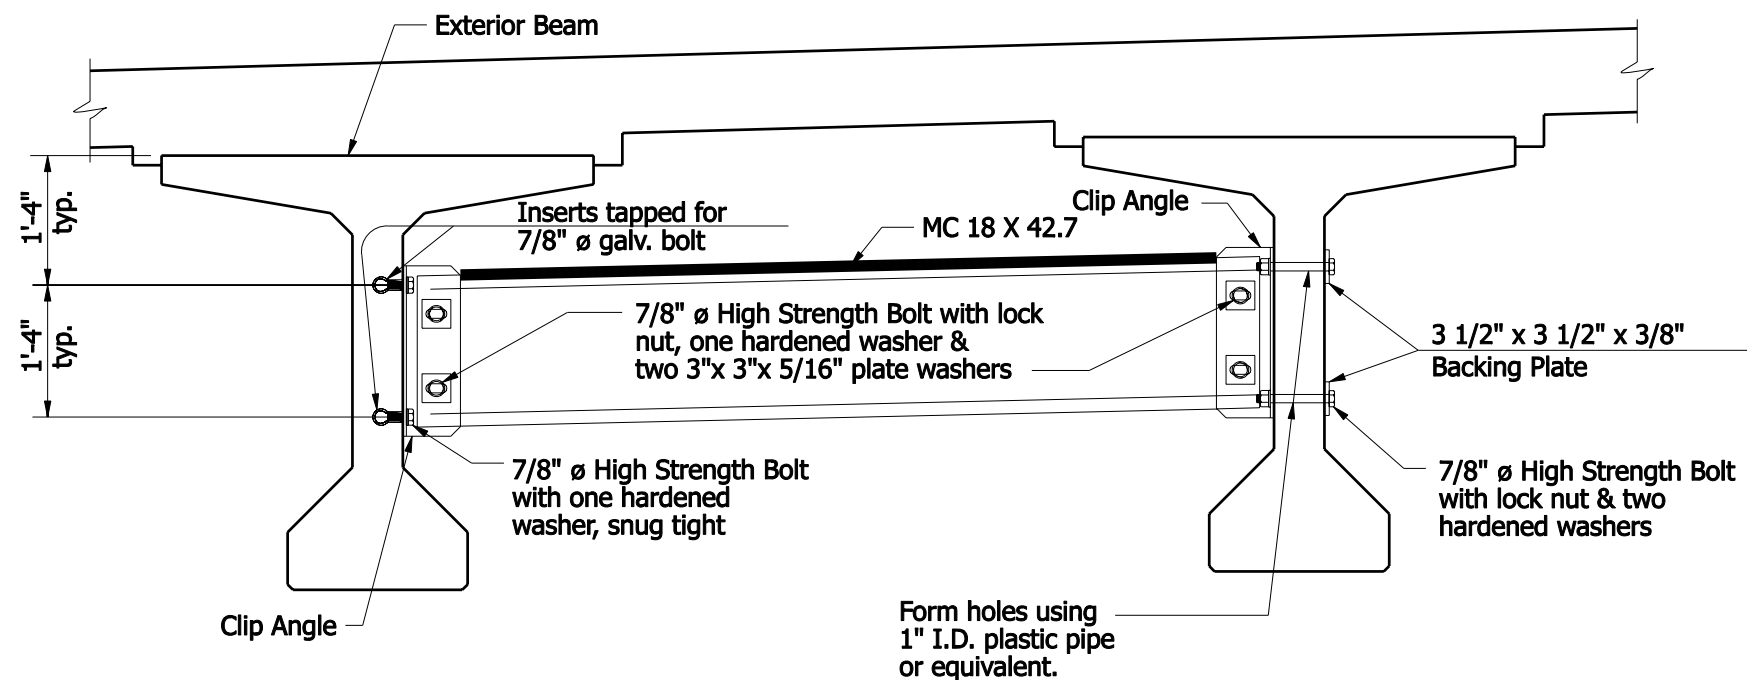

**INTERMEDIATE DIAPHRAGM**  
*Typical for Skewed Structure*

**NOTES:**


1. See Standard Drawing E 707-SDPC-04 for connection details.

INDIANA DEPARTMENT OF TRANSPORTATION

STEEL DIAPHRAGMS  
INDIANA BULB-TEES, 54-IN. DEPTH

SEPTEMBER 2007


STANDARD DRAWING NO. E 707-SDPC-03




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/04/07  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/04/07  
CHIEF HIGHWAY ENGINEER DATE

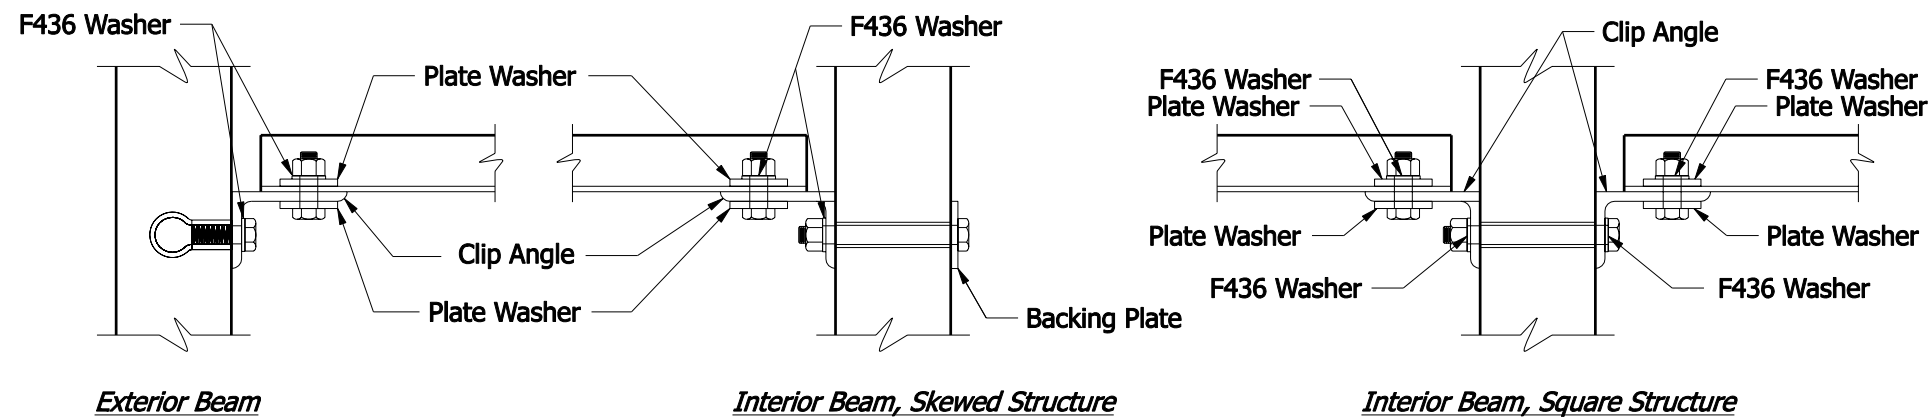


### CONNECTION DETAILS

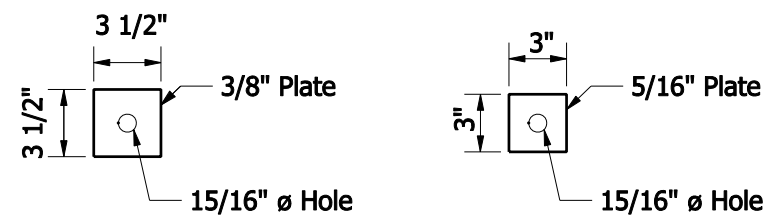

**BACKING PLATE**  
*Skewed Structure Only*


**PLATE WASHER**

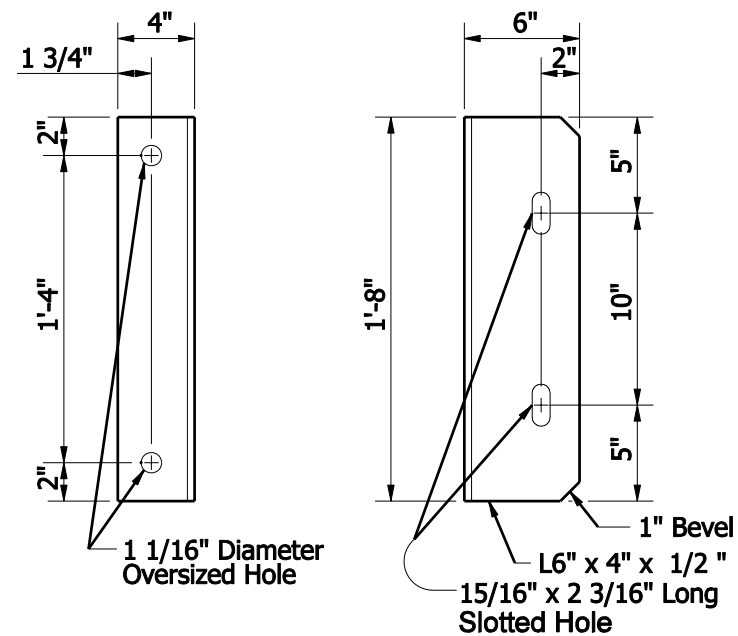

*Beam Face*

*Diaphragm Face*

**CLIP ANGLE**

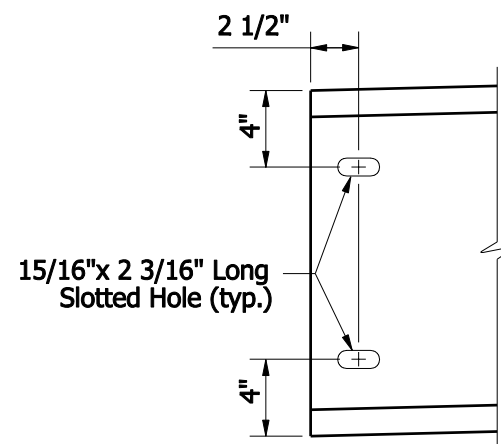


**CHANNEL END**

INDIANA DEPARTMENT OF TRANSPORTATION

STEEL DIAPHRAGMS  
INDIANA BULB-TEES, 54-IN. DEPTH

SEPTEMBER 2007

STANDARD DRAWING NO. E 707-SDPC-04




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/04/07  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/04/07  
CHIEF HIGHWAY ENGINEER DATE






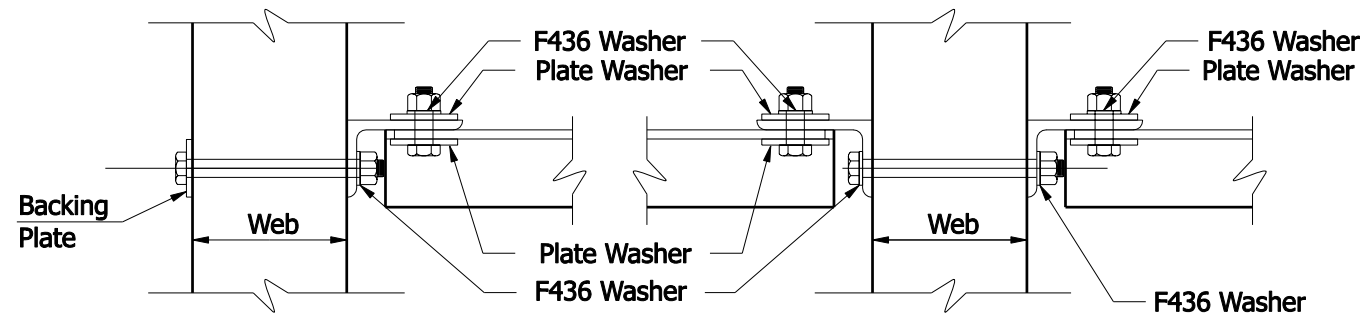


**SECTION T-T**  
*Interior Beam, Skewed Structure*


**SECTION B-B**  
*Interior Beam, Square Structure*

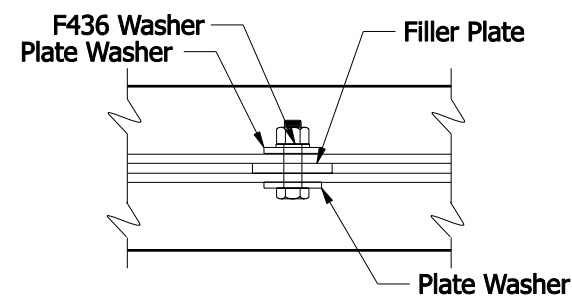


**SECTION X-X**

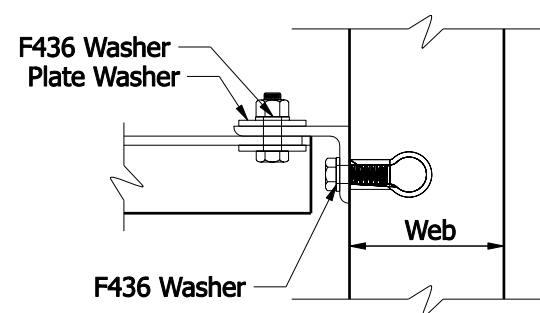


**SECTION E-E**  
*Exterior Beam*

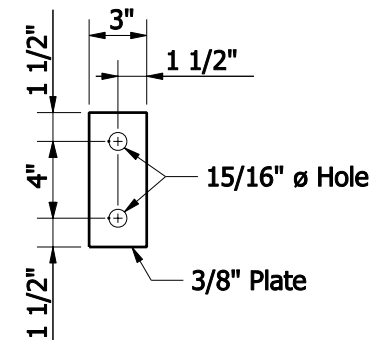


**BACKING PLATE**




**PLATE WASHER**




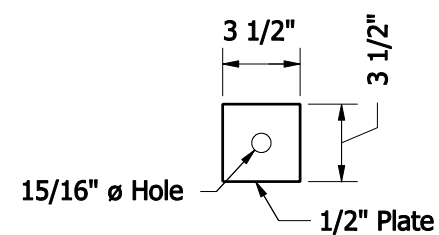


**FILLER PLATE**

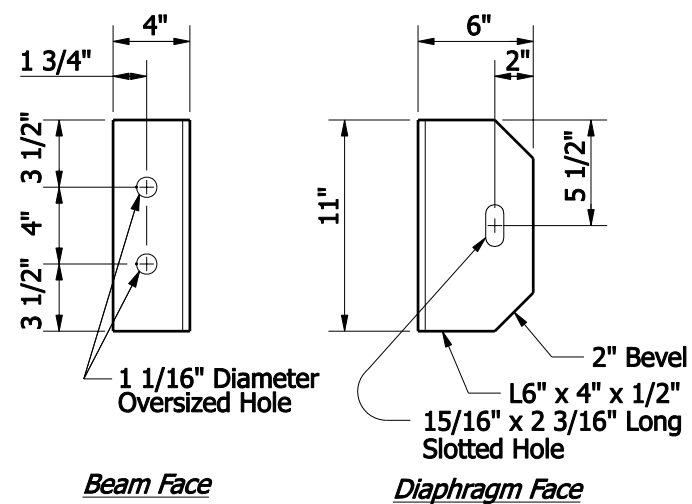

**CLIP ANGLE**

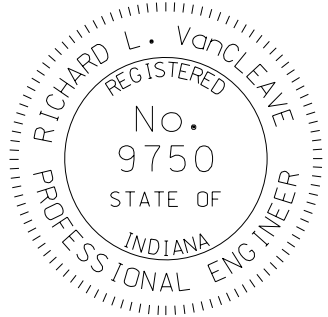INDIANA DEPARTMENT OF TRANSPORTATION	
STEEL DIAPHRAGMS INDIANA BULB-TEES, 60 IN. OR DEEPER	
SEPTEMBER 2007	
STANDARD DRAWING NO. E 707-SDPC-06	
	<div> <div>/s/ Richard L. VanCleave</div> <div>DESIGN STANDARDS ENGINEER</div> <div>09/04/07</div> <div>DATE</div> </div> <div> <div>/s/ Mark A. Miller</div> <div>CHIEF HIGHWAY ENGINEER</div> <div>09/04/07</div> <div>DATE</div> </div>
DESIGN STANDARDS ENGINEER	

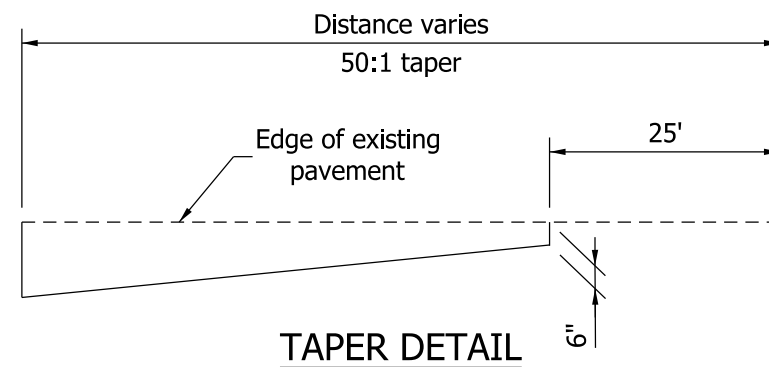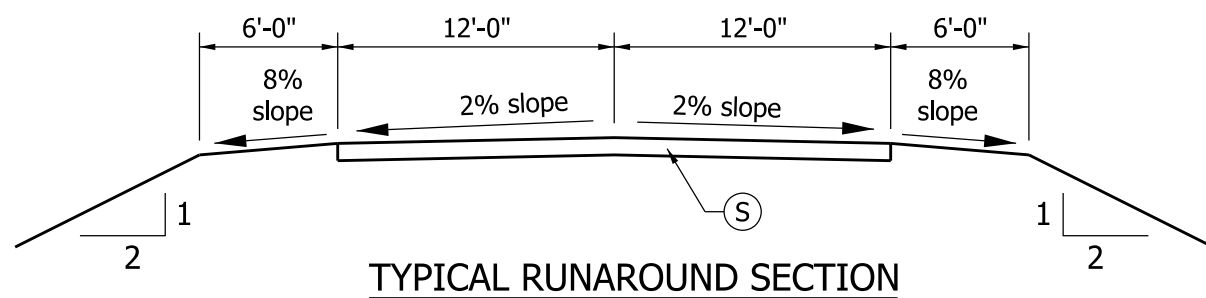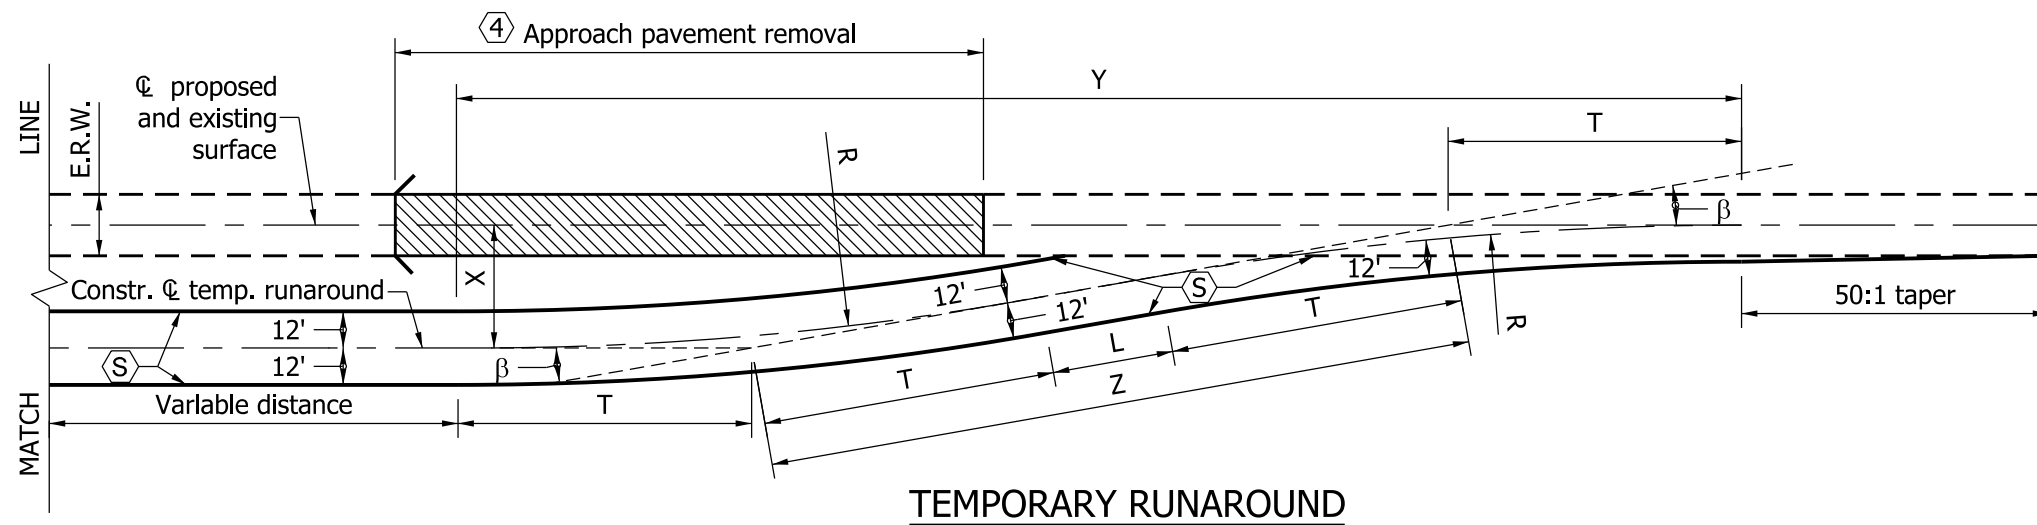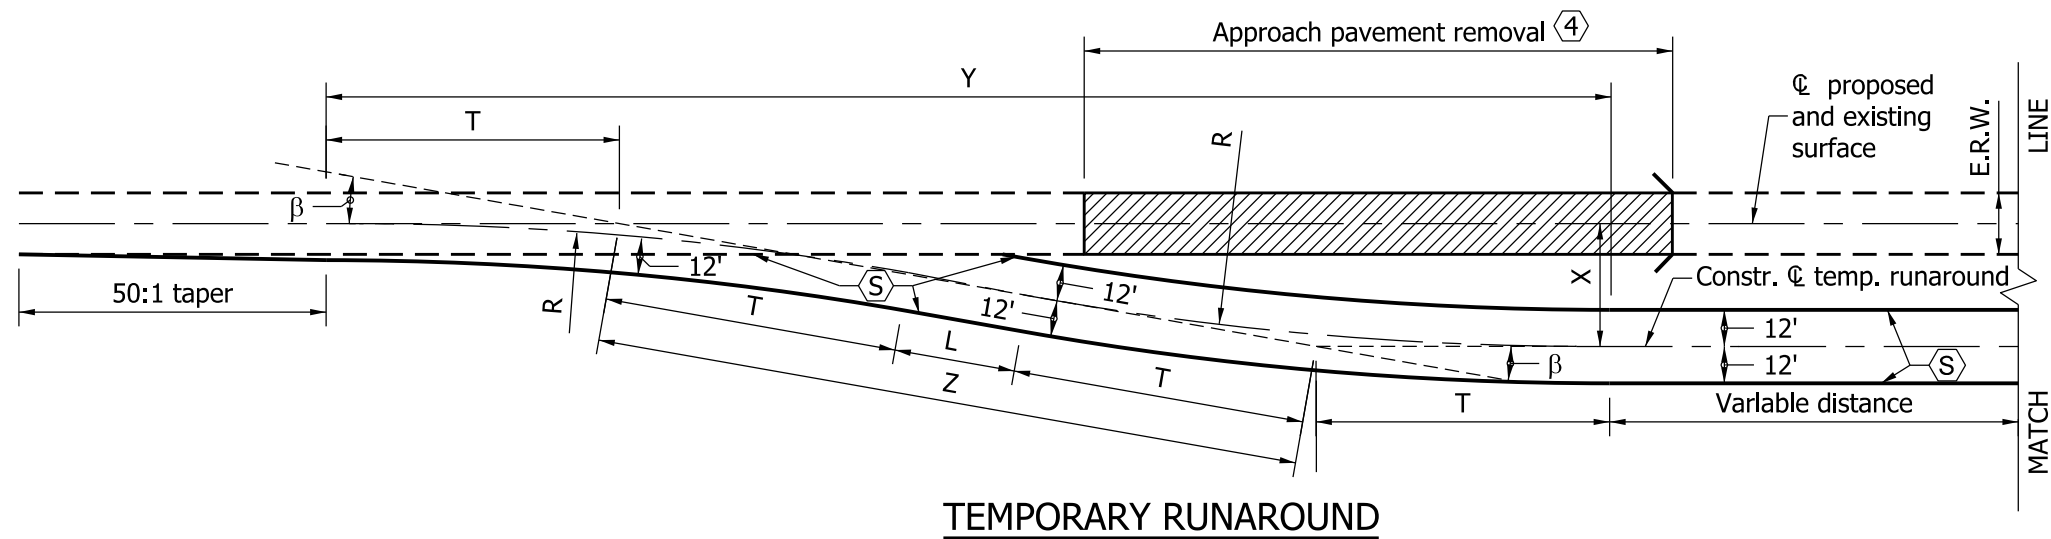

### NOTES:

1. See Standard Drawing E 713-TCTR-04 for general notes with numbered hexagon frame that apply to this sheet.
2. See Standard Drawings E 713-TCTR-02 for runaround geometrics and -02A for surface areas.
3. See Standard Drawing E 801-TCLG-01 for standard notes and legend.

### LEGEND:


 Work Area

INDIANA DEPARTMENT OF TRANSPORTATION

TEMPORARY RUNAROUND  
GEOMETRICS

SEPTEMBER 2011

STANDARD DRAWING NO. E 713-TCTR-01



DESIGN STANDARDS ENGINEER

DETAILS PLACED IN THIS FORMAT 9/1/2011

/s/ Richard L. VanCleave 09/01/11

DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/11

CHIEF HIGHWAY ENGINEER DATE

ORIGINALLY APPROVAL ON SEPTEMBER 9/1/06

RUNAROUND GEOMETRICS AND SURFACE AREAS												
TYPE A, ≥ 50 MPH							TYPE B, ≤ 45 MPH					
X (ft)	40	45	50	55	60	65	40	45	50	55	60	65
β	10°	10°	10°	10°	10°	10°	13°	13°	13°	13°	13°	13°
Z (ft)	230.35	259.14	287.94	316.73	345.53	374.32	177.82	200.04	222.27	244.50	266.72	288.95
R (ft)	1070	1070	1070	1070	1070	1070	720	720	720	720	720	720
T (ft)	93.61	93.61	93.61	93.61	93.61	93.61	82.03	82.03	82.03	82.03	82.03	82.03
L (ft)	43.13	71.92	100.72	129.51	158.31	187.10	13.76	35.98	58.21	80.44	102.66	124.89
Y (ft)	414.07	442.42	470.79	499.14	527.50	555.85	337.32	358.97	380.63	402.29	423.94	445.60
E.R.W. (ft)	SURFACE AREA OF RUNAROUND IN SYS. (VARIABLE DISTANCE NOT INCLUDED)											
18	1555	1751	1950	2148	2347	2545	1280	1433	1586	1739	1892	2045
20	1493	1691	1890	2088	2287	2585	1225	1378	1531	1684	1837	1990
22	1428	1627	1825	2024	2222	2420	1170	1323	1476	1629	1783	1935
24	1375	1574	1773	1971	2170	2368	1127	1280	1432	1586	1739	1892


ERW - Existing Roadway Width

INDIANA DEPARTMENT OF TRANSPORTATION

TEMPORARY RUNAROUND  
GEOMETRICS

SEPTEMBER 2011

STANDARD DRAWING NO. E 713-TCTR-02



DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave09/01/11

DESIGN STANDARDS ENGINEERDATE

/s/ Mark A. Miller09/01/11

CHIEF HIGHWAY ENGINEERDATE


ORIGINALLY APPROVAL ON SEPTEMBER 9/1/06

ERW - Existing Roadway Width

# INDIANA DEPARTMENT OF TRANSPORTATION

SEPTEMBER 2011

STANDARD DRAWING NO. E 713-TCTR-02A



/s/ Richard L. VanCleave 09/01/11

DESIGN STANDARDS ENGINEER	DATE
---------------------------	------


/s/ Mark A. Miller 09/01/11


CHIEF HIGHWAY ENGINEER \_\_\_\_\_ DATE \_\_\_\_\_

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVAL ON SEPTEMBER 9/1/06

- NOTES:
- 1. See Standard Drawing E 713-TCTR-04 for notes that apply to this sheet.
  - 2. See Standard Drawing E 801-TCLG-01 for standard notes and legend.

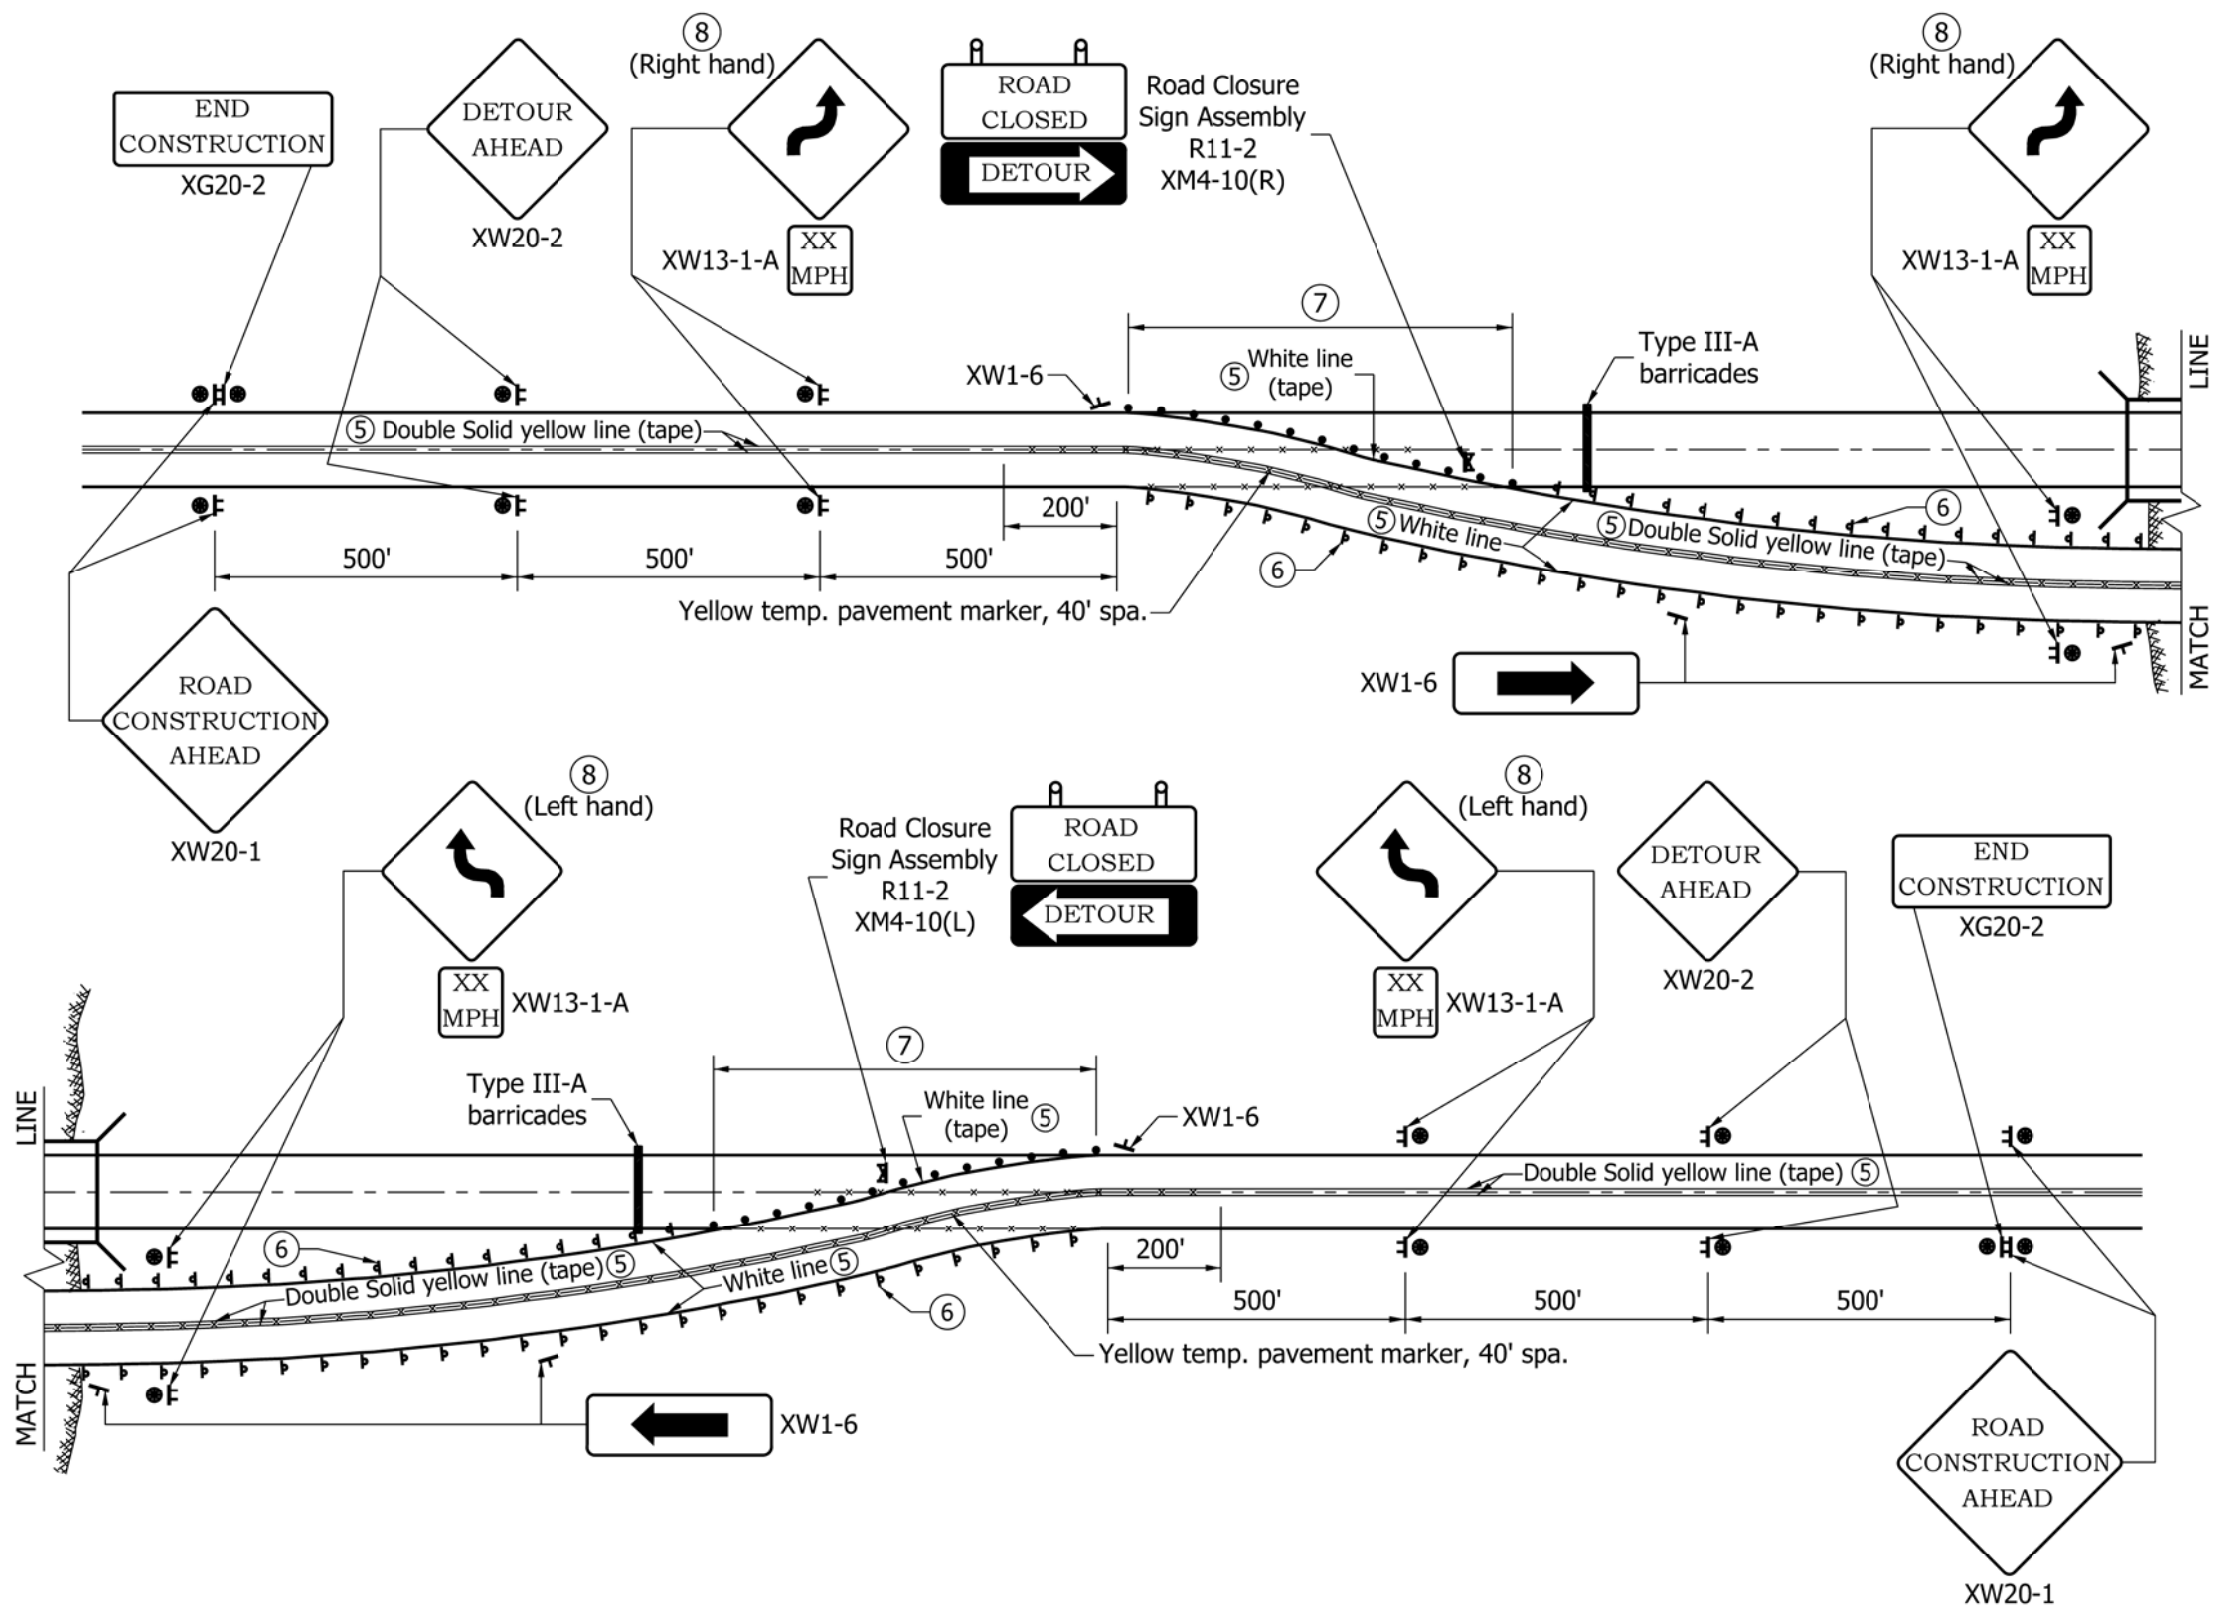

INDIANA DEPARTMENT OF TRANSPORTATION	
TEMPORARY RUNAROUND SIGNING AND MARKING	
SEPTEMBER 2011	
STANDARD DRAWING NO. E 713-TCTR-03	
DETAILS PLACED IN THIS FORMAT 9/1/2011	
	<i>/s/ Richard L. VanCleave</i> 9/01/11 DESIGN STANDARDS ENGINEER DATE
	<i>/s/ Mark A. Miller</i> 9/01/11 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	ORIGINALLY APPROVAL ON SEPTEMBER 9/1/97


GENERAL NOTES:


1. The pavement section for trucks count exceeding the values shown in (S) in the Legend shall be as shown elsewhere in the plans.
3. A temporary bridge or temporary pipe shall be used as specified. A 28'-0 clear roadway width shall be provided on a temporary bridge.
- ④ The connection of the temporary runaround to the existing pavement shall be outside the limits of the approach pavement removal.
- ⑤ Temporary pavement markings will be required as shown. The contractor shall have the option of using temporary tape or paint for all temporary pavement markings except where otherwise specified.
- ⑥ Delineators type D-2 (white) shall be placed at 30 ft maximum spacing on both sides throughout the length of the temporary runaround, including across the temporary structure. If a temporary bridge is used, type 3 object markers shall be placed at all four corners in accordance with the MUTCD.
- ⑦ Spacing of drums at this location shall be 20 ft.
- ⑧ If the runaround posted speed limit is greater than 30 mph the reverse curve sign, XW1-4 (36" x 36"), shall be used at this location. If the runaround posted advisory speed limit is 30 mph or less, the reverse turn sign, XW1-3 (36" x 36") shall be used.

LEGEND:


- Delineator type D-2 (white)
- Ⓢ

Pavement section for truck count, AADTT < 500, shall be:  
  
165 #/yd² HMA Surface, Type A, on  
275 #/yd² HMA Intermediate, Type A, on  
6 in. compacted aggregate, size No. 53, Base, on  
Type III Subgrade Treatment  
(See Genaral Note #1)


INDIANA DEPARTMENT OF TRANSPORTATION			
TEMPORARY RUNAROUND GENERAL NOTES			
SEPTEMBER 2010			
STANDARD DRAWING NO.		E 713-TCTR-04	
	<i>/s/ Richard L. VanCleave</i>		<i>09/01/10</i>
	DESIGN STANDARDS ENGINEER		DATE
	<i>/s/ Mark A. Miller</i>		<i>09/01/10</i>
DESIGN STANDARDS ENGINEER		CHIEF HIGHWAY ENGINEER	
		DATE	

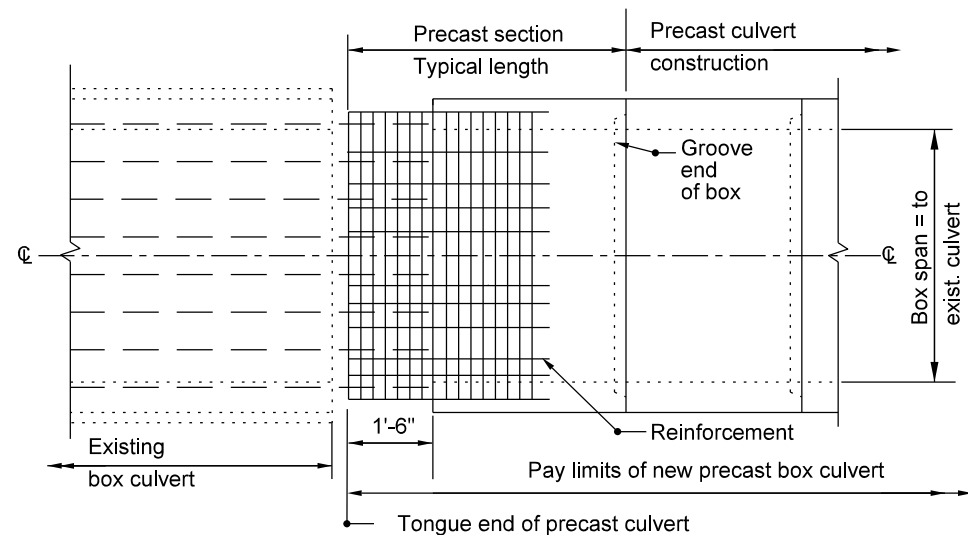

**SECTION A-A CONNECTION VIEW**

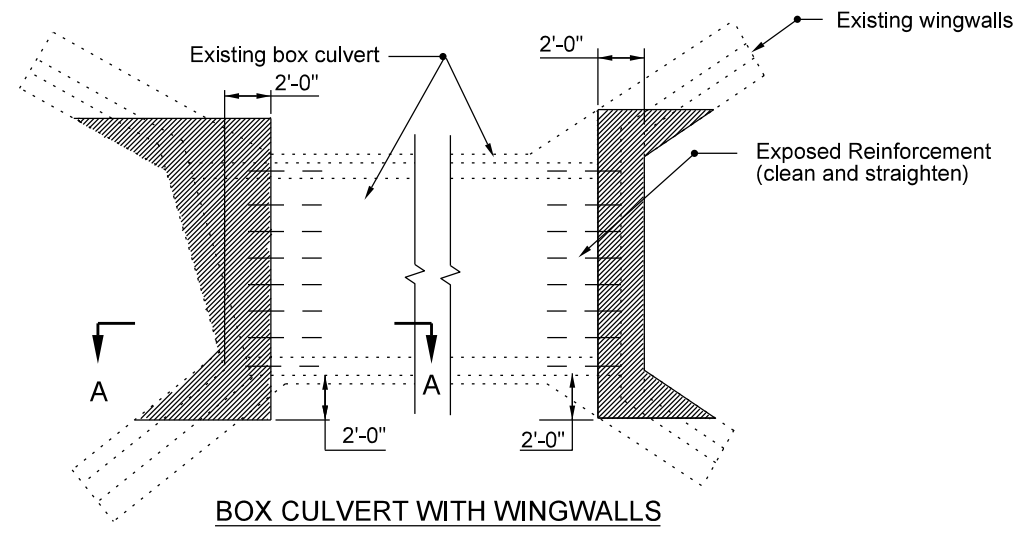

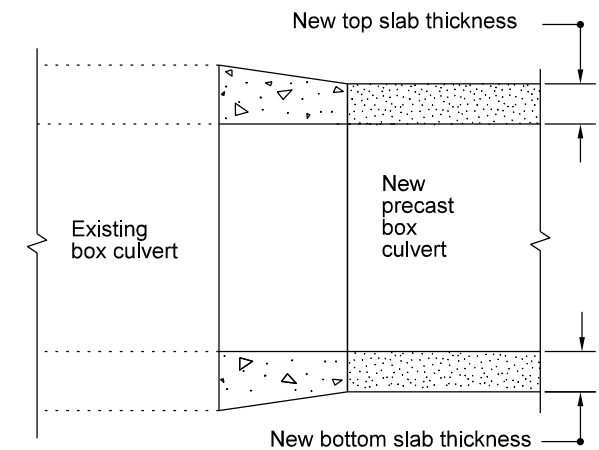


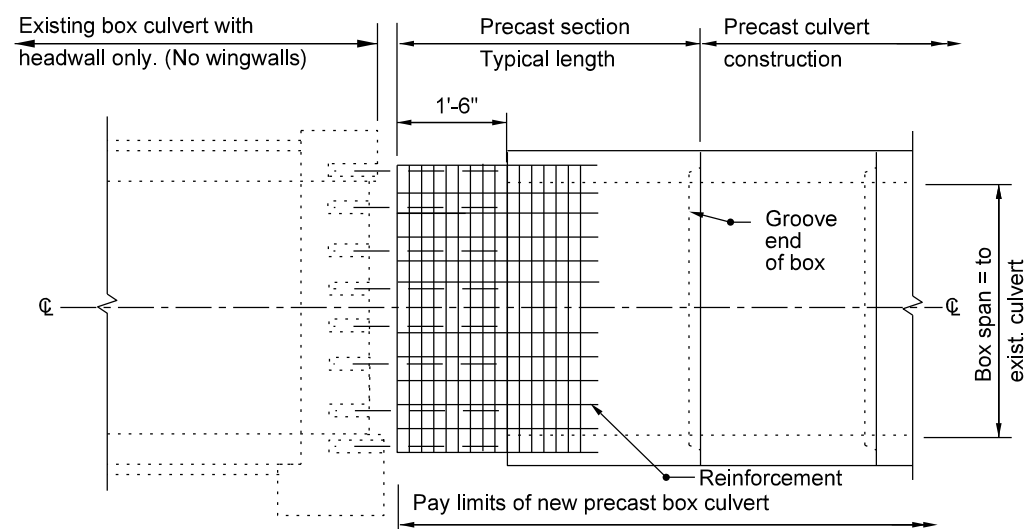
**BOX CULVERT WITH WINGWALLS  
EXTENSION PREPARATION**




**SECTION A-A AND B-B  
(Showing cast-in-place section)**

**LEGEND :**

-  Removal
-  Existing structure
-  New element or structure



**SECTION B-B CONNECTION VIEW**

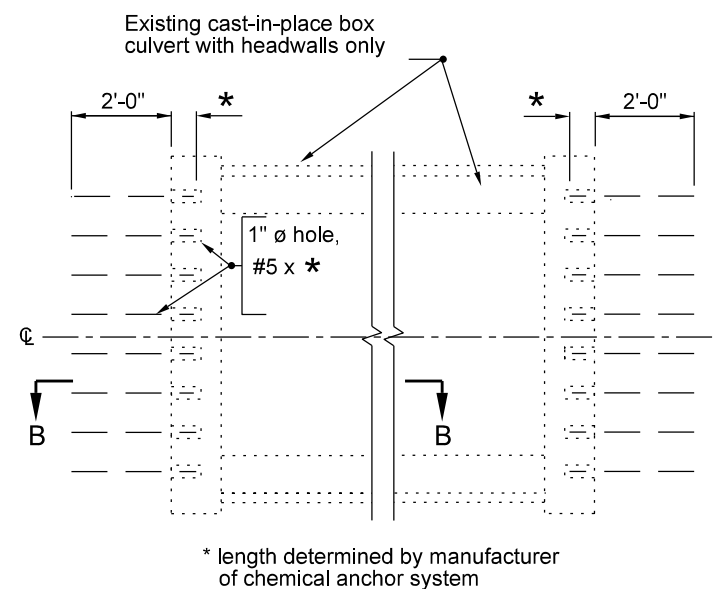


**BOX CULVERT WITH HEADWALLS ONLY  
EXTENSION PREPARATION**

INDIANA DEPARTMENT OF TRANSPORTATION

PRECAST BOX-CULVERT EXTENSION

SEPTEMBER 2010


STANDARD DRAWING NO. E 714-BCEX-01



DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave* 09/01/10  
DESIGN STANDARDS ENGINEER DATE

*/s/ Mark A. Miller* 09/01/10  
CHIEF HIGHWAY ENGINEER DATE

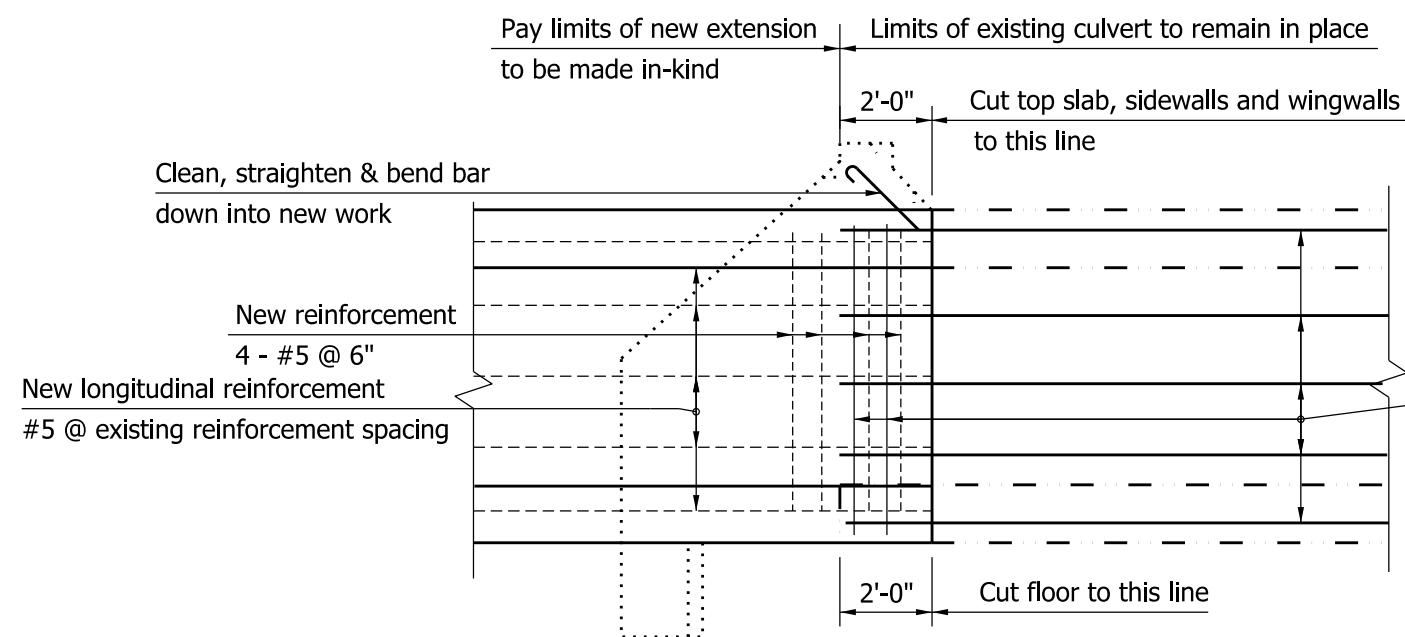


**LONGITUDINAL SECTION  
FOR ALL CULVERTS**

All existing exposed longitudinal reinforcing and wall reinforcement shall remain in place and project into new work.


New reinforcement  
4 - #5 @ 6"  
New longitudinal reinforcement  
#5 @ existing reinforcement spacing

**NOTES:**

1. Before removing existing concrete, saw around the perimeter of the removal areas on the interior and exterior of the culvert to a depth of 1".
2. New horizontal reinforcement shall be anchored into the culvert walls with bar hooks.

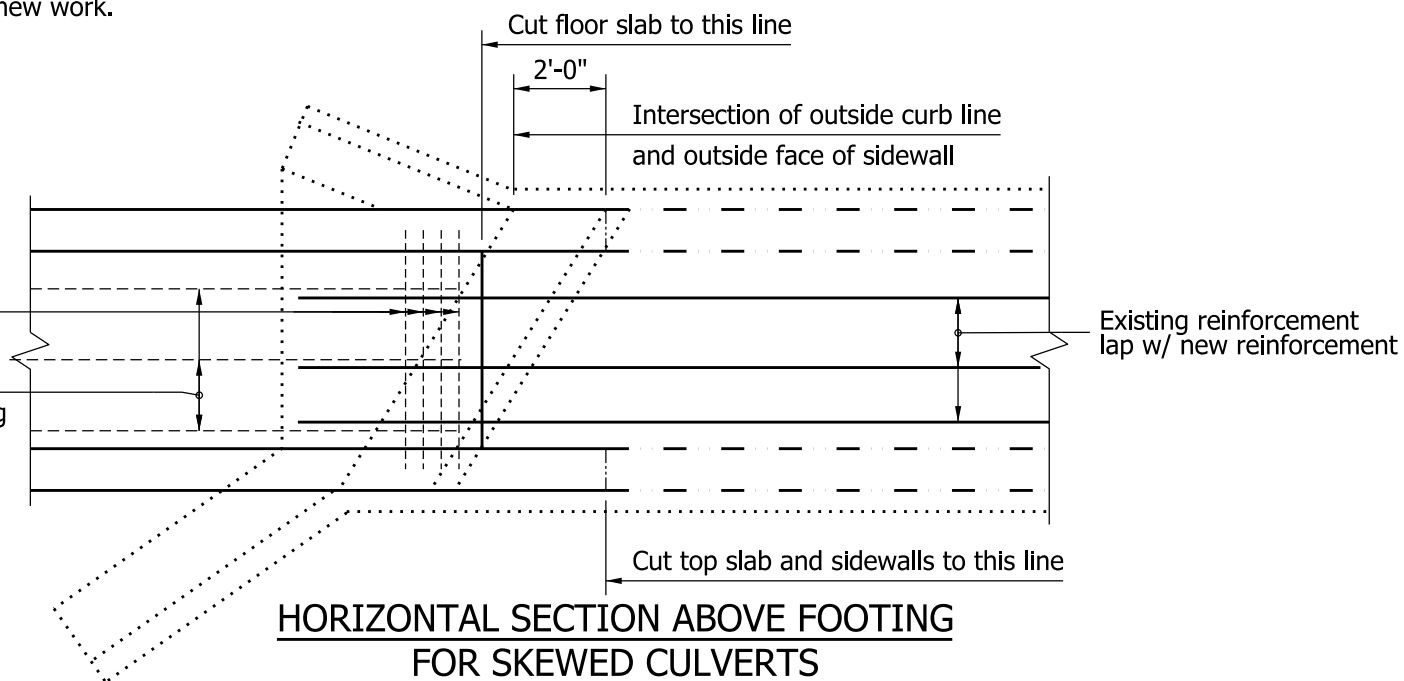

**HORIZONTAL SECTION ABOVE FOOTING  
FOR SKEWED CULVERTS**

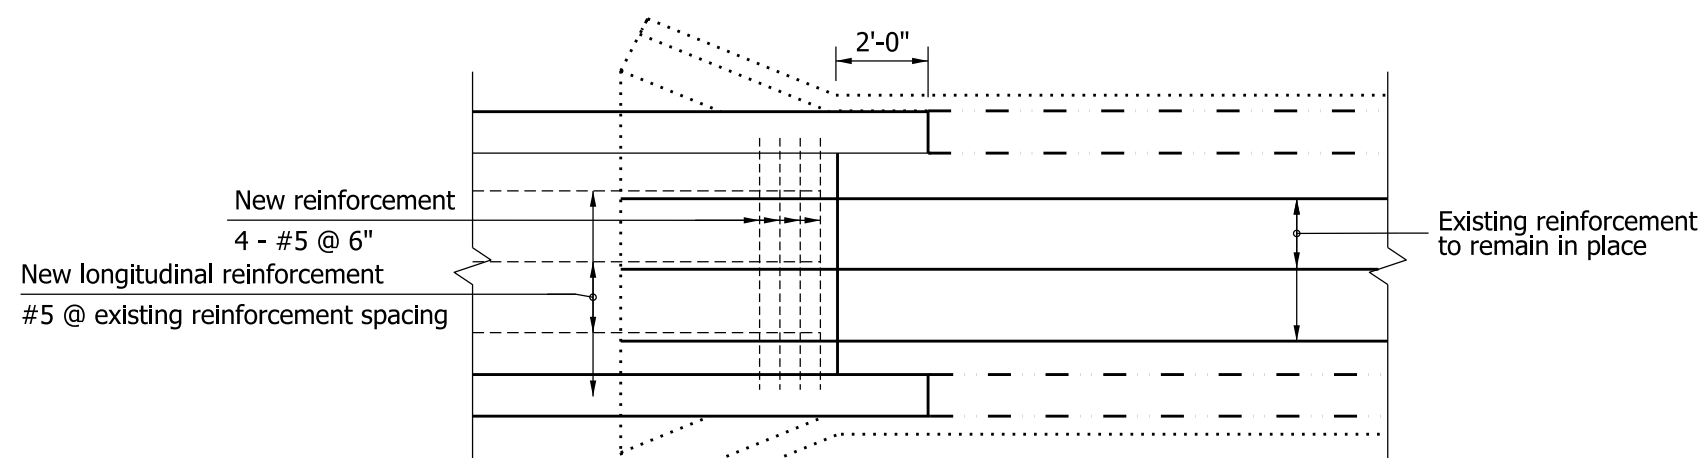


**HORIZONTAL SECTION ABOVE FOOTING  
FOR SQUARE CULVERTS**

INDIANA DEPARTMENT OF TRANSPORTATION

CAST-IN-PLACE  
BOX-CULVERT EXTENSION

SEPTEMBER 2010

STANDARD DRAWING NO. E 714-BCEX-02




DESIGN STANDARDS ENGINEER


/s/ *Richard L. VanCleave* 09/01/10  
DESIGN STANDARDS ENGINEER DATE


/s/ *Mark A. Miller* 09/01/10  
CHIEF HIGHWAY ENGINEER DATE



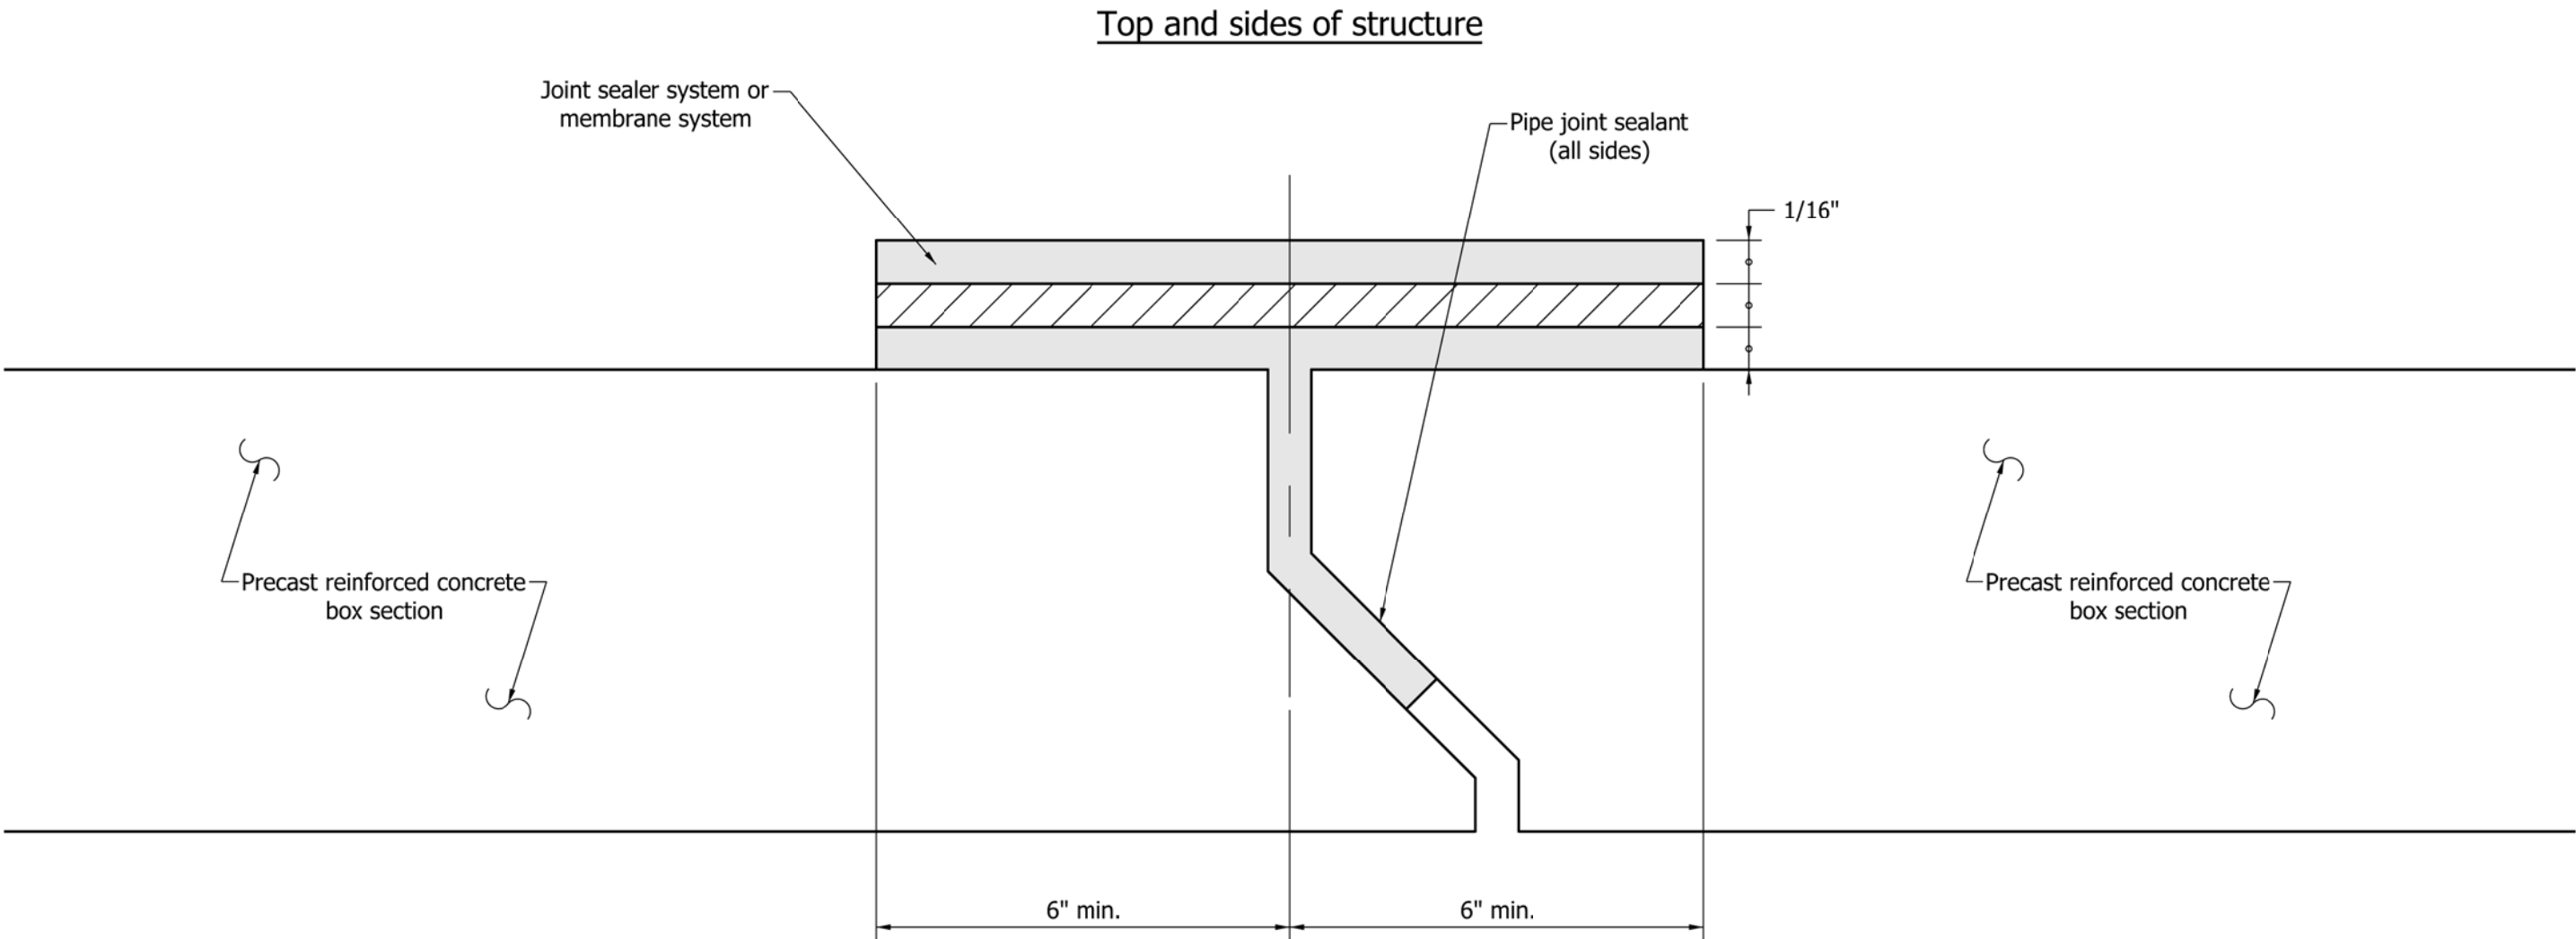


Inside of structure

INDIANA DEPARTMENT OF TRANSPORTATION		
PRECAST REINFORCED CONCRETE BOX SECTION JOINT		
SEPTEMBER 2011		
STANDARD DRAWING NO. E 714-BCJT-01		
	<i>/s/ Richard L. VanCleave</i>	<i>09/01/11</i>
	DESIGN STANDARDS ENGINEER	DATE
	<i>/s/ Mark A. Miller</i>	<i>09/01/11</i>
DESIGN STANDARDS ENGINEER	CHIEF HIGHWAY ENGINEER	DATE

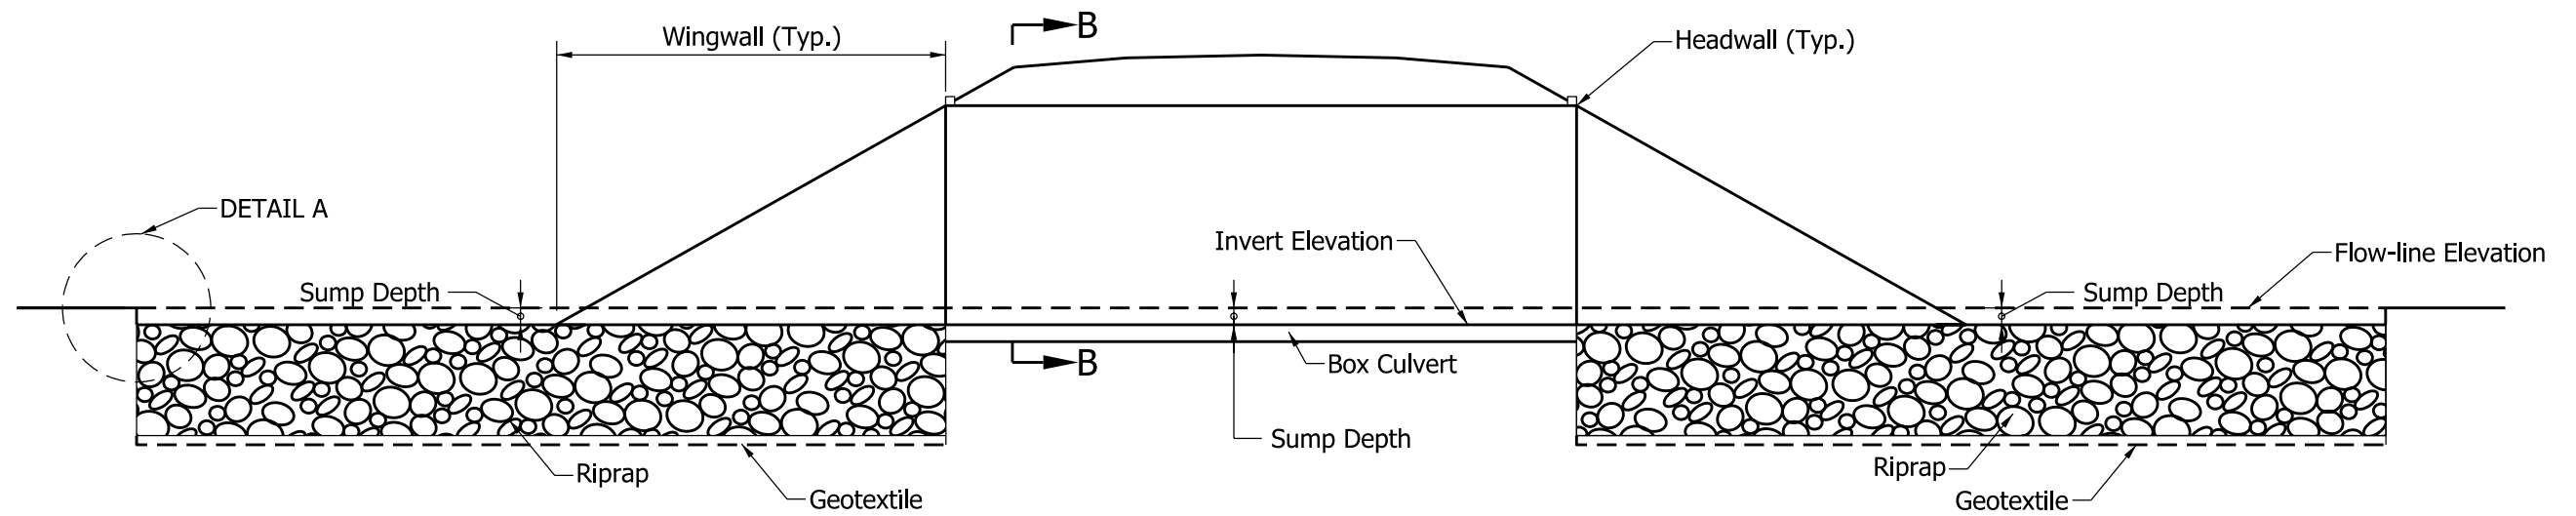


**SECTION A-A ELEVATION**

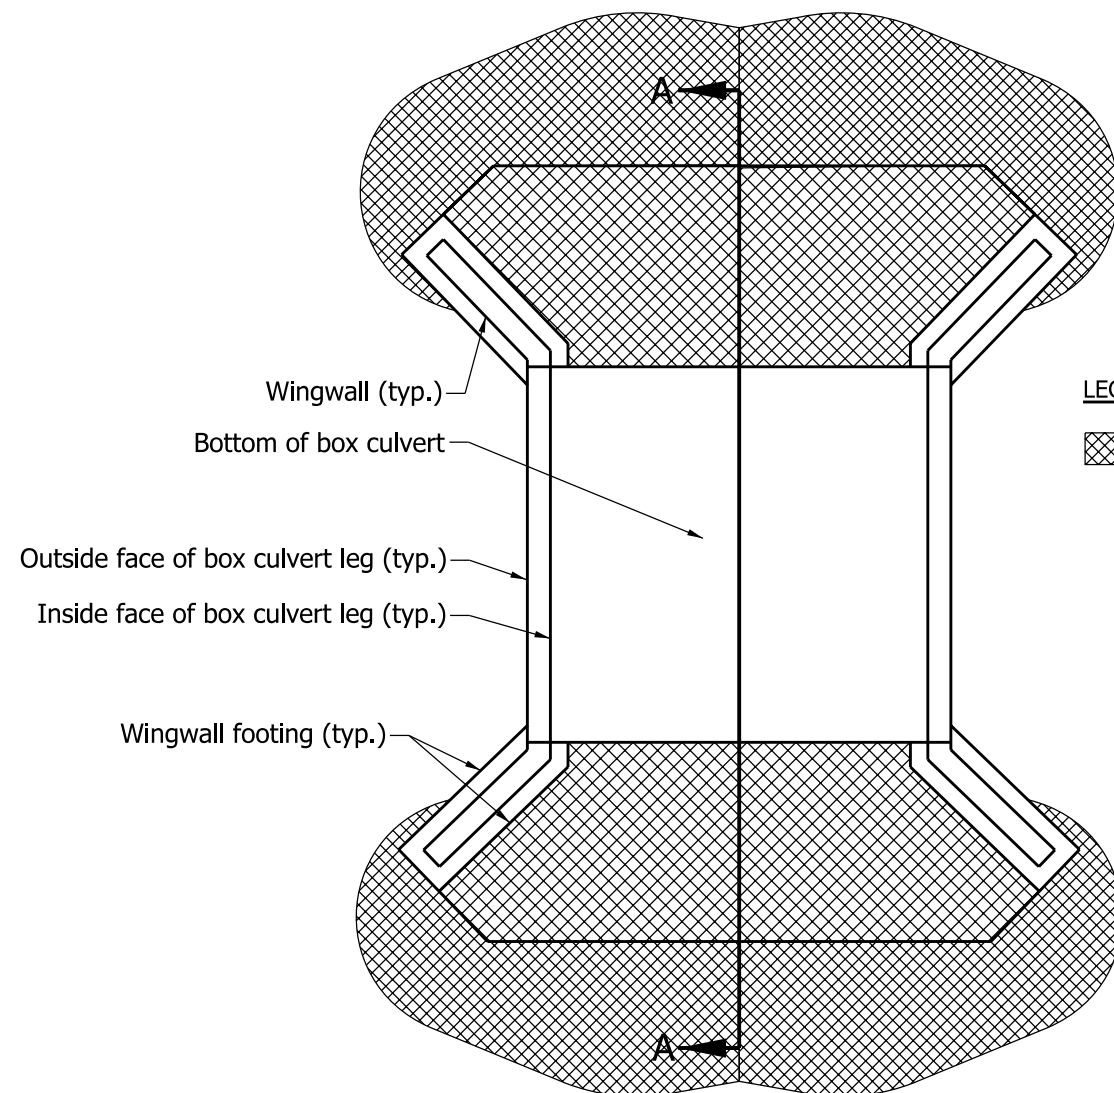


**PLAN - WITH WINGWALLS**

**LEGEND:**

▨ Riprap on geotextiles as shown on the plans.

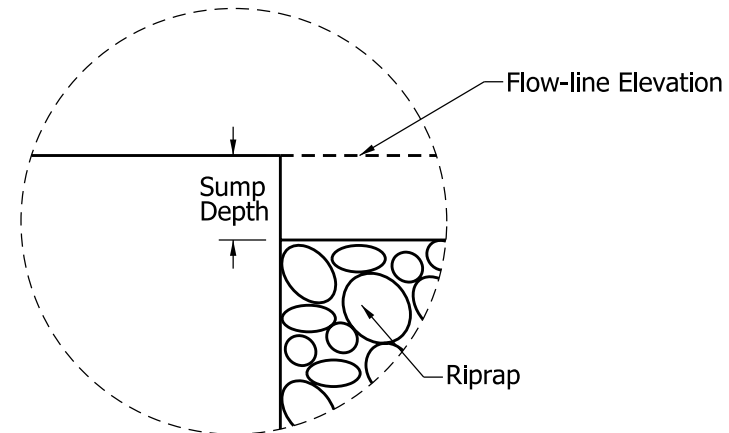

**DETAIL A**

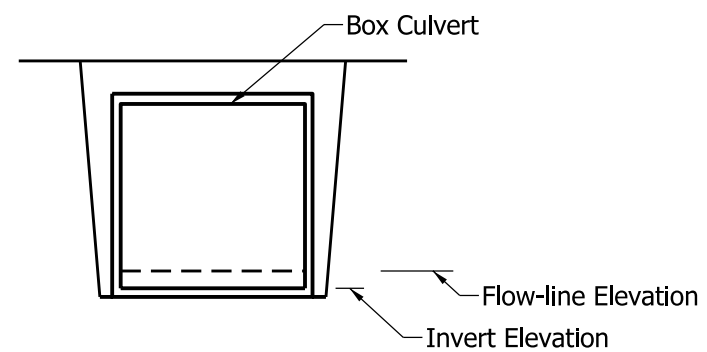

**SECTION B-B**

INDIANA DEPARTMENT OF TRANSPORTATION			
BOX CULVERT SUMPING AND SCOUR PROTECTION			
SEPTEMBER 2011			
STANDARD DRAWING NO.		E 714-BCSP-01	
	<i>/s/ Richard L. VanCleave</i>		09/01/11
	DESIGN STANDARDS ENGINEER		DATE
	<i>/s/ Mark A. Miller</i>		09/01/11
DESIGN STANDARDS ENGINEER		CHIEF HIGHWAY ENGINEER	
		DATE	

REINFORCED CONCRETE PIPE									
D	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
				G	CU.YDS.CONC. 2 ANCHORS	G	CU.YDS.CONC. 2 ANCHORS	G	CU.YDS.CONC. 2 ANCHORS
42"	3'-3	2'-7½"	6'-3	5'-3	2.5	11'-6	5.5	17'-9	8.6
48"	3'-5	2'-11	6'-10	5'-10	2.8	12'-8	6.2	19'-6	9.6
54"	3'-7	3'-2½"	7'-8	6'-5	3.2	14'-1	7.1	21'-9	11.1
60"	3'-9	3'-6	8'-6	7'-0	3.5	15'-6	8.0	24'-0	12.5
66"	3'-11	3'-9½"	9'-4	7'-7	3.9	16'-11	9.0	26'-3	14.1
72"	4'-1	4'-1	10'-2	8'-2	4.3	18'-4	10.0	28'-6	15.7
78"	4'-3	4'-4½"	11'-0	8'-9	4.7	19'-9	11.0	30'-9	17.3
84"	4'-5	4'-8	11'-10	9'-4	5.1	21'-2	12.1	33'-0	19.0
90"	4'-7	4'-11½"	12'-8	9'-11	5.5	22'-7	13.2	35'-3	20.8
96"	4'-9	5'-3	13'-6	10'-6	6.0	24'-0	14.3	37'-6	22.7
102"	4'-11	5'-6½"	14'-1	11'-1	6.4	25'-2	15.3	39'-3	24.2
108"	5'-1	5'-10	14'-8	11'-8	6.9	26'-4	16.3	41'-0	25.7
114"	5'-3	6'-1½"	15'-3	12'-3	7.4	27'-6	17.3	42'-9	27.3
120"	5'-5	6'-5	15'-10	12'-10	7.8	28'-8	18.4	44'-6	28.9
126"	5'-7	6'-8½"	16'-5	13'-5	8.3	29'-10	19.4	46'-3	30.5
132"	5'-9	7'-0	17'-0	14'-0	8.8	31'-0	20.5	48'-0	32.2
138"	5'-11	7'-3½"	17'-7	14'-7	9.4	32'-2	21.6	49'-9	33.9
144"	6'-1	7'-7	18'-2	15'-2	9.9	33'-4	22.8	51'-6	35.6


### GENERAL NOTES

1. Refer to Standard Drawings E 715-SPCA-01 and E 715-SPCA-02 for single pipe anchor details.
2. Refer to Standard Drawings E 715-MPCA-01 and E 715-MPCA-02 for multiple pipe anchor details.

### LEGEND

- D - Pipe diameter  
H - Anchor height  
R - Dimension from anchor edge to  $\phi$  of pipe  
S - Dimension between  $\phi$  of adjacent pipes  
G - Overall anchor length

CORRUGATED ALUMINUM ALLOY OR STEEL PIPE									
D	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
				G	CU.YDS.CONC. 2 ANCHORS	G	CU.YDS.CONC. 2 ANCHORS	G	CU.YDS.CONC. 2 ANCHORS
42"	2'-11	2'-4	5'-8	4'-8	2.1	10'-4	4.7	16'-0	7.3
48"	3'-1	2'-7	6'-2	5'-2	2.4	11'-4	5.3	17'-6	8.2
54"	3'-3	2'-10	6'-11	5'-8	2.7	12'-7	6.1	19'-6	9.5
60"	3'-4	3'-1	7'-8	6'-2	3.0	13'-10	6.7	21'-6	10.5
66"	3'-5	3'-4	8'-5	6'-8	3.2	15'-1	7.5	23'-6	11.6
72"	3'-7	3'-7	9'-2	7'-2	3.6	16'-4	8.3	25'-6	13.0
78"	3'-9	3'-10	9'-11	7'-8	3.9	17'-7	9.1	27'-6	14.4
84"	3'-10	4'-1	10'-8	8'-2	4.2	18'-10	9.9	29'-6	15.6
90"	3'-11	4'-4	11'-5	8'-8	4.5	20'-1	10.7	31'-6	16.8
96"	4'-1	4'-7	12'-2	9'-2	4.8	21'-4	11.6	33'-6	18.4
102"	4'-2	4'-10	12'-8	9'-8	5.1	22'-4	12.2	35'-0	19.3
108"	4'-4	5'-1	13'-2	10'-2	5.5	23'-4	13.0	36'-6	20.6
114"	4'-5	5'-4	13'-8	10'-8	5.8	24'-4	13.7	38'-0	21.6
120"	4'-7	5'-7	14'-2	11'-2	6.2	25'-4	14.6	39'-6	22.9
126"	4'-8	5'-10	14'-8	11'-8	6.5	26'-4	15.2	41'-0	23.9
132"	4'-10	6'-1	15'-2	12'-2	6.9	27'-4	16.1	42'-6	25.3
138"	4'-11	6'-4	15'-8	12'-8	7.3	28'-4	16.8	44'-0	26.4
144"	5'-1	6'-7	16'-2	13'-2	7.7	29'-4	17.8	45'-6	27.8

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>CONCRETE ANCHOR TABLE</b>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-ANCH-01</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ <i>Anthony L. Uremovich</i> 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ <i>Firooz Zandi</i> 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98

### REINFORCED CONCRETE HORIZONTAL ELLIPTICAL PIPE

SPAN	RISE	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
					G	CU.YDS.CONC., 2 ANCHORS	G	CU.YDS.CONC., 2 ANCHORS	G	CU.YDS.CONC., 2 ANCHORS
45"	29"	3'-0	2'-9	6'-6	5'-6	2.5	12'-0	5.5	18'-6	8.5
49"	32"	3'-1	2'-11½	6'-11	5'-11	2.7	12'-10	5.9	19'-9	9.2
53"	34"	3'-2	3'-1½	7'-6	6'-3	2.9	13'-9	6.4	21'-3	10.0
60"	38"	3'-3	3'-5½	8'-5	6'-11	3.2	13'-4	7.3	23'-9	11.3
68"	43"	3'-5	3'-10	9'-6	7'-8	3.6	17'-2	8.3	26'-8	13.0
76"	48"	3'-7	4'-2½	10'-7	8'-5	4.1	19'-0	9.4	29'-7	14.8
83"	53"	3'-8	4'-6½	11'-7	9'-1	4.5	20'-8	10.5	32'-3	16.5
91"	58"	3'-10	4'-11	12'-8	9'-10	4.9	22'-6	11.7	35'-2	18.4
98"	63"	4'-0	5'-3	13'-6	10'-6	5.3	24'-0	12.7	37'-6	20.1
106"	68"	4'-2	5'-7½	14'-3	11'-3	5.8	25'-6	13.7	39'-9	21.7
113"	72"	4'-3	5'-11½	14'-11	11'-11	6.2	26'-10	14.6	41'-9	23.0
121"	77"	4'-5	6'-4	15'-8	12'-8	6.7	28'-4	15.7	44'-0	24.6
128"	82"	4'-6	6'-8	16'-4	13'-4	7.2	29'-8	16.6	46'-0	26.1
136"	87"	4'-8	7'-0	17'-0	14'-0	7.6	31'-0	17.6	48'-0	27.6
143"	92"	4'-10	7'-4	17'-8	14'-8	8.1	32'-4	18.7	50'-0	29.2
151"	97"	5'-0	7'-8½	18'-5	15'-5	8.7	33'-10	19.9	52'-3	31.0
166"	106"	5'-3	8'-5	19'-10	16'-10	9.7	36'-8	22.0	56'-6	34.4
180"	116"	5'-6	9'-1	21'-2	18'-2	10.8	39'-4	24.3	60'-6	37.8

### GENERAL NOTES

1. Refer to Standard Drawings E 715-SPCA-01 and E 715-SPCA-02 for single anchor details.
2. Refer to Standard Drawing E 715-MPCA-02 for multiple anchor details.

### LEGEND

- H - Anchor height  
R - Dimension from anchor edge to  $\phi$  exterior pipe  
S - Dimension between  $\phi$  of adjacent pipes  
G - Overall anchor length

### CORRUGATED ALUMINUM ALLOY OR STEEL PIPE-ARCH


SPAN	RISE	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
					G	CU.YDS.CONC., 2 ANCHORS	G	CU.YDS.CONC., 2 ANCHORS	G	CU.YDS.CONC., 2 ANCHORS
49"	33"	3'-0	2'-7	6'-3	5'-2	2.2	11'-5	4.9	17'-8	7.7
57"	38"	3'-1	2'-11	7'-3	5'-10	2.5	13'-1	5.7	20'-4	8.9
64"	43"	3'-3	3'-2½	8'-1	6'-5	2.8	14'-6	6.4	22'-7	10.1
71"	47"	3'-4	3'-6	9'-0	7'-0	3.0	16'-0	7.2	25'-0	11.3
77"	52"	3'-6	3'-9	9'-9	7'-6	3.3	17'-3	7.9	27'-0	12.5
83"	57"	3'-8	4'-0	10'-6	8'-0	3.5	18'-6	8.6	29'-0	13.6
60"	46"	3'-9	3'-1	7'-8	6'-2	2.9	13'-10	6.7	21'-6	10.5
66"	51"	3'-10	3'-4	8'-5	6'-8	3.1	15'-1	7.4	23'-6	11.6
73"	55"	4'-0	3'-7½	9'-4	7'-3	3.4	16'-7	8.3	25'-11	13.1
81"	59"	4'-2	3'-11½	10'-4	7'-11	3.7	18'-3	9.1	28'-7	14.5
87"	63"	4'-2	4'-2½	11'-1	8'-5	4.0	19'-6	9.8	30'-7	15.6
95"	67"	4'-4	4'-6½	12'-1	9'-1	4.3	21'-2	10.8	33'-3	17.2
103"	71"	4'-6	4'-10½	12'-9	9'-9	4.7	22'-6	11.6	35'-3	18.5
112"	75"	4'-8	5'-3	13'-6	10'-6	5.1	24'-0	12.5	37'-6	19.8
117"	79"	4'-9	5'-5½	13'-11	10'-11	5.3	24'-10	12.9	38'-9	20.6
128"	83"	5'-0	5'-11	14'-10	11'-10	5.8	26'-8	14.1	41'-6	22.4
137"	87"	5'-2	6'-3	15'-7	12'-7	6.1	28'-1	14.8	43'-8	23.5
142"	91"	5'-4	6'-6	16'-0	13'-0	6.5	29'-0	15.7	45'-0	24.9

INDIANA DEPARTMENT OF TRANSPORTATION

### CONCRETE ANCHOR TABLES

JANUARY 1998


STANDARD DRAWING NO. E 715-ANCH-02




DETAILS PLACED IN THIS FORMAT 11-15-99


/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE  
ORIGINALLY APPROVED 1-02-98

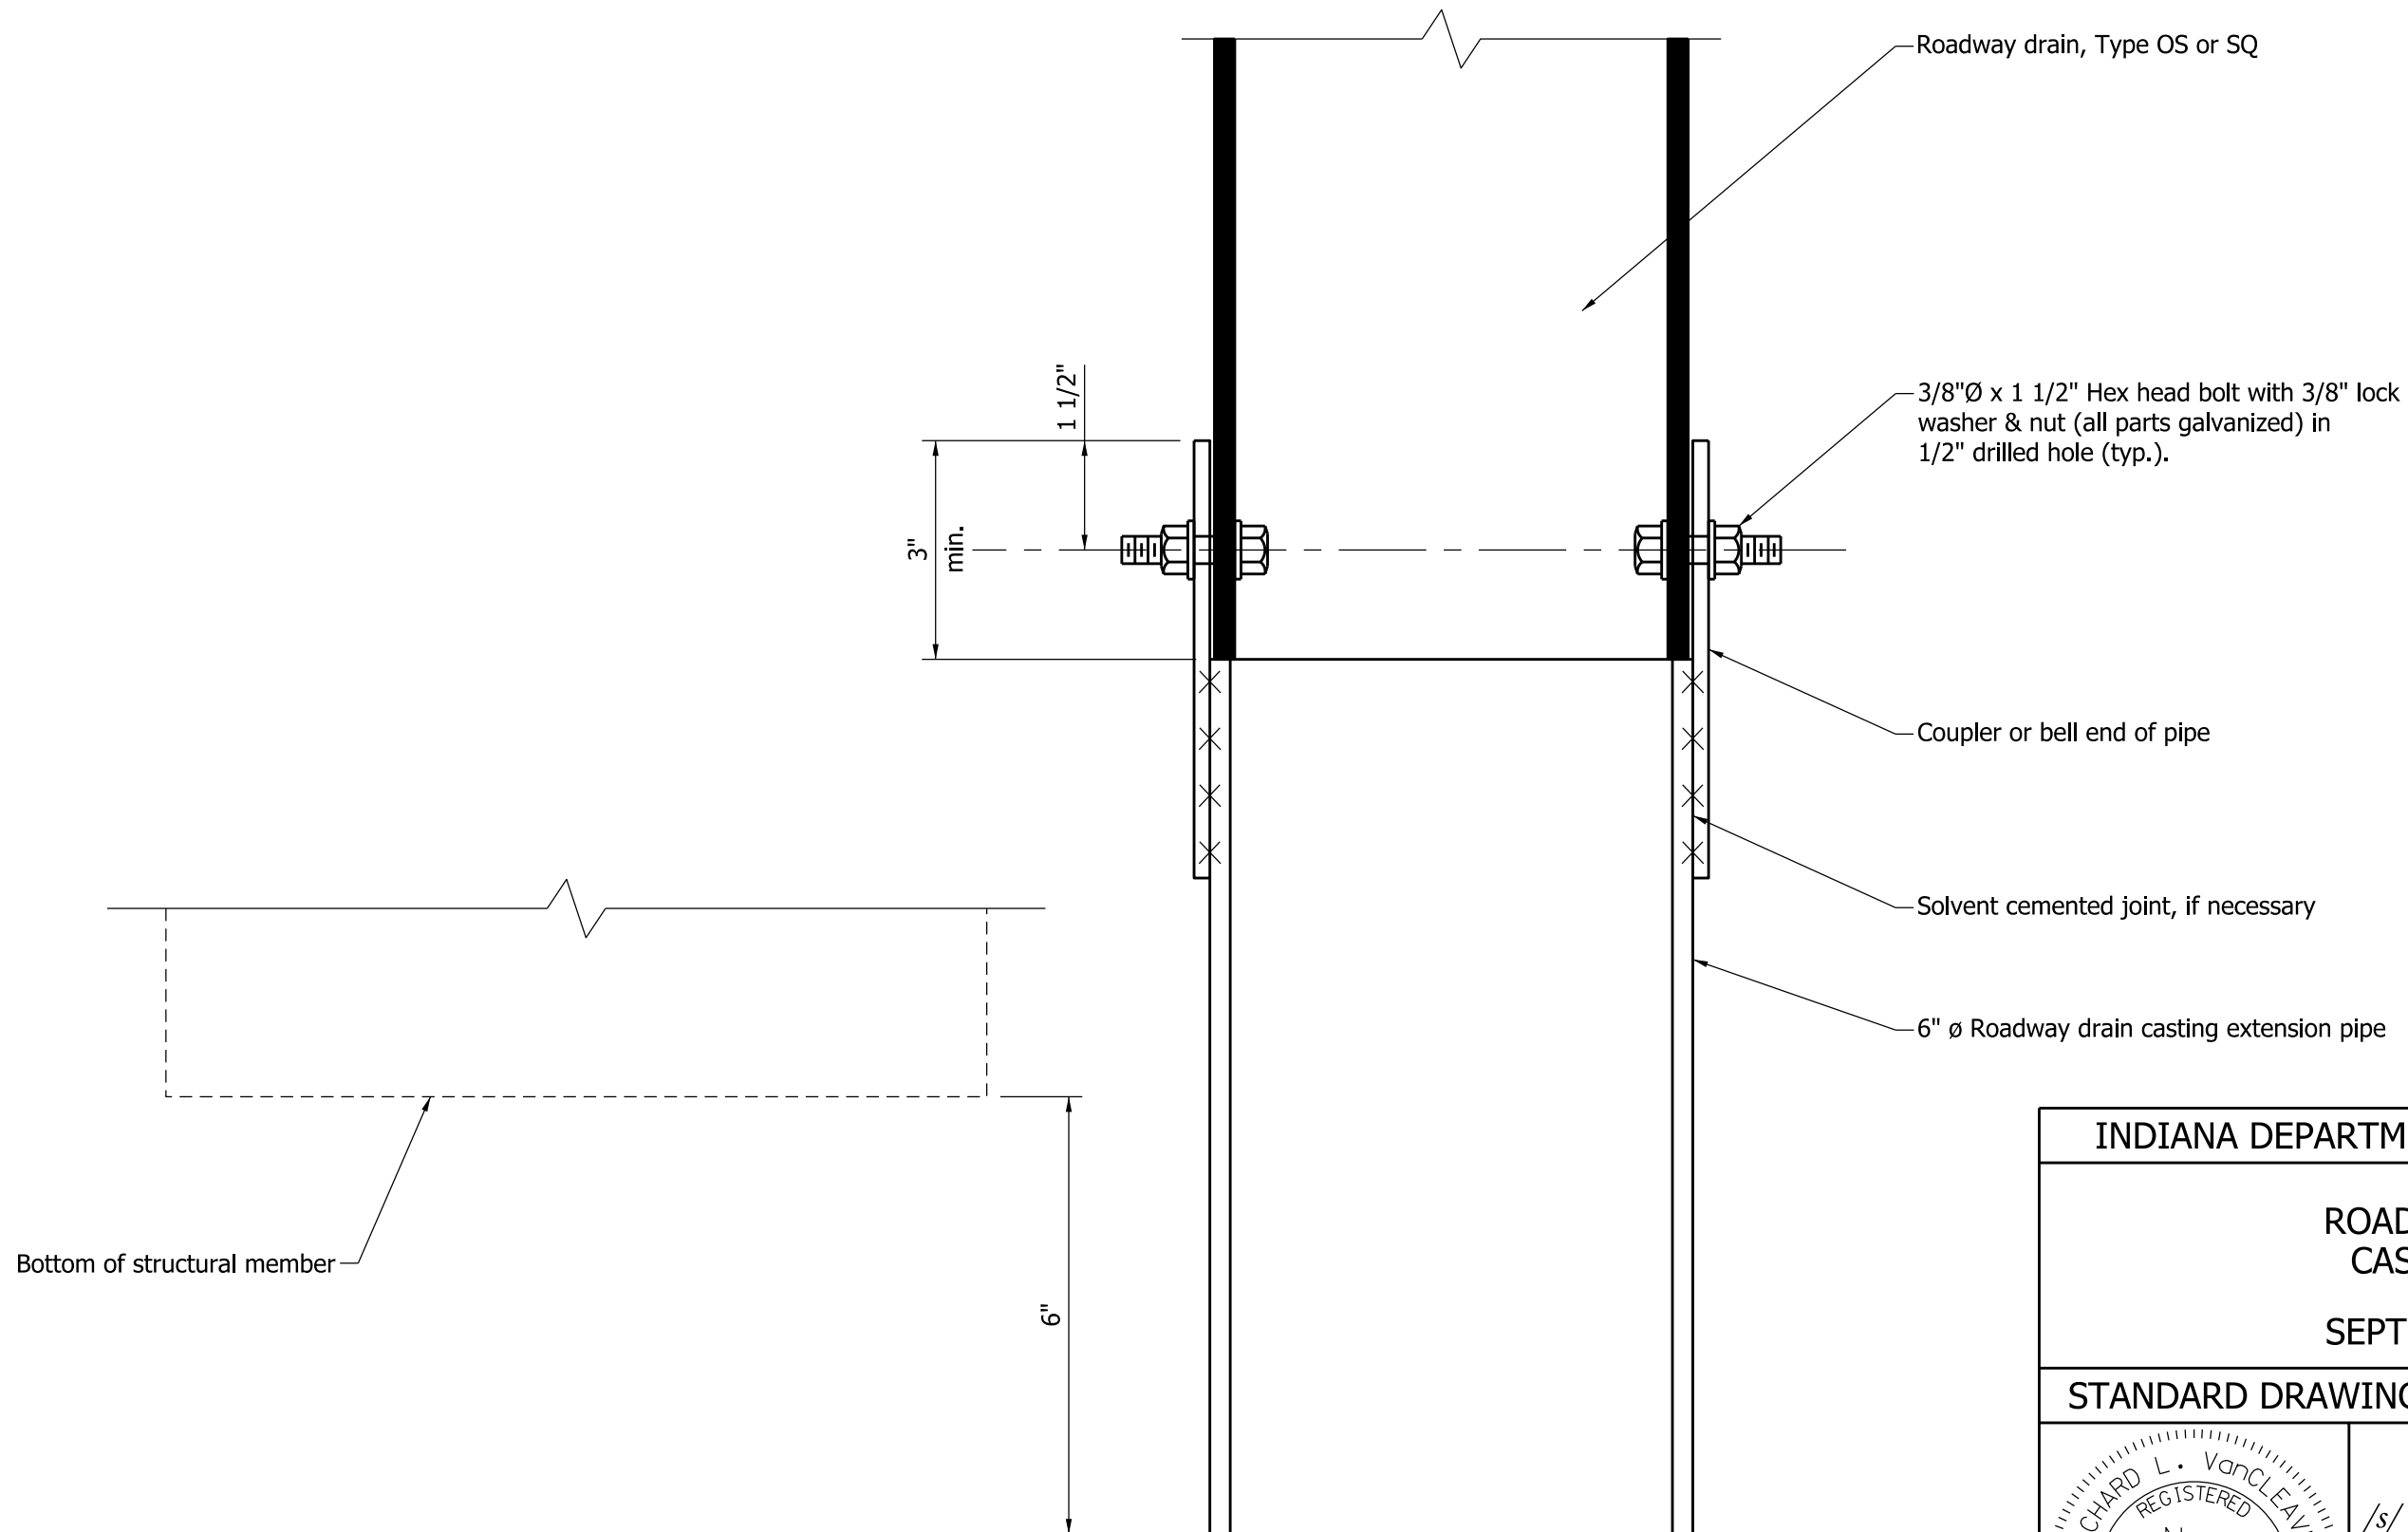

Note: Pipe support brackets not shown for clarity.

INDIANA DEPARTMENT OF TRANSPORTATION		
ROADWAY DRAIN CASTING PIPE		
SEPTEMBER 2011		
STANDARD DRAWING NO.		E 715-BDCG-01
	/s/ <i>Richard L. VanCleave</i>	09/01/11
	DESIGN STANDARDS ENGINEER	DATE
	/s/ <i>Mark A. Miller</i>	09/01/11
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		

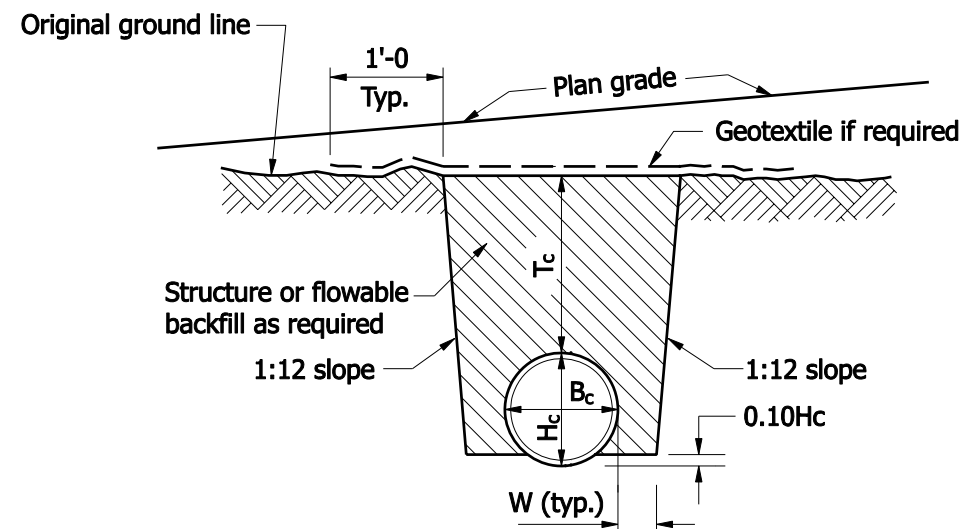

SECTION A-A

#### LEGEND

$H_c$  = Overall diameter or rise (typ.)

$B_c$  = Overall diameter or span


$A$  = 8" min. for fill height less than 16'  
= 12" min. for fill height of 16' or more

$T_c$  = Trench cover depth over pipe

$W$  =  $0.3 B_c$  or 9", whichever is greater

$E$  = Encasement


$L_B$  = Backfill length measured from toe to toe of the 2:1 slopes.

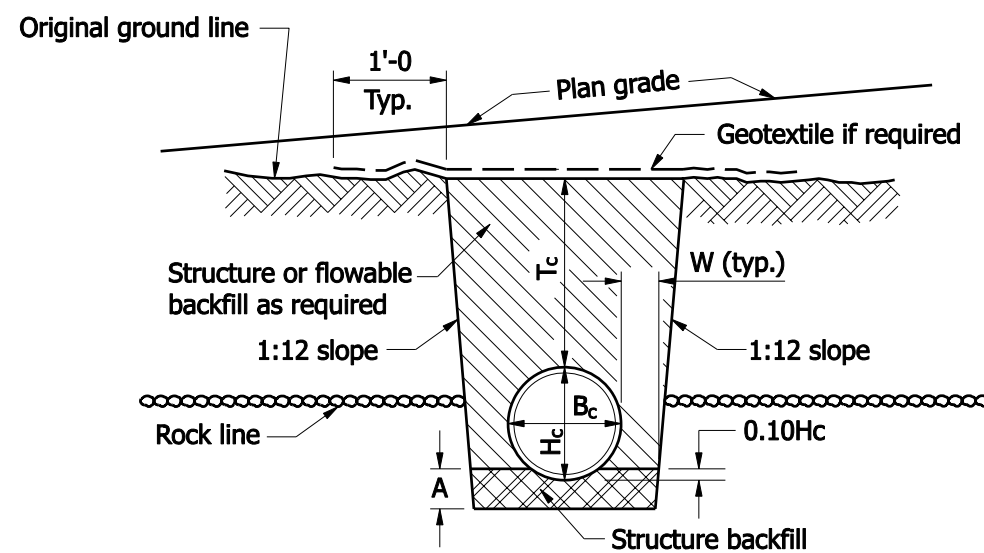

SECTION A-A  
ROCK FOUNDATION

#### NOTES :

- Protective cover shall be constructed prior to running heavy equipment over installed pipes. The minimum covers are listed below:
  - 1.5' for  $B_c \leq 18"$
  - 3' for  $18" < B_c \leq 54"$
  - 4' for  $B_c > 54"$
- For backfill purposes, paved shoulders, curbs, and sidewalks are considered pavement. See Standard Drawing E 715-BKFL-10 for pavement limits when curbs, paved shoulders, or sidewalks are present.
- Flowable or structure backfill shall be encased by compacted earth backfill. The minimum encasement shall be 2 ft. If necessary, the 2:1 slope between the flowable or structure backfill and the encasement shall be modified to maintain the minimum 2 ft encasement.

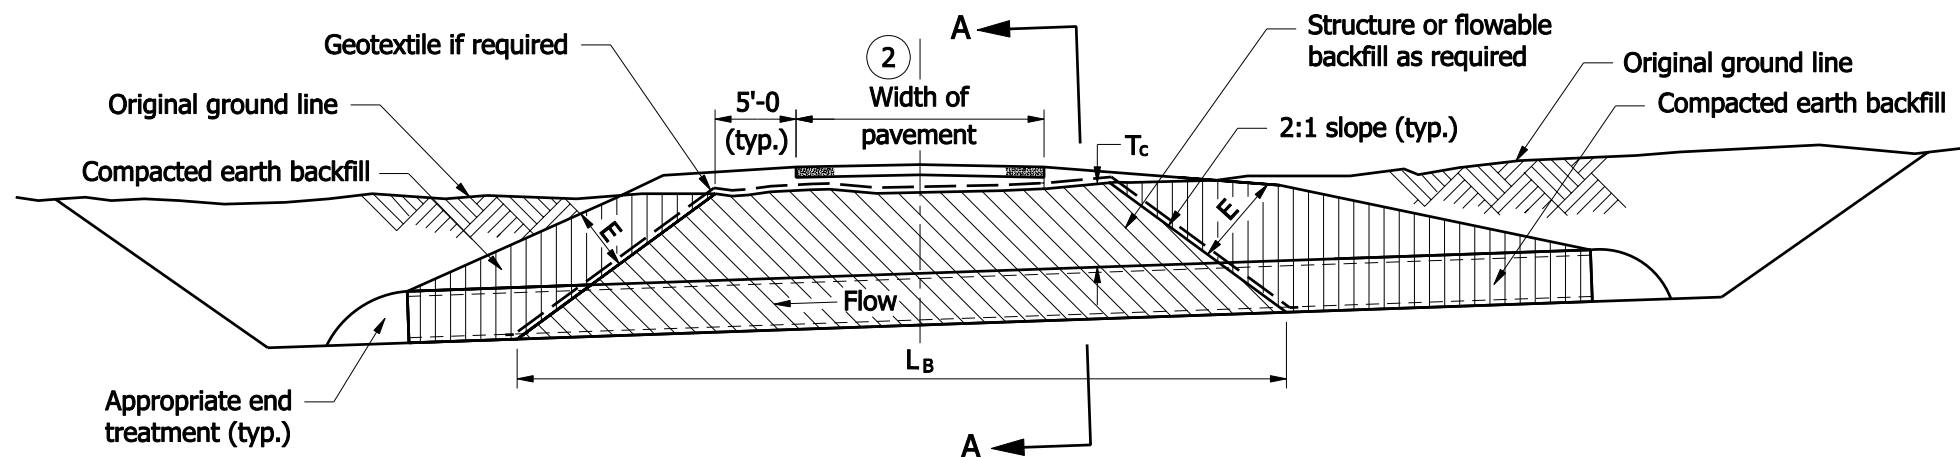


ELEVATION

INDIANA DEPARTMENT OF TRANSPORTATION

PIPE BACKFILL METHOD 1  
NEW ROADWAY, TRENCH

SEPTEMBER 2008


STANDARD DRAWING NO. E 715-BKFL-01



DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/02/08  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/02/08  
CHIEF HIGHWAY ENGINEER DATE

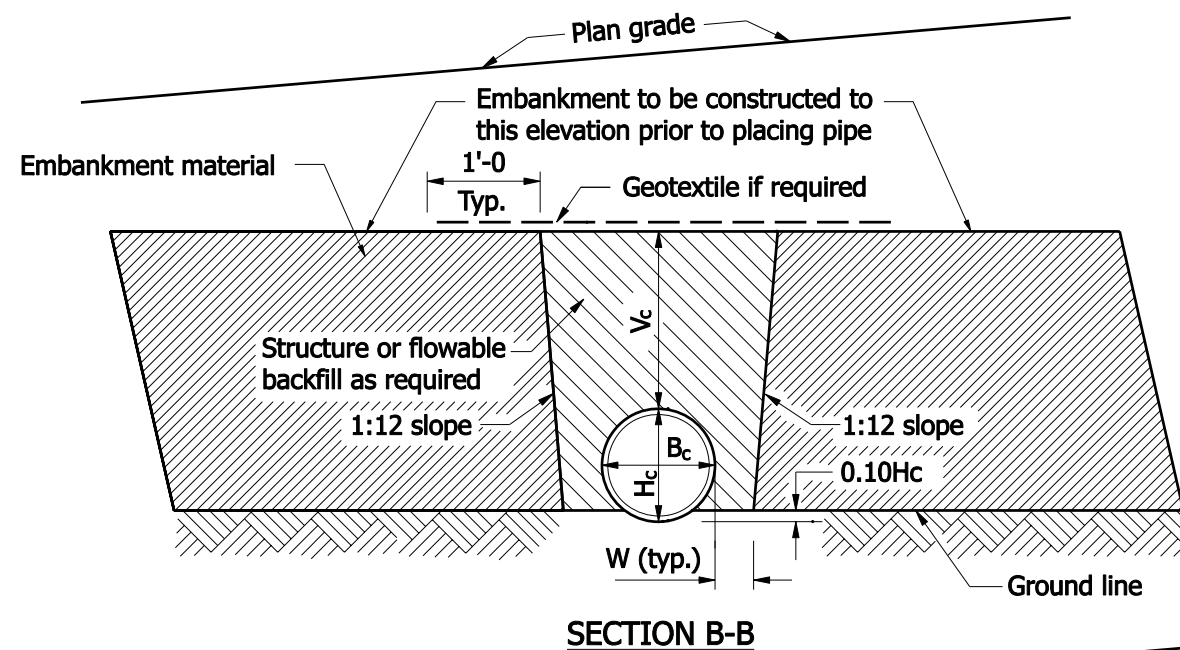

## LEGEND

**H<sub>c</sub> = Overall diameter or rise (typ.)**



**B<sub>c</sub> = Overall diameter or span**

**A = 8" min. for fill height less than 16'**  
**= 12" min. for fill height of 16' or more**

$$V_c = \begin{cases} 12'' & \text{for } B_c \leq 18'' \\ 18'' & \text{for } B_c > 18'' \end{cases}$$

**W = 0.3 B<sub>c</sub> or 9", whichever is greater**

$L_B$  = Backfill length measured from toe to toe of the 2:1 slopes.

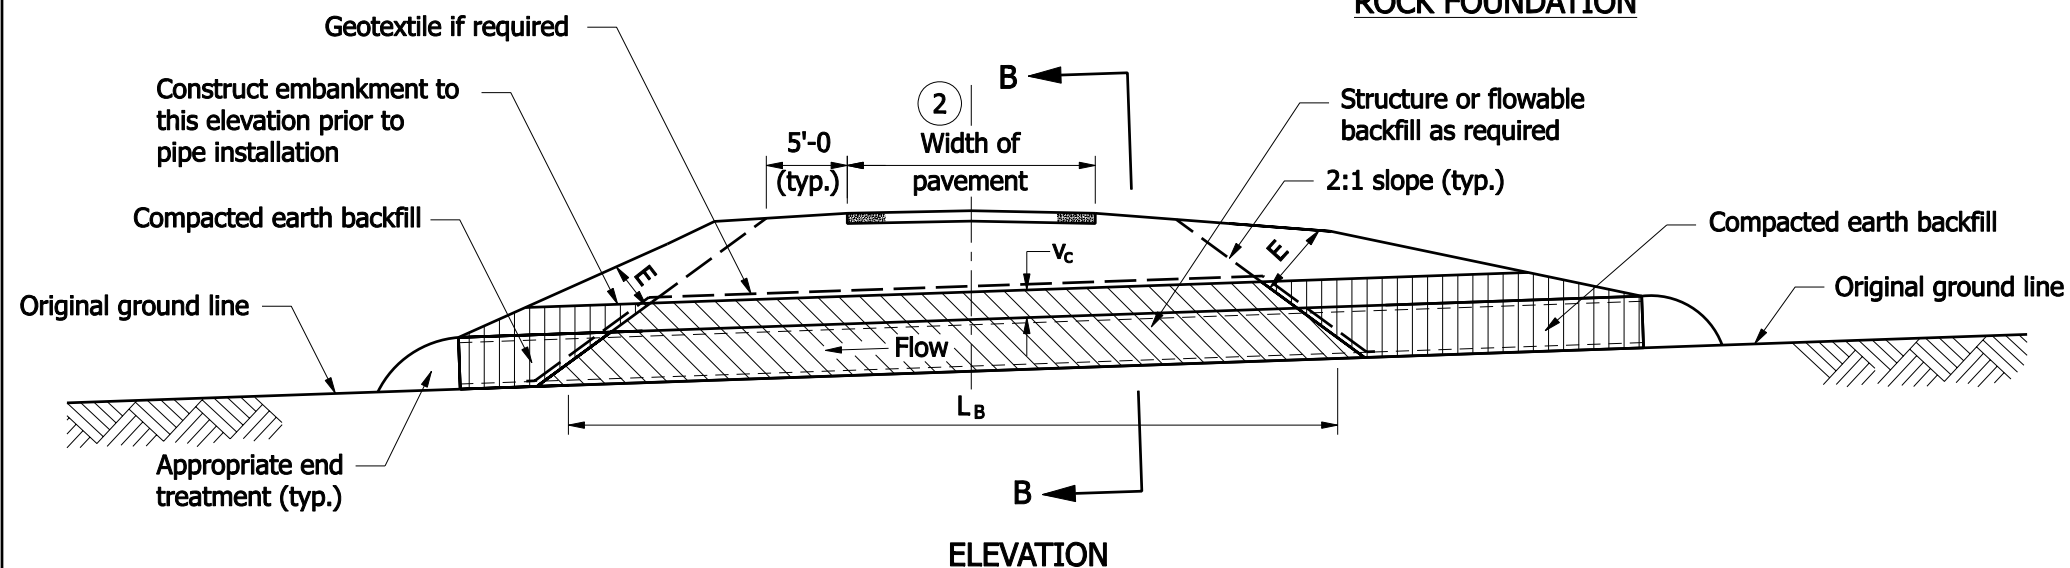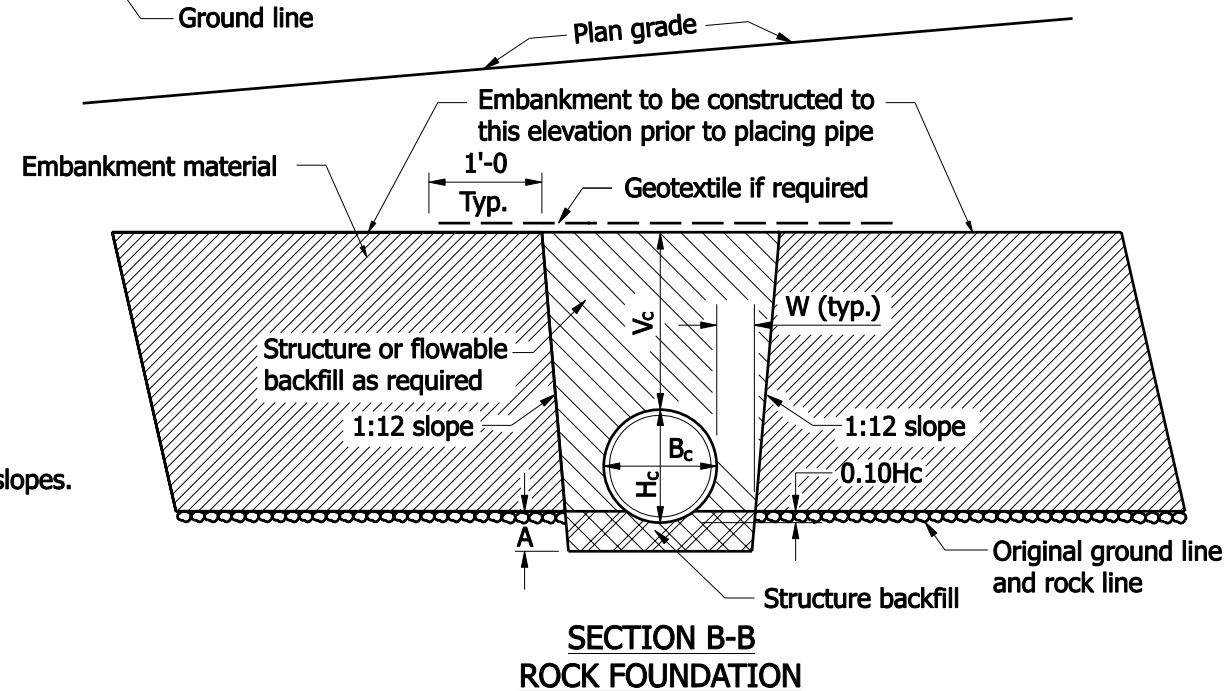

**NOTES :**


1. Protective cover shall be constructed prior to running heavy equipment over installed pipes. The minimum covers are listed below:
  - a.) 1.5' for  $B_c \leq 18"$
  - b.) 3' for  $18" < B_c \leq 54"$
  - c.) 4' for  $B_c > 54"$
2. For backfill purposes, paved shoulders, curbs, and sidewalks are considered pavement. See Standard Drawing E 715-BKFL-10 for pavement limits when curbs, paved shoulders, or sidewalks are present.
3. Flowable or structure backfill shall be encased by compacted earth backfill. The minimum encasement shall be 2 ft. If necessary, the 2:1 slope between the flowable or structure backfill and the encasement shall be modified to maintain the minimum 2 ft encasement.

INDIANA DEPARTMENT OF TRANSPORTATION

## PIPE BACKFILL METHOD 1 NEW ROADWAY, EMBANKMENT

SEPTEMBER 2008


**STANDARD DRAWING NO. E 715-BKFL-02**



<u>/s/ Richard L. VanCleave</u>	<u>09/02/08</u>
DESIGN STANDARDS ENGINEER	DATE

<u>/s/ Mark A. Miller</u>	<u>09/02/08</u>
CHIEF HIGHWAY ENGINEER	DATE

DESIGN STANDARDS ENGINEER

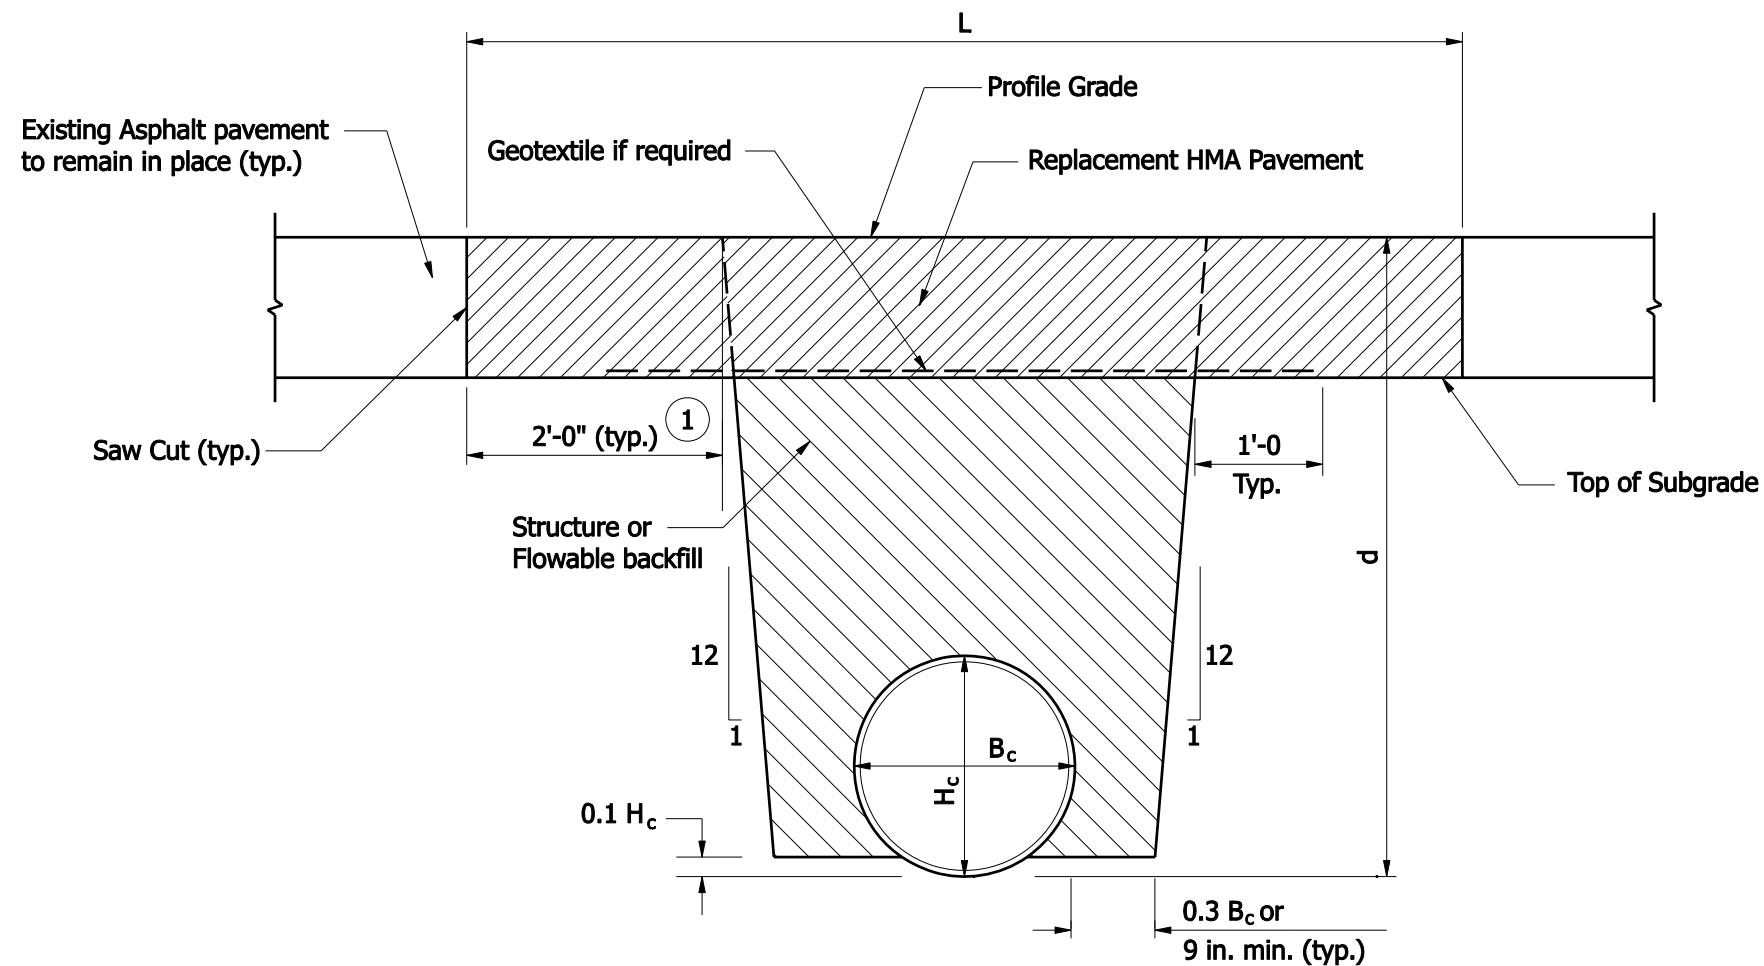

- $L$  = Pay limits of pavement removal and pavement replacement (ft); for cross pipe, measured along roadway centerline; for pipe parallel to roadway centerline, measured perpendicular to pipe centerline.
- $B_c$  = Overall diameter or span (in.)
- $H_c$  = Overall diameter or rise (in.)
- $d$  = Vertical distance from flowline to profile grade (ft)

#### ASPHALT REPLACEMENT PAVEMENT

#### NOTES :


- ① Existing subgrade over this distance shall remain in place.
2. The minimum pavement sections shall be as follows:  
HMA: 165 #/syd HMA Surface, Type A,B,C or D on variable HMA Intermediate, Type A, B, C or D
3. If underdrains are present, they shall be perpetuated in accordance with the details shown on Standard Drawing E 718-UNDR-01.
4. See Standard Drawing E 715-BKFL-01 for pipe backfill trench elevation view.

INDIANA DEPARTMENT OF TRANSPORTATION

PIPE BACKFILL METHOD 1  
EXISTING ROADWAY, TRENCH

SEPTEMBER 2008

STANDARD DRAWING NO. E 715-BKFL-03




DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave* 09/02/08  
DESIGN STANDARDS ENGINEER DATE

*/s/ Mark A. Miller* 09/02/08  
CHIEF HIGHWAY ENGINEER DATE



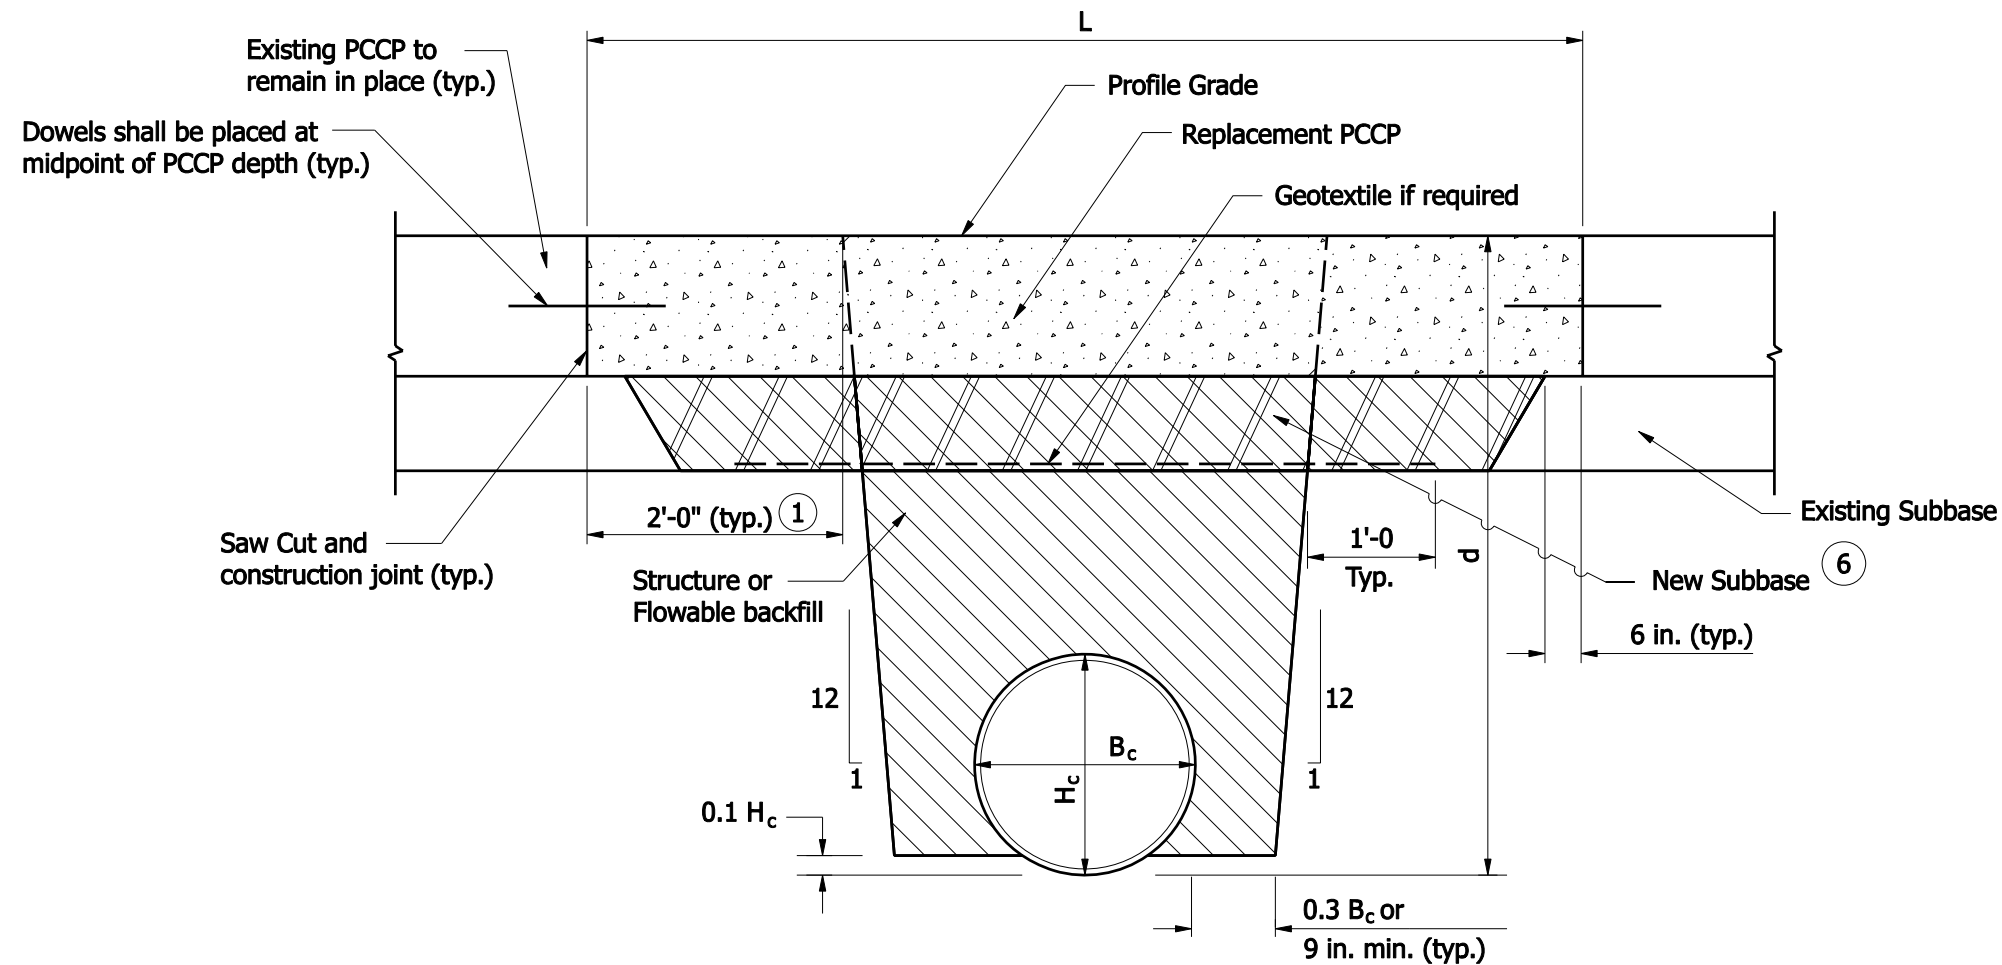

- L = Pay limits of pavement removal and pavement replacement (ft);  
for cross pipe, measured along roadway centerline; for pipe parallel to  
roadway centerline, measured perpendicular to pipe centerline.
- $B_c$  = Overall diameter or span (in.)
- $H_c$  = Overall diameter or rise (in.)
- d = Vertical distance from flowline to profile grade (ft)

#### PCCP REPLACEMENT PAVEMENT

#### NOTES :


- ① Existing subgrade over this longitudinal distance shall remain in place.
2. The thickness of the replacement PCCP shall match that of the existing concrete pavement.
3. See Standard Drawing E 506-CCPP-01 for subbase, dowels, and construction joint details.
4. If underdrains are present, they shall be perpetuated in accordance with the details shown on Standard Drawing E 718-UNDR-01.
5. See Standard Drawing E 715-BKFL-01 for pipe backfill trench elevation view.
- ⑥ New subbase type shall match the existing subbase type and thickness.

INDIANA DEPARTMENT OF TRANSPORTATION

### PIPE BACKFILL METHOD 1 EXISTING ROADWAY, TRENCH

SEPTEMBER 2008


STANDARD DRAWING NO. E 715-BKFL-04



DESIGN STANDARDS ENGINEER

/s/ *Richard L. VanCleave* 09/02/08  
DESIGN STANDARDS ENGINEER DATE

/s/ *Mark A. Miller* 09/02/08  
CHIEF HIGHWAY ENGINEER DATE

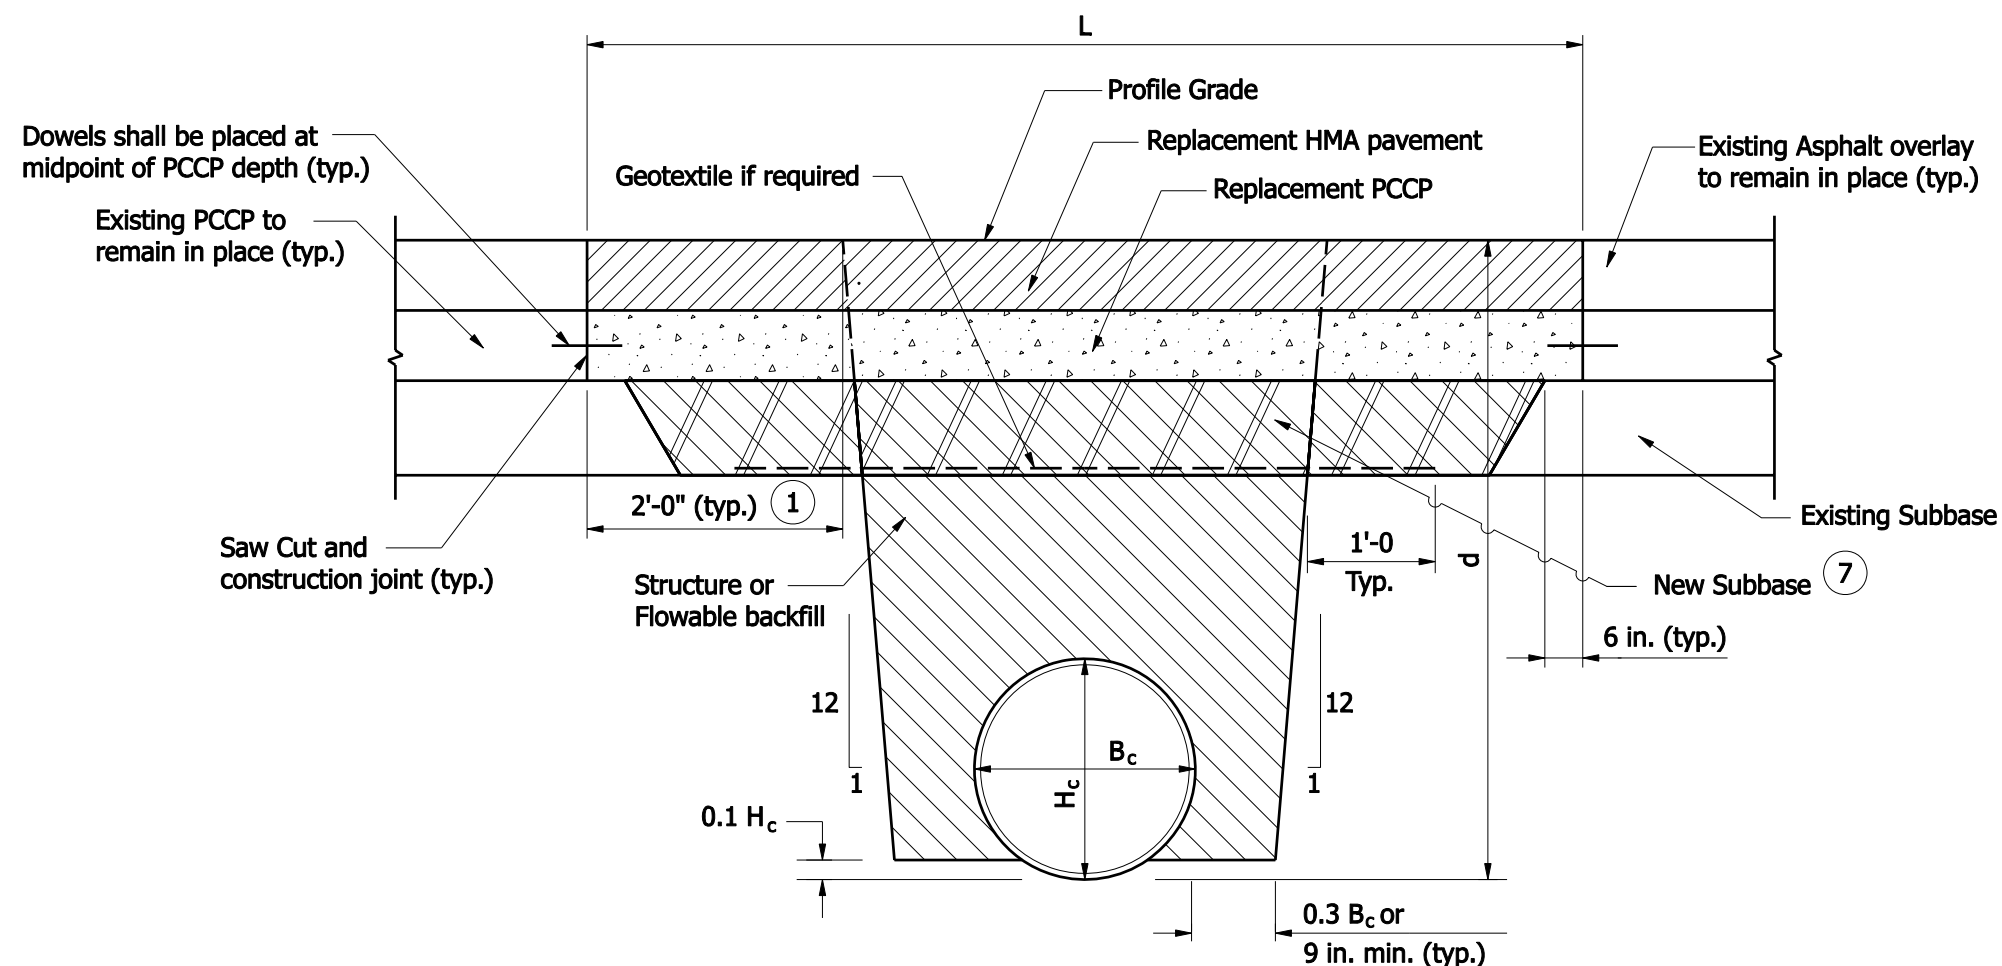

- $L$  = Pay limits of pavement removal and pavement replacement (ft); for cross pipe, measured along roadway centerline; for pipe parallel to roadway centerline, measured perpendicular to pipe centerline.
- $B_c$  = Overall diameter or span (in.)
- $H_c$  = Overall diameter or rise (in.)
- $d$  = Vertical distance from flowline to profile grade (ft)

### COMPOSITE REPLACEMENT PAVEMENT

### NOTES :


- ① Existing subgrade over this distance shall remain in place.
2. The thickness of the replacement PCCP shall match that of the existing concrete pavement.
3. The minimum pavement sections shall be as follows:  
HMA: 165 #/syd HMA Surface, Type A,B,C or D on variable HMA Intermediate, Type A, B, C or D
4. See Standard Drawing E 506-CCPP-01 for subbase, dowels, and construction joint details.
5. If underdrains are present, they shall be perpetuated in accordance with the details shown on Standard Drawing E 718-UNDR-01.
6. See Standard Drawing E 715-BKFL-01 for pipe backfill trench elevation view.
- ⑦ New subbase type shall match the existing subbase type and thickness.

INDIANA DEPARTMENT OF TRANSPORTATION

## PIPE BACKFILL METHOD 1 EXISTING ROADWAY, TRENCH

SEPTEMBER 2008

STANDARD DRAWING NO. E 715-BKFL-05



DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave  
DESIGN STANDARDS ENGINEER

09/02/08  
DATE


/s/ Mark A. Miller  
CHIEF HIGHWAY ENGINEER

09/02/08  
DATE



## LEGEND

$H_c$  = Overall diameter or rise (typ.)  
 $B_c$  = Overall diameter or span  
 $A$  = 8" min. for fill height less than 16'  
       = 12" min. for fill height of 16' or more  
 $T_c$  = Trench cover depth over pipe  
 $W$  = 0.3  $B_c$  or 9", whichever is greater  
 $E$  = Encasement  
 $L_B$  = Backfill length measured from toe to toe of the 2:1 slopes.

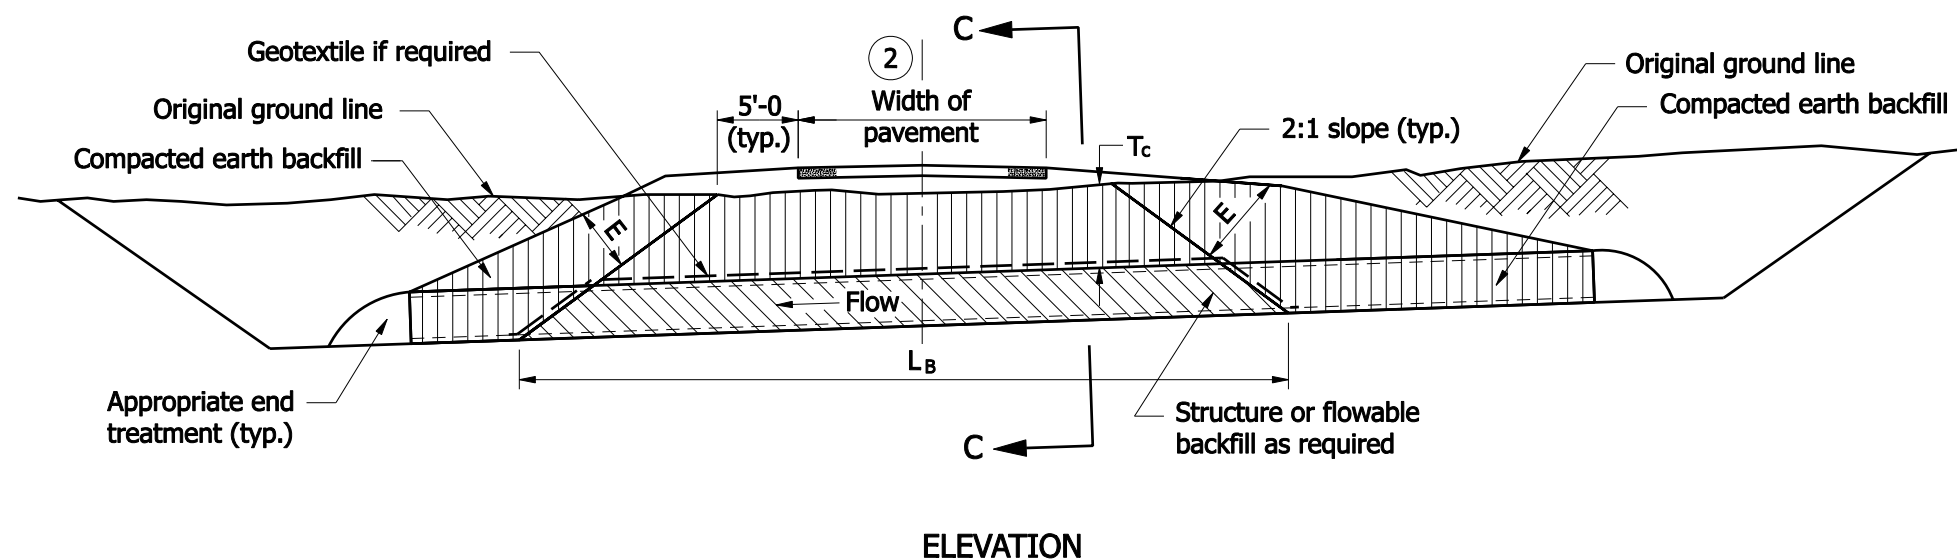

**NOTES :**


1. Protective cover shall be constructed prior to running heavy equipment over installed pipes. The minimum covers are listed below:
  - a.) 1.5' for  $B_c \leq 18"$
  - b.) 3' for  $18" < B_c \leq 54"$
  - c.) 4' for  $B_c > 54"$
2. For backfill purposes, paved shoulders, curbs, and sidewalks are considered pavement. See Standard Drawing E 715-BKFL-10 for pavement limits when curbs, paved shoulders, or sidewalks are present.
3. Flowable or structure backfill shall be encased by compacted earth backfill. The minimum encasement shall be 2 ft. If necessary, the 2:1 slope between the flowable or structure backfill and the encasement shall be modified to maintain the minimum 2 ft encasement.

INDIANA DEPARTMENT OF TRANSPORTATION

## PIPE BACKFILL METHOD 2 NEW OR EXISTING DRIVE

SEPTEMBER 2008


**STANDARD DRAWING NO. E 715-BKFL-06**



<u>/s/ Richard L. VanCleave</u>	<u>09/02/08</u>
DESIGN STANDARDS ENGINEER	DATE



<i>/s/ Mark A. Miller</i>	09/02/08
CHIEF HIGHWAY ENGINEER	DATE

DESIGN STANDARDS ENGINEER

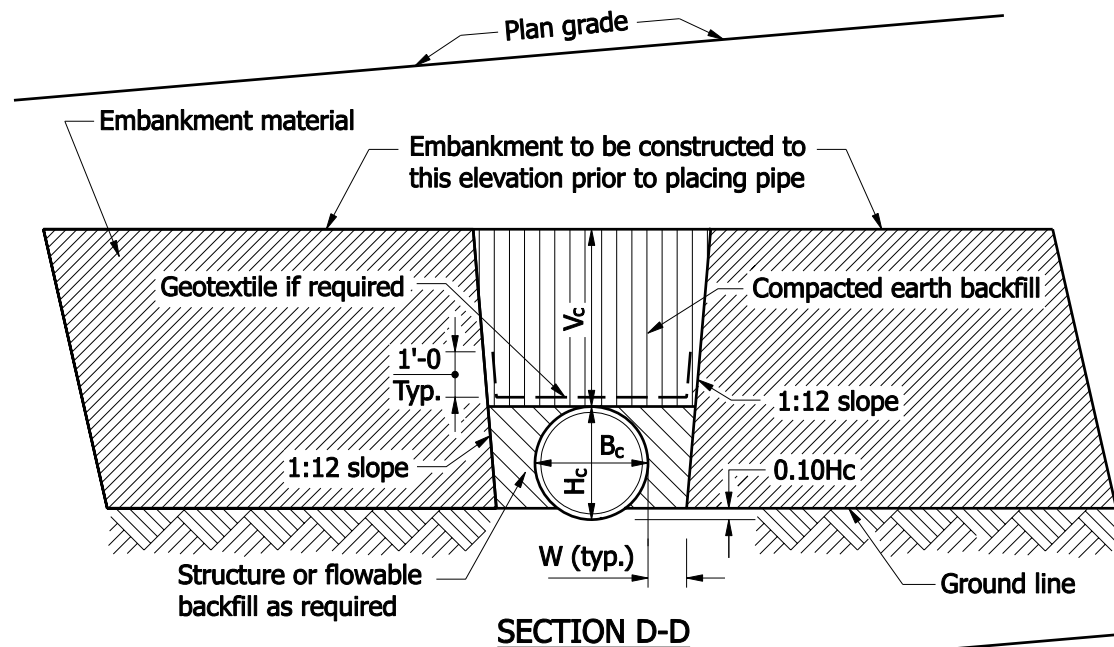

#### LEGEND

$H_c$  = Overall diameter or rise (typ.)  
 $B_c$  = Overall diameter or span  
 $A$  = 8" min. for fill height less than 16'  
           = 12" min. for fill height of 16' or more  
 $V_c$  = 12" for  $B_c \leq 18"$   
           = 18" for  $B_c > 18"$   
 $W$  =  $0.3 B_c$  or 9", whichever is greater  
 $E$  = Encasement  
 $L_B$  = Backfill length measured from toe to toe of the 2:1 slopes.

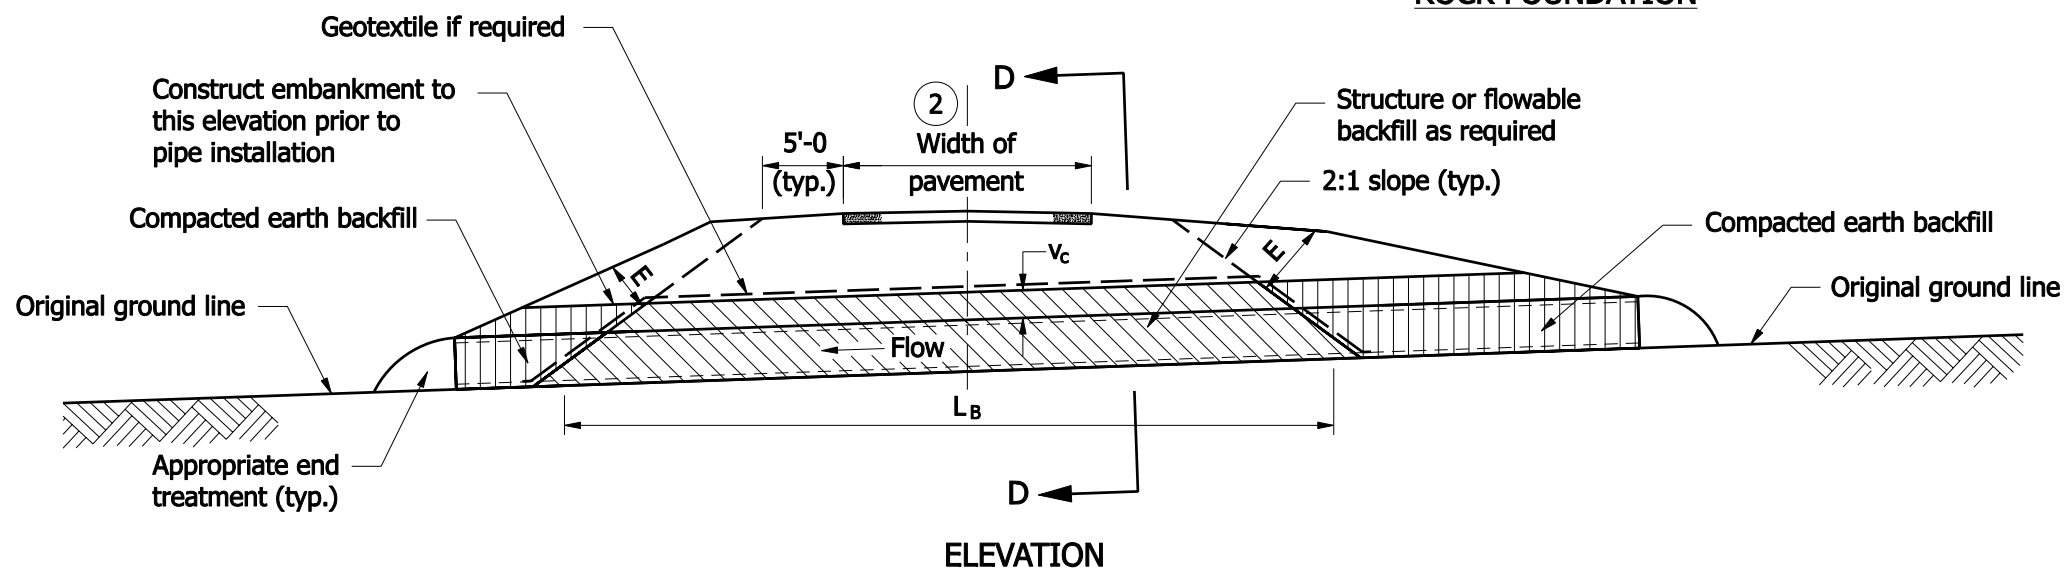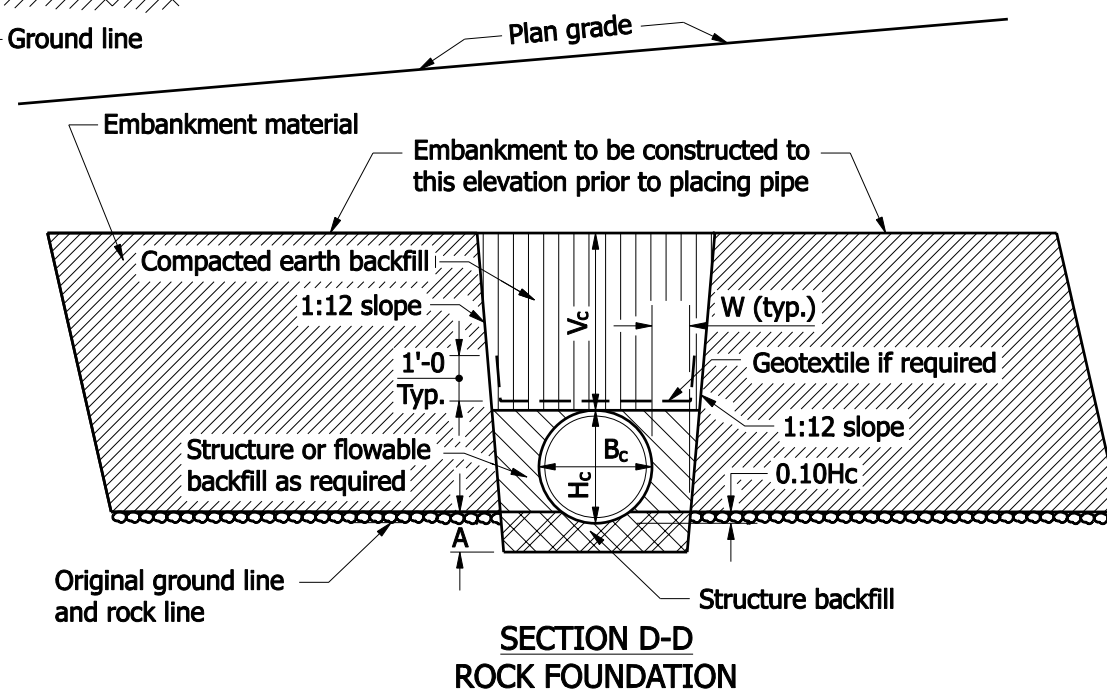

#### NOTES :


- Protective cover shall be constructed prior to running heavy equipment over installed pipes. The minimum covers are listed below:
  - 1.5' for  $B_c \leq 18"$
  - 3' for  $18" < B_c \leq 54"$
  - 4' for  $B_c > 54"$
- For backfill purposes, paved shoulders, curbs, and sidewalks are considered pavement. See Standard Drawing E 715-BKFL-10 for pavement limits when curbs, paved shoulders, or sidewalks are present.
- Flowable or structure backfill shall be encased by compacted earth backfill. The minimum encasement shall be 2 ft. If necessary, the 2:1 slope between the flowable or structure backfill and the encasement shall be modified to maintain the minimum 2 ft encasement.

INDIANA DEPARTMENT OF TRANSPORTATION

PIPE BACKFILL METHOD 2  
NEW OR EXISTING DRIVE

SEPTEMBER 2008

STANDARD DRAWING NO. E 715-BKFL-07




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave  
DESIGN STANDARDS ENGINEER

09/02/08  
DATE


/s/ Mark A. Miller  
CHIEF HIGHWAY ENGINEER

09/02/08  
DATE

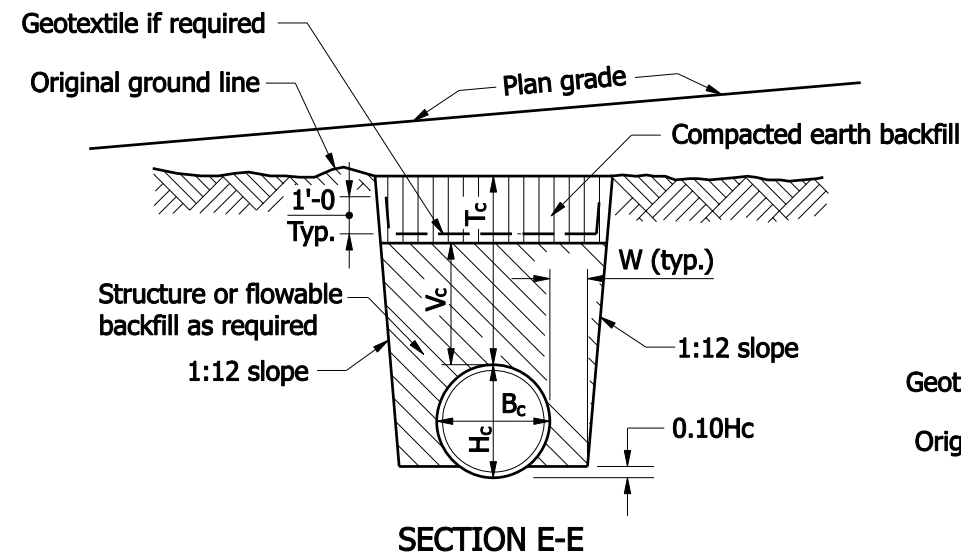


#### LEGEND

$H_c$  = Overall diameter or rise (typ.)  
 $B_c$  = Overall diameter or span  
 $A$  = 8" min. for fill height less than 16'  
           = 12" min. for fill height of 16' or more  
 $V_c$  = 12" for  $B_c \leq 18"$   
           = 18" for  $B_c > 18"$   
 $T_c$  = Trench cover depth over pipe  
 $W$  =  $0.3 B_c$  or 9", whichever is greater  
 $L_B$  = Backfill length measured from toe to toe of the 2:1 slopes.

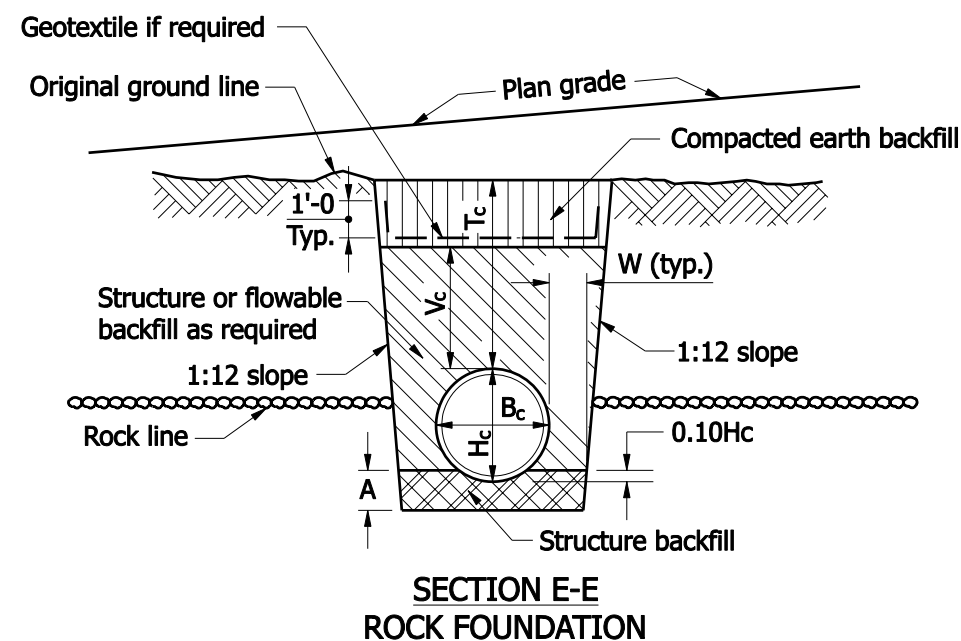

#### NOTES :

1. Protective cover shall be constructed prior to running heavy equipment over installed pipes. The minimum covers are listed below:
  - a.) 1.5' for  $B_c \leq 18"$
  - b.) 3' for  $18" < B_c \leq 54"$
  - c.) 4' for  $B_c > 54"$
2. For backfill purposes, paved shoulders, curbs, and sidewalks are considered pavement. See Standard Drawing E 715-BKFL-10 for pavement limits when curbs, paved shoulders, or sidewalks are present.

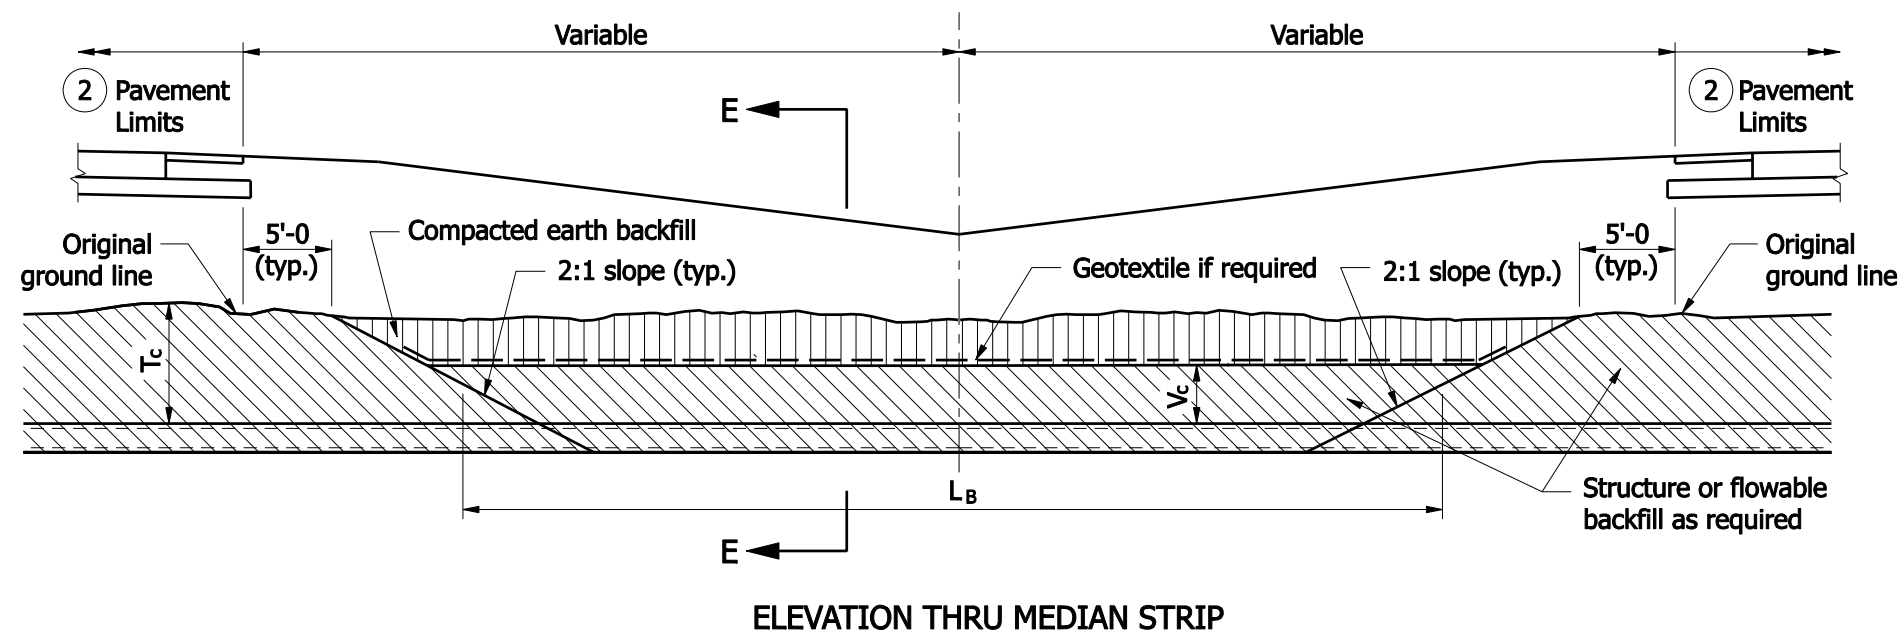


INDIANA DEPARTMENT OF TRANSPORTATION

### PIPE BACKFILL METHOD 3 MEDIAN INSTALLATION, TRENCH

SEPTEMBER 2008


STANDARD DRAWING NO. E 715-BKFL-08



DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave* 09/02/08  
 DESIGN STANDARDS ENGINEER DATE


*/s/ Mark A. Miller* 09/02/08  
 CHIEF HIGHWAY ENGINEER DATE

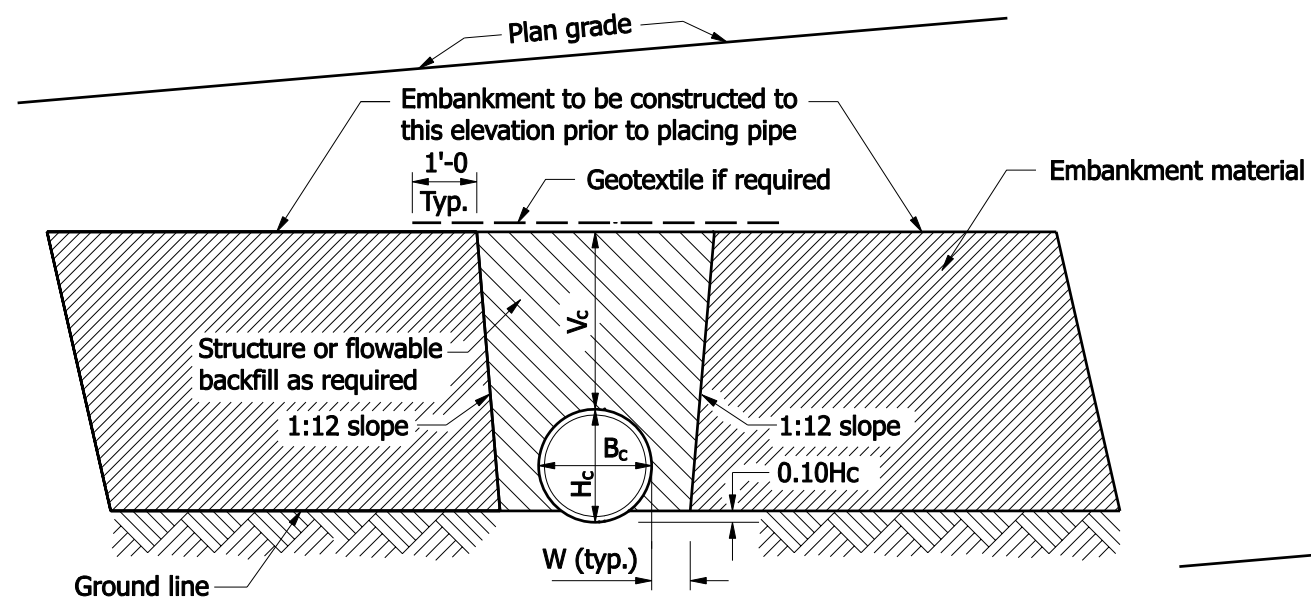

SECTION F-F

# LEGEND


$H_c$  = Overall diameter or rise (typ.)  
 $B_c$  = Overall diameter or span  
 $A$  = 8" min. for fill height less than 16'  
           = 12" min. for fill height of 16' or more  
 $V_c$  = 12" for  $B_c \leq 18"$   
           = 18" for  $B_c > 18"$   
 $W$  =  $0.3 B_c$  or 9", whichever is greater  
 $L_B$  = Backfill length measured from toe to toe of the 2:1 slopes.

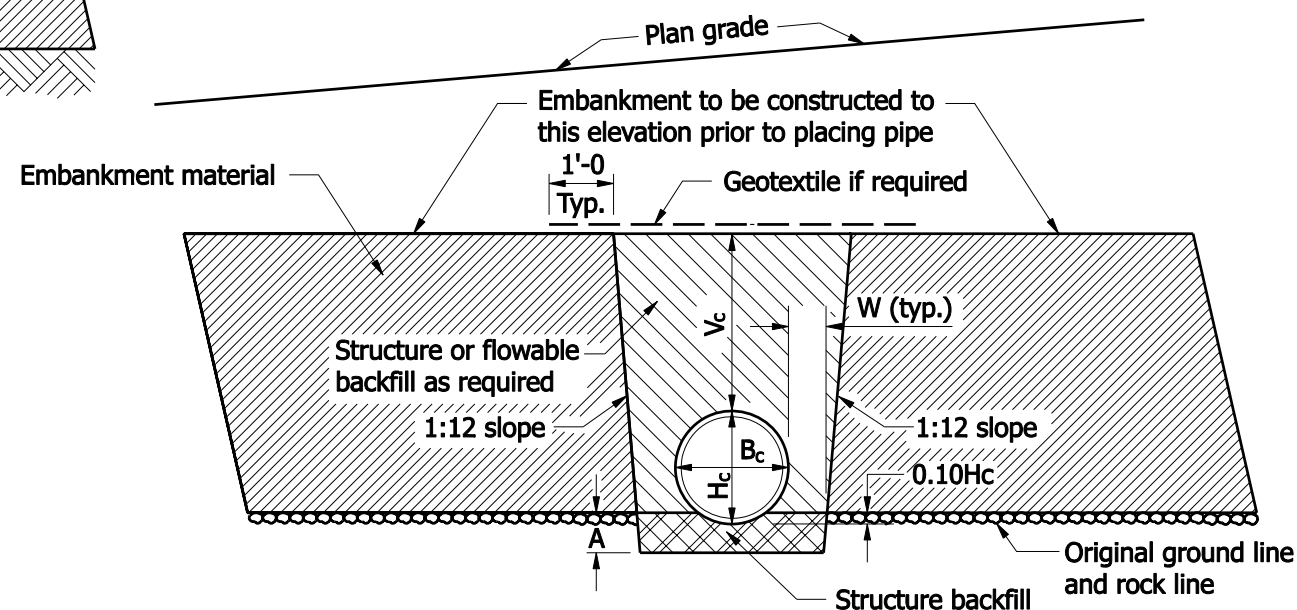

SECTION F-F  
ROCK FOUNDATION

## NOTES :

- Protective cover shall be constructed prior to running heavy equipment over installed pipes. The minimum covers are listed below:
  - 1.5' for  $B_c \leq 18"$
  - 3' for  $18" < B_c \leq 54"$
  - 4' for  $B_c > 54"$
- For backfill purposes, paved shoulders, curbs, and sidewalks are considered pavement. See Standard Drawing E 715-BKFL-10 for pavement limits when curbs, paved shoulders, or sidewalks are present.

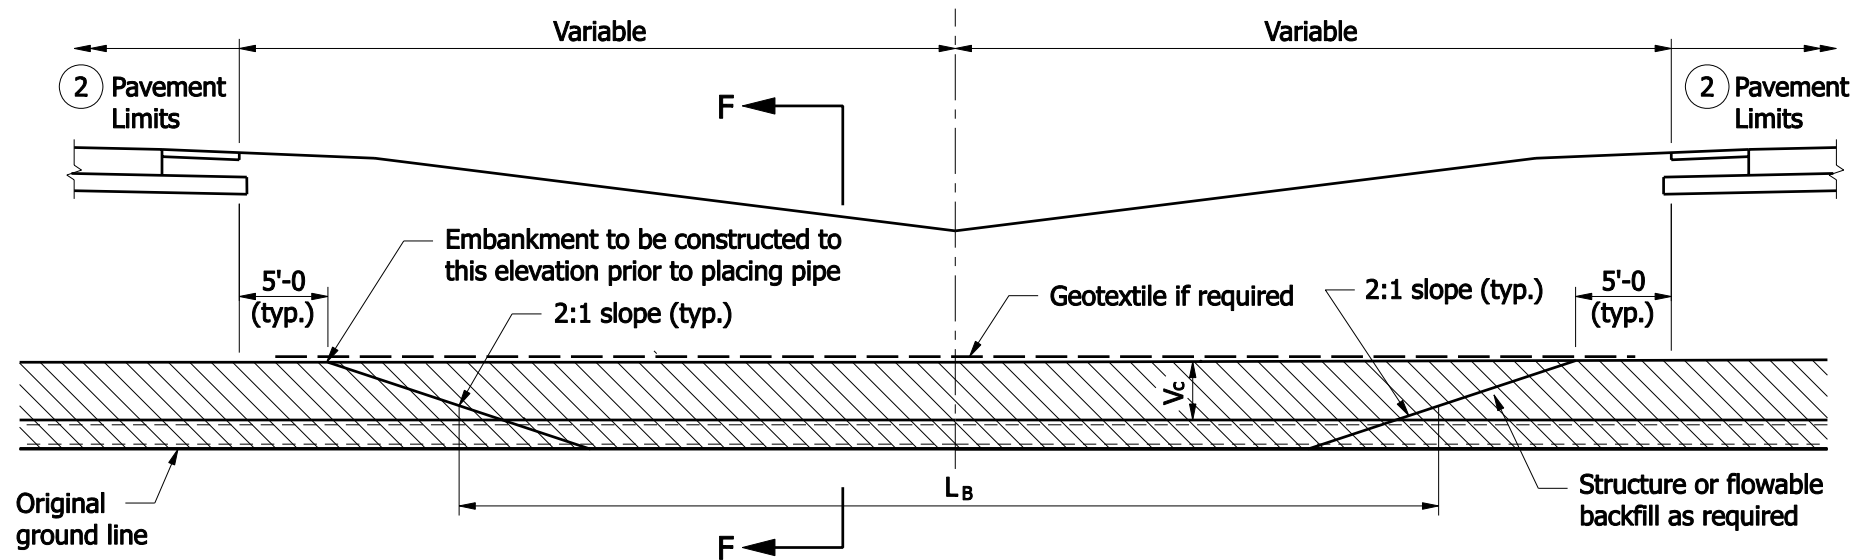


ELEVATION THRU MEDIAN STRIP

INDIANA DEPARTMENT OF TRANSPORTATION

PIPE BACKFILL METHOD 1  
MEDIAN INSTALLATION, EMBANKMENT

SEPTEMBER 2008

STANDARD DRAWING NO. E 715-BKFL-09



DESIGN STANDARDS ENGINEER

/s/ Richard L. Van Cleave 09/02/08  
DESIGN STANDARDS ENGINEER DATE


/s/ Mark A. Miller 09/02/08  
CHIEF HIGHWAY ENGINEER DATE

**LEGEND**

- (C) Curb
- (P) Pavement Limits \*
- (S) Sidewalk
- (T) Travel Lane
- (U) Utility Strip
- (V) Paved Shoulder


\* For backfill placement and computation

**EDGE OF TRAVELWAY**

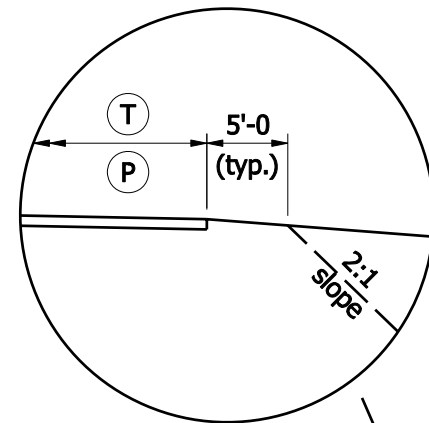


or

**BACK OF CURB**

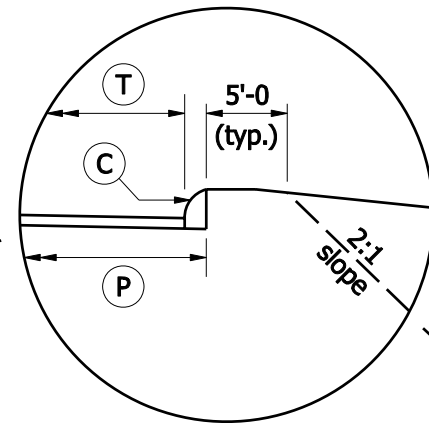


or


**EDGE OF SIDEWALK  
ADJACENT TO CURB**

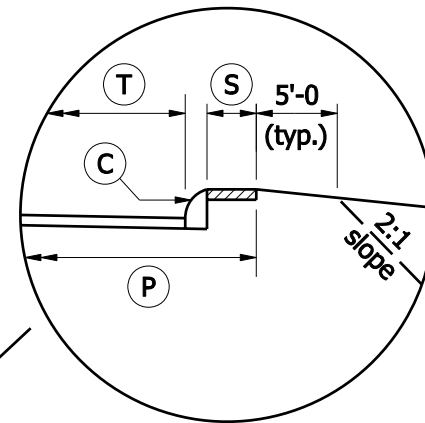


**EDGE OF SIDEWALK  
ADJACENT TO UTILITY  
STRIP**

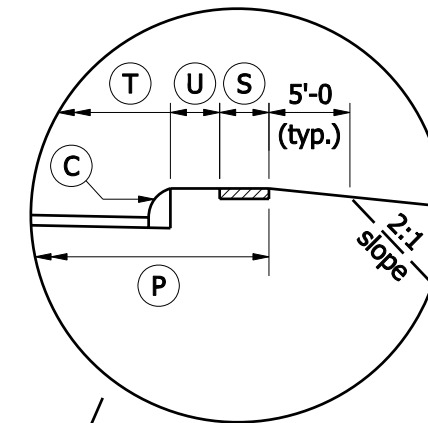

**EDGE OF PAVED  
SHOULDER**

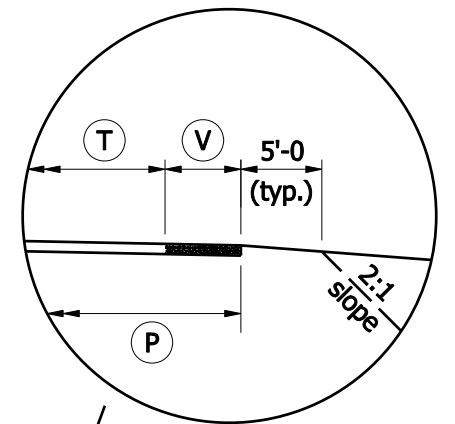

or

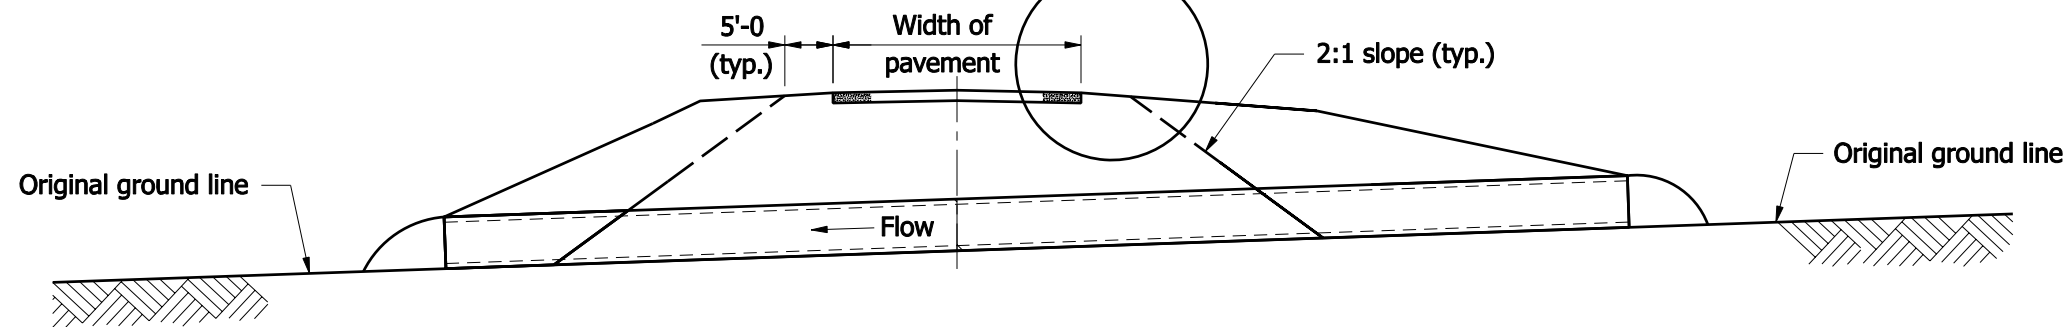


**ELEVATION**

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE BACKFILL  
LIMIT DETERMINATION**

SEPTEMBER 2007

STANDARD DRAWING NO. E 715-BKFL-10




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/04/07  
DESIGN STANDARDS ENGINEER DATE


/s/ Mark A. Miller 09/04/07  
CHIEF HIGHWAY ENGINEER DATE






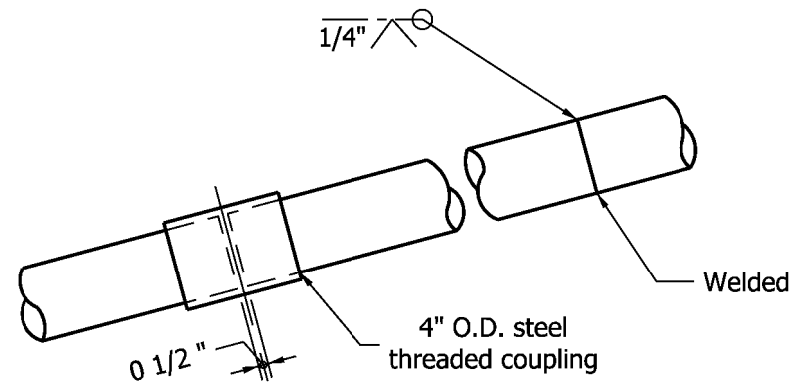


OPTIONAL COUPLING

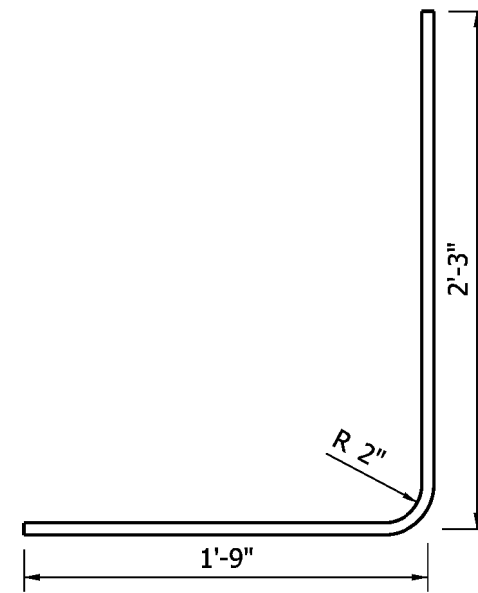

501 x 4'-0"

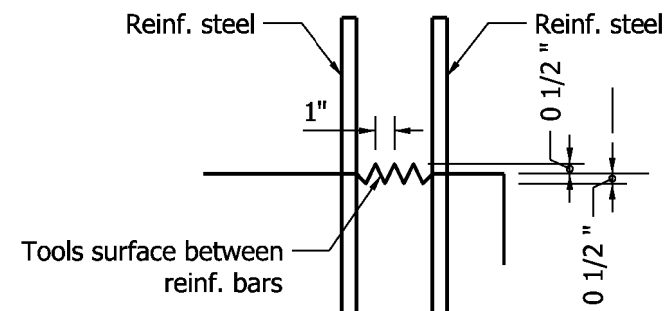

TYPE A CONSTRUCTION JOINT

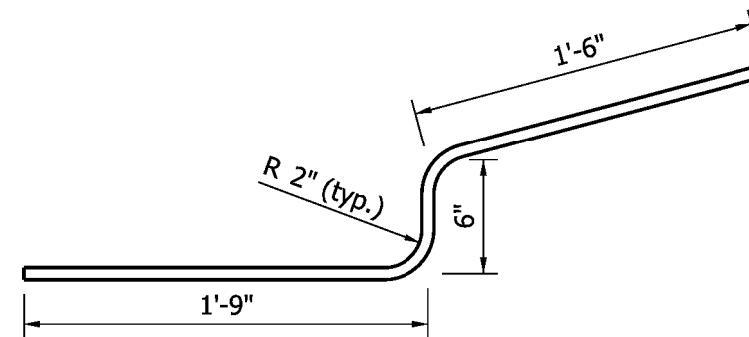


502 x 3'-9"

INDIANA DEPARTMENT OF TRANSPORTATION

GRATED BOX END SECTION  
TYPE 1

SEPTEMBER 2009



STANDARD DRAWING NO. E 715-GBTO-02



DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE


/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

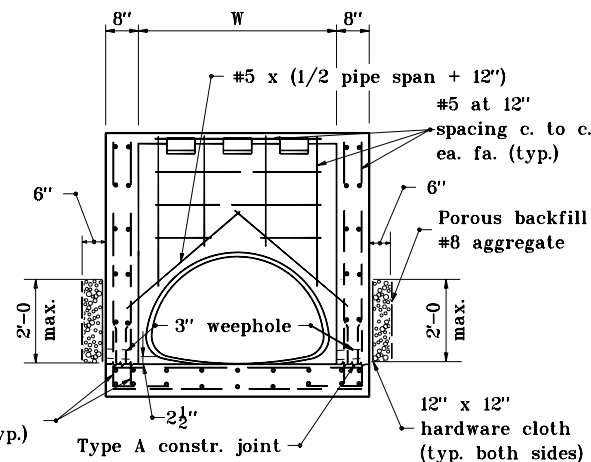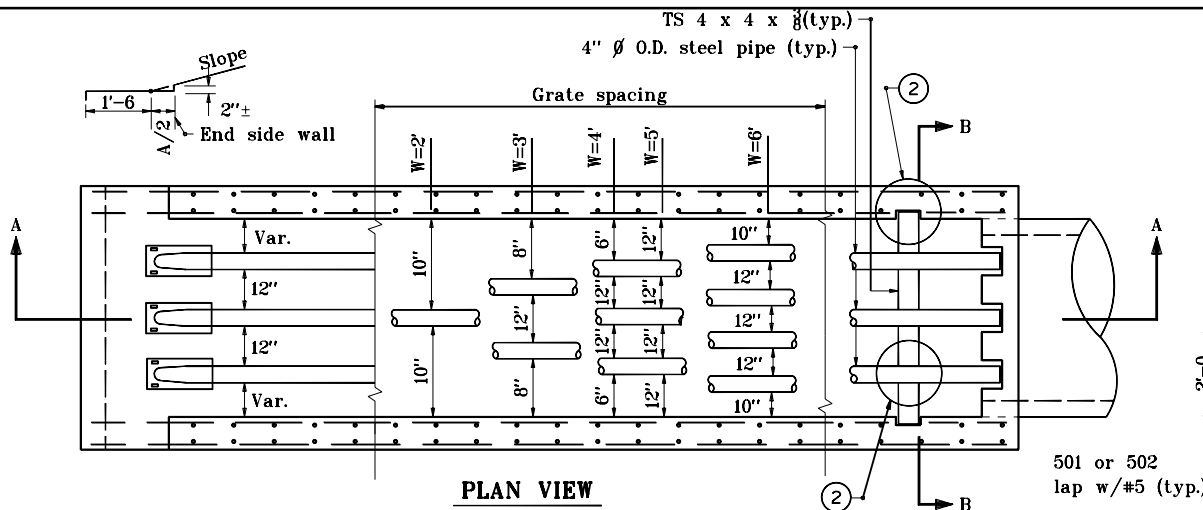

### GRATE REMOVED SECTION B-B

#### GENERAL NOTES

- The invert grade of the grated box end section shall be the same as that of the pipe.
- See Standard Drawing E 715-GBT0-04 for Details A, B, C, and D.
- See Standard Drawings E 715-GBT0-05 through -08 for tables.
- Type I grated box end sections shall be used for mainline cross-culverts' outlet pipes within the clear zone.
- See Standard Drawing E 715-GBT0-02 for bending diagrams.

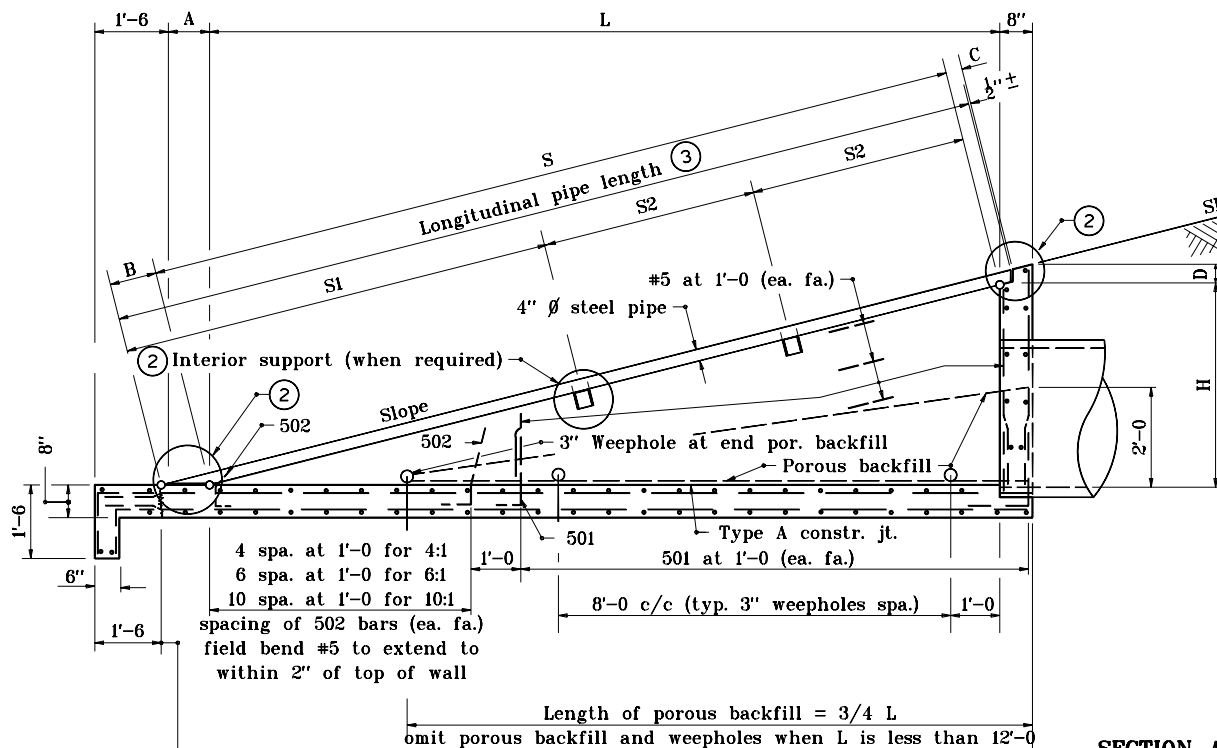


### SECTION A-A

INDIANA DEPARTMENT OF TRANSPORTATION

### GRATED BOX END SECTION TYPE I

JANUARY 1999

STANDARD DRAWING NO. E 715-GBT0-03




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 1-04-99

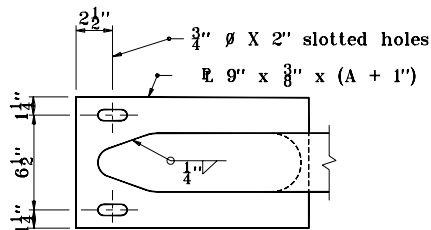


**PLAN**

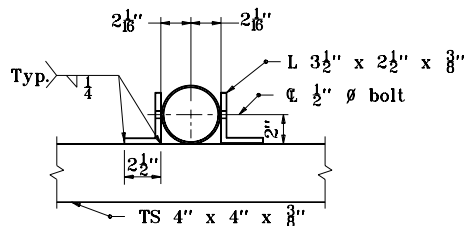


**SECTION L-L**

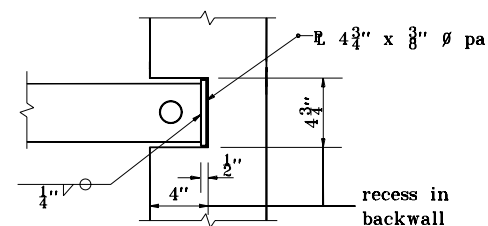


**PLAN**

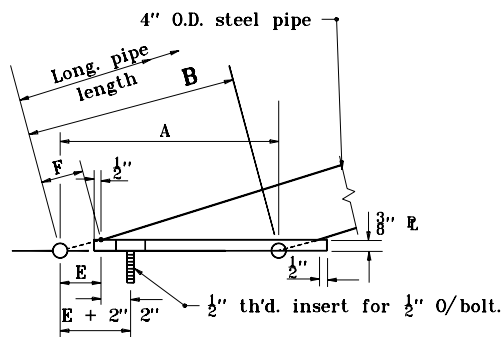


**DETAIL A**

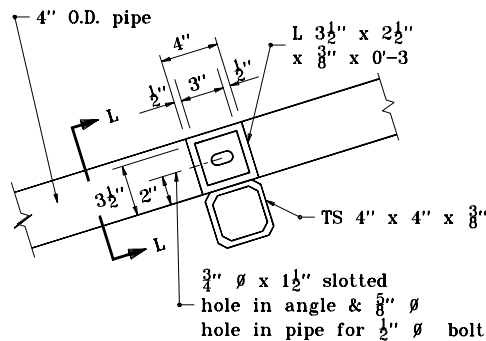


**DETAIL B**

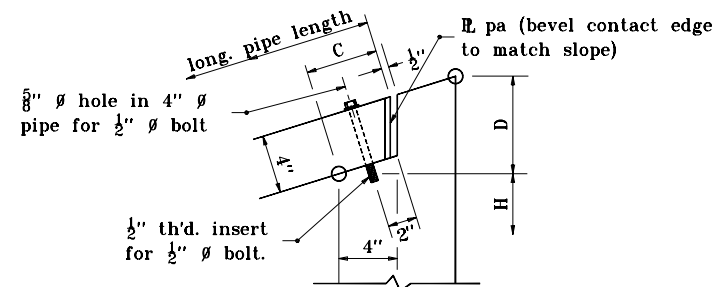

**DETAIL C**

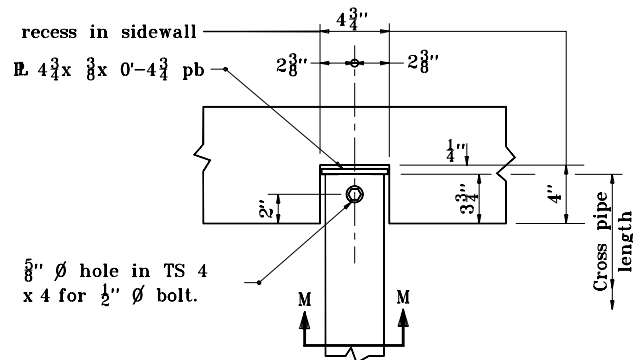

**DETAIL D**

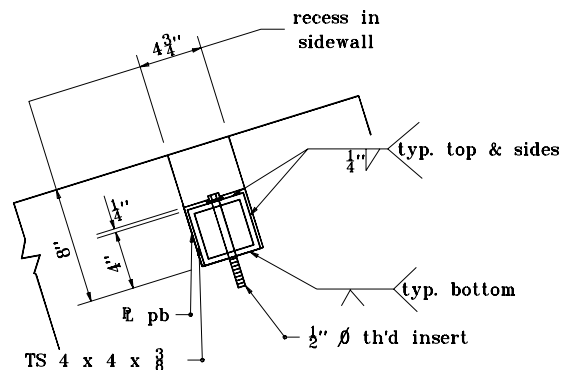

**SECTION M-M**


INDIANA DEPARTMENT OF TRANSPORTATION

**GRATED BOX END SECTION**

**TYPE I**

JANUARY 1999

**STANDARD DRAWING NO.E 715-GBT0-04**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-04-99

2 : 1 SLOPE										
CULVERT SIZE	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	SI	S2
12	2'-0"	4'-0"	2'-0"	4'-5 $\frac{1}{2}$ "	1	5'-7 $\frac{1}{2}$ "	-	-	5'-1 $\frac{1}{2}$ "	-
15 & 18	2'-6"	5'-0"	2'-0"	5'-7"	1	6'-9"	1	2'-7 $\frac{1}{2}$ "	4'-9 $\frac{1}{2}$ "	1'-6"
21 & 24	3'-0"	6'-0"	3'-0"	6'-8 $\frac{1}{2}$ "	2	7'-10 $\frac{1}{2}$ "	-	-	7'-4 $\frac{1}{2}$ "	-
27 & 30	3'-6"	7'-0"	3'-0"	7'-9 $\frac{1}{2}$ "	2	10'-1 $\frac{1}{2}$ "	-	-	8'-5 $\frac{1}{2}$ "	-
33 & 36	4'-0"	8'-0"	4'-0"	8'-11 $\frac{1}{2}$ "	3	10'-11 $\frac{1}{2}$ "	-	-	9'-7 $\frac{1}{2}$ "	-
42	4'-6"	9'-0"	4'-0"	10'-0 $\frac{1}{2}$ "	3	11'-1 $\frac{1}{2}$ "	-	-	10'-8 $\frac{1}{2}$ "	-
48	5'-0"	10'-0"	5'-0"	11'-2 $\frac{1}{2}$ "	3	12'-4 $\frac{1}{2}$ "	-	-	11'-10 $\frac{1}{2}$ "	-
54	5'-6"	11'-0"	6'-0"	12'-3 $\frac{1}{2}$ "	4	13'-5 $\frac{1}{2}$ "	1	6'-7 $\frac{1}{2}$ "	9'-11 $\frac{1}{2}$ "	3'-0"
60	6'-0"	12'-0"	6'-0"	13'-5"	4	14'-7"	1	6'-7 $\frac{1}{2}$ "	11'-1"	3'-0"


3 : 1 SLOPE										
CULVERT SIZE	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	SI	S2
12	2'-0"	6'-0"	2'-0"	6'-3 $\frac{1}{2}$ "	1	7'-9"	1	2'-7 $\frac{1}{2}$ "	5'-3 $\frac{1}{2}$ "	2'-0"
15 & 18	2'-6"	7'-6"	2'-0"	7'-10 $\frac{1}{2}$ "	1	9'-3 $\frac{1}{2}$ "	1	2'-7 $\frac{1}{2}$ "	5'-4 $\frac{1}{2}$ "	3'-6"
21 & 24	3'-0"	9'-0"	3'-0"	9'-5 $\frac{1}{2}$ "	2	10'-10 $\frac{1}{2}$ "	1	3'-7 $\frac{1}{2}$ "	6'-11 $\frac{1}{2}$ "	3'-6"
27 & 30	3'-6"	10'-6"	3'-0"	11'-0 $\frac{1}{2}$ "	2	12'-5 $\frac{1}{2}$ "	1	3'-7 $\frac{1}{2}$ "	8'-6 $\frac{1}{2}$ "	3'-6"
33 & 36	4'-0"	12'-0"	4'-0"	12'-7 $\frac{1}{2}$ "	3	14'-0 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	10'-1 $\frac{1}{2}$ "	3'-6"
42	4'-6"	13'-6"	4'-0"	14'-2 $\frac{1}{2}$ "	3	15'-7 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	10'-8 $\frac{1}{2}$ "	4'-6"
48	5'-0"	15'-0"	5'-0"	15'-9 $\frac{1}{2}$ "	3	17'-2 $\frac{1}{2}$ "	1	5'-7 $\frac{1}{2}$ "	12'-3 $\frac{1}{2}$ "	4'-6"
54	5'-6"	16'-6"	6'-0"	17'-4 $\frac{1}{2}$ "	4	18'-9 $\frac{1}{2}$ "	1	6'-7 $\frac{1}{2}$ "	10'-4 $\frac{1}{2}$ "	8'-0"
60	6'-0"	18'-0"	6'-0"	18'-11 $\frac{1}{2}$ "	4	20'-4 $\frac{1}{2}$ "	1	6'-7 $\frac{1}{2}$ "	11'-11 $\frac{1}{2}$ "	8'-0"

4 : 1 SLOPE										
CULVERT SIZE	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	SI	S2
12	2'-0"	8'-0"	2'-0"	8'-3"	1	9'-11 $\frac{1}{2}$ "	1	2'-7 $\frac{1}{2}$ "	5'-7"	4'-0"
15 & 18	2'-6"	10'-0"	2'-0"	10'-3 $\frac{1}{2}$ "	1	12'-0 $\frac{1}{2}$ "	2	2'-7 $\frac{1}{2}$ "	5'-7 $\frac{1}{2}$ "	3'-0"
21 & 24	3'-0"	12'-0"	3'-0"	12'-4 $\frac{1}{2}$ "	2	14'-1"	1	3'-7 $\frac{1}{2}$ "	9'-2 $\frac{1}{2}$ "	4'-6"
27 & 30	3'-6"	14'-0"	3'-0"	14'-5 $\frac{1}{2}$ "	2	16'-1 $\frac{1}{2}$ "	1	3'-7 $\frac{1}{2}$ "	9'-3 $\frac{1}{2}$ "	6'-6"
33 & 36	4'-0"	16'-0"	4'-0"	16'-5 $\frac{1}{2}$ "	3	18'-2 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	11'-3 $\frac{1}{2}$ "	6'-6"
42	4'-6"	18'-0"	4'-0"	18'-6 $\frac{1}{2}$ "	3	20'-3 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	12'-4 $\frac{1}{2}$ "	7'-6"
48	5'-0"	20'-0"	5'-0"	20'-7 $\frac{1}{2}$ "	3	22'-4"	1	5'-7 $\frac{1}{2}$ "	11'-5 $\frac{1}{2}$ "	10'-6"
54	5'-6"	22'-0"	6'-0"	22'-8 $\frac{1}{2}$ "	4	24'-4 $\frac{1}{2}$ "	1	6'-7 $\frac{1}{2}$ "	12'-6 $\frac{1}{2}$ "	11'-6"
60	6'-0"	24'-0"	6'-0"	24'-8 $\frac{1}{2}$ "	4	26'-5 $\frac{1}{2}$ "	2	6'-7 $\frac{1}{2}$ "	12'-6 $\frac{1}{2}$ "	6'-9"

5 : 1 SLOPE										
CULVERT SIZE	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	SI	S2
12	2'-0"	10'-0"	2'-0"	10'-2 $\frac{1}{2}$ "	1	12'-2 $\frac{1}{2}$ "	2	2'-7 $\frac{1}{2}$ "	6'-2 $\frac{1}{2}$ "	2'-10"
15 & 18	2'-6"	12'-6"	2'-0"	12'-9"	1	14'-9 $\frac{1}{2}$ "	2	2'-7 $\frac{1}{2}$ "	5'-11"	4'-3"
21 & 24	3'-0"	15'-0"	3'-0"	15'-3 $\frac{1}{2}$ "	2	17'-4"	1	3'-7 $\frac{1}{2}$ "	9'-2 $\frac{1}{2}$ "	7'-9"
27 & 30	3'-6"	17'-6"	3'-0"	17'-10 $\frac{1}{2}$ "	2	19'-10 $\frac{1}{2}$ "	2	3'-7 $\frac{1}{2}$ "	9'-6 $\frac{1}{2}$ "	5'-0"
33 & 36	4'-0"	20'-0"	4'-0"	20'-4 $\frac{1}{2}$ "	3	22'-5 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	13'-0 $\frac{1}{2}$ "	9'-0"
42	4'-6"	22'-6"	4'-0"	22'-11 $\frac{1}{2}$ "	3	24'-11 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	13'-1 $\frac{1}{2}$ "	11'-6"
48	5'-0"	25'-0"	5'-0"	25'-6"	3	27'-6 $\frac{1}{2}$ "	2	5'-7 $\frac{1}{2}$ "	13'-2"	7'-0"
54	5'-6"	27'-6"	6'-0"	28'-0 $\frac{1}{2}$ "	4	30'-0 $\frac{1}{2}$ "	2	6'-7 $\frac{1}{2}$ "	13'-2 $\frac{1}{2}$ "	8'-3"
60	6'-0"	30'-0"	6'-0"	30'-7 $\frac{1}{2}$ "	4	32'-7 $\frac{1}{2}$ "	2	6'-7 $\frac{1}{2}$ "	11'-9 $\frac{1}{2}$ "	10'-3"

6 : 1 SLOPE										
CULVERT SIZE	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	SI	S2
12	2'-0"	12'-0"	2'-0"	12'-2"	1	14'-6 $\frac{1}{2}$ "	2	2'-7 $\frac{1}{2}$ "	6'-2"	4'-0"
15 & 18	2'-6"	15'-0"	2'-0"	15'-2 $\frac{1}{2}$ "	1	17'-6 $\frac{1}{2}$ "	2	2'-7 $\frac{1}{2}$ "	6'-8 $\frac{1}{2}$ "	5'-3"
21 & 24	3'-0"	18'-0"	3'-0"	18'-3"	2	20'-7 $\frac{1}{2}$ "	2	3'-7 $\frac{1}{2}$ "	9'-9"	5'-3"
27 & 30	3'-6"	21'-0"	3'-0"	21'-3 $\frac{1}{2}$ "	2	23'-7 $\frac{1}{2}$ "	2	3'-7 $\frac{1}{2}$ "	9'-9 $\frac{1}{2}$ "	6'-9"
33 & 36	4'-0"	24'-0"	4'-0"	24'-4"	3	26'-8 $\frac{1}{2}$ "	2	4'-7 $\frac{1}{2}$ "	13'-4"	6'-6"
42	4'-6"	27'-0"	4'-0"	27'-4 $\frac{1}{2}$ "	3	29'-8 $\frac{1}{2}$ "	2	4'-7 $\frac{1}{2}$ "	13'-4 $\frac{1}{2}$ "	8'-0"
48	5'-0"	30'-0"	5'-0"	30'-5"	3	32'-9 $\frac{1}{2}$ "	2	5'-7 $\frac{1}{2}$ "	13'-5"	9'-6"
54	5'-6"	33'-0"	6'-0"	33'-5 $\frac{1}{2}$ "	4	35'-9 $\frac{1}{2}$ "	2	6'-7 $\frac{1}{2}$ "	12'-11 $\frac{1}{2}$ "	11'-3"
60	6'-0"	36'-0"	6'-0"	36'-6"	4	38'-10 $\frac{1}{2}$ "	3	6'-7 $\frac{1}{2}$ "	13'-0"	8'-6"


APPROXIMATE QUANTITIES																				
PIPE DIAMETER	2 : 1 SLOPE				3 : 1 SLOPE				4 : 1 SLOPE				5 : 1 SLOPE				6 : 1 SLOPE			
	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.
	Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe		
12	1.1	1.1	290	80	1.4	1.4	375	160	1.7	1.7	465	195	2.1	2.1	555	275	2.4	2.4	645	305
15 & 18	1.3	1.3	345	145	1.8	1.8	460	180	2.2	2.2	575	270	2.8	2.8	690	305	3.0	3.0	805	345
21 & 24	1.9	1.9	460	215	2.5	2.5	620	370	3.1	3.1	775	460	3.7	3.8	935	545	4.3	4.4	1090	705
27 & 30	2.1	2.2	525	245	2.9	3.0	715	410	3.6	3.7	905	510	4.4	4.5	1095	680	5.2	5.3	1285	780
33 & 36	2.8	2.9	670	410	3.8	3.9	910	660	4.8	4.9	1150	825	5.9	6.0	1395	995	6.9	7.0	1640	1255
42	3.2	3.3	745	450	4.4	4.5	1025	720	5.6	5.7	1305	905	6.8	6.9	1585	1090	8.0	8.1	1870	1370
48	4.0	4.1	1.1	910	5.5	5.6	1250	80	8.5	8.7	1940	1310	10.1	10.2	1940	1310	10.1	10.2	2285	1515
54	4.9	5.1	1090	845	6.8	6.9	1500	1125	8.6	8.8	1915	1415	10.5	10.7	2330	1845	12.4	12.6	2745	2145
60	5.4	5.8	1180	900	7.8	7.7	1640	1205	9.8	9.8	2105	1850	11.7	11.9	2570	1970	13.8	14.0	3035	2425

INDIANA DEPARTMENT OF TRANSPORTATION	
GRADED BOX END SECTION TYPE I	
DIMENSIONS AND QUANTITIES	
JANUARY 1999	
STANDARD DRAWING NO.E 715-GBT0-05	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 1-04-99

2:1 SLOPE										
Pipe Size	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	S 1	S 2
17 x 13	1'-9"	3'-6"	2'-0"	3'-11"	1	5'-0 $\frac{7}{8}$ "	-	-	4'-7"	-
21 x 15	1'-11"	3'-10"	2'-0"	4'-3 $\frac{1}{2}$ "	1	5'-5 $\frac{3}{8}$ "	-	-	4'-11 $\frac{3}{8}$ "	-
24 x 18	2'-2"	4'-4"	3'-0"	4'-10 $\frac{1}{8}$ "	2	6'-0 $\frac{1}{8}$ "	-	-	5'-6 $\frac{1}{8}$ "	-
28 x 20	2'-4"	4'-8"	3'-0"	5'-2 $\frac{1}{2}$ "	2	6'-4 $\frac{3}{8}$ "	-	-	5'-10 $\frac{3}{8}$ "	-
35 x 24	2'-8"	5'-4"	4'-0"	5'-11 $\frac{1}{2}$ "	3	7'-1 $\frac{1}{2}$ "	-	-	6'-7 $\frac{1}{2}$ "	-
42 x 29	3'-1"	6'-2"	4'-0"	6'-10 $\frac{3}{4}$ "	3	8'-0 $\frac{3}{4}$ "	-	-	7'-6 $\frac{3}{4}$ "	-
49 x 33	3'-5"	6'-10"	5'-0"	7'-7 $\frac{3}{8}$ "	3	8'-9 $\frac{3}{8}$ "	-	-	8'-3 $\frac{3}{8}$ "	-
57 x 38	3'-10"	7'-8"	5'-0"	8'-6 $\frac{1}{8}$ "	3	9'-8 $\frac{1}{8}$ "	-	-	9'-2 $\frac{1}{8}$ "	-
64 x 43	4'-3"	8'-6"	6'-0"	9'-6"	4	10'-8"	-	-	10'-2"	-
71 x 47	4'-7"	9'-2"	6'-0"	10'-3"	4	11'-5"	-	-	10'-11"	-


3:1 SLOPE										
Pipe Size	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	S 1	S 2
17 x 13	1'-9"	5'-3"	2'-0"	5'-6 $\frac{3}{8}$ "	1	6'-11 $\frac{1}{8}$ "	1	2'-7 $\frac{1}{2}$ "	5'-0 $\frac{3}{8}$ "	1'-6"
21 x 15	1'-11"	5'-9"	2'-0"	6'-0 $\frac{3}{8}$ "	1	7'-5 $\frac{3}{8}$ "	1	2'-7 $\frac{1}{2}$ "	5'-0 $\frac{3}{8}$ "	2'-0"
24 x 18	2'-2"	6'-6"	3'-0"	6'-10 $\frac{1}{4}$ "	2	8'-3 $\frac{1}{4}$ "	-	-	7'-10 $\frac{1}{4}$ "	-
28 x 20	2'-4"	7'-0"	3'-0"	7'-4 $\frac{1}{2}$ "	2	8'-9 $\frac{3}{8}$ "	-	-	8'-4 $\frac{1}{2}$ "	-
35 x 24	2'-8"	8'-0"	4'-0"	8'-5 $\frac{1}{4}$ "	3	9'-10 $\frac{1}{4}$ "	-	-	9'-5 $\frac{1}{4}$ "	-
42 x 29	3'-1"	9'-3"	4'-0"	9'-9"	3	11'-2"	-	-	10'-9"	-
49 x 33	3'-5"	10'-3"	5'-0"	10'-9 $\frac{5}{8}$ "	3	12'-2 $\frac{3}{8}$ "	-	-	11'-9 $\frac{5}{8}$ "	-
57 x 38	3'-10"	11'-6"	5'-0"	12'-1 $\frac{1}{2}$ "	3	13'-6 $\frac{1}{2}$ "	1	5'-7 $\frac{1}{2}$ "	10'-1 $\frac{1}{2}$ "	3'-0"
64 x 43	4'-3"	12'-9"	6'-0"	13'-5 $\frac{1}{4}$ "	4	14'-10 $\frac{3}{8}$ "	1	6'-7 $\frac{1}{2}$ "	11'-5 $\frac{1}{4}$ "	3'-0"
71 x 47	4'-7"	13'-9"	6'-0"	14'-5 $\frac{6}{8}$ "	4	15'-11"	1	6'-7 $\frac{1}{2}$ "	12'-5 $\frac{6}{8}$ "	3'-0"

4:1 SLOPE										
Pipe Size	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	S 1	S 2
17 x 13	1'-9"	7'-0"	2'-0"	7'-2 $\frac{5}{8}$ "	1	8'-11 $\frac{1}{4}$ "	1	2'-7 $\frac{1}{2}$ "	5'-9 $\frac{5}{8}$ "	2'-9"
21 x 15	1'-11"	7'-8"	2'-0"	7'-10 $\frac{1}{4}$ "	1	9'-7 $\frac{1}{2}$ "	1	2'-7 $\frac{1}{2}$ "	5'-8 $\frac{1}{4}$ "	3'-6"
24 x 18	2'-2"	8'-8"	3'-0"	8'-11 $\frac{1}{4}$ "	2	10'-7 $\frac{3}{8}$ "	1	3'-7 $\frac{1}{2}$ "	8'-3 $\frac{1}{4}$ "	2'-0"
28 x 20	2'-4"	9'-4"	3'-0"	9'-7 $\frac{1}{2}$ "	2	11'-4"	1	3'-7 $\frac{1}{2}$ "	8'-11 $\frac{1}{2}$ "	2'-0"
35 x 24	2'-8"	10'-8"	4'-0"	11'-0"	3	12'-8 $\frac{1}{2}$ "	-	-	12'-4"	-
42 x 29	3'-1"	12'-4"	4'-0"	12'-8 $\frac{1}{2}$ "	3	14'-5 $\frac{1}{8}$ "	1	4'-7 $\frac{1}{2}$ "	11'-0 $\frac{1}{2}$ "	3'-0"
49 x 33	3'-5"	13'-8"	5'-0"	14'-1"	3	15'-9 $\frac{3}{8}$ "	1	5'-7 $\frac{1}{2}$ "	12'-5"	3'-0"
57 x 38	3'-10"	15'-4"	5'-0"	15'-9 $\frac{3}{8}$ "	3	17'-6 $\frac{1}{4}$ "	1	5'-7 $\frac{1}{2}$ "	12'-7 $\frac{3}{8}$ "	4'-6"
64 x 43	4'-3"	17'-0"	6'-0"	17'-6 $\frac{1}{4}$ "	4	19'-2 $\frac{6}{8}$ "	1	6'-7 $\frac{1}{2}$ "	12'-4 $\frac{1}{4}$ "	6'-6"
71 x 47	4'-7"	18'-4"	6'-0"	18'-10 $\frac{1}{4}$ "	4	20'-7 $\frac{3}{8}$ "	1	6'-7 $\frac{1}{2}$ "	12'-8 $\frac{3}{4}$ "	7'-6"

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>GRATED BOX END SECTION</b> <b>TYPE I DIMENSIONS</b> JANUARY 1999	
STANDARD DRAWING NO. <b>E 715-GBT0-06</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-04-99


5:1 SLOPE										
Pipe Size	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	S 1	S 2
17 x 13	1'-9"	8'-9"	2'-0"	8'-11 $\frac{1}{2}$ "	1	10'-11 $\frac{1}{2}$ "	1	2'-7 $\frac{1}{2}$ "	6'-1 $\frac{1}{2}$ "	4'-6"
21 x 15	1'-11"	9'-7"	2'-0"	9'-9 $\frac{1}{4}$ "	1	11'-9 $\frac{3}{8}$ "	1	2'-7 $\frac{1}{2}$ "	6'-8 $\frac{1}{4}$ "	4'-9"
24 x 18	2'-2"	10'-10"	3'-0"	11'-0 $\frac{3}{8}$ "	2	13'-1"	1	3'-7 $\frac{1}{2}$ "	8'-8 $\frac{3}{8}$ "	4'-0"
28 x 20	2'-4"	11'-6"	3'-0"	11'-0 $\frac{3}{4}$ "	2	13'-11 $\frac{1}{8}$ "	1	3'-7 $\frac{1}{2}$ "	9'-6 $\frac{3}{4}$ "	4'-0"
35 x 24	2'-8"	13'-4"	4'-0"	13'-7 $\frac{1}{8}$ "	3	15'-7 $\frac{1}{2}$ "	1	4'-7 $\frac{1}{2}$ "	12'-3 $\frac{1}{8}$ "	3'-0"
42 x 29	3'-1"	15'-5"	4'-0"	15'-8 $\frac{8}{8}$ "	3	17'-9"	1	4'-7 $\frac{1}{2}$ "	12'-10 $\frac{8}{8}$ "	4'-6"
49 x 33	3'-5"	17'-1"	5'-0"	17'-5"	3	19'-5 $\frac{1}{2}$ "	1	5'-7 $\frac{1}{2}$ "	13'-1"	6'-0"
57 x 38	3'-10"	19'-2"	5'-0"	19'-6 $\frac{1}{2}$ "	3	21'-6 $\frac{1}{2}$ "	1	5'-7 $\frac{1}{2}$ "	13'-2 $\frac{1}{2}$ "	8'-0"
64 x 43	4'-3"	21'-3"	6'-0"	21'-8"	4	23'-8 $\frac{3}{8}$ "	1	6'-7 $\frac{1}{2}$ "	12'-10"	10'-6"
71 x 47	4'-7"	22'-11"	6'-0"	23'-4 $\frac{3}{8}$ "	4	25'-4 $\frac{3}{4}$ "	1	6'-7 $\frac{1}{2}$ "	13'-6 $\frac{3}{8}$ "	11'-6"

6:1 SLOPE										
Pipe Size	H	L	W	Longitudinal Pipe			Cross Tube			
				S	No.	Length	No.	Length	S 1	S 2
17 x 13	1'-9"	10'-6"	2'-0"	10'-7 $\frac{3}{4}$ "	1	13'-0"	2	2'-7 $\frac{1}{2}$ "	6'-7 $\frac{3}{4}$ "	3'-0"
21 x 15	1'-11"	11'-6"	2'-0"	11'-7 $\frac{1}{8}$ "	1	14'-0 $\frac{1}{8}$ "	2	2'-7 $\frac{1}{2}$ "	6'-1 $\frac{1}{8}$ "	3'-9"
24 x 18	2'-2"	13'-0"	3'-0"	13'-2 $\frac{1}{4}$ "	2	15'-6 $\frac{1}{8}$ "	1	3'-7 $\frac{1}{2}$ "	9'-8 $\frac{1}{4}$ "	5'-6"
28 x 20	2'-4"	14'-0"	3'-0"	14'-2 $\frac{1}{4}$ "	2	16'-6 $\frac{1}{2}$ "	1	3'-7 $\frac{1}{2}$ "	9'-8 $\frac{1}{4}$ "	6'-6"
35 x 24	2'-5"	16'-0"	4'-0"	16'-2 $\frac{3}{8}$ "	3	18'-6 $\frac{1}{8}$ "	1	4'-7 $\frac{1}{2}$ "	13'-2 $\frac{3}{8}$ "	5'-0"
42 x 29	3'-1"	18'-6"	4'-0"	18'-9"	3	21'-1 $\frac{1}{4}$ "	1	4'-7 $\frac{1}{2}$ "	13'-6"	7'-3"
49 x 33	3'-5"	20'-6"	5'-0"	20'-9 $\frac{3}{8}$ "	3	23'-1 $\frac{3}{8}$ "	1	5'-7 $\frac{1}{2}$ "	13'-3 $\frac{3}{8}$ "	9'-6"
57 x 38	3'-10"	23'-0"	5'-0"	23'-3 $\frac{3}{4}$ "	3	25'-8"	1	5'-7 $\frac{1}{2}$ "	13'-9 $\frac{3}{4}$ "	11'-6"
64 x 43	4'-3"	25'-6"	6'-0"	25'-10 $\frac{1}{4}$ "	4	28'-2 $\frac{1}{2}$ "	2	6'-7 $\frac{1}{2}$ "	13'-4 $\frac{1}{4}$ "	7'-3"
71 x 47	4'-7"	27'-6"	6'-0"	27'-10 $\frac{1}{2}$ "	4	30'-2 $\frac{3}{4}$ "	2	6'-7 $\frac{1}{2}$ "	13'-4 $\frac{1}{2}$ "	8'-3"

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>GRATED BOX END SECTION</b> <b>TYPE I DIMENSIONS</b> JANUARY 1999	
STANDARD DRAWING NO.E 715-GBT0-07	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-04-99


APPROXIMATE QUANTITIES																				
PIPE SIZE	2:1 SLOPE				3:1 SLOPE				4:1 SLOPE				5:1 SLOPE				6:1 SLOPE			
	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.	Concrete, Cu. Yds.		Reinf. Steel, lb.	Str. Steel, lb.
	Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe		
17 x 13	—	1.0	260	75	—	1.2	335	150	—	1.5	415	180	—	1.8	490	210	—	2.1	565	290
21 x 15	—	1.1	280	80	—	1.3	360	160	—	1.6	445	190	—	1.9	530	220	—	2.3	615	300
24 x 18	—	1.4	360	170	—	1.8	465	235	—	2.2	570	370	—	2.6	680	440	—	3.1	790	505
28 x 20	—	1.5	375	180	—	1.9	495	245	—	2.4	610	390	—	2.8	730	460	—	3.3	845	530
35 x 24	—	2.0	475	300	—	2.6	625	410	—	3.2	775	525	—	3.8	925	740	—	4.4	1075	860
42 x 29	—	2.2	535	335	—	2.9	710	460	—	3.6	885	685	—	4.4	1060	820	—	5.1	1240	955
49 x 33	—	2.8	645	360	—	3.7	860	500	—	4.6	1075	750	—	5.5	1290	900	—	6.4	1505	1045
57 x 38	—	3.0	710	395	—	4.1	955	655	—	5.2	1205	815	—	6.2	1450	980	—	7.3	1700	1140
64 x 43	—	3.8	855	575	—	5.1	1155	925	—	6.4	1450	1160	—	7.8	1755	1400	—	9.1	2055	1760
71 x 47	—	4.0	910	610	—	5.5	1235	980	—	7.0	1565	1225	—	8.4	1895	1480	—	9.9	2225	1865

DIMENSIONS						
Slope	A	B	C	D	E	F
2:1	0'-9"	0'-8"	0'-6 $\frac{1}{2}$ "	0'-8 $\frac{1}{2}$ "	0'-0 $\frac{3}{4}$ "	0'-0 $\frac{7}{8}$ "
3:1	1'-0 $\frac{3}{8}$ "	1'-0"	0'-5 $\frac{1}{2}$ "	0'-6 $\frac{1}{8}$ "	0'-1 $\frac{1}{8}$ "	0'-1 $\frac{1}{8}$ "
4:1	1'-4 $\frac{1}{2}$ "	1'-4"	0'-5 $\frac{1}{8}$ "	0'-6 $\frac{1}{8}$ "	0'-1 $\frac{1}{2}$ "	0'-1 $\frac{1}{2}$ "
5:1	1'-8 $\frac{3}{8}$ "	1'-8"	0'-4 $\frac{1}{8}$ "	0'-5 $\frac{3}{8}$ "	0'-1 $\frac{1}{8}$ "	0'-1 $\frac{1}{8}$ "
6:1	2'-0 $\frac{3}{8}$ "	2'-0"	0'-4 $\frac{3}{4}$ "	0'-5 $\frac{3}{8}$ "	0'-2 $\frac{1}{4}$ "	0'-2 $\frac{1}{4}$ "


INDIANA DEPARTMENT OF TRANSPORTATION	
GRADED BOX END SECTION TYPE I	
DIMENSIONS AND QUANTITIES	
JANUARY 1999	
STANDARD DRAWING NO. <b>E 715-GBT0-08</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-04-99






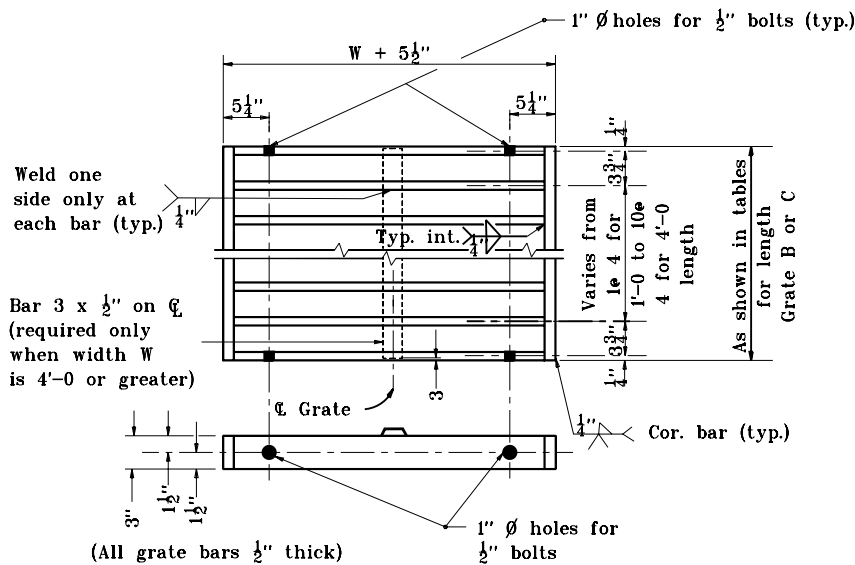


**GRATE B & C**

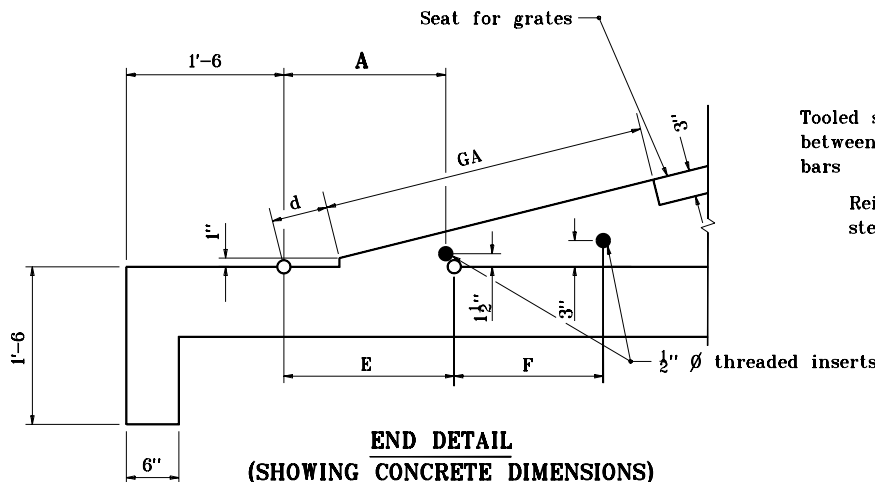

**END DETAIL  
(SHOWING CONCRETE DIMENSIONS)**




**TYPE A CONSTR.  
JOINT**

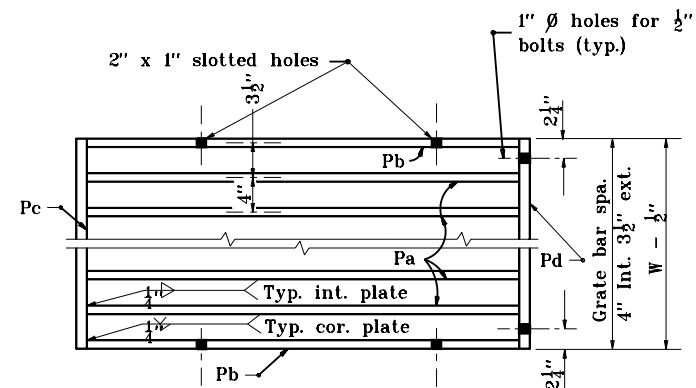


**PLAN VIEW**


1" x 2" slotted hole in R. Pb only for  $\frac{1}{2}"$  bolt conn. to threaded inserts.

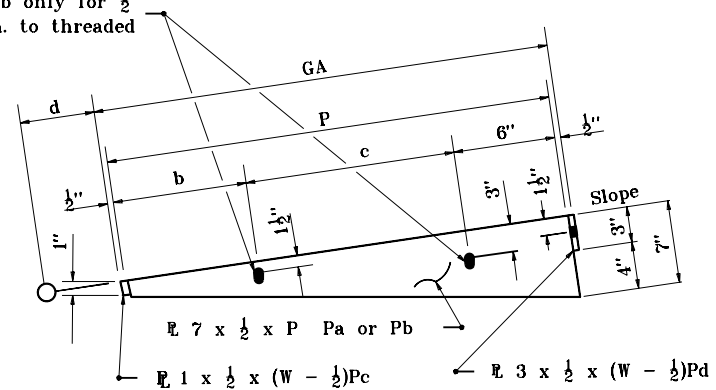


**ELEVATION  
GRATE A**




INDIANA DEPARTMENT OF TRANSPORTATION	
<b>GRATED BOX END SECTION TYPE II</b>	
JANUARY 1999	
<b>STANDARD DRAWING NO. E 715-GBTT-02</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 1-04-99

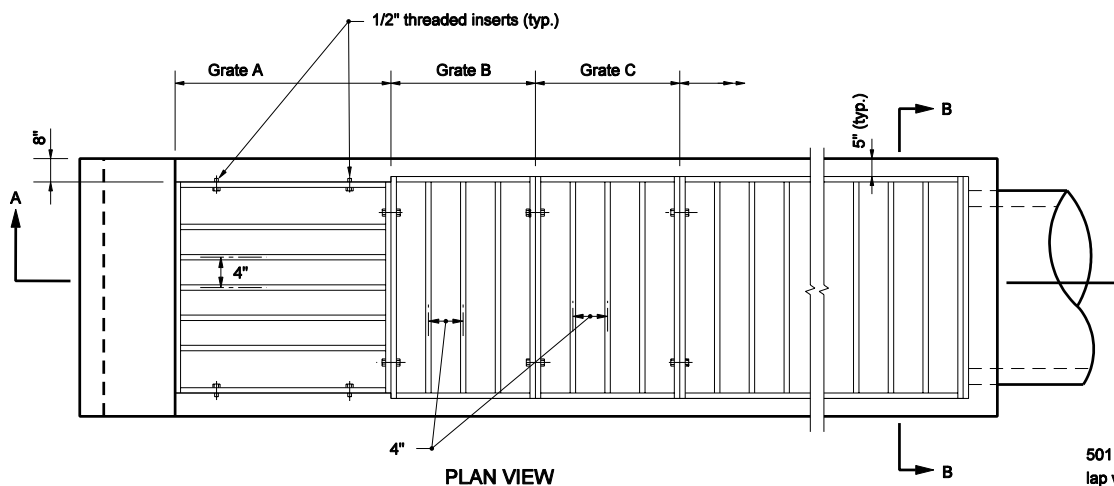

PLAN VIEW

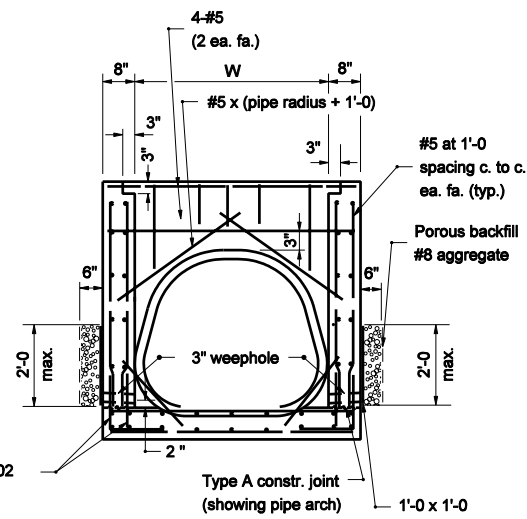

GRATE REMOVED  
SECTION B-B

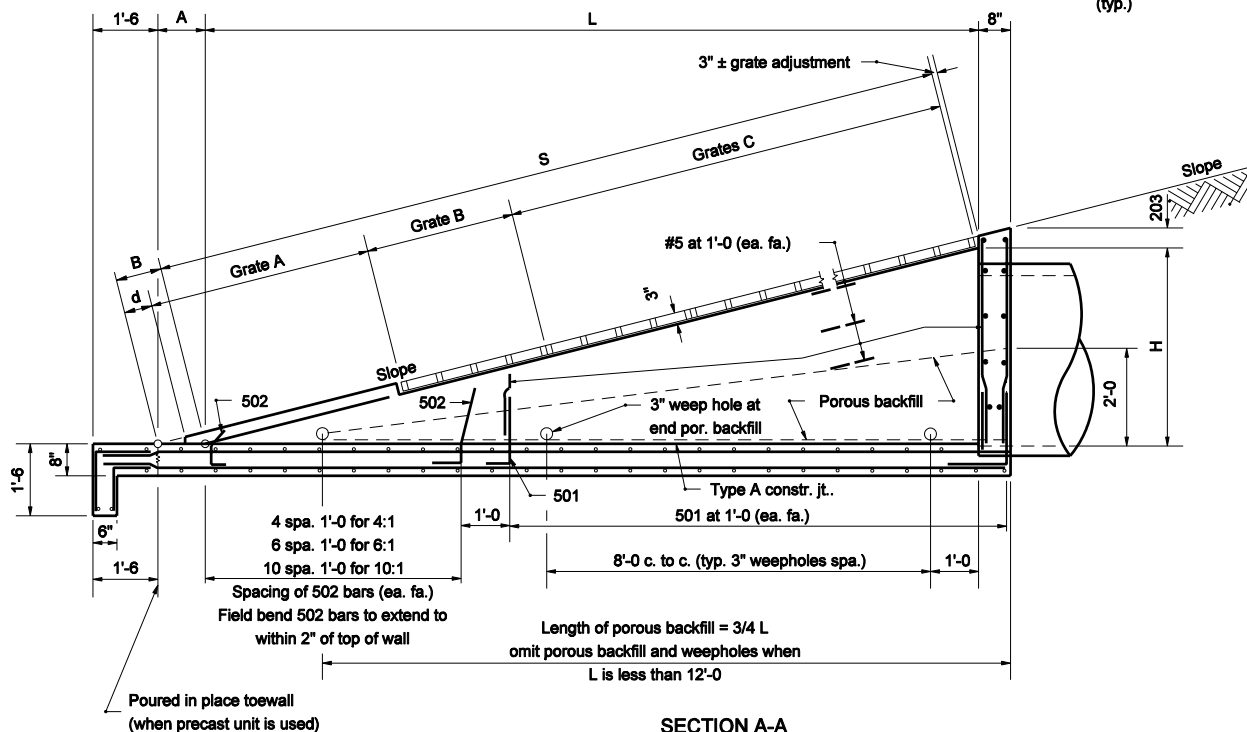

SECTION A-A

**GENERAL NOTES**


1. The invert grade of the grated box end section shall be the same as that of the pipe.
2. See Standard Drawings E 715-GBTT-05 and -06 for dimensions tables.
3. See Standard Drawing E 715-GBTT-02 for bending diagrams.
4. Type II grated box end sections shall be used for culverts parallel to the mainline within the clear zone.

INDIANA DEPARTMENT OF TRANSPORTATION

**GRATED BOX END  
SECTION TYPE II**


MARCH 2006

STANDARD DRAWING NO. E 715-GBTT-03




/s/ Richard L. VanCleave 3-01-06  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-01-06  
CHIEF HIGHWAY ENGINEER DATE

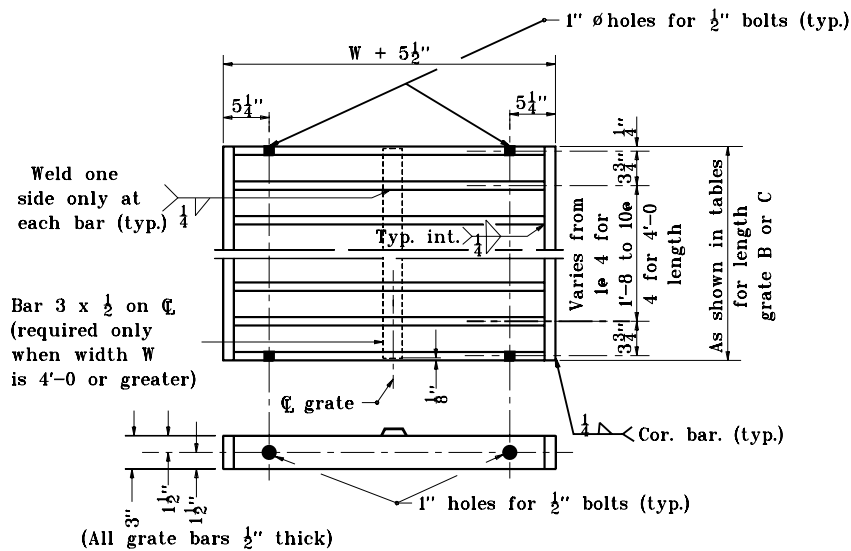


**GRATE B & C**

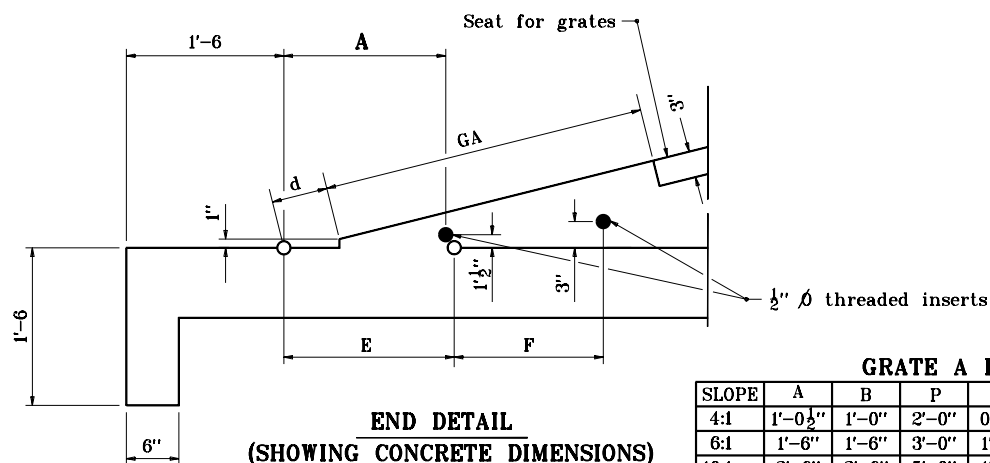

**END DETAIL  
(SHOWING CONCRETE DIMENSIONS)**


**GRATE A DIMENSIONS TABLE**

SLOPE	A	B	P	b	c	d	E	F	G
4:1	1'-0 1/2"	1'-0"	2'-0"	0'-8"	0'-10"	4"	1'-0 1/2"	0'-10"	2'-1"
6:1	1'-6"	1'-6"	3'-0"	1'-0"	1'-6"	6"	1'-6 1/2"	1'-6"	3'-1"
10:1	2'-6"	2'-6"	5'-0"	1'-8"	2'-10"	10"	2'-6 1/2"	2'-10"	5'-1"

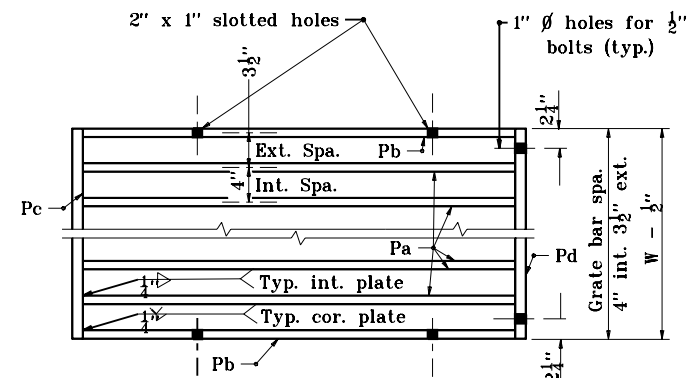

**PLAN VIEW**

1" x 2" slotted hole in R Pb only for 1/2" bolt conn. to threaded inserts.

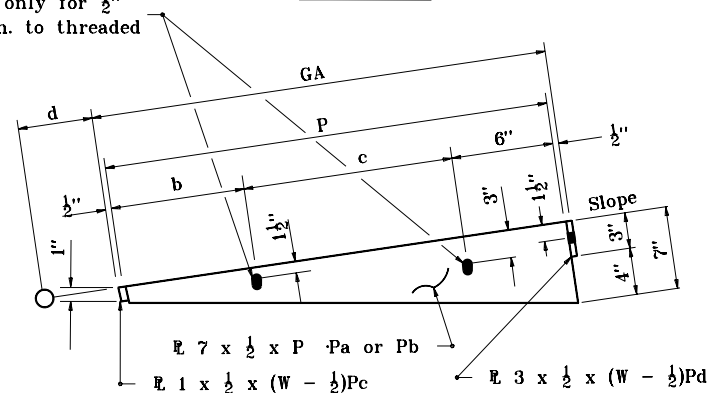


**ELEVATION  
GRATE A**

INDIANA DEPARTMENT OF TRANSPORTATION

**GRATED BOX END SECTION  
TYPE II**

JANUARY 1999

**STANDARD DRAWING NO. E 715-GBTT-04**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED

1-04-99


4:1 Slope							
Pipe Diameter	H	L	W	S	Grate C		Grate B
					No.	Length	Length
12	1'-5	5'-8	2'-0	5'-9	1	3'-4	1'-0
15 & 18	2'-0	8'-0	2'-0	8'-1	1	4'-0	2'-8
21 & 24	2'-6	10'-0	3'-0	10'-1	2	3'-0	2'-8
27 & 30	3'-1	12'-4	3'-0	12'-5	3	3'-0	2'-0
33 & 36	3'-7	14'-4	4'-0	14'-5	5	2'-4	1'-4
42	4'-2	16'-5	4'-0	17'-1	6	2'-4	1'-8
48	4'-8	18'-8	5'-0	19'-1	8	2'-0	1'-8
54	5'-3	21'-0	6'-0	21'-5	12	1'-8	-
60	5'-9	23'-0	6'-0	23'-5	12	1'-8	2'-0

10:1 Slope							
Pipe Diameter	H	L	W	S	Grate C		Grate B
					No.	Length	Length
12	1'-5	14'-2	2'-0	14'-1	2	4'-0	2'-8
15 & 18	2'-0	20'-0	2'-0	19'-9	4	3-8	1'-8
21 & 24	2'-6	25'-0	3'-0	24'-9	8	2'-8	-
27 & 30	3'-1	30'-10	3'-0	30'-5	9	3'-0	-
33 & 36	3'-7	35'-10	4'-0	35'-9	13	2'-4	2'-0
42	4'-2	41'-8	4'-0	41'-9	16	2'-4	1'-0
48	4'-8	46'-8	5'-0	46'-9	21	2'-0	1'-4
54	5'-3	52'-6	6'-0	52'-5	36	1'-4	1'-0
60	5'-9	57'-6	6'-0	57'-9	40	1'-4	1'-0

6:1 Slope							
Pipe Diameter	H	L	W	S	Grate C		Grate B
					No.	Length	Length
12	1'-5	8'-6	2'-0	8'-5	1	4'-0	2'-4
15 & 18	2'-0	12'-0	2'-0	11'-9	2	4'-0	1'-8
21 & 24	2'-6	15'-0	3'-0	15'-1	4	3'-0	1'-0
27 & 30	3'-1	18'-6	3'-0	18'-5	5	3'-0	1'-4
33 & 36	3'-7	21'-6	4'-0	21'-5	9	2'-0	1'-4
42	4'-2	25'-0	4'-0	25'-1	9	2'-4	2'-0
48	4'-8	28'-0	5'-0	28'-1	13	2'-0	-
54	5'-3	31'-6	6'-0	31'-9	17	1'-8	1'-4
60	5'-9	34'-6	6'-0	34'-9	19	1'-8	1'-0

GRATE A DIMENSIONS TABLE								
Slope	A	B	P	b	c	d	E	F GA
4:1	1'-0½"	1'-0	2'-0	0'-8	0'-10	4"	1'-0½"	0'-10 2'-1
6:1	1'-6	1'-6	3'-0	1'-0	1'-6	6"	1'-6½"	1'-6 3'-1
10:1	2'-6	2'-6	5'-0	1'-8	2'-10	10"	2'-6½"	2'-10 5'-1

APPROXIMATE QUANTITIES												
Pipe Diameter	4:1 Slope				6:1 Slope				10:1 Slope			
	Conc., cys		Reinf. Steel, lb.	Str. Steel, lb.	Conc., cys		Reinf. Steel, lb.	Str. Steel, lb.	Conc., cys		Reinf. Steel, lb.	Str. Steel, lb.
	Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe			Conc. Pipe	C.M. Pipe		
12	1.1	1.1	295	335	1.5	1.5	400	480	2.3	2.4	605	790
15 & 18	1.6	1.6	395	445	2.2	2.2	550	645	3.4	3.4	865	1080
21 & 24	2.4	2.4	565	750	3.3	3.3	790	1130	5.2	5.2	1245	1830
27 & 30	2.9	3.0	695	910	4.2	4.3	980	1345	6.6	6.7	1580	2195
33 & 36	4.0	4.1	910	1415	5.7	5.8	1290	2115	9.1	9.2	2075	3455
42	4.8	4.9	1085	1655	6.9	7.0	1545	2415	11.0	11.2	2490	4015
48	6.2	6.3	1350	2230	8.8	9.0	1925	3265	14.2	14.4	3100	5425
54	7.8	8.0	1665	2955	11.3	11.4	2400	4375	18.1	18.3	3855	7440
60	8.7	8.9	1850	3215	12.6	12.8	2675	4780	20.4	20.4	4310	8175


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>GRATED BOX END SECTION</b> <b>DIMENSIONS &amp; QUANTITIES TYPE II</b> JANUARY 1999	
STANDARD DRAWING NO.E 715-GBTT-05	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE	ORIGINALLY APPROVED 1-04-99

4:1 SLOPE							
PIPE SIZE	H	L	W	S	GRATE C		GRATE B
					No.	LENGTH	LENGTH
17 x 13	1'-6	6'-0	2'-0	6'-1	1	3'-8	1'-0
21 x 15	1'-8	6'-8	2'-0	6'-9	1	4'-0	1'-4
24 x 18	1'-11	7'-8	3'-0	7'-9	2	2'-8	1'-0
28 x 20	2'-1	8'-4	3'-0	8'-5	2	3'-0	1'-0
35 x 24	2'-5	9'-8	4'-0	9'-9	3	2'-4	1'-4
42 x 29	2'-10	11'-4	4'-0	11'-5	5	2'-0	-
49 x 33	3'-2	12'-8	5'-0	12'-9	5	2'-0	1'-4
57 x 38	3'-7	14'-4	5'-0	14'-5	6	2'-0	1'-0
64 x 43	4'-0	16'-0	6'-0	16'-5	9	1'-8	-
71 x 47	4'-4	17'-4	6'-0	17'-9	9	1'-8	1'-4


10:1 SLOPE							
PIPE SIZE	H	L	W	S	GRATE C		GRATE B
					No.	LENGTH	LENGTH
17 x 13	1'-6	15'-0	2'-0	14'-9	2	4'-0	3'-4
21 x 15	1'-8	16'-8	2'-0	16'-5	3	4'-0	1'-0
24 x 18	1'-11	19'-2	3'-0	19'-1	5	2'-6	2'-4
28 x 20	2'-1	20'-10	3'-0	20'-9	5	3'-0	2'-4
35 x 24	2'-5	24'-2	4'-0	24'-1	8	2'-4	2'-0
42 x 29	2'-10	28'-4	4'-0	28'-1	10	2'-4	1'-4
49 x 33	3'-2	31'-8	5'-0	31'-9	17	1'-8	-
57 x 38	3'-7	35'-10	5'-0	35'-9	23	1'-4	1'-8
64 x 43	4'-0	40'-0	6'-0	40'-1	22	1'-8	-
71 x 47	4'-4	43'-4	6'-0	43'-5	24	1'-8	-

6:1 SLOPE							
PIPE SIZE	H	L	W	S	GRATE C		GRATE B
					No.	LENGTH	LENGTH
17 x 13	1'-6	9'-0	2'-0	8'-9	1	4'-0	2'-8
21 x 15	1'-8	10'-0	2'-0	9'-9	1	4'-0	3'-8
24 x 18	1'-11	11'-6	3'-0	11'-5	3	2'-8	1'-4
28 x 20	2'-1	12'-6	3'-0	12'-5	3	3'-0	1'-4
35 x 24	2'-5	14'-6	4'-0	14'-5	5	2'-0	2'-4
42 x 29	2'-10	17'-0	4'-0	17'-1	7	2'-0	1'-0
49 x 33	3'-2	19'-0	5'-0	19'-1	8	2'-0	1'-0
57 x 38	3'-7	21'-6	5'-0	21'-5	9	2'-0	1'-4
64 x 43	4'-0	24'-0	6'-0	24'-1	12	1'-8	2'-0
71 x 47	4'-4	26'-0	6'-0	26'-1	18	1'-4	-


APPROXIMATE QUANTITIES									
PIPE Size	4:1 SLOPE			6:1 SLOPE			10:1 SLOPE		
	Str. Steel, lb.	Conc., cys	Reinf. Steel, lb.	Str. Steel, lb.	Conc., cys	Reinf. Steel, lb.	Str. Steel, lb.	Conc., cys	Reinf. Steel, lb.
17 x 13	355	1.2	305	495	1.6	415	820	2.5	640
21 x 15	385	1.3	335	540	1.8	460	910	2.8	715
24 x 18	605	1.8	440	875	2.5	610	1445	3.9	935
28 x 20	645	2.0	465	940	2.7	645	1545	4.2	1020
35 x 24	975	2.7	615	1435	3.7	855	2375	5.8	1325
42 x 29	1145	3.1	700	1710	4.4	995	2750	6.9	1570
49 x 33	1520	4.0	880	2270	5.6	1230	3825	8.9	1960
57 x 38	1715	4.5	985	2525	6.4	1400	4400	10.2	2245
64 x 43	2295	5.7	1210	3335	8.1	1725	5560	12.9	2755
71 x 47	2470	6.2	1310	3735	8.9	1880	6005	14.2	3015

INDIANA DEPARTMENT OF TRANSPORTATION	
GRADED BOX END SECTION TYPE II	
DIMENSIONS AND QUANTITIES	
JANUARY 1999	
STANDARD DRAWING NO.E 715-GBTT-06	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 1-04-99

④ 3' x 8' x H/3 keyway constr. jt.

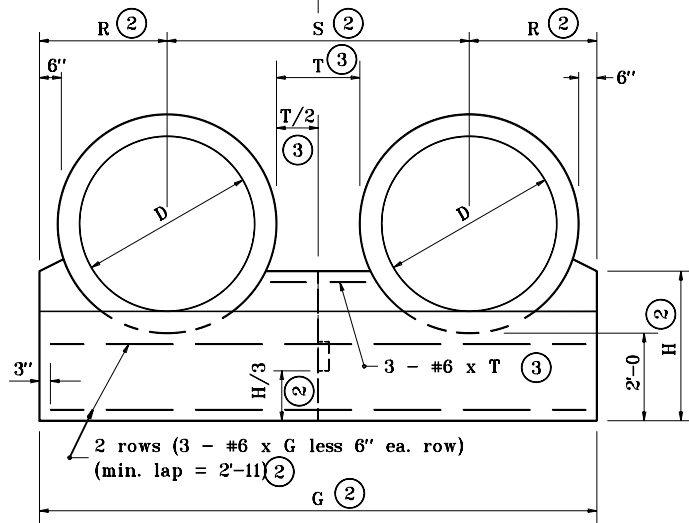


**ANCHOR FOR DOUBLE PIPE INSTALLATION**  
**FRONT ELEVATION**

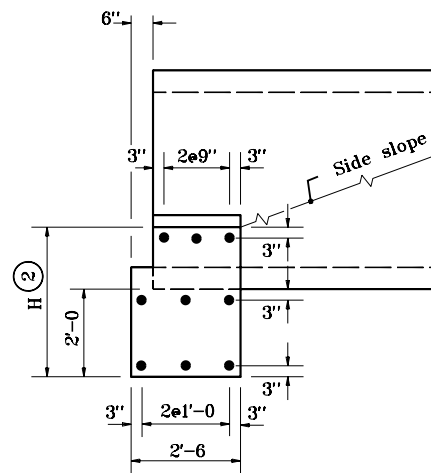

**SECTION THROUGH**  
**ANCHOR**

2 rows (3 - #6 x G  
less 6" ea. row)  
(min. lap = 2'-11")

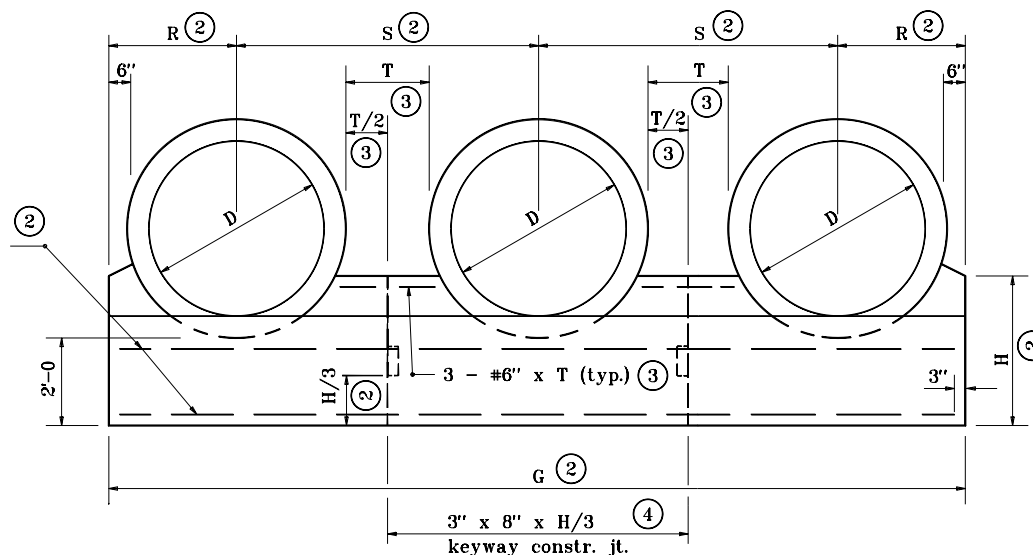

**ANCHOR FOR TRIPLE PIPE INSTALLATION**  
**FRONT ELEVATION**

## GENERAL NOTES

1. Circular reinforced concrete pipes shown.  
For details of other pipe alternates, see  
partial elevations on Standard Drawing  
E 715-MPCA-02.

② For dimension enter chart on Standard  
Drawing E 715-ANCH-01 with known  
dimension D.

③ T = Clear distance between pipes.  
For D less than 48", T = 2'-0".  
For D of 48" to 96", T = 1/2 D  
For D greater than 96", T = 4'-0".


④ No joint required if G is less than or  
equal to 30'. One joint required if  
G is greater than 30' but less than  
or equal to 42'. Two joints  
required if G is greater than 42'.

INDIANA DEPARTMENT OF TRANSPORTATION

## MULTIPLE PIPE CONCRETE ANCHORS

JANUARY 1998

STANDARD DRAWING NO. **E 715-MPCA-01**



DETAILS PLACED IN THIS FORMAT 7-27-99


/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED


1-02-98

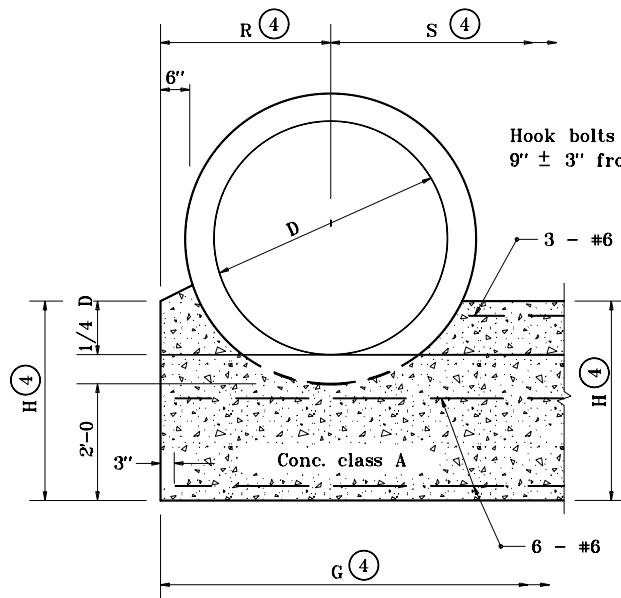


**ANCHOR FOR  
REINFORCED CONCRETE PIPE  
PARTIAL ELEVATION**

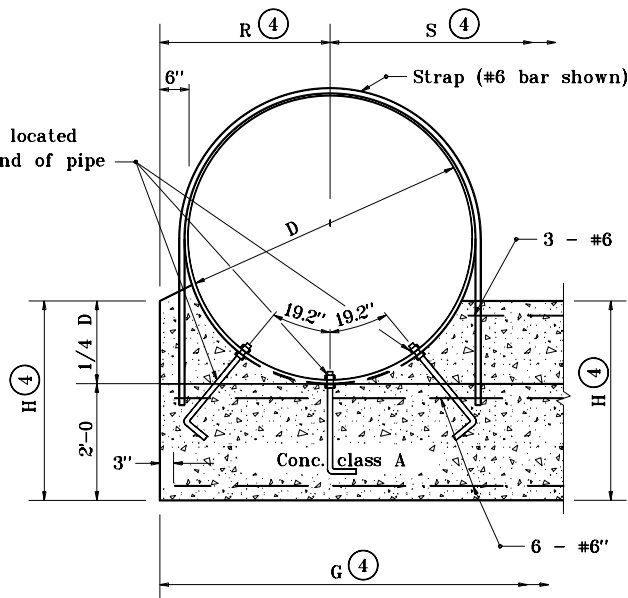

**ANCHOR FOR  
CORRUGATED METAL PIPE  
PARTIAL ELEVATION**

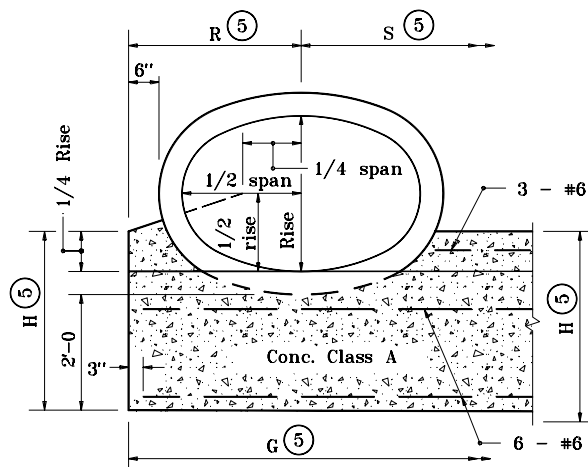

**ANCHOR FOR  
REINFORCED CONCRETE HORIZONTAL ELLIPTICAL PIPE  
PARTIAL ELEVATION**

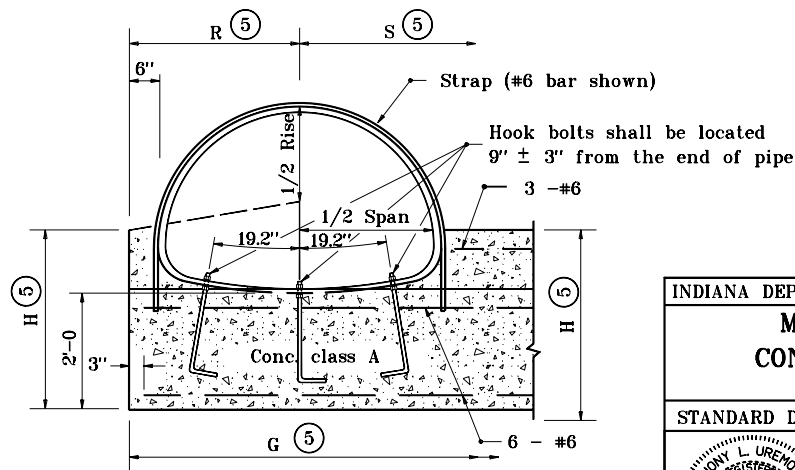

**ANCHOR FOR CORRUGATED METAL PIPE-ARCH  
PARTIAL ELEVATION**

## GENERAL NOTES

1. Anchor straps shall be used at both upstream and downstream ends of all C.M. pipes with a diameter or span of 42" or greater.
2. Hook bolts and anchor straps shall be used for all C.M. pipes with a diameter or span of 84" or greater.
3. Riprap shall be placed at the ends of pipe structures when shown on the plans.
- ④ For dimension, enter chart on Standard Drawing E 715-ANCH-01 with known dimension D.
- ⑤ For dimension, enter chart on Standard Drawing E 715-ANCH-02 with known span and rise.

## LEGEND

C.M. = Corrugated Metal


INDIANA DEPARTMENT OF TRANSPORTATION

## MULTIPLE PIPE CONCRETE ANCHOR JANUARY 1998


STANDARD DRAWING NO. E 715-MPCA-02

	DETAILS PLACED IN THIS FORMAT	7-27-99
	/s/ Anthony L. Uremovich 7-27-99 DESIGN STANDARDS ENGINEER DATE	
	/s/ Firooz Zandi 7-27-99 CHIEF HIGHWAY ENGINEER DATE	
	ORIGINALLY APPROVED 1-02-98	


PIPE DIA.	END SECTION THICK. (in.)	DIMENSIONS					APPROX. SLOPE	BODY
		A ( $\pm 1''$ )	B (Max.)	H ( $\pm 1''$ )	L ( $\pm 1\frac{1}{2}''$ )	W ( $\pm 2''$ )		
12	.064	6	6	6	21	24	$2\frac{1}{2}:1$	1 Pc.
15	.064	7	8	6	26	30	$2\frac{1}{2}:1$	1 Pc.
18	.064	8	10	6	31	36	$2\frac{1}{2}:1$	1 Pc.
21	.064	9	12	6	36	42	$2\frac{1}{2}:1$	1 Pc.
24	.064	10	13	6	41	48	$2\frac{1}{2}:1$	1 Pc.
30	.079	12	16	8	51	60	$2\frac{1}{2}:1$	1 Pc.
36	.079	14	19	9	60	72	$2\frac{1}{2}:1$	2 Pc.

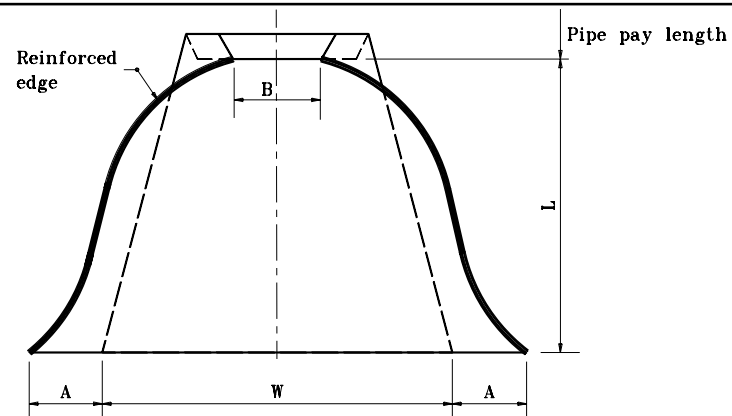

**PLAN VIEW**

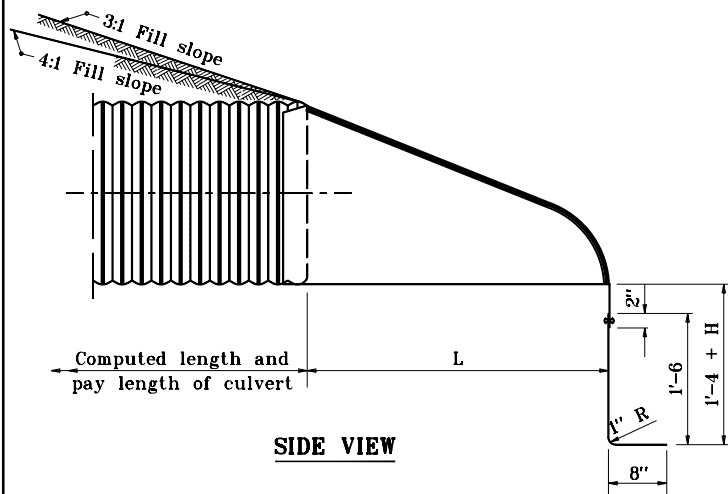

**SIDE VIEW**

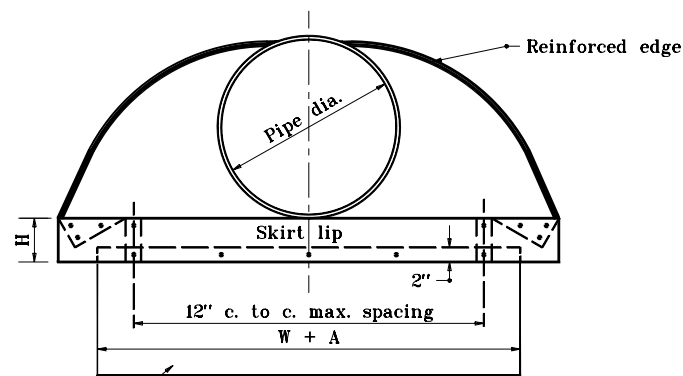


**END VIEW**

INDIANA DEPARTMENT OF TRANSPORTATION

# **METAL PIPE END SECTION**

JANUARY 1998

STANDARD DRAWING NO. **E 715-MPES-01**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 1-02-98



PIPE-ARCH DIMENSIONS		END SECTION THICK. (in.)	DIMENSIONS					APPROX. SLOPE	BODY
SPAN	RISE		A (±1")	B (Max.)	H (±1")	L (±1½")	W (±2")		
17	13	.064	7	9	6	19	30	2½:1	1 Pc.
21	15	.064	7	10	6	23	36	2½:1	1 Pc.
24	18	.064	8	12	6	28	42	2½:1	1 Pc.
28	20	.064	9	14	6	32	48	2½:1	1 Pc.
35	24	.079	10	16	8	39	60	2½:1	1 Pc.
42	29	.079	12	18	9	46	75	2½:1	1 Pc.

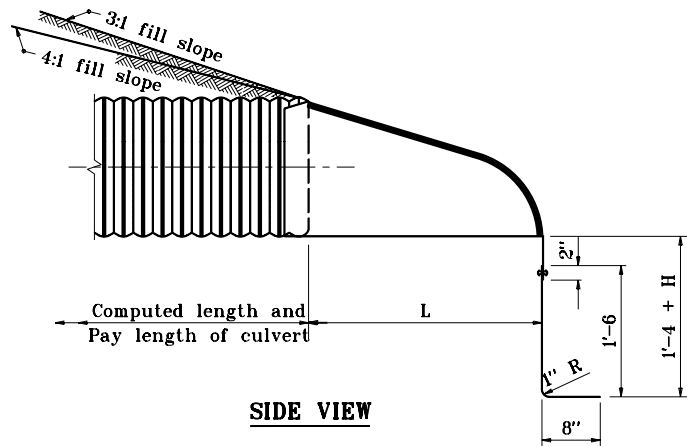


**SIDE VIEW**

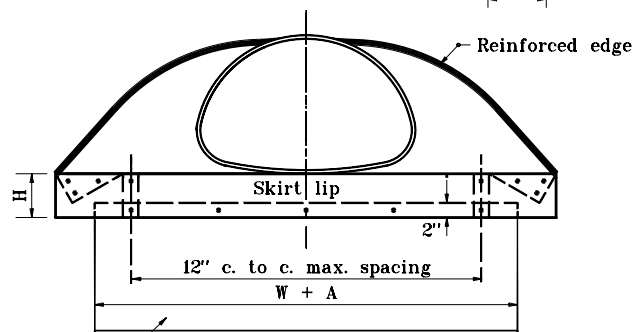


**END VIEW**

Toe plate anchor

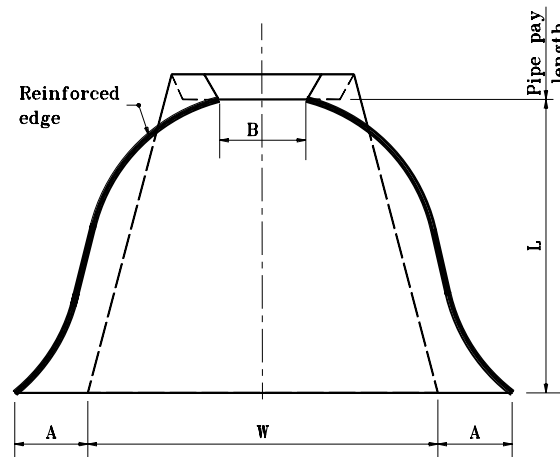


**PLAN VIEW**


INDIANA DEPARTMENT OF TRANSPORTATION	
METAL PIPE ARCH	
END SECTION	
JANUARY 1998	
STANDARD DRAWING NO.E 715-MPES-02	
ANTHONY L. UREMOWICH No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 1-02-98

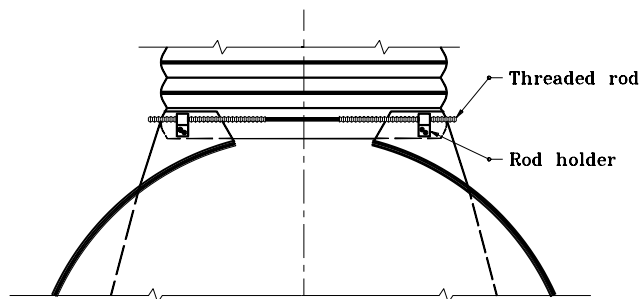


**TYPE 1**  
**FOR 17" x 13" THROUGH 42" x 29" ONLY**

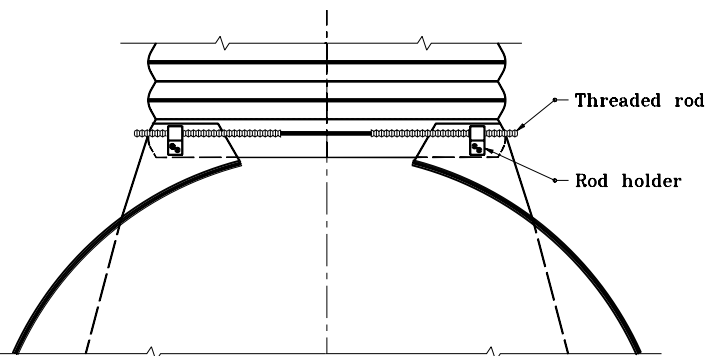

**TYPE 4**  
**FOR 30" THROUGH 36" ONLY**

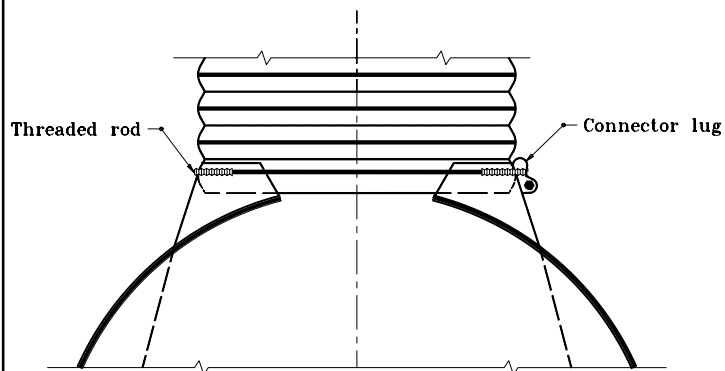

**TYPE 3**  
**FOR 12" THROUGH 24" ONLY**

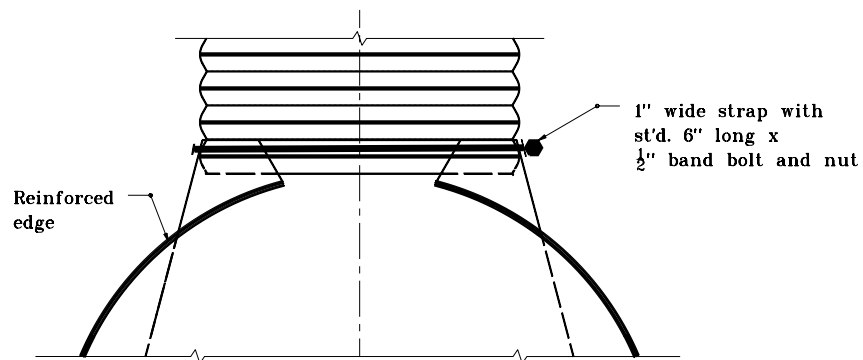


**ALTERNATE TYPE 3**  
**FOR 12" THROUGH 24" ONLY**

INDIANA DEPARTMENT OF TRANSPORTATION

**METAL PIPE**  
**END SECTION CONNECTIONS**  
JANUARY 1998


STANDARD DRAWING NO. **E 715-MPES-03**




DETAILS PLACED IN THIS FORMAT 7-27-99

/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE  
ORIGINALLY APPROVED 1-02-98

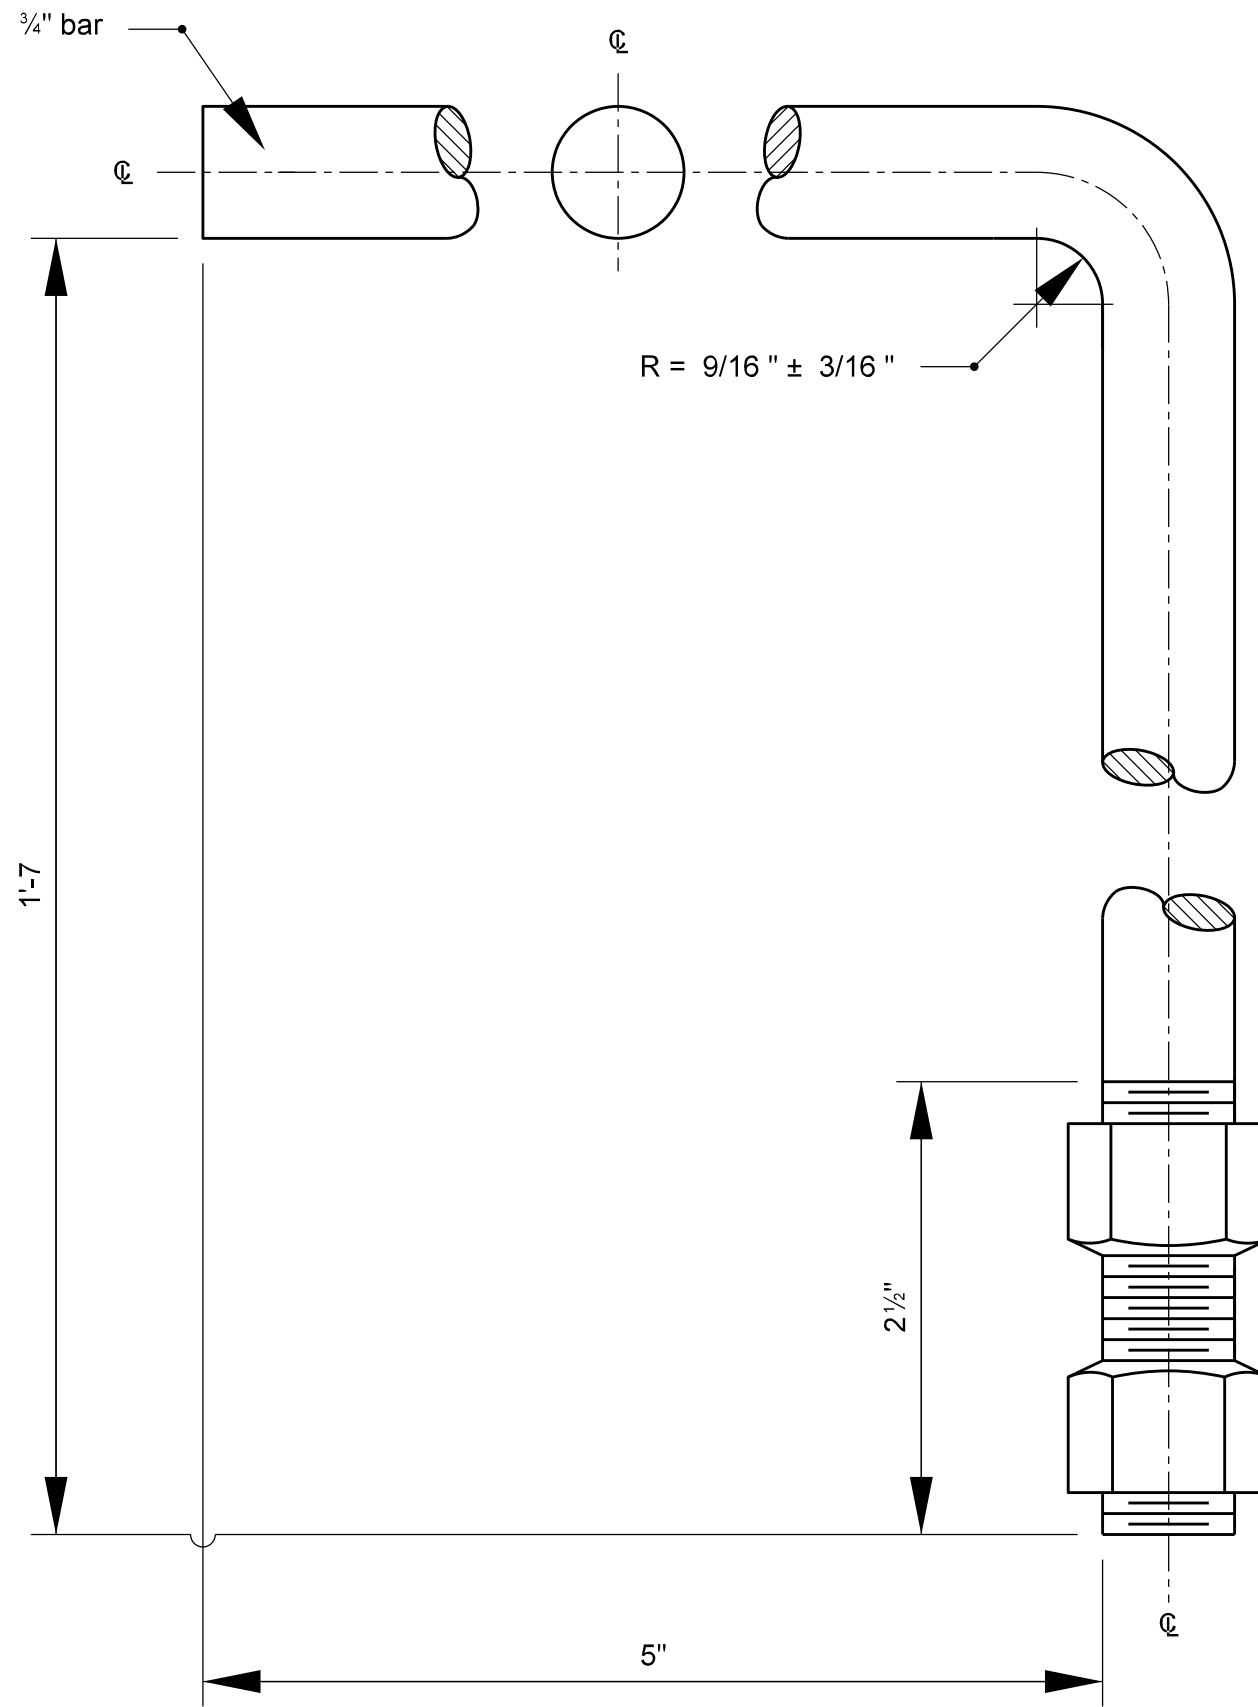

GALVANIZED  
HOOK BOLT AND NUTS

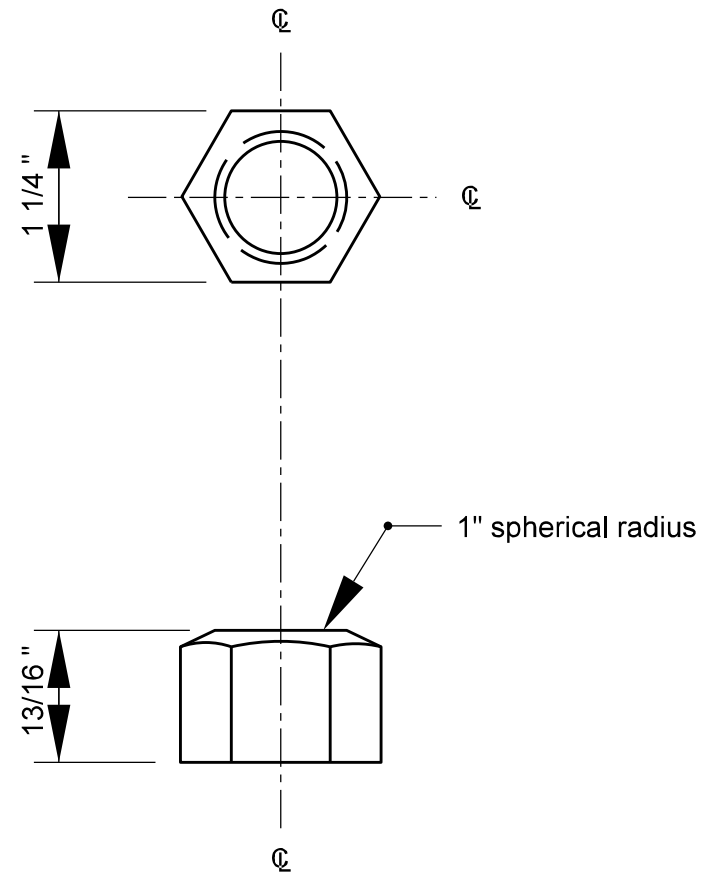


### GENERAL NOTES


1. Hook bolts and anchor straps shall be used at both upstream and downstream ends of all C.A., C.S., and structural plate pipes and pipe diameter or span of 84" or greater.
2. See Standard Drawing E 715-PASD-01 for anchor strap details.

INDIANA DEPARTMENT OF TRANSPORTATION			
PIPE ANCHOR HOOK BOLT DETAILS			
STANDARD DRAWING NO.		E 715-PAHB-01	
		APRIL 1995	
		DETAILS PLACED IN THIS FORMAT ON 7-27-95	
		/s/ <i>Anthony L. Uremovich</i>	7-27-99
		DESIGN STANDARDS ENGINEER	DATE
DESIGN STANDARDS ENGINEER		/s/ <i>Firooz Zandi</i>	7-27-99
		CHIEF HIGHWAY ENGINEER	DATE

ORIGINALLY APPROVED 4-01-95

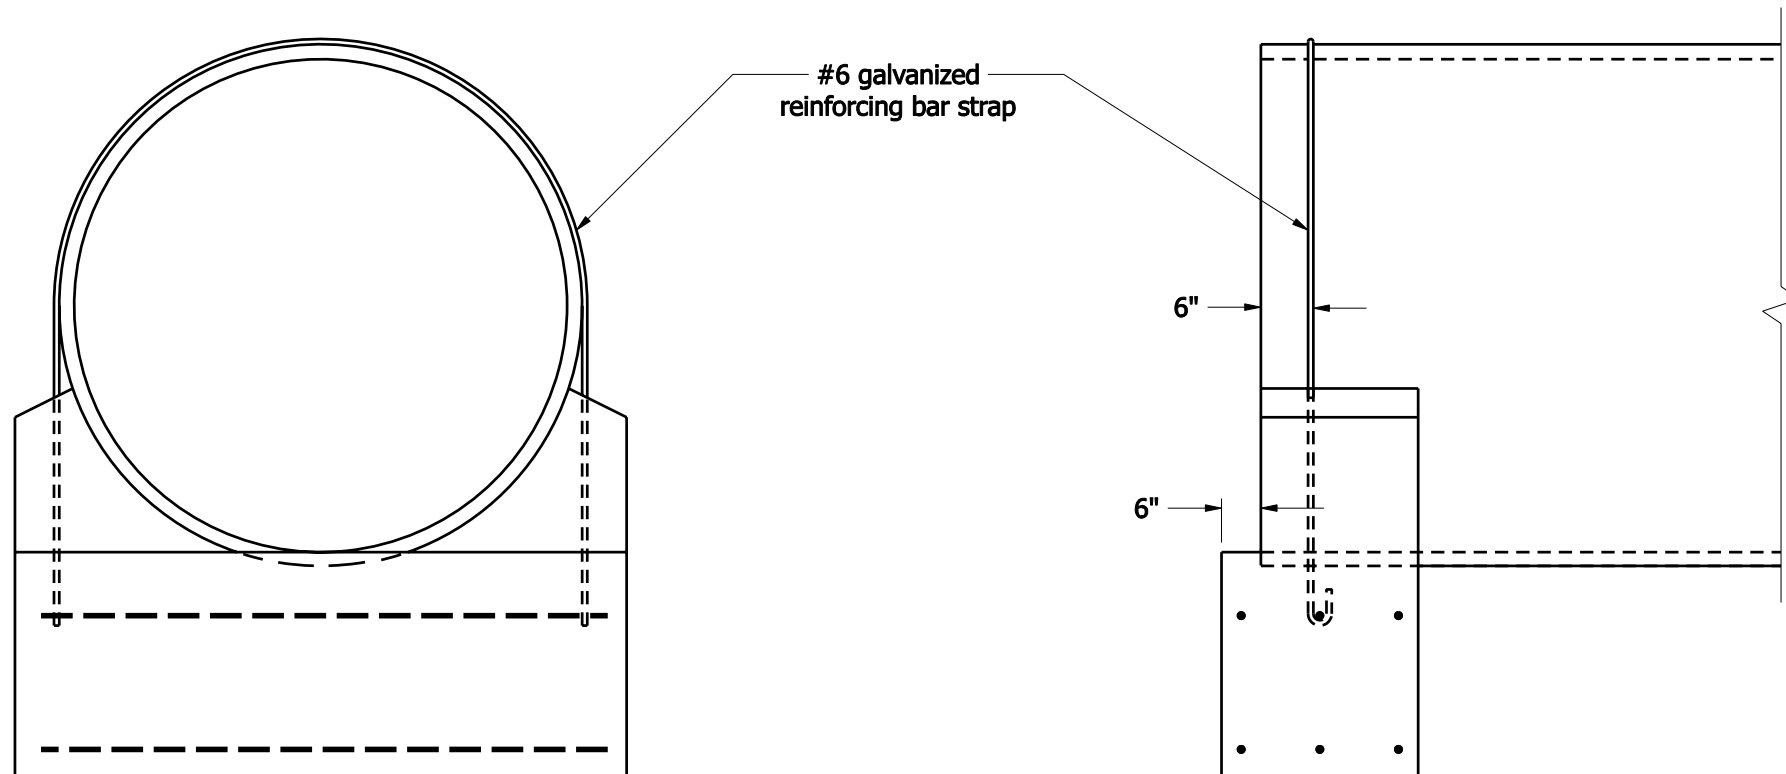

**#6 REINFORCING BAR STRAP DETAILS**

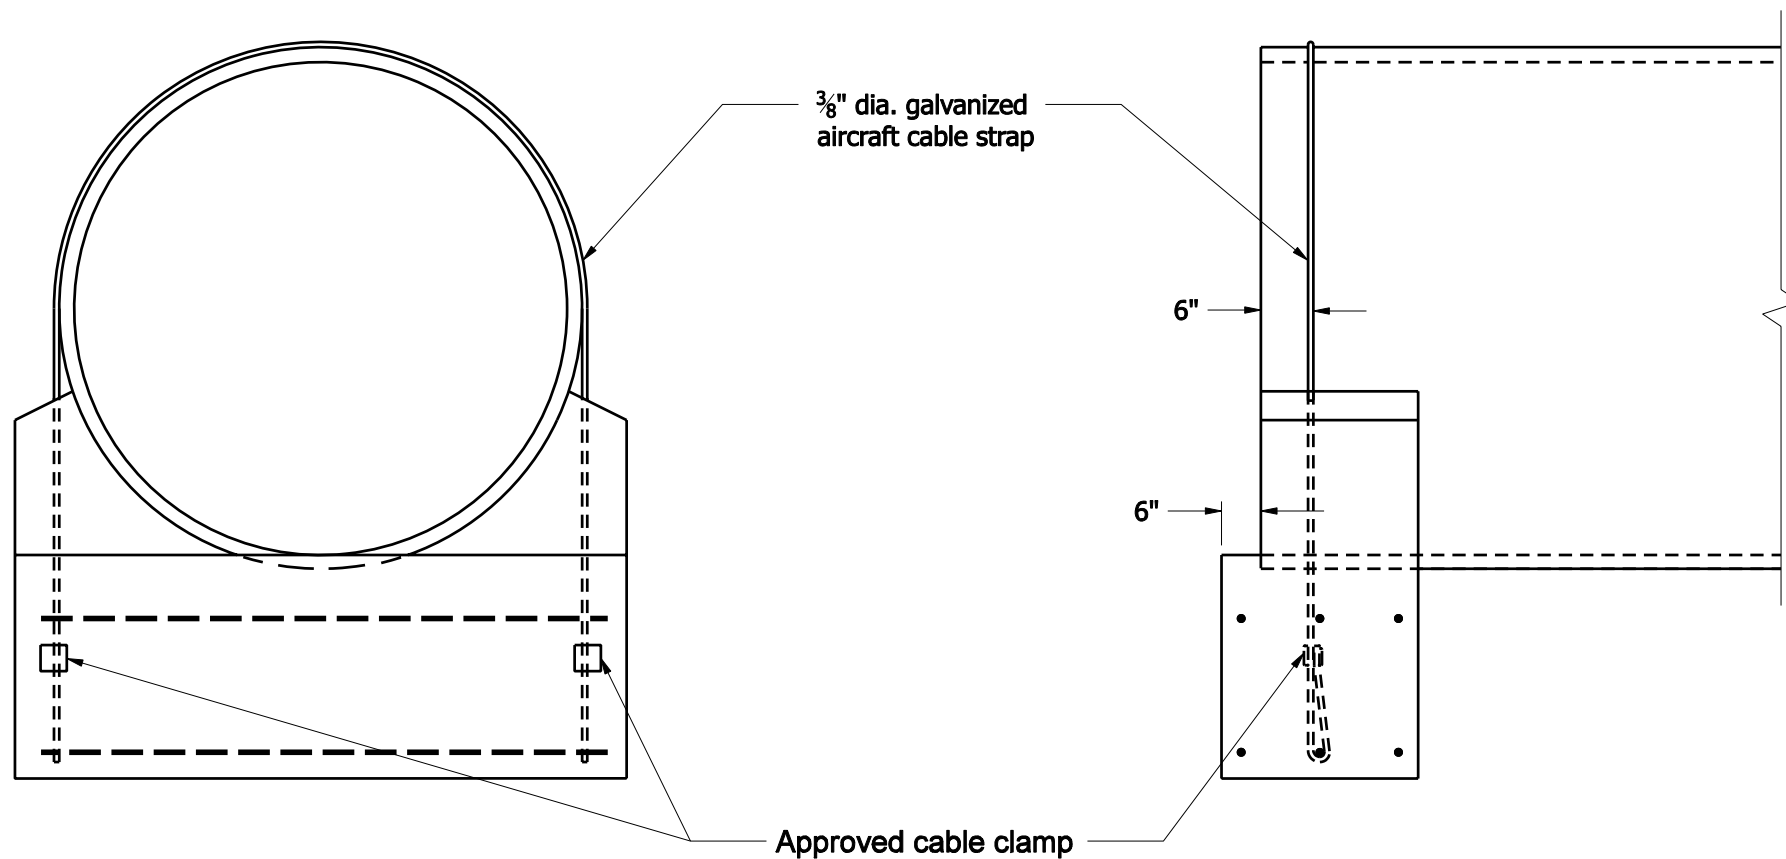

**3/8" AIRCRAFT CABLE STRAP DETAILS**

**GENERAL NOTES**


1. See Standard Drawing E 715-PAHB-01 for hook bolt details.

INDIANA DEPARTMENT OF TRANSPORTATION

PIPE ANCHOR  
STRAP DETAILS

SEPTEMBER 2008

STANDARD DRAWING NO. E 715- PASD-01




DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave*  
DESIGN STANDARDS ENGINEER


*09/02/08*  
DATE

*/s/ Mark A. Miller*  
CHIEF HIGHWAY ENGINEER


*09/02/08*  
DATE

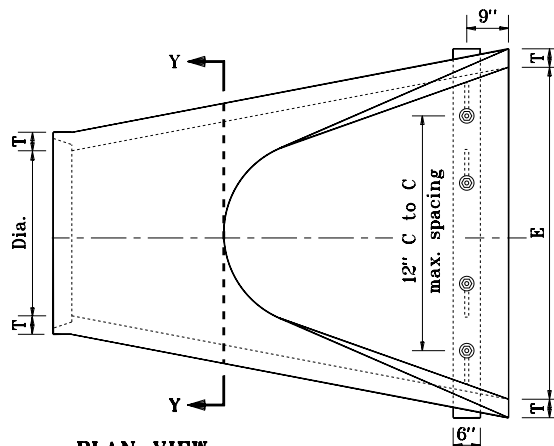


**PLAN VIEW**

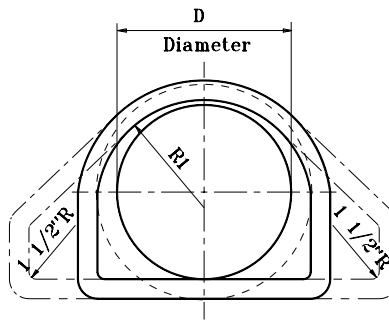


**SECTION Y-Y**

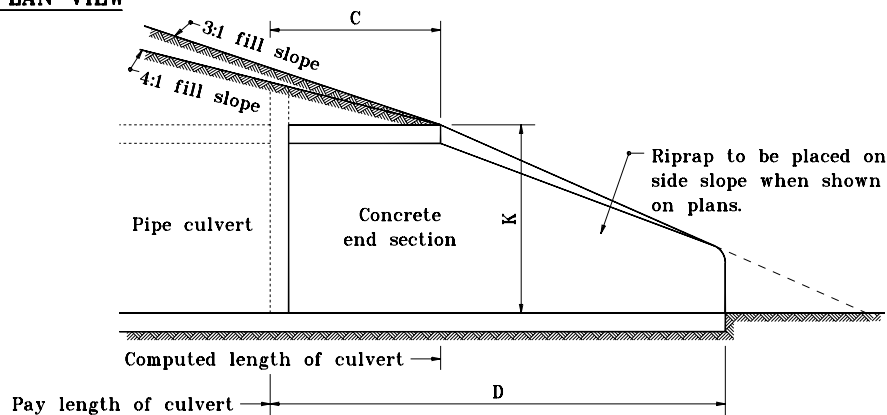

**SLOPE DETAIL**

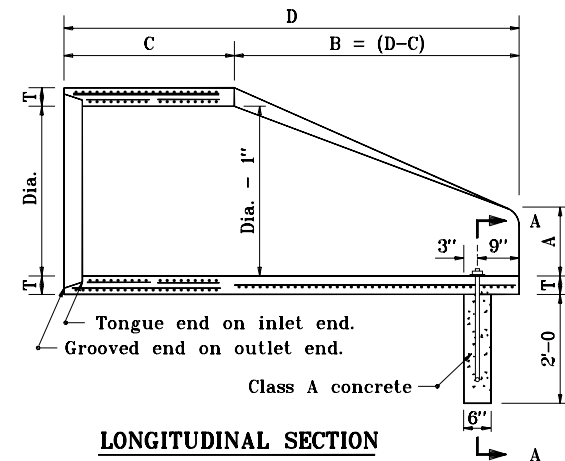

**LONGITUDINAL SECTION**

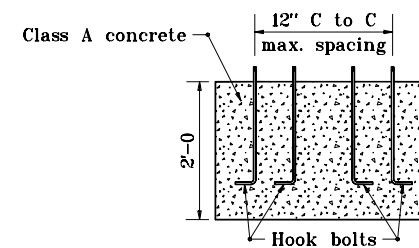

**SECTION A-A**

Concrete Pipe Toe Anchor

**TABLE OF DIMENSIONS**

DIA.	T (min.)	A (±1")	C (±1")	D (±1")	E (±1")	K	R1	R2	APPROX. WEIGHT, lb.
12"	2"	5"	4'-3	6'-2	2'-0	1.3	10 1/8"	9"	800
15"	2 1/4"	7"	4'-0	6'-3	2'-6	1.5	12 1/2"	11"	1100
18"	2 1/2"	11"	4'-1	6'-2	3'-0	1.8	15 1/2"	12"	1300
21"	2 3/4"	11"	3'-6	6'-3	3'-6	2.1	16 1/8"	13"	1500
24"	3"	1'-0	2'-8	6'-3	4'-0	2.3	16 3/16"	14"	1800
27"	3 1/4"	1'-1	2'-5	6'-3	4'-6	2.6	18 3/16"	14 1/2"	2100
30"	3 1/2"	1'-2	1'-10	6'-3	5'-0	2.9	18 1/2"	15"	2400
33"	3 3/4"	1'-3	3'-6	8'-3	5'-6	3.1	23 3/4"	17 1/2"	4100
36"	4"	1'-5	3'-1	8'-3	6'-0	3.4	24 5/8"	20"	4200


INDIANA DEPARTMENT OF TRANSPORTATION

**PRECAST CONCRETE**

**END SECTION**

MAY 1998

STANDARD DRAWING NO. **E 715-PCES-01**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 5-01-98

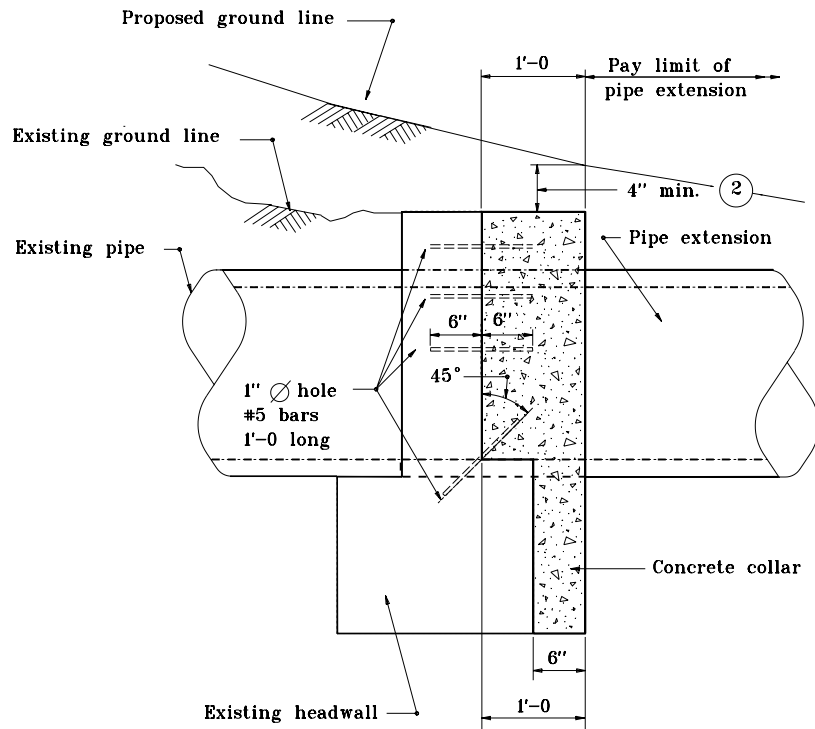

**SIDE VIEW**

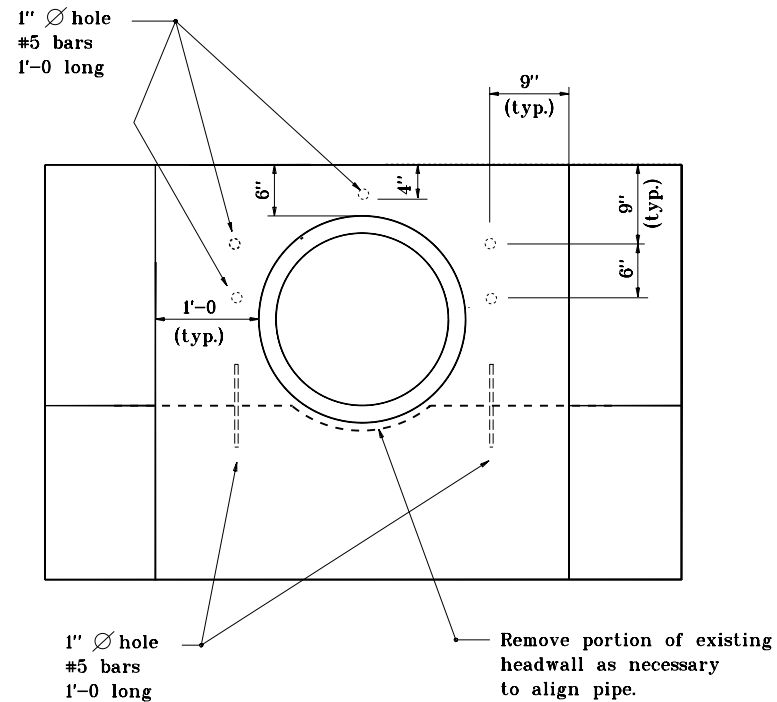


**END VIEW**


**NOTES:**

1. For other types of pipe end structures and pipes larger than 33"  $\varnothing$ , collar details are shown on the plans.
- 2 Remove portions of existing headwall if required to maintain 4" ground cover.


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>CONCRETE COLLAR FOR PIPE EXTENSION</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO. E 715-PCEX-01</b>	
	DETAILS PLACED IN THIS FORMAT 7-27-99
	/s/ Anthony L. Uremovich 7-27-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 7-27-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 1-02-98

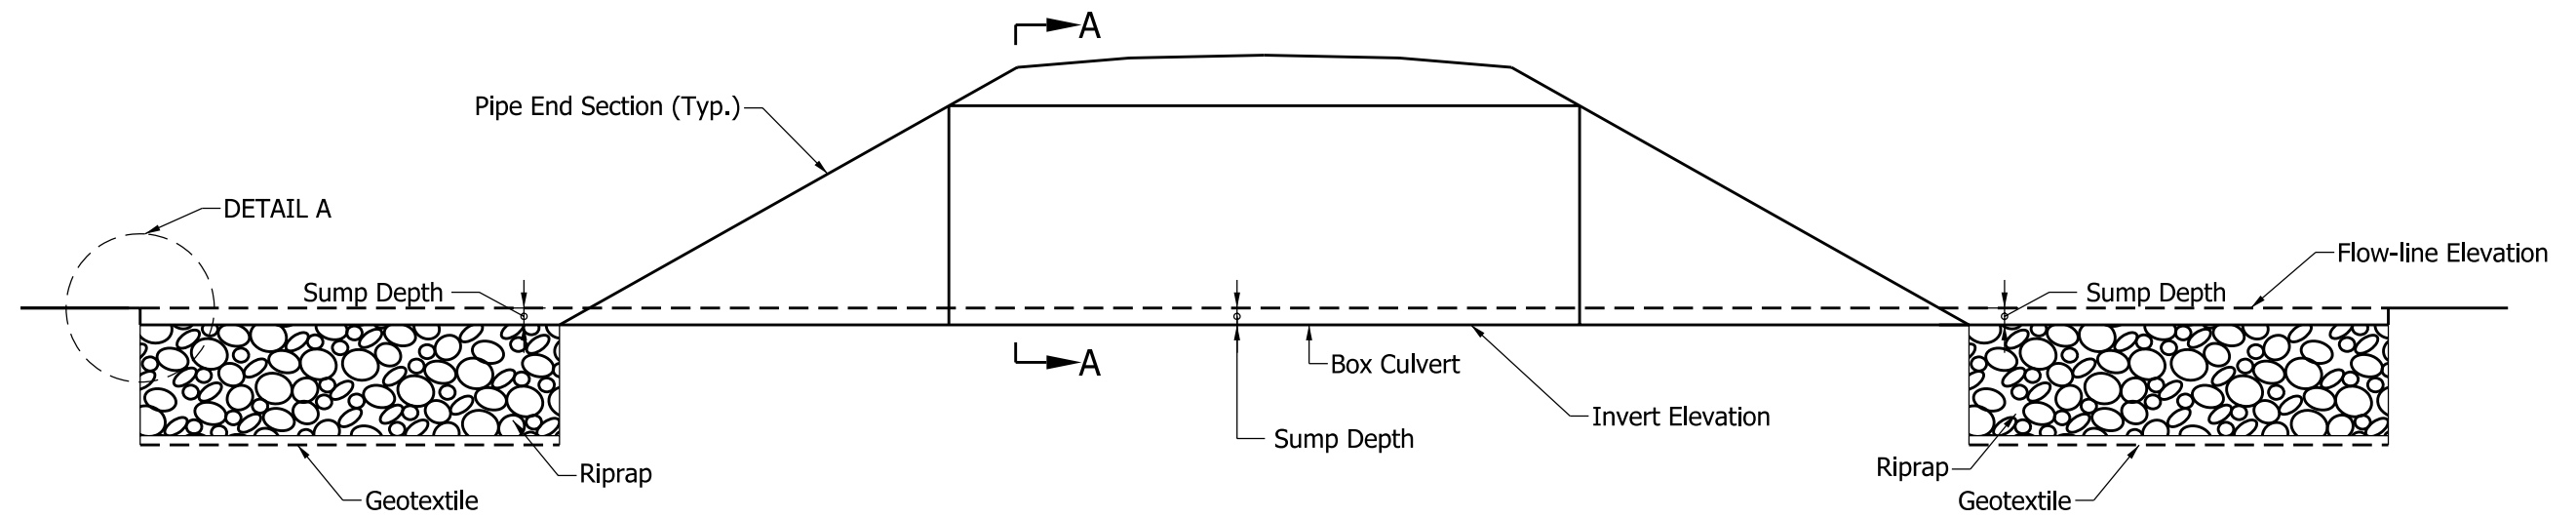

ELEVATION

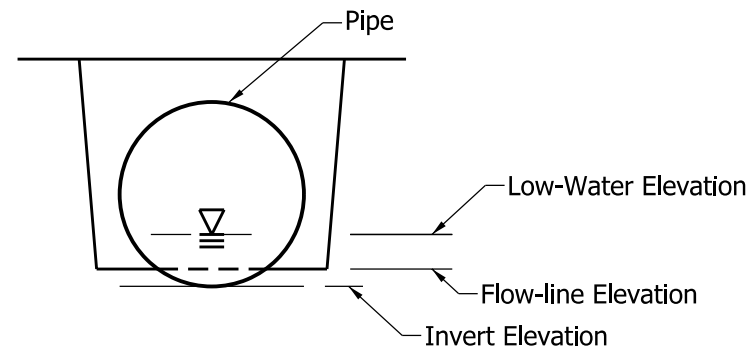

SECTION A-A

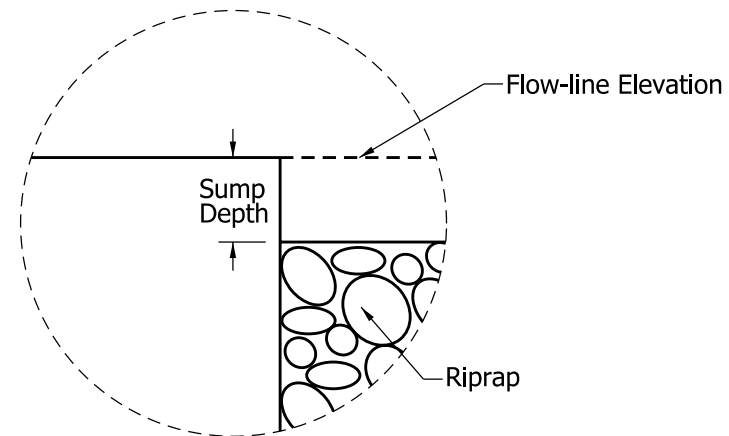

DETAIL A


INDIANA DEPARTMENT OF TRANSPORTATION		
PIPE SUMPING PROTECTION		
SEPTEMBER 2011		
STANDARD DRAWING NO.		E 715-PCSP-01
	/s/ <i>Richard L. VanCleave</i>	09/01/11
	DESIGN STANDARDS ENGINEER	DATE
	/s/ <i>Mark A. Miller</i>	09/01/11
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		

**2  $\frac{2}{3}$ " x  $\frac{1}{2}$ " CORRUGATED ALUMINUM ALLOY PIPE (LOCK SEAM)  
HEIGHT OF COVER LIMITS (ft.)**

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-01</b>	
	DETAILS PLACED IN THIS FORMAT <span style="float: right;">11-15-99</span>
	<u>/s/ Anthony L. Uremovich</u> <span style="float: right;"><u>11-15-99</u></span> DESIGN STANDARDS ENGINEER <span style="float: right;">DATE</span>
	<u>/s/ Firooz Zandi</u> <span style="float: right;"><u>11-15-99</u></span> CHIEF HIGHWAY ENGINEER <span style="float: right;">DATE</span>
	ORIGINALLY APPROVED <span style="float: right;">1-02-98</span>
DESIGN STANDARDS ENGINEER	




2 $\frac{2}{3}$ " x $\frac{1}{2}$ " CORRUGATED ALUMINUM ALLOY PIPE (RIVETED) HEIGHT OF COVER LIMITS (ft.)	
1	1.5
2	2.5
3	3.5
4	4.5
5	5.5
6	6.5
7	7.5
8	8.5
9	9.5
10	10.5
11	11.5
12	12.5
13	13.5
14	14.5
15	15.5
16	16.5
17	17.5
18	18.5
19	19.5
20	20.5
21	21.5
22	22.5
23	23.5
24	24.5
25	25.5
26	26.5
27	27.5
28	28.5
29	29.5
30	30.5
31	31.5
32	32.5
33	33.5
34	34.5
35	35.5
36	36.5
37	37.5
38	38.5
39	39.5
40	40.5
41	41.5
42	42.5
43	43.5
44	44.5
45	45.5
46	46.5
47	47.5
48	48.5
49	49.5
50	50.5
51	51.5
52	52.5
53	53.5
54	54.5
55	55.5
56	56.5
57	57.5
58	58.5
59	59.5
60	60.5
61	61.5
62	62.5
63	63.5
64	64.5
65	65.5
66	66.5
67	67.5
68	68.5
69	69.5
70	70.5
71	71.5
72	72.5
73	73.5
74	74.5
75	75.5
76	76.5
77	77.5
78	78.5
79	79.5
80	80.5
81	81.5
82	82.5
83	83.5
84	84.5
85	85.5
86	86.5
87	87.5
88	88.5
89	89.5
90	90.5
91	91.5
92	92.5
93	93.5
94	94.5
95	95.5
96	96.5
97	97.5
98	98.5
99	99.5
100	100.5

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-02</b>	
	DETAILS PLACED IN THIS FORMAT      11-15-99
	<i>/s/ Anthony L. Uremovich</i> <i>11-15-99</i> DESIGN STANDARDS ENGINEER      DATE
	 <i>/s/ Firooz Zandi</i> <i>11-15-99</i> CHIEF HIGHWAY ENGINEER      DATE
	ORIGINALLY APPROVED      1-02-98
DESIGN STANDARDS ENGINEER	

2<sup>2</sup>/<sub>3</sub>" x 1/2" CORRUGATED ALUMINUM ALLOY PIPE-ARCH (RIVETED OR LOCK SEAM)  
HEIGHT OF COVER LIMITS (ft.)

[illegible]

**NOTE:**


1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. Dual entries in the "Corner Radius" column, such as  $3/3\frac{1}{2}$ , represent the following:
  - 3 - minimum corner radius allowed by AASHTO M 196.
  - $3\frac{1}{2}$  - corner radius typically available.
3. The tabulated cover heights reflect pipe-arches with typically available corner radii. If a pipe-arch with corner radii other than what is typically available is to be used, a specific design shall be performed to verify structural adequacy.

INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-03</b>	
	DETAILS PLACED IN THIS FORMAT <span style="float: right;">11-15-99</span>
	<u>/s/ Anthony L. Uremovich</u> <span style="float: right;"><u>11-15-99</u></span> DESIGN STANDARDS ENGINEER <span style="float: right;">DATE</span>
	<u>/s/ Firooz Zandi</u> <span style="float: right;"><u>11-15-99</u></span> CHIEF HIGHWAY ENGINEER <span style="float: right;">DATE</span>
	ORIGINALLY APPROVED _____ _____ _____
DESIGN STANDARDS ENGINEER	

NOTE:

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

3" x 1" CORRUGATED ALUMINUM ALLOY PIPE (LOCK SEAM) HEIGHT OF COVER LIMITS (ft.)											
AREA (sft)	DIAMETER (in.)	THICKNESS (in.)									
		0.060		0.075		0.105		0.135		0.164	
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
4.9	30	1.0	71.2	1.0	89.4	1.0	100.0	1.0	100.0		
5.9	33	1.0	59.3	1.0	74.5	1.0	100.0	1.0	100.0		
7.1	36	1.0	59.3	1.0	74.5	1.0	100.0	1.0	100.0		
9.6	42	1.0	50.8	1.0	63.8	1.0	89.1	1.0	100.0		
12.6	48	1.0	44.5	1.0	55.9	1.0	78.0	1.0	100.0	1.0	100.0
15.9	54	1.0	39.5	1.0	49.6	1.0	69.3	1.0	92.8	1.0	90.7
19.6	60	1.0	35.6	1.0	44.7	1.0	62.4	1.0	83.5	1.0	81.6
23.8	66	1.0	32.3	1.0	40.6	1.0	56.7	1.0	75.9	1.0	74.2
28.3	72			1.0	37.2	1.0	52.0	1.0	69.6	1.0	68.0
33.2	78			1.0	34.4	1.0	48.0	1.0	64.2	1.0	62.8
38.5	84					1.0	44.5	1.0	59.6	1.0	58.3
44.2	90					1.0	41.6	1.0	55.6	1.0	54.4
50.3	96					1.0	38.1	1.0	51.3	1.0	51.0
56.7	102							1.1	46.3	1.1	48.0
63.6	108							1.1	41.8	1.1	45.3
70.9	114									1.2	42.9
78.5	120									1.3	40.1


INDIANA DEPARTMENT OF TRANSPORTATION	
PIPE HEIGHT OF COVER LIMITS	
STANDARD DRAWING NO.      E 715-PHCL-04	
	JANUARY 1998
	DETAILS PLACED IN THIS FORMAT ON 11/15/99
	/s/ Anthony L. Uremovich      11/15/99
	DESIGN STANDARDS ENGINEER      DATE
DESIGN STANDARDS ENGINEER	/s/ Firooz Zandi      11/15/99
	CHIEF HIGHWAY ENGINEER      DATE

3" x 1" CORRUGATED ALUMINUM ALLOY PIPE (RIVETED)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-05</b>	
	DETAILS PLACED IN THIS FORMAT      11-15-99
	<i>/s/ Anthony L. Uremovich</i> <i>11-15-99</i> DESIGN STANDARDS ENGINEER      DATE
	 <i>/s/ Firooz Zandi</i> <i>11-15-99</i> CHIEF HIGHWAY ENGINEER      DATE
	ORIGINALLY APPROVED      1-02-98
DESIGN STANDARDS ENGINEER	

**3" x 1" CORRUGATED ALUMINUM ALLOY PIPE-ARCH (RIVETED OR LOCK SEAM)  
HEIGHT OF COVER LIMITS (ft.)**

CORNER RADIUS (in.)	SPAN (in.)	RISE (in.)	AREA (sft)	THICKNESS (in.)									
				0.060		0.075		0.105		0.135		0.164	
				MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
8/18 $\frac{3}{4}$	60	46	15.6			1.1	20.8	1.1	20.8	1.1	20.8	1.1	20.8
9/20 $\frac{3}{4}$	66	51	19.3			1.1	20.9	1.1	20.9	1.1	20.9	1.1	20.9
12/22 $\frac{3}{4}$	73	55	23.2			1.1	20.8	1.1	20.8	1.1	20.8	1.1	20.8
14/20 $\frac{3}{4}$	81	59	27.4					1.2	17.1	1.2	17.1	1.2	17.1
14/22 $\frac{3}{4}$	87	63	32.1					1.2	17.3	1.2	17.3	1.2	17.3
16/24 $\frac{3}{4}$	95	67	37.0							1.2	17.1	1.2	17.1
16/26 $\frac{3}{4}$	103	71	42.4							1.2	16.9	1.2	16.9
18/27 $\frac{3}{4}$	112	75	48.0									1.3	16.5

**NOTE:**


- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- Dual entries in the "Corner Radius" column, such as 8/18 $\frac{3}{4}$  represent the following:  
8 - minimum corner radius allowed by AASHTO M 196.  
18 $\frac{3}{4}$  - corner radius typically available.
- The tabulated cover heights reflect pipe-arches with typically available corner radii. If a pipe-arch with corner radii other than what is typically available is to be used, a specific design shall be performed to verify structural adequacy.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

**STANDARD DRAWING NO. E 715-PHCL-06**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 1-02-98

6" x 1" CORRUGATED ALUMINUM ALLOY PIPE (LOCK SEAM)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5
101	51.0
102	51.5
103	52.0
104	52.5
105	53.0
106	53.5
107	54.0
108	54.5
109	55.0
110	55.5
111	56.0
112	56.5
113	57.0
114	57.5
115	58.0
116	58.5
117	59.0
118	59.5
119	60.0
120	60.5
121	61.0
122	61.5
123	62.0
124	62.5
125	63.0
126	63.5
127	64.0
128	64.5
129	65.0
130	65.5
131	66.0
132	66.5
133	67.0
134	67.5
135	68.0
136	68.5
137	69.0
138	69.5
139	70.0
140	70.5
141	71.0
142	71.5
143	72.0
144	72.5
145	73.0
146	73.5
147	74.0
148	74.5
149	75.0
150	75.5
151	76.0
152	76.5
153	77.0
154	77.5
155	78.0
156	78.5
157	79.0
158	79.5
159	80.0
160	

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-07</b>	
	DETAILS PLACED IN THIS FORMAT      11-15-99  <u>/s/ Anthony L. Uremovich</u> <u>11-15-99</u> DESIGN STANDARDS ENGINEER      DATE
DESIGN STANDARDS ENGINEER	<u>/s/ Firooz Zandi</u> <u>11-15-99</u> CHIEF HIGHWAY ENGINEER      DATE ORIGINALLY APPROVED      1-02-98

6" x 1" CORRUGATED ALUMINUM ALLOY PIPE (RIVETED)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-08</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	<u>/s/ Anthony L. Uremovich</u> 11-15-99
	DESIGN STANDARDS ENGINEER DATE
	<u>/s/ Firooz Zandi</u> 11-15-99
DESIGN STANDARDS ENGINEER	CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 1-02-98

**2  $\frac{2}{3}$ " x  $\frac{1}{2}$ " CORRUGATED STEEL PIPE (LOCK SEAM)**  
**HEIGHT OF COVER LIMITS (ft.)**

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1> <p style="text-align: center;">JANUARY 1998</p>	
STANDARD DRAWING NO. E 715-PHCL-09	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	<u>/s/ Anthony L. Uremovich</u> 11-15-99 DESIGN STANDARDS ENGINEER DATE
	<u>/s/ Firooz Zandi</u> 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 1-02-98
DESIGN STANDARDS ENGINEER	




$2\frac{2}{3}'' \times \frac{1}{2}''$ CORRUGATED STEEL PIPE (RIVETED) HEIGHT OF COVER LIMITS (ft.)	
---	--

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-10</b>	
	DETAILS PLACED IN THIS FORMAT <span style="float: right;">11-15-99</span>
	<u>/s/ Anthony L. Uremovich</u> <span style="float: right;"><u>11-15-99</u></span> DESIGN STANDARDS ENGINEER <span style="float: right;">DATE</span>
	<u>/s/ Firooz Zandi</u> <span style="float: right;"><u>11-15-99</u></span> CHIEF HIGHWAY ENGINEER <span style="float: right;">DATE</span>
	ORIGINALLY APPROVED <span style="float: right;">1-02-98</span>
DESIGN STANDARDS ENGINEER	


$2\frac{2}{3}$ " x $\frac{1}{2}$ " CORRUGATED STEEL PIPE—ARCH (RIVETED OR LOCK SEAM) HEIGHT OF COVER LIMITS (ft.)	
1	1.5
2	2.5
3	3.5
4	4.5
5	5.5
6	6.5
7	7.5
8	8.5
9	9.5
10	10.5
11	11.5
12	12.5
13	13.5
14	14.5
15	15.5
16	16.5
17	17.5
18	18.5
19	19.5
20	20.5
21	21.5
22	22.5
23	23.5
24	24.5
25	25.5
26	26.5
27	27.5
28	28.5
29	29.5
30	30.5
31	31.5
32	32.5
33	33.5
34	34.5
35	35.5
36	36.5
37	37.5
38	38.5
39	39.5
40	40.5
41	41.5
42	42.5
43	43.5
44	44.5
45	45.5
46	46.5
47	47.5
48	48.5
49	49.5
50	50.5
51	51.5
52	52.5
53	53.5
54	54.5
55	55.5
56	56.5
57	57.5
58	58.5
59	59.5
60	60.5
61	61.5
62	62.5
63	63.5
64	64.5
65	65.5
66	66.5
67	67.5
68	68.5
69	69.5
70	70.5
71	71.5
72	72.5
73	73.5
74	74.5
75	75.5
76	76.5
77	77.5
78	78.5
79	79.5
80	80.5
81	81.5
82	82.5
83	83.5
84	84.5
85	85.5
86	86.5
87	87.5
88	88.5
89	89.5
90	90.5
91	91.5
92	92.5
93	93.5
94	94.5
95	95.5
96	96.5
97	97.5
98	98.5
99	99.5
100	100.5

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. Dual entries in the "Corner Radius" column, such as  $3/3\frac{1}{2}$ , represent the following:
  - 3 - minimum corner radius allowed by AASHTO M 36.
  - $3\frac{1}{2}$  - corner radius typically available.
3. The tabulated cover heights reflect pipe-arches with typically available corner radii. If a pipe-arch with corner radii other than what is typically available is to be used, a specific design shall be performed to verify structural adequacy.

INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="margin: 0;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-11</b>	



ANTHONY L. UREMOWICH  
REGISTERED  
No. 18095  
STATE OF INDIANA  
PROFESSIONAL ENGINEER


DETAILS PLACED IN THIS FORMAT	11-15-99
<u>/s/ Anthony L. Uremovich</u>	<u>11-15-99</u>
DESIGN STANDARDS ENGINEER	DATE
<u>/s/ Firooz Zandi</u>	<u>11-15-99</u>
CHIEF HIGHWAY ENGINEER	DATE
ORIGINALLY APPROVED	
DESIGN STANDARDS ENGINEER	1-02-98

3" x 1" CORRUGATED STEEL PIPE (LOCK SEAM)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5
101	51.0
102	51.5
103	52.0
104	52.5
105	53.0
106	53.5
107	54.0
108	54.5
109	55.0
110	55.5
111	56.0
112	56.5
113	57.0
114	57.5
115	58.0
116	58.5
117	59.0
118	59.5
119	60.0
120	60.5
121	61.0
122	61.5
123	62.0
124	62.5
125	63.0
126	63.5
127	64.0
128	64.5
129	65.0
130	65.5
131	66.0
132	66.5
133	67.0
134	67.5
135	68.0
136	68.5
137	69.0
138	69.5
139	70.0
140	70.5
141	71.0
142	71.5
143	72.0
144	72.5
145	73.0
146	73.5
147	74.0
148	74.5
149	75.0
150	75.5
151	76.0
152	76.5
153	77.0
154	77.5
155	78.0
156	78.5
157	79.0
158	79.5
159	80.0
160	80

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-12</b>	
	DETAILS PLACED IN THIS FORMAT      11-15-99
	<i>/s/ Anthony L. Uremovich</i> <i>11-15-99</i> DESIGN STANDARDS ENGINEER      DATE
	 <i>/s/ Firooz Zandi</i> <i>11-15-99</i> CHIEF HIGHWAY ENGINEER      DATE
	ORIGINALLY APPROVED      1-02-98
DESIGN STANDARDS ENGINEER	

3" x 1" CORRUGATED STEEL PIPE (RIVETED)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5
101	51.0
102	51.5
103	52.0
104	52.5
105	53.0
106	53.5
107	54.0
108	54.5
109	55.0
110	55.5
111	56.0
112	56.5
113	57.0
114	57.5
115	58.0
116	58.5
117	59.0
118	59.5
119	60.0
120	60.5
121	61.0
122	61.5
123	62.0
124	62.5
125	63.0
126	63.5
127	64.0
128	64.5
129	65.0
130	65.5
131	66.0
132	66.5
133	67.0
134	67.5
135	68.0
136	68.5
137	69.0
138	69.5
139	70.0
140	70.5
141	71.0
142	71.5
143	72.0
144	72.5
145	73.0
146	73.5
147	74.0
148	74.5
149	75.0
150	75.5
151	76.0
152	76.5
153	77.0
154	77.5
155	78.0
156	78.5
157	79.0
158	79.5
159	80.0
160	8

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-13</b>	
	DETAILS PLACED IN THIS FORMAT      11-15-99  <u>/s/ Anthony L. Uremovich</u> <u>11-15-99</u> DESIGN STANDARDS ENGINEER      DATE
DESIGN STANDARDS ENGINEER	<u>/s/ Firooz Zandi</u> <u>11-15-99</u> CHIEF HIGHWAY ENGINEER      DATE ORIGINALLY APPROVED

3" x 1" CORRUGATED STEEL PIPE-ARCH (RIVETED OR LOCK SEAM) HEIGHT OF COVER LIMITS (ft.)
---

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. 2. Dual entries in the ,Corner Radius, column, such as  $8/18\frac{3}{4}$ , represent the following:
  - 8 - minimum corner radius allowed by AASHTO M 36.
  - $18\frac{3}{4}$  - corner radius typically available.
3. The tabulated cover heights reflect pipe-arches with typically available corner radii. If a pipe-arch with corner radii other than what is typically available is to be used, a specific design shall be performed to verify structural adequacy.


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="text-align: center;">PIPE HEIGHT OF COVER LIMITS</h1>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-14</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	<u>/s/ Anthony L. Uremovich</u> 11-15-99
	DESIGN STANDARDS ENGINEER DATE
	<u>/s/ Firooz Zandi</u> 11-15-99
DESIGN STANDARDS ENGINEER	CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 1-02-98

5" x 1" CORRUGATED STEEL PIPE (LOCK SEAM)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5
101	51.0
102	51.5
103	52.0
104	52.5
105	53.0
106	53.5
107	54.0
108	54.5
109	55.0
110	55.5
111	56.0
112	56.5
113	57.0
114	57.5
115	58.0
116	58.5
117	59.0
118	59.5
119	60.0
120	60.5
121	61.0
122	61.5
123	62.0
124	62.5
125	63.0
126	63.5
127	64.0
128	64.5
129	65.0
130	65.5
131	66.0
132	66.5
133	67.0
134	67.5
135	68.0
136	68.5
137	69.0
138	69.5
139	70.0
140	70.5
141	71.0
142	71.5
143	72.0
144	72.5
145	73.0
146	73.5
147	74.0
148	74.5
149	75.0
150	75.5
151	76.0
152	76.5
153	77.0
154	77.5
155	78.0
156	78.5
157	79.0
158	79.5
159	80.0
160	80

[illegible]

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION															
<h1 style="margin: 0;">PIPE HEIGHT OF COVER LIMITS</h1>															
JANUARY 1998															
STANDARD DRAWING NO. <b>E 715-PHCL-15</b>															
	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 80%;">DETAILS PLACED IN THIS FORMAT</td> <td style="width: 20%; text-align: right;">11-15-99</td> </tr> <tr> <td colspan="2" style="padding-top: 10px;"> <u>/s/ Anthony L. Uremovich</u> <span style="float: right;"><u>11-15-99</u></span> </td> </tr> <tr> <td style="text-align: center;">DESIGN STANDARDS ENGINEER</td> <td style="text-align: center;">DATE</td> </tr> <tr> <td colspan="2" style="padding-top: 10px;"> <u>/s/ Firooz Zandi</u> <span style="float: right;"><u>11-15-99</u></span> </td> </tr> <tr> <td style="text-align: center;">CHIEF HIGHWAY ENGINEER</td> <td style="text-align: center;">DATE</td> </tr> <tr> <td colspan="2" style="text-align: center; padding-top: 10px;"> <b>ORIGINALLY APPROVED</b> </td> </tr> <tr> <td style="text-align: center;">DESIGN STANDARDS ENGINEER</td> <td style="text-align: center;">1-02-98</td> </tr> </table>	DETAILS PLACED IN THIS FORMAT	11-15-99	<u>/s/ Anthony L. Uremovich</u> <span style="float: right;"><u>11-15-99</u></span>		DESIGN STANDARDS ENGINEER	DATE	<u>/s/ Firooz Zandi</u> <span style="float: right;"><u>11-15-99</u></span>		CHIEF HIGHWAY ENGINEER	DATE	<b>ORIGINALLY APPROVED</b>		DESIGN STANDARDS ENGINEER	1-02-98
DETAILS PLACED IN THIS FORMAT	11-15-99														
<u>/s/ Anthony L. Uremovich</u> <span style="float: right;"><u>11-15-99</u></span>															
DESIGN STANDARDS ENGINEER	DATE														
<u>/s/ Firooz Zandi</u> <span style="float: right;"><u>11-15-99</u></span>															
CHIEF HIGHWAY ENGINEER	DATE														
<b>ORIGINALLY APPROVED</b>															
DESIGN STANDARDS ENGINEER	1-02-98														

**5" x 1" CORRUGATED STEEL PIPE-ARCH (LOCK SEAM)  
HEIGHT OF COVER LIMITS (ft.)**

Rc (in.)	SPAN (in.)	RISE (in.)	AREA (sft)	THICKNESS (in.)									
				0.064		0.079		0.109		0.138		0.168	
				MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
8/18 <sup>3</sup> / <sub>4</sub>	60	46	15.6					1.1	20.8	1.1	20.8		
9/20 <sup>3</sup> / <sub>4</sub>	66	51	19.3					1.1	20.9	1.1	20.9		
12/22 <sup>3</sup> / <sub>4</sub>	73	55	23.2					1.1	20.8	1.1	20.8		
14/20 <sup>3</sup> / <sub>4</sub>	81	59	27.4					1.2	17.1	1.2	17.1	1.2	17.1
14/22 <sup>3</sup> / <sub>4</sub>	87	63	32.1					1.2	17.3	1.2	17.3	1.2	17.3
16/24 <sup>3</sup> / <sub>4</sub>	95	67	37.0					1.2	17.1	1.2	17.1	1.2	17.1
16/26 <sup>3</sup> / <sub>4</sub>	103	71	42.4					1.2	16.9	1.2	16.9	1.2	16.9
18/27 <sup>3</sup> / <sub>4</sub>	112	75	48.0					1.3	16.5	1.3	16.5	1.3	16.5
18/29 <sup>3</sup> / <sub>4</sub>	117	79	54.2					1.2	16.8	1.2	16.8	1.2	16.8
18/31 <sup>3</sup> / <sub>4</sub>	128	83	60.5							1.3	16.2	1.3	16.2
18/33	137	87	67.4							1.3	16.0	1.3	16.0
18/34 <sup>3</sup> / <sub>4</sub>	142	91	74.5									1.3	16.3


**NOTES:**

- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- Dual entries in the "Corner Radius" column, such as 8/18 $\frac{3}{4}$ , represent the following:  
8 - minimum corner raduis allowed by AASHTO M 36.  
18 $\frac{3}{4}$ - corner radius typically available.
- The tabulated cover heights reflect pipe-arches with typically available corner radii. If a pipe-arch with corner radii other than what is typically available is to be used, a specific design shall be performed to verify structural adequacy.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**  
JANUARY 1998

**STANDARD DRAWING NO. E 715-PHCL-16**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98

**NON-REINFORCED CONCRETE PIPE  
CLASS 3  
HEIGHT OF COVER LIMITS (ft.)**

DIAMETER (in.)	MINIMUM (ft.)	MAXIMUM (ft.)
12	1.3	14.1
15	1.4	13.1
18	1.5	12.8
21	1.5	13.4
24	1.5	13.5
27	1.6	12.1
30	1.8	10.7
33	1.9	9.8
36	2.1	9.0

**NOTE:**


1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

STANDARD DRAWING NO. **E 715-PHCL-17**



DETAILS PLACED IN THIS FORMAT 11-15-99

*/s/ Anthony L. Uremovich* 11-15-99  
DESIGN STANDARDS ENGINEER DATE

*/s/ Firooz Zandi* 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98



**CORRUGATED POLYETHYLENE PIPE, TYPES  
HEIGHT OF COVER LIMITS (ft.)**

PAY ITEM DIAMETER (in.)	NOMINAL DIAMETER (in.)	MINIMUM (ft.)	MAXIMUM (ft.)
12	12	2.0	11.0
15	15	2.0	11.0
18	18	2.0	11.0
21	21	2.0	11.0
24	24	2.0	11.0
30	30	2.0	11.0
36	36	2.0	11.0

**RIBBED POLYETHYLENE PIPE  
HEIGHT OF COVER LIMITS (ft.)**

PAY ITEM DIAMETER (in.)	NOMINAL DIAMETER (in.)	MINIMUM (ft.)	MAXIMUM (ft.)
18	18	2.0	18.0
21	21	2.0	22.0
24	24	2.0	21.0
27	27	2.0	24.0
30	30	2.0	22.0
33	33	2.0	23.0
36	36	2.0	25.0

**SMOOTH WALL POLYETHYLENE PIPE  
HEIGHT OF COVER LIMITS (ft.)**

PAY ITEM DIA. (in.)	NOMINAL DIA. (in.)	DIMENSION RATIO (NOM. DIA./WALL THICKNESS)							
		26		21		17		11	
		MIN.	MAX. (ft.)	MIN. (ft.)	MAX. (ft.)	MIN. (ft.)	MAX. (ft.)	MIN. (ft.)	MAX. (ft.)
12	13	2.0	40.0	2.0	57.0				
12	14					2.0	81.0		
15	18	2.0	40.0	2.0	57.0	2.0	81.0		
18	20	2.0	40.0	2.0	57.0	2.0	81.0		
18	22					2.0	81.0	2.0	100.0
21	24	2.0	40.0	2.0	57.0	2.0	81.0		
24	28	2.0	40.0	2.0	57.0	2.0	81.0		
27	32	2.0	40.0	2.0	57.0	2.0	81.0		
30	34	2.0	40.0	2.0	57.0	2.0	81.0		
36	42	2.0	40.0	2.0	57.0	2.0	81.0		

**NOTE:**


1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. The pay item diameter reflects the minimum required inside diameter.
3. Because the nominal size of smooth wall polyethylene pipe is based on the outside diameter, different dimension ratios may require different nominal diameters to satisfy the pay item diameter requirements.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

**STANDARD DRAWING NO. E 715-PHCL-18**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98

**PROFILE WALL POLYVINYL CHLORIDE PIPE  
HEIGHT OF COVER LIMITS (ft.)**

DIAMETER (in.)	MINIMUM (ft.)	MAXIMUM (ft.)
12	2.0	35.3
15	2.0	34.2
18	2.0	34.0
21	2.0	33.0
24	2.0	31.0
27	2.0	30.0
30	2.0	29.0
36	2.0	27.0

**SMOOTH WALL POLYVINYL CHLORIDE PIPE  
HEIGHT OF COVER LIMITS (ft.)**

PAY ITEM DIAMETER (in.)	NOMINAL DIAMETER (in.)	MINIMUM (ft.)	MAXIMUM (ft.)
12	12	2.0	64.0
15	15	2.0	64.0
18	18	2.0	61.0
21	21	2.0	61.0
24	24	2.0	61.0
27	27	2.0	61.0

**NOTE:**


1. The tabulated cover depths shall be measured from the bottom of the concrete or asphalt pavement to the top of the pipe.
2. The pay item diameter reflects the minimum required inside diameter.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

MAY 1999

**STANDARD DRAWING NO. E 715-PHCL-19**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED

5-03-99

VITRIFIED CLAY PIPE, EXTRA STRENGTH HEIGHT OF COVER LIMITS (ft.)		
DIAMETER (in)	MINIMUM (ft.)	MAXIMUM (ft.)
12	1.2	16.0
15	1.4	14.0
18	1.4	13.0
21	1.4	14.0
24	1.4	15.0
27	1.5	14.0
30	1.6	13.0
33	1.5	13.0
36	1.5	14.0

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION		
<b>PIPE HEIGHT OF COVER LIMITS</b> JANUARY 1998		
STANDARD DRAWING NO. <b>E 715-PHCL-20</b>		
	DETAILS PLACED IN THIS FORMAT 11-15-99	
	<i>/s/ Anthony L. Uremovich</i> 11-15-99 DESIGN STANDARDS ENGINEER DATE	
	<i>/s/ Firooz Zandi</i> 11-15-99 CHIEF HIGHWAY ENGINEER DATE	
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98	


- NOTE:
1. The tabulated cover depths shall be measured from the bottom of the bituminous or concrete pavement to the top of the pipe.

REINFORCED CONCRETE CIRCULAR PIPE HEIGHT OF COVER LIMITS (ft.)												
DIAMETER (in.)	Strength Class/D-load Rating											
	Class II: D <sub>0.01</sub> = 1000		Class III: D <sub>0.01</sub> = 1250		Class III: D <sub>0.01</sub> = 1350		Class IV: D <sub>0.01</sub> = 1500		Class IV: D <sub>0.01</sub> = 1750		Class IV: D <sub>0.01</sub> = 2000	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
12	1.4	6.0	1.1	10.0	1.1	12.0	1.0	15.0	1.0	24.0	1.0	100.0
15	1.1	8.0	1.0	12.0	1.0	14.0	1.0	19.0	1.0	35.0	1.0	100.0
18	1.0	9.0	1.0	14.0	1.0	17.0	1.0	22.0	1.0	52.0	1.0	100.0
21	1.0	10.0	1.0	15.0	1.0	18.0	1.0	24.0	1.0	84.0	1.0	100.0
24	1.0	11.0	1.0	17.0	1.0	20.0	1.0	26.0	1.0	85.0	1.0	100.0
27	1.0	10.0	1.0	13.0	1.0	15.0	1.0	19.0	1.0	26.0	1.0	42.0
30	1.0	10.0	1.0	14.0	1.0	16.0	1.0	20.0	1.0	28.0	1.0	44.0
33	1.0	10.0	1.0	15.0	1.0	17.0	1.0	20.0	1.0	29.0	1.0	45.0
36	1.0	11.0	1.0	15.0	1.0	17.0	1.0	21.0	1.0	29.0	1.0	45.0
42	1.0	11.0	1.0	16.0	1.0	18.0	1.0	22.0	1.0	30.0	1.0	44.0
48	1.0	12.0	1.0	17.0	1.0	19.0	1.0	22.0	1.0	30.0	1.0	43.0
54	1.0	12.0	1.0	17.0	1.0	19.0	1.0	23.0	1.0	31.0	1.0	42.0
60	1.0	10.0	1.0	13.0	1.0	14.0	1.0	17.0	1.0	21.0	1.0	26.0
66	1.0	10.0	1.0	14.0	1.0	15.0	1.0	17.0	1.0	21.0	1.0	26.0
72	1.0	11.0	1.0	14.0	1.0	15.0	1.0	18.0	1.0	22.0	1.0	27.0
78	1.0	11.0	1.0	14.0	1.0	16.0	1.0	18.0	1.0	22.0	1.0	27.0
84	1.0	11.0	1.0	15.0	1.0	16.0	1.0	19.0	1.0	23.0	1.0	28.0
90	1.0	11.0	1.0	15.0	1.0	16.0	1.0	19.0	1.0	23.0	1.0	28.0
96	1.0	11.0	1.0	15.0	1.0	17.0	1.0	19.0	1.0	23.0	1.0	28.0
102	1.1	12.0	1.1	15.0	1.1	17.0	1.1	19.0	1.1	24.0	1.1	29.0
108	1.2	12.0	1.2	15.0	1.2	17.0	1.2	20.0	1.2	24.0	1.2	29.0
114	1.2	12.0	1.2	16.0	1.2	17.0	1.2	20.0	1.2	24.0	1.2	29.0
120	1.3	12.0	1.3	16.0	1.3	17.0	1.3	20.0	1.3	24.0	1.3	29.0
126	1.4	12.0	1.4	16.0	1.4	18.0	1.4	20.0	1.4	24.0	1.4	29.0
132	1.4	12.0	1.4	16.0	1.4	18.0	1.4	20.0	1.4	25.0	1.4	29.0
138	1.5	12.0	1.5	16.0	1.5	18.0	1.5	20.0	1.5	25.0	1.5	29.0
144	1.5	12.0	1.5	16.0	1.5	18.0	1.5	20.0	1.5	25.0	1.5	29.0

INDIANA DEPARTMENT OF TRANSPORTATION

PIPE HEIGHT OF  
COVER LIMITS  
SEPTEMBER 2009

STANDARD DRAWING NO. E 715-PHCL-21



DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave*09/01/09

DESIGN STANDARDS ENGINEERDATE


*/s/ Mark A. Miller*09/01/09

CHIEF HIGHWAY ENGINEERDATE

REINFORCED CONCRETE CIRCULAR PIPE HEIGHT OF COVER LIMITS (ft.)										
DIAMETER (in.)	Strength Class/D-load Rating									
	Class V: D <sub>0.01</sub> = 2250		Class V: D <sub>0.01</sub> = 2500		Class V: D <sub>0.01</sub> = 2750		Class V: D <sub>0.01</sub> = 3000		Class Special: D <sub>0.01</sub> = 3250	
	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
12	1.0	100.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
15	1.0	100.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
18	1.0	100.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
21	1.0	100.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
24	1.0	100.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
27	1.0	92.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
30	1.0	100.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
33	1.0	89.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
36	1.0	79.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
42	1.0	68.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
48	1.0	61.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
54	1.0	57.0	1.0	100.0	1.0	100.5	1.0	100.5	1.0	100.5
60	1.0	30.0	1.0	100.0	1.0	45.0	1.0	57.0	1.0	75.0
66	1.0	31.0	1.0	100.0	1.0	46.0	1.0	57.0	1.0	74.0
72	1.0	32.0	1.0	37.0	1.0	47.0	1.0	57.0	1.0	73.0
78	1.0	32.0	1.0	39.0	1.0	47.0	1.0	57.0	1.0	72.0
84	1.0	33.0	1.0	39.0	1.0	47.0	1.0	57.0	1.0	70.0
90	1.0	33.0	1.0	40.0	1.0	47.0	1.0	57.0	1.0	69.0
96	1.0	33.0	1.0	40.0	1.0	47.0	1.0	57.0	1.0	68.0
102	1.1	34.0	1.1	40.0	1.1	47.0	1.1	57.0	1.1	67.0
108	1.2	34.0	1.2	40.0	1.2	47.0	1.2	55.0	1.2	66.0
114	1.2	34.0	1.2	40.0	1.2	47.0	1.2	55.0	1.2	65.0
120	1.3	34.0	1.3	40.0	1.3	47.0	1.3	55.0	1.3	64.0
126	1.4	34.0	1.4	40.0	1.4	47.0	1.4	54.0	1.4	63.0
132	1.4	34.0	1.4	40.0	1.4	46.0	1.4	54.0	1.4	63.0
138	1.5	34.0	1.5	40.0	1.5	46.0	1.5	54.0	1.5	62.0
144	1.5	34.0	1.5	40.0	1.5	46.0	1.5	53.0	1.5	61.0

NOTE:

- The tabulated cover depths shall be measured from the bottom of the bituminous or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
PIPE HEIGHT OF COVER LIMITS	
SEPTEMBER 2009	
STANDARD DRAWING NO. E 715- PHCL-22	
	<div> <div>/s/ Richard L. VanCleave</div> <div>DESIGN STANDARDS ENGINEER</div> <div>09/01/09</div> <div>DATE</div> </div> <div> <div>/s/ Mark A. Miller</div> <div>CHIEF HIGHWAY ENGINEER</div> <div>09/01/09</div> <div>DATE</div> </div>
DESIGN STANDARDS ENGINEER	

**REINFORCED CONCRETE HORIZONTAL ELLIPICAL PIPE  
HEIGHT OF COVER LIMITS (ft.)**

SPAN (in.)	RISE (in.)	AREA (sft)	Strength Class/D-load Rating									
			Class HE-A: D <sub>0.01</sub> = 600		Class HE-I: D <sub>0.01</sub> = 800		Class HE-II: D <sub>0.01</sub> = 1000		Class HE-III: D <sub>0.01</sub> = 1350		Class HE-IV: D <sub>0.01</sub> = 2000	
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
23	14	1.8	1.3	4.0	1.0	8.0	1.0	11.0	1.0	20.0	1.0	100.0
30	19	3.3	1.1	5.0	1.0	7.0	1.0	10.0	1.0	16.0	1.0	47.0
34	22	4.1	1.0	5.0	1.0	8.0	1.0	11.0	1.0	17.0	1.0	48.0
38	24	5.1	1.0	5.0	1.0	8.0	1.0	11.0	1.0	18.0	1.0	49.0
42	27	6.3	1.0	6.0	1.0	9.0	1.0	12.0	1.0	19.0	1.0	50.0
45	29	7.4	1.0	6.0	1.0	9.0	1.0	12.0	1.0	19.0	1.0	45.0
49	32	8.8	1.0	6.0	1.0	9.0	1.0	12.0	1.0	19.0	1.0	45.0
53	34	10.2	1.0	6.0	1.0	9.0	1.0	12.0	1.0	20.0	1.0	44.0
60	38	12.9	1.0	5.0	1.0	8.0	1.0	10.0	1.0	15.0	1.0	26.0
68	43	16.6	1.0	6.0	1.0	8.0	1.0	10.0	1.0	15.0	1.0	27.0
76	48	20.5	1.0	6.0	1.0	8.0	1.0	11.0	1.0	16.0	1.0	28.0
83	53	24.8	1.0	6.0	1.0	9.0	1.0	11.0	1.0	16.0	1.0	29.0
91	58	29.5	1.0	6.0	1.0	9.0	1.0	12.0	1.0	17.0	1.0	29.0
98	63	34.6	1.1	6.0	1.1	9.0	1.1	12.0	1.1	17.0	1.1	29.0
106	68	40.1	1.2	6.0	1.2	9.0	1.2	12.0	1.2	17.0	1.2	30.0
113	72	46.1	1.2	7.0	1.2	9.0	1.2	12.0	1.2	18.0	1.2	30.0
121	77	52.4	1.3	7.0	1.3	9.0	1.3	12.0	1.3	18.0	1.3	30.0
128	82	59.2	1.4	7.0	1.4	10.0	1.4	13.0	1.4	18.0	1.4	30.0
136	87	66.4	1.5	7.0	1.5	10.0	1.5	13.0	1.5	18.0	1.5	31.0
143	92	74.0	1.5	7.0	1.5	10.0	1.5	13.0	1.5	18.0	1.5	31.0
151	97	82.0	1.6	7.0	1.6	10.0	1.6	13.0	1.6	19.0	1.6	31.0
166	106	99.2	1.7	7.0	1.8	10.0	1.8	13.0	1.8	19.0	1.8	31.0
180	116	118.6	1.8	7.0	1.9	10.0	1.9	13.0	1.9	19.0	1.9	31.0

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE HEIGHT OF COVER LIMITS</b> JANUARY 1998	
STANDARD DRAWING NO. <b>E 715-PHCL-23</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  <div style="display: flex; justify-content: space-between;"> <div> <u>/s/ Anthony L. Uremovich</u> 11-15-99  <small>DESIGN STANDARDS ENGINEER DATE</small> </div> <div> <u>/s/ Firooz Zandi</u> 11-15-99  <small>CHIEF HIGHWAY ENGINEER DATE</small> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 5px;"> <span><small>DESIGN STANDARDS ENGINEER</small></span> <span><small>ORIGINALLY APPROVED</small></span> <span><small>1-02-98</small></span> </div>

MATERIAL	PIPE TYPE				
	1	2	3	4	5
Non-Reinforced Concrete Pipe				X	
Non-Reinforced Concrete Pipe, Class 3 (S)	X	X	X		
Reinforced Concrete Pipe (S)	X	X	X		
Reinforced Concrete Horizontal Elliptical Pipe (S)	X	X	X		
Corrugated Steel Pipe (C)	X		X		X
Corrugated Steel Pipe-Arch (C)	X		X		X
Polymer Precoated Galvanized Corrugated Steel Pipe (C)	X		X		X
Polymer Precoated Galvanized Corrugated Steel Pipe Type 1A (S)	X	X	X		X
Fully Bituminous Coated and Lined Corrugated Steel Pipe (S)		X			X
Polymer Precoated Galvanized Corr. Steel Pipe Arch Type IIA (S)	X	X	X		X
Fully Bituminous Coated and Lined Corrugated Steel Pipe-Arch (S)		X			X
Corrugated Aluminum Alloy Pipe (C)	X		X		X
Corrugated Aluminum Alloy Pipe-Arch (C)	X		X		X
Structural Plate Steel Pipe (C)	X		X		
Polymer Precoated Galvanized Corrugated Steel Pipe-Arch (C)	X		X		X

MATERIAL	PIPE TYPE				
	1	2	3	4	5
Structural Plate Steel Pipe-Arch (C)	X		X		
Structural Plate Aluminum Alloy Pipe (C)	X		X		
Structural Plate Aluminum Alloy Pipe-Arch (C)	X		X		
Clay Pipe, Extra Strength (S)	X	X	X		
Clay Pipe				X	
Perforated Clay Pipe				X	
Corrugated Polyethylene Pipe, Type SP				X	
Corrugated Polyethylene Pipe, Type (S)	X	X	X	X	X
Ribbed Polyethylene Pipe (S)	X	X	X		X
Smooth Wall Polyethylene Pipe (S)	X	X	X		X
Corrugated Polyethylene Drainage Tubing				X	
Perforated PVC Semicircular Pipe				X	
Profile Wall PVC Pipe (S)	X	X	X	X	X
Smooth Wall PVC Pipe (S)	X	X	X		X
Concrete Drain Tile				X	
Clay Drain Tile				X	


## GENERAL NOTES


1. The prescribed uses for the pipe types are as follows:
  - a. Type 1 Pipe - Culverts under mainline pavement and public road approaches.
  - b. Type 2 Pipe - Storm sewer pipe.
  - c. Type 3 Pipe - Culverts under driveways and field entrances.
  - d. Type 4 Pipe - Drain tile and longitudinal underdrains.
  - e. Type 5 Pipe - Broken back and other installations requiring coupled pipe.
2. Refer to Standard Drawings E 715-PHCL-01 through E 715-PHCL-23 and E 717-PHCL-01 through E 717-PHCL-10 for allowable heights of cover for various pipe materials (except Type 4 pipes).
3. Refer to Standard Drawings E 715-PSLC-01 through E 715-PSLC-03 for required pipe service life criteria.
4. Any pipe material which is in accordance with the designated pipe type, acceptable for cover conditions, and conforms to service life criteria may be installed.

### LEGEND


(C)- Corrugated Interior Culvert Pipe.

(S)- Smooth Interior Culvert or Storm Sewer Pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
PIPE CLASSIFICATION TABLES	
SEPTEMBER 2010	
STANDARD DRAWING NO.      E 715-PIPE-01	
	<i>/s/ Richard L. VanCleave</i> 09/01/10 <hr/> DESIGN STANDARDS ENGINEER      DATE
	<i>/s/ Mark A. Miller</i> 09/01/10 <hr/> CHIEF HIGHWAY ENGINEER      DATE
	DESIGN STANDARDS ENGINEER

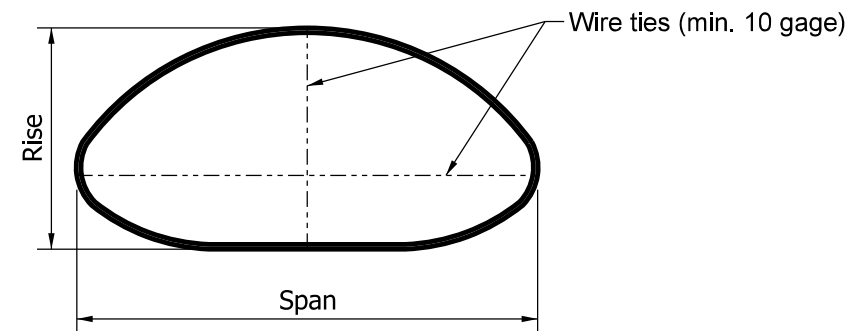


**STEEL PIPE-ARCH SECTIONS  
END STABILIZATION OF 3" x 1" CORRUGATED** ①

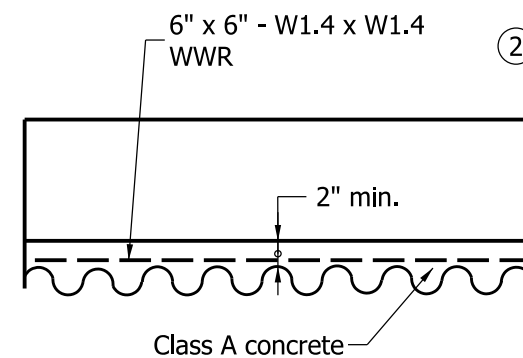


**TYPICAL LONGITUDINAL SECTION**

**NOTES:**

- ① In order to maintain their manufactured shape, all 3" x 1" corrugated steel pipe-arch sections shall have wire ties attached at each end as shown in the detail. The wire ties shall be attached across the largest vertical and horizontal dimension of the pipe-arch. The wire ties shall be installed by the manufacturer and shall remain in place until the on-site installation is complete.
- ② WWR shall be wired to every second circumferential bolt and every twelfth longitudinal bolt.

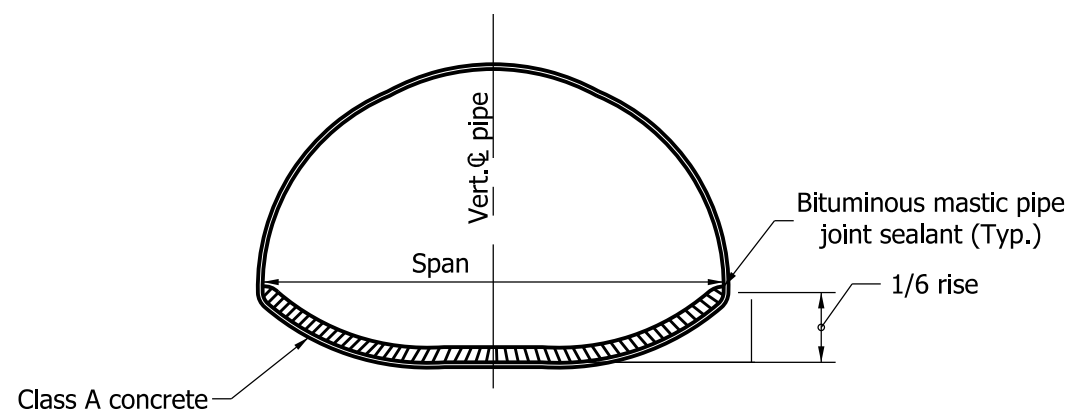


**STRUCTURAL PLATE  
PIPE-ARCH CULVERT  
ELEVATION**

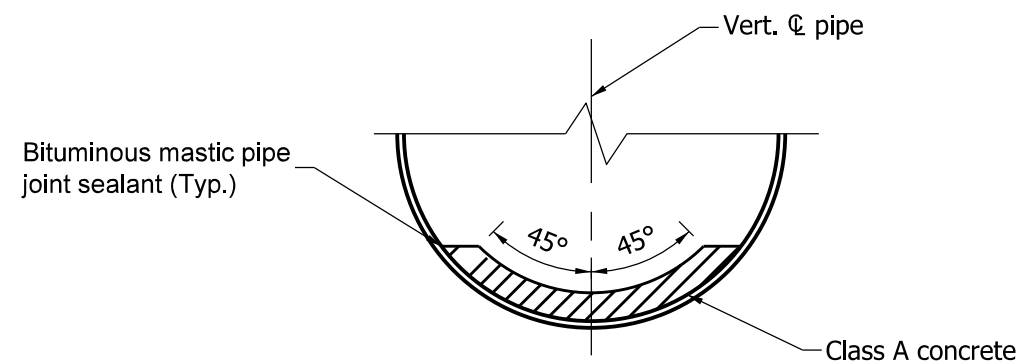

**STRUCTURAL PLATE  
PIPE CULVERT**

**CONCRETE FIELD PAVED INVERT DETAILS**

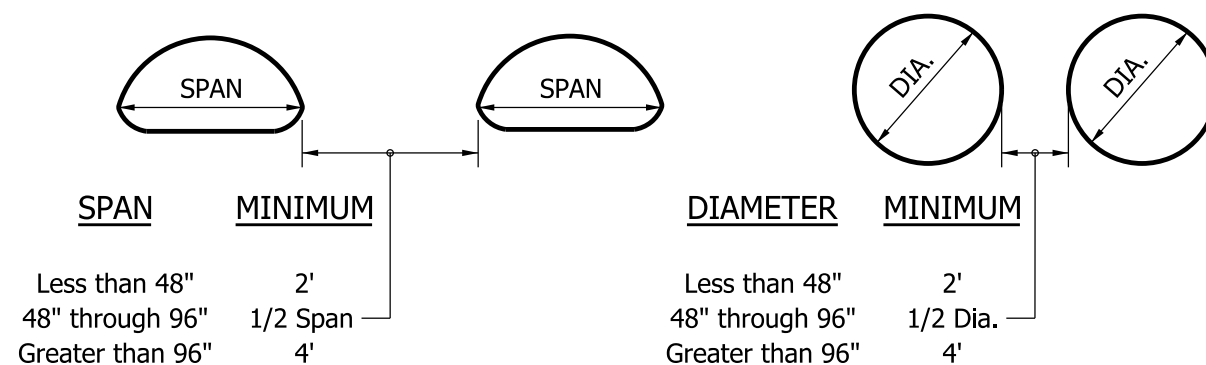


**MULTIPLE INSTALLATIONS**

**INDIANA DEPARTMENT OF TRANSPORTATION**

**MISCELLANEOUS PIPE  
DETAILS**

**SEPTEMBER 2011**

**STANDARD DRAWING NO. E 715-PIPE-02**



**DESIGN STANDARDS ENGINEER**

*/s/ Richard L. Vancleave* 09/01/11  
DESIGN STANDARDS ENGINEER DATE

*/s/ Mark A. Miller* 09/01/11  
CHIEF HIGHWAY ENGINEER DATE




**REQUIREMENTS FOR CORRUGATED STEEL PIPE THICKNESS  
AND PROTECTION AT NON-ABRASIVE SITES**

pH	≤ 4.0	4.5	5.0	5.5	6.0	6.5	≥ 7.0	Steel Conduit Type
Thickness required for 50 year Design Service Life				0.168	0.168	0.138	0.109	Zinc Coated Corrugated Steel Pipe Zinc Coated Corrugated Steel Pipe-Arch
								Zinc Coated Corrugated Steel Pipe w/Paved Invert Zinc Coated Corrugated Steel Pipe-Arch w/Paved Invert
			0.138	0.109	0.109	0.079	0.064	Fully Bituminous Coated and Lined Corrugated Steel Pipe Fully Bituminous Coated and Lined Corrugated Steel Pipe-Arch
			0.138	0.109	0.109	0.079	0.064	Aluminum Coated Type 2 Corrugated Steel Pipe Aluminum Coated Type 2 Corrugated Steel Pipe-Arch
	0.109	0.109	0.079	0.064	0.064	0.064	0.064	Polymer Precoated Galvanized Corrugated Steel Pipe Polymer Precoated Galvanized Corrugated Steel Pipe-Arch
	0.111*	0.111*	0.111*	0.170	0.111	0.111	0.111	Structural Plate Steel Pipe Structural Plate Steel Pipe-Arch

\* -- Concrete field paving required

pH	≤ 4.0	4.5	5.0	5.5	6.0	6.5	≥ 7.0	Steel Conduit Type
Thickness required for 75 year Design Service Life						0.168	0.138	Zinc Coated Corrugated Steel Pipe Zinc Coated Corrugated Steel Pipe-Arch
								Zinc Coated Corrugated Steel Pipe w/Paved Invert Zinc Coated Corrugated Steel Pipe-Arch w/Paved Invert
				0.168	0.168	0.138	0.109	Fully Bituminous Coated and Lined Corrugated Steel Pipe Fully Bituminous Coated and Lined Corrugated Steel Pipe-Arch
						0.138	0.109	Aluminum Coated Type 2 Corrugated Steel Pipe Aluminum Coated Type 2 Corrugated Steel Pipe-Arch
				0.138	0.138	0.109	0.109	Polymer Precoated Galvanized Corrugated Steel Pipe Polymer Precoated Galvanized Corrugated Steel Pipe-Arch
	0.111*	0.111*	0.111*	0.218	0.111	0.111	0.111	Structural Plate Steel Pipe Structural Plate Steel Pipe-Arch

\* -- Concrete field paving required  
Refer to Standard Drawing E 715-PSLC-03 for General Notes.


INDIANA DEPARTMENT OF TRANSPORTATION	
PIPE SERVICE LIFE CRITERIA	
MARCH 2006	
STANDARD DRAWING NO. E 715-PSLC-01	
	/s/ Richard L. VanCleave 3-01-06 DESIGN STANDARDS ENGINEER DATE  /s/ Richard K. Smutzer 3-01-06 CHIEF HIGHWAY ENGINEER DATE

**REQUIREMENTS FOR CORRUGATED STEEL PIPE THICKNESS  
AND PROTECTION AT ABRASIVE SITES**

pH	≤ 4.0	4.5	5.0	5.5	6.0	6.5	≥ 7.0	Steel Conduit Type
Thickness required for 50 year Design Service Life				0.168	0.168	0.138	0.109	Zinc Coated Corrugated Steel Pipe w/Paved Invert Zinc Coated Corrugated Steel Pipe-Arch w/Paved Invert Fully Bituminous Coated and Lined Corrugated Steel Pipe Fully Bituminous Coated and Lined Corrugated Steel Pipe-Arch
			0.138	0.109	0.109	0.079	0.064	Aluminum Coated Type 2 Corrugated Steel Pipe w/Paved Invert Aluminum Coated Type 2 Corrugated Steel Pipe-Arch w/Paved Invert
	0.109	0.109	0.079	0.064	0.064	0.064	0.064	Polymer Precoated Galvanized Corrugated Steel Pipe Polymer Precoated Galvanized Corrugated Steel Pipe Arch
				0.170	0.111	0.111	0.111	Structural Plate Steel Pipe w/Concrete Field Paving Structural Plate Steel Pipe-Arch w/Concrete Field Paving

pH	≤ 4.0	4.5	5.0	5.5	6.0	6.5	≥ 7.0	Steel Conduit Type
Thickness required for 75 year Design Service Life						0.168	0.138	Zinc Coated Corrugated Steel Pipe w/Paved Invert Zinc Coated Corrugated Steel Pipe-Arch w/Paved Invert Fully Bituminous Coated and Lined Corrugated Steel Pipe Fully Bituminous Coated and Lined Corrugated Steel Pipe-Arch
						0.138	0.109	Aluminum Coated Type 2 Corrugated Steel Pipe w/Paved Invert Aluminum Coated Type 2 Corrugated Steel Pipe-Arch w/Paved Invert
				0.138	0.138	0.109	0.109	Polymer Precoated Galvanized Corrugated Steel Pipe Polymer Precoated Galvanized Corrugated Steel Pipe Arch
				0.218	0.111	0.111	0.111	Structural Plate Steel Pipe w/Concrete Field Paving Structural Plate Steel Pipe-Arch w/Concrete Field Paving

Refer to Standard Drawing E 715-PSLC-03 for General Notes.

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE SERVICE LIFE CRITERIA</b>	
MARCH 2006	
STANDARD DRAWING NO. E 715-PSLC-02	
	/s/ Richard L. VanCleave      3-01-06 DESIGN STANDARDS ENGINEER      DATE
DESIGN STANDARDS ENGINEER	/s/ Richard K. Smutzer      3-01-06 CHIEF HIGHWAY ENGINEER      DATE


### GENERAL NOTES


1. "X" entries in the table indicate that a thickness which satisfies the required design service life is not available.
2. The tabulated plate thickness for Structural Plate Steel Pipe and Pipe-Arches reflects the required thickness for the top and side plates. If the tabulated plate thickness is less than 0.280 in. the bottom plates shall be of the next greater available thickness.
3. Corrugated Aluminum Alloy Pipe and Pipe-Arches and Aluminum Alloy Structural Plate Pipe and Pipe-Arches are acceptable with the minimum thickness required to satisfy cover conditions for all non-abrasive sites with a structure pH  $\geq$  5.0.
4. Corrugated Aluminum Alloy Pipe and Pipe-Arches with bituminous paved invert and Aluminum Alloy Structural Plate Pipe and Pipe-Arches with concrete field paving are acceptable with the minimum thickness required to satisfy cover conditions for all abrasive sites with a structure pH  $\geq$  5.0.
5. Service life criteria apply to only reinforced concrete, corrugated metal, and structural plate metal pipe. Other materials which conform to the designated pipe type and height of cover parameters are acceptable for installation.
6. Service life criteria do not apply to Type 4 pipe.

### **REQUIREMENTS FOR REINFORCED CONCRETE PIPE PROTECTION**


Pipe Slope	Minimum pH to Attain Design Service Life	
	50 Year	75 Year
Less than 3%	4.0	4.5
3% to 10%	4.5	5.0
Greater than 10%	5.0	5.5

For a structure pH lower than the minimums listed above, reinforced concrete pipe shall not be used.


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE SERVICE LIFE CRITERIA</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO. E 715-PSLC-03</b>	
	DETAILS PLACED IN THIS FORMAT 7-27-99
/s/ Anthony L. Uremovich DESIGN STANDARDS ENGINEER	7-27-99 DATE
/s/ Firooz Zandi CHIEF HIGHWAY ENGINEER	7-27-99 DATE
DESIGN STANDARDS ENGINEER	ORIGINALLY APPROVED 1-02-98

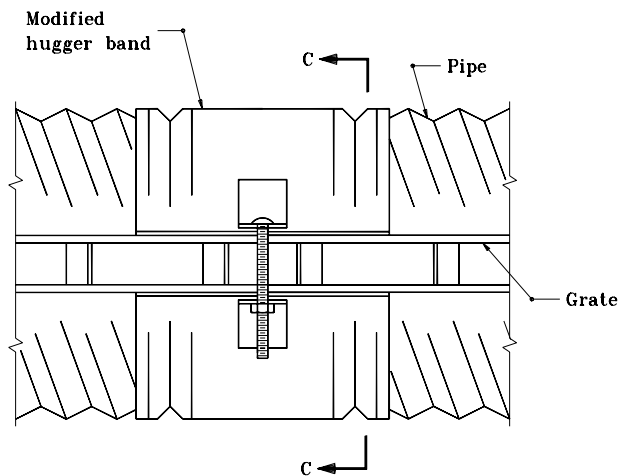


**MODIFIED HUGGER BAND**  
**TOP VIEW**

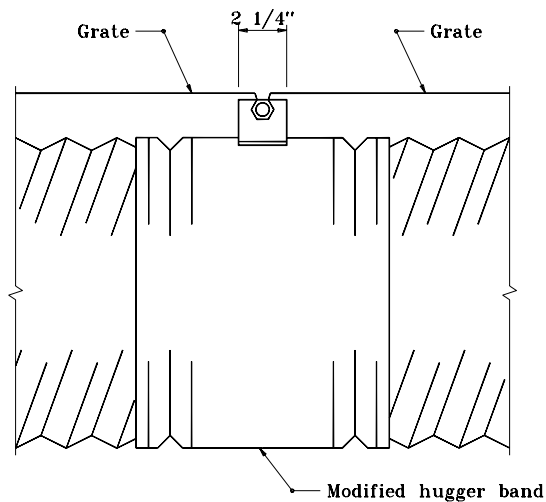

**MODIFIED HUGGER BAND**  
**SIDE VIEW**

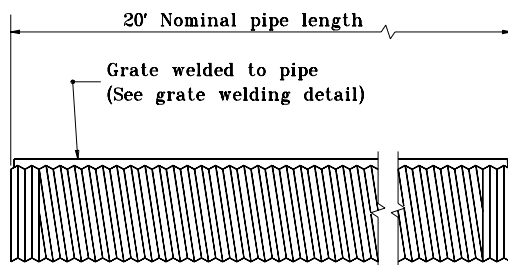

**TYPICAL PIPE SECTION**

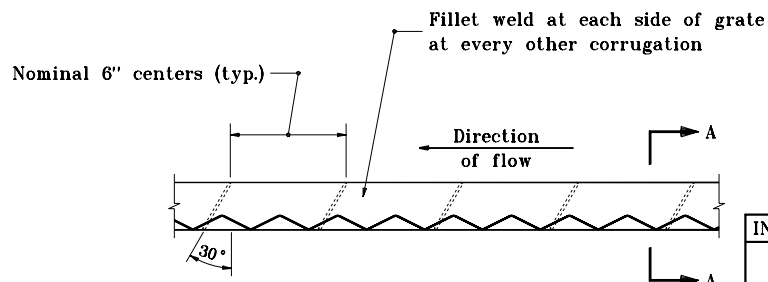


**GRATE WELDING DETAIL**

INDIANA DEPARTMENT OF TRANSPORTATION

**SLOTTED DRAIN PIPE**

APRIL 1995

STANDARD DRAWING NO. **E 715-SDLR-01**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 4-04-95

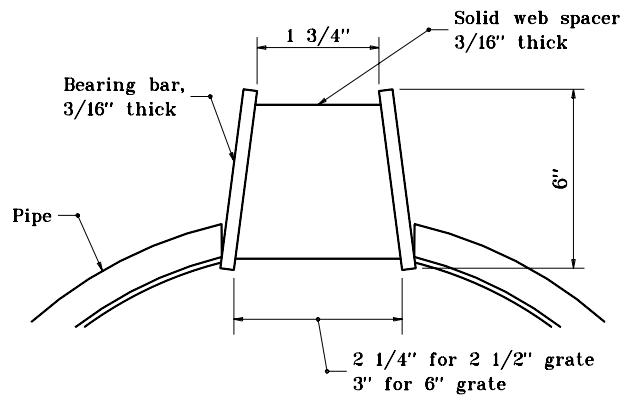


**SECTION A-A**  
**STANDARD GRATE DETAIL**

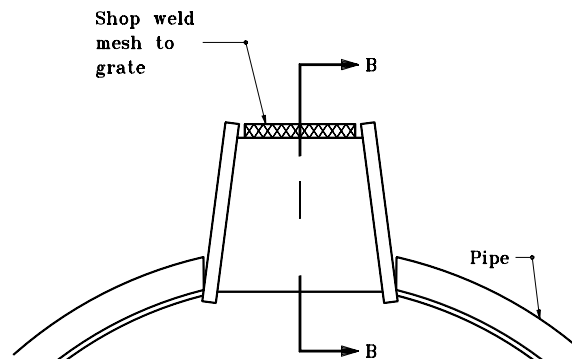

**SECTION A-A**  
**GRATE DETAIL WITH MESH**

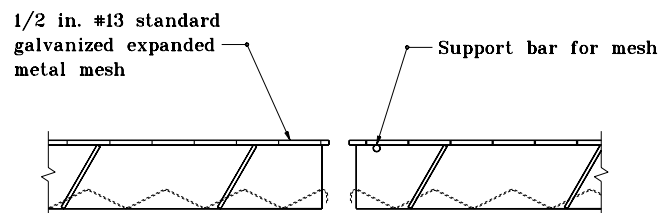

**SECTION B-B**

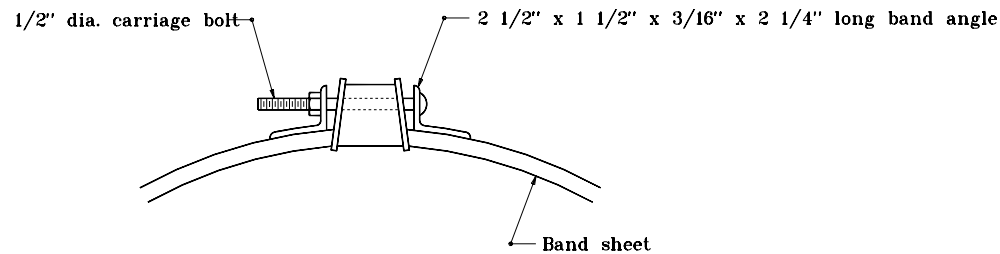

**SECTION C-C**

STANDARD SIZES						
PIPE THICK-NESS (IN.)	DIAMETER OF PIPE (IN.)					
	12	15	18	24	30	36
0.064	X	X	X	X	X	X
0.079	X	X	X	X	X	X
0.109	N.A.	N.A.	N.A.	N.A.	X	X

X - Size available for designated thickness


N.A. - Size not available for designated thickness

INDIANA DEPARTMENT OF TRANSPORTATION

**SLOTTED DRAIN PIPE**

JANUARY 1998

**STANDARD DRAWING NO. E 715-SLDR-02**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98

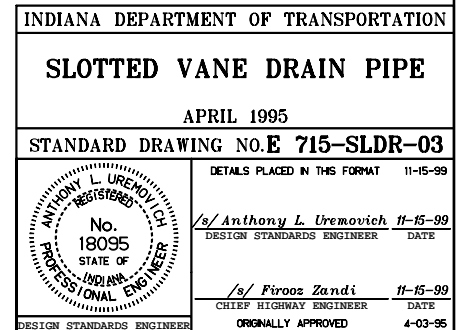


## GENERAL NOTES



- ① Longitudinal safety bar shall be welded to transverse bars. For cross structure and section, if  $S < 2'-6"$ , no longitudinal safety bar is required. If  $S > 2'-6"$ , longitudinal safety bar(s) shall be provided so  $S_1 < 2'-6"$ .
2. Bolts shall be oriented with threads to inside of end section.

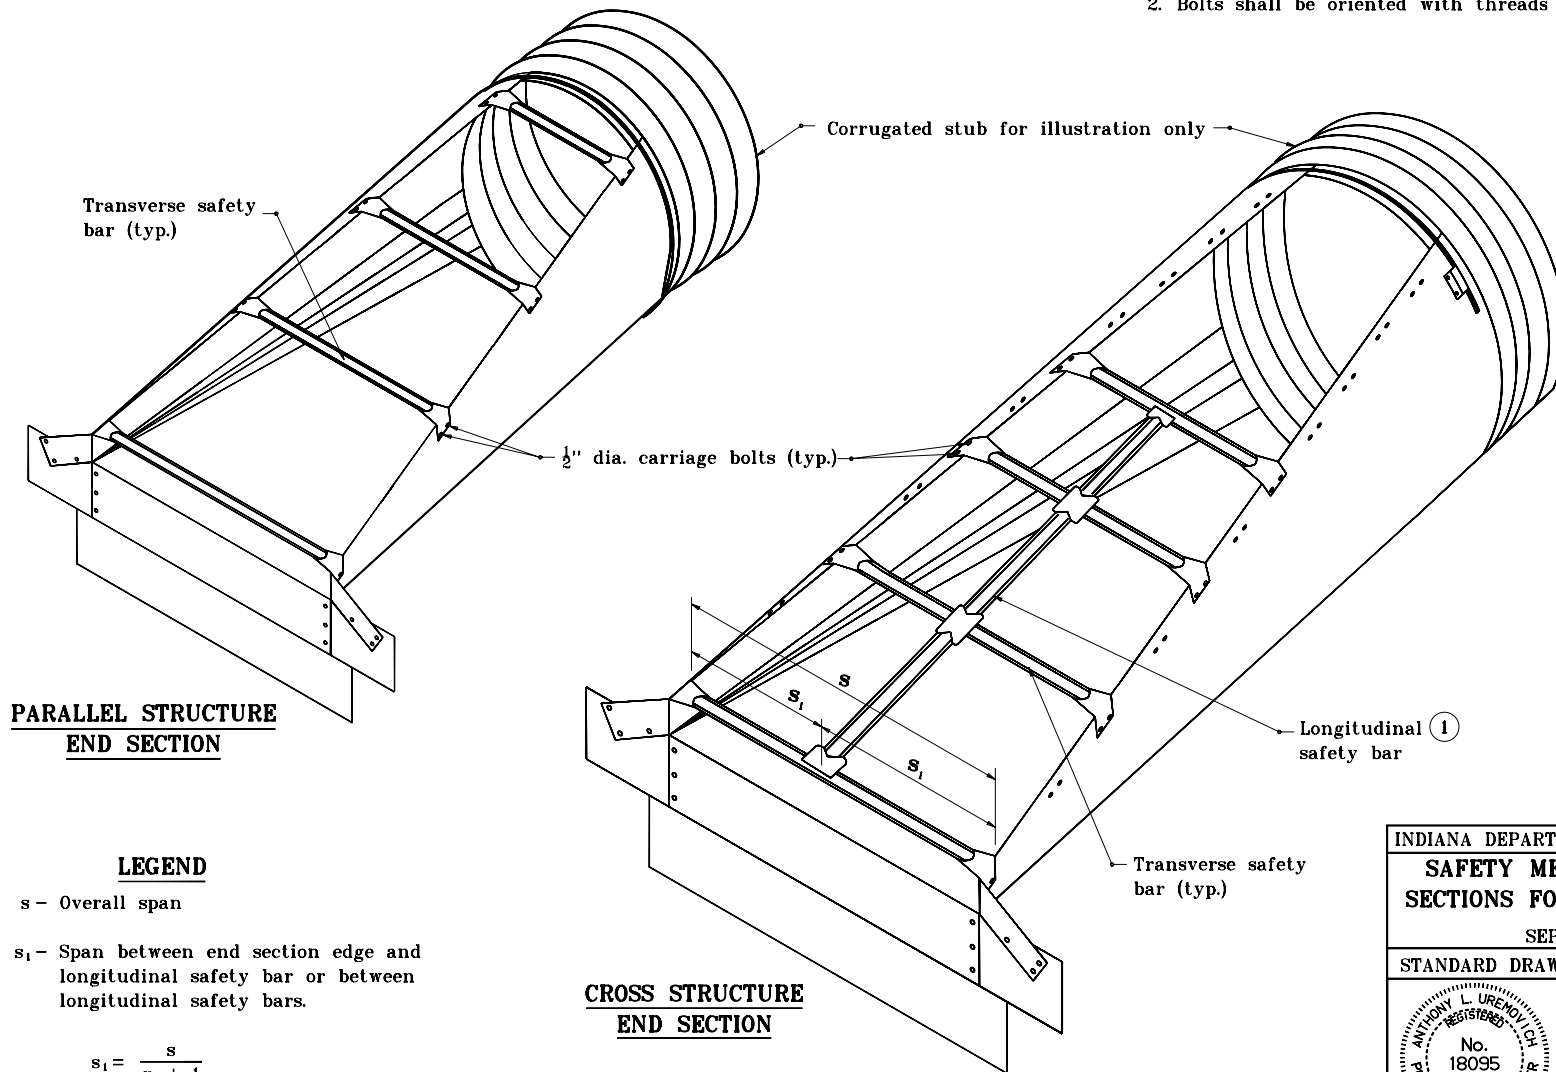

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>SAFETY METAL CULVERT END SECTIONS FOR CORRUGATED PIPE</b>	
SEPTEMBER 2000	
STANDARD DRAWING NO. E 715-SMES-01	
	/s/ Anthony L. Uremovich 9-01-00 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 9-01-00 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	


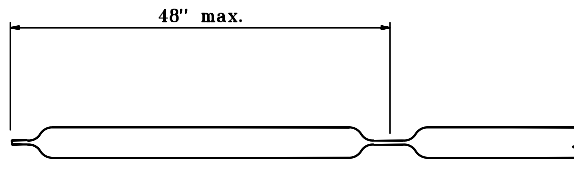


**LONGITUDINAL SAFETY BAR DETAIL**

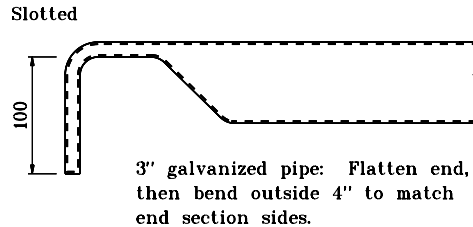

3" galvanized pipe: Flatten end, then bend outside 4" to match end section sides.

OR

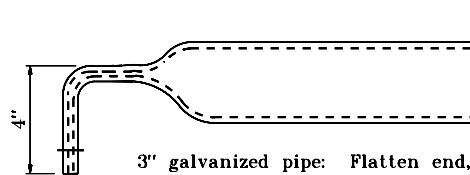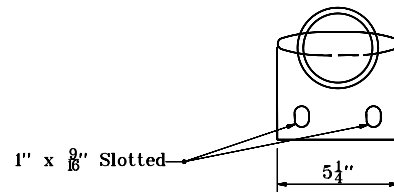

3" galvanized pipe: Flatten end, then bend outside 4" to match end section sides.


**TRANSVERSE SAFETY BAR DETAILS**

INDIANA DEPARTMENT OF TRANSPORTATION

**SAFETY METAL CULVERT END  
SECTIONS FOR CORRUGATED PIPE**

JANUARY 1998

STANDARD DRAWING NO. **E 715-SMES-02**



DETAILS PLACED IN THIS FORMAT 7-27-99

/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98




## GENERAL NOTES

1. For circular pipe diameters through 24", attach end section to pipe with type 1 connector. For all other sizes, attach end section to pipe with type 2 connector.

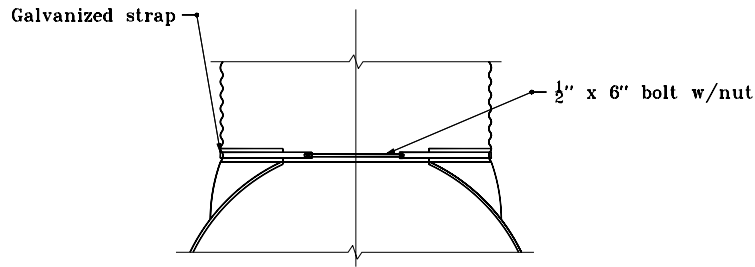


### TYPE 1 CONNECTOR DETAIL

Through 24" dia.

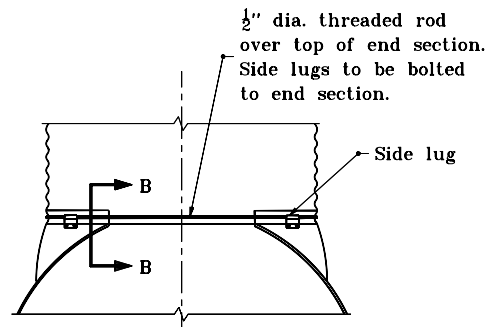

### TYPE 2 CONNECTOR DETAIL

For all circular pipes larger than 24"  
and all pipe-arches

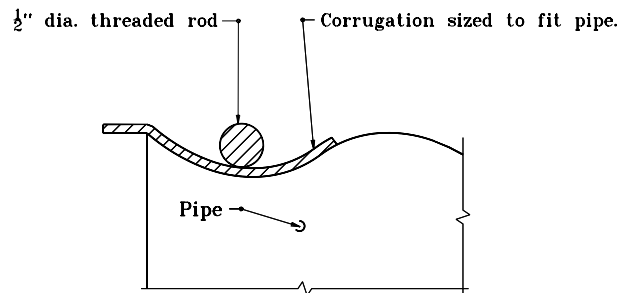

### SECTION B-B


INDIANA DEPARTMENT OF TRANSPORTATION

## SAFETY METAL CULVERT END SECTIONS FOR CORRUGATED PIPE

JANUARY 1998

STANDARD DRAWING NO. **E 715-SMES-03**

DETAILS PLACED IN THIS FORMAT 7-27-99




/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED

1-02-98

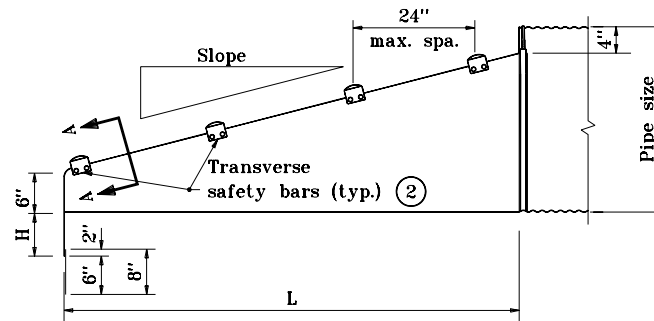


**SIDE ELEVATION OF PARALLEL STRUCTURE END SECTION**

Edge of sidewall sheet rolled snugly against steel rod.



**SECTION A-A**

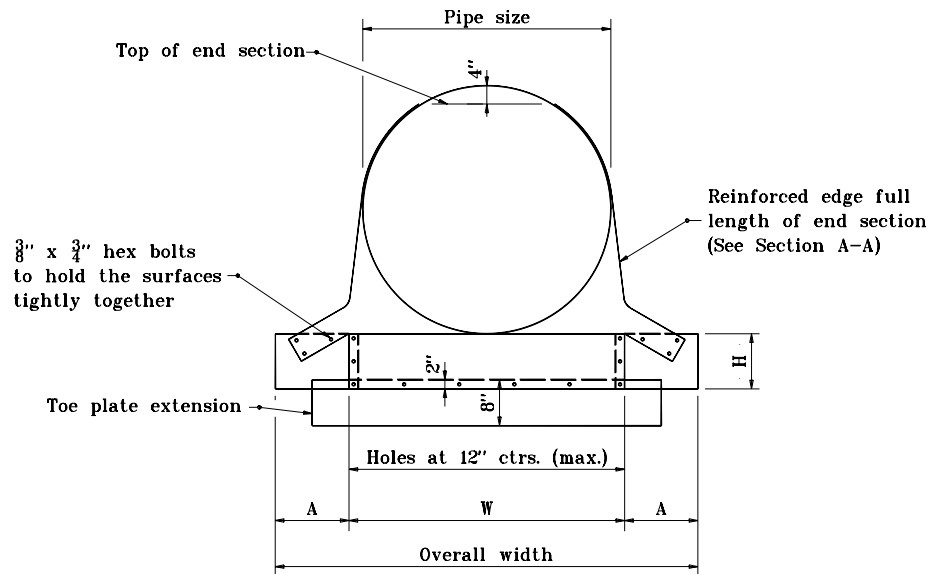

**FRONT VIEW**

**GENERAL NOTES**


1. See Standard Drawing E 715-SMES-06 for variable dimensions.
- ② Transverse safety bars shall be schedule 40 galvanized steel pipe. Pipe shall be galvanized after forming. Number of bars required will vary depending on the length of the end sections.
3. The toe plate extension shall be the same thickness as the end section. The dimension shall be the end section overall width less 6".

INDIANA DEPARTMENT OF TRANSPORTATION

**SAFETY METAL CULVERT END  
SECTIONS FOR CORRUGATED PIPE**

JANUARY 1998

STANDARD DRAWING NO. **E 715-SMES-04**



DETAILS PLACED IN THIS FORMAT 7-27-99

/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 1-02-98

## GENERAL NOTES

- ① Toe plate extension shall be the same thickness as the end section. Dimension shall be overall width less 6".
- ② Transverse safety bars shall be Schedule 40 galvanized steel pipe. Pipe shall be galvanized after forming. Number of bars required will vary depending on the length of the end sections.
3. Slotted holes for safety bar attachment shall be provided for all end sections.
4. See Standard Drawing E 715-SMES-04 for Section A-A.
5. See Standard Drawing E 715-SMES-06 for variable dimensions.
- ⑥ See Standard Drawing E 715-SMES-01 for warrant of longitudinal safety bar.

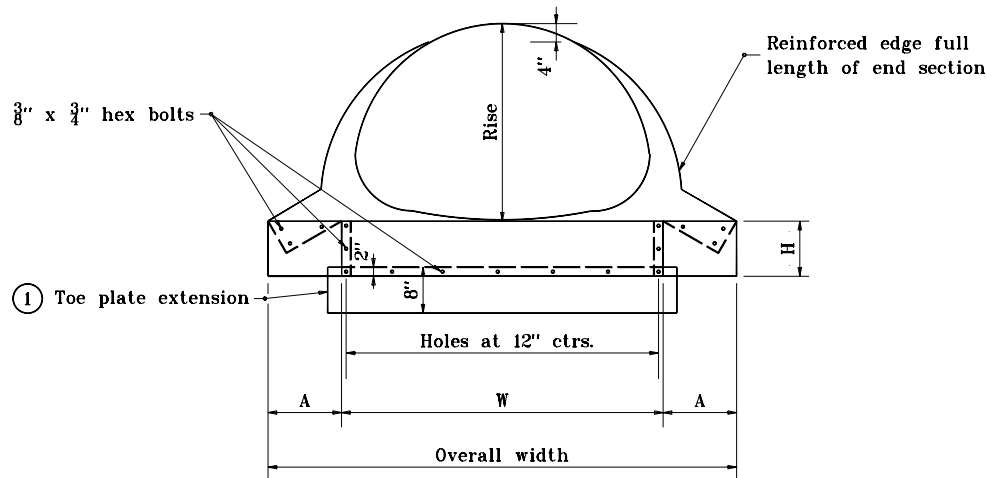

**FRONT VIEW**

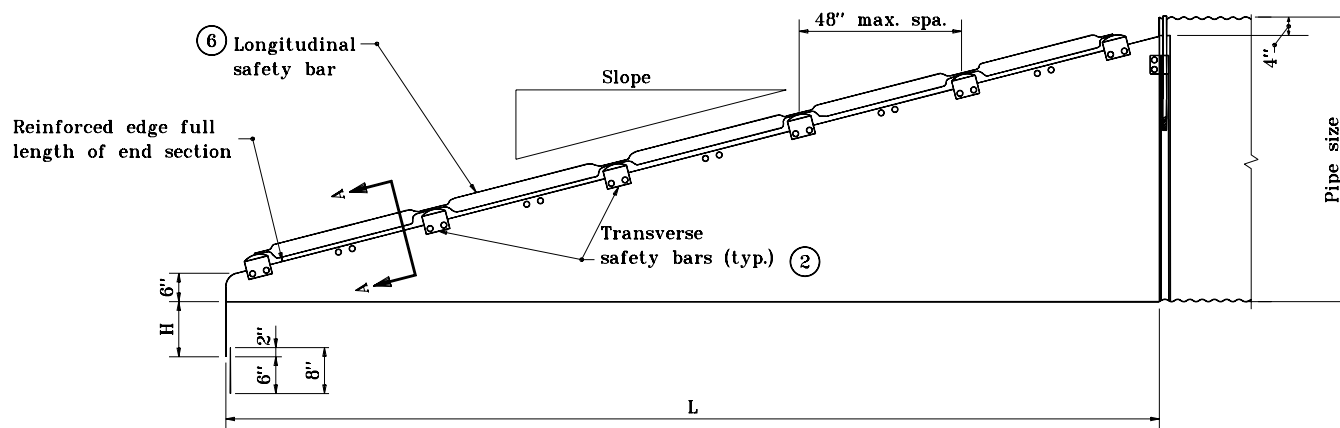


**SIDE ELEVATION FOR CROSS STRUCTURE END SECTION**

INDIANA DEPARTMENT OF TRANSPORTATION

### SAFETY METAL CULVERT END SECTIONS FOR CORRUGATED PIPE

JANUARY 1998

STANDARD DRAWING NO. E 715-SMES-05




DETAILS PLACED IN THIS FORMAT 7-27-99

/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE  
ORIGINALLY APPROVED 1-02-96


METAL END SECTIONS FOR CIRCULAR PIPES									
Pipe Dia.	Min. Thick.	Dimensions, in.				L Dimensions			
		A	H	W	Overall Width	Slope	Length (in.)	Slope	Length (in.)
15	.064	8	6	37	37	4:1	20	6:1	30
18	.064	8	6	40	40	4:1	32	6:1	48
21	.064	8	6	43	43	4:1	44	6:1	66
24	.064	8	6	46	46	4:1	56	6:1	84
30	.109	12	9	60	60	4:1	80	6:1	120
36	.109	12	9	66	66	4:1	104	6:1	156
42	.109	16	12	80	80	4:1	128	6:1	192
48	.109	16	12	86	86	4:1	152	6:1	228
54	.109	16	12	92	92	4:1	176	6:1	264
60	.109	16	12	66	98	4:1	200	6:1	300

SAFETY METAL END SECTIONS FOR PIPE-ARCHES											
Equiv. Dia. (in.)	(inches)		Min. Thick. in.	Dimensions, in.				L Dimensions			
	Span	Rise		A	H	W	Overall Width	Slope	Length (in.)	Slope	Length (in.)
18	21	15	.064	8	6	27	43	4:1	20	6:1	30
21	24	18	.064	8	6	30	46	4:1	32	6:1	48
24	28	20	.064	8	6	34	50	4:1	40	6:1	60
30	35	24	.079	12	9	41	65	4:1	56	6:1	84
36	42	29	.109	12	9	48	72	4:1	76	6:1	114
42	49	33	.109	16	12	55	87	4:1	92	6:1	138
48	57	38	.109	16	12	63	95	4:1	112	6:1	168
54	64	43	.109	16	12	70	102	4:1	132	6:1	198
60	71	47	.109	16	12	77	109	4:1	148	6:1	222
72	83	57	.109	16	12	89	121	4:1	188	6:1	282

INDIANA DEPARTMENT OF TRANSPORTATION	
SAFETY METAL CULVERT END SECTIONS FOR CORRUGATED PIPE	
JANUARY 1998	
STANDARD DRAWING NO. E 715-SMES-06	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98

## GENERAL NOTES

- ① Longitudinal safety bar shall be welded to transverse bars. For cross structure and section, if  $S < 2'-6"$ , no longitudinal safety bar is required. If  $S > 2'-6"$ , longitudinal safety bar(s) shall be provided so  $S_1 < 2'-6"$ .
2. Bolts shall be oriented with threads to inside of end section.

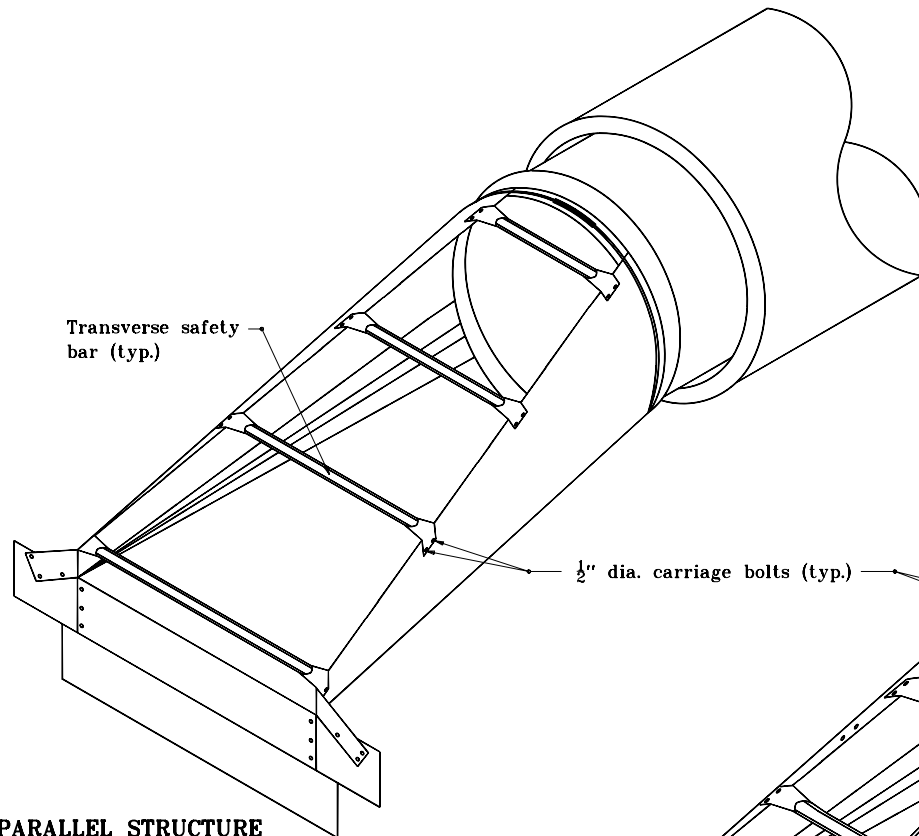

**PARALLEL STRUCTURE  
END SECTION**

## LEGEND


s - Overall span

$s_1$  - Span between end section edge and longitudinal safety bar or between longitudinal safety bars.

$$s_1 = \frac{s}{n + 1}$$

where n = Number of longitudinal safety bars


**CROSS STRUCTURE  
END SECTION**

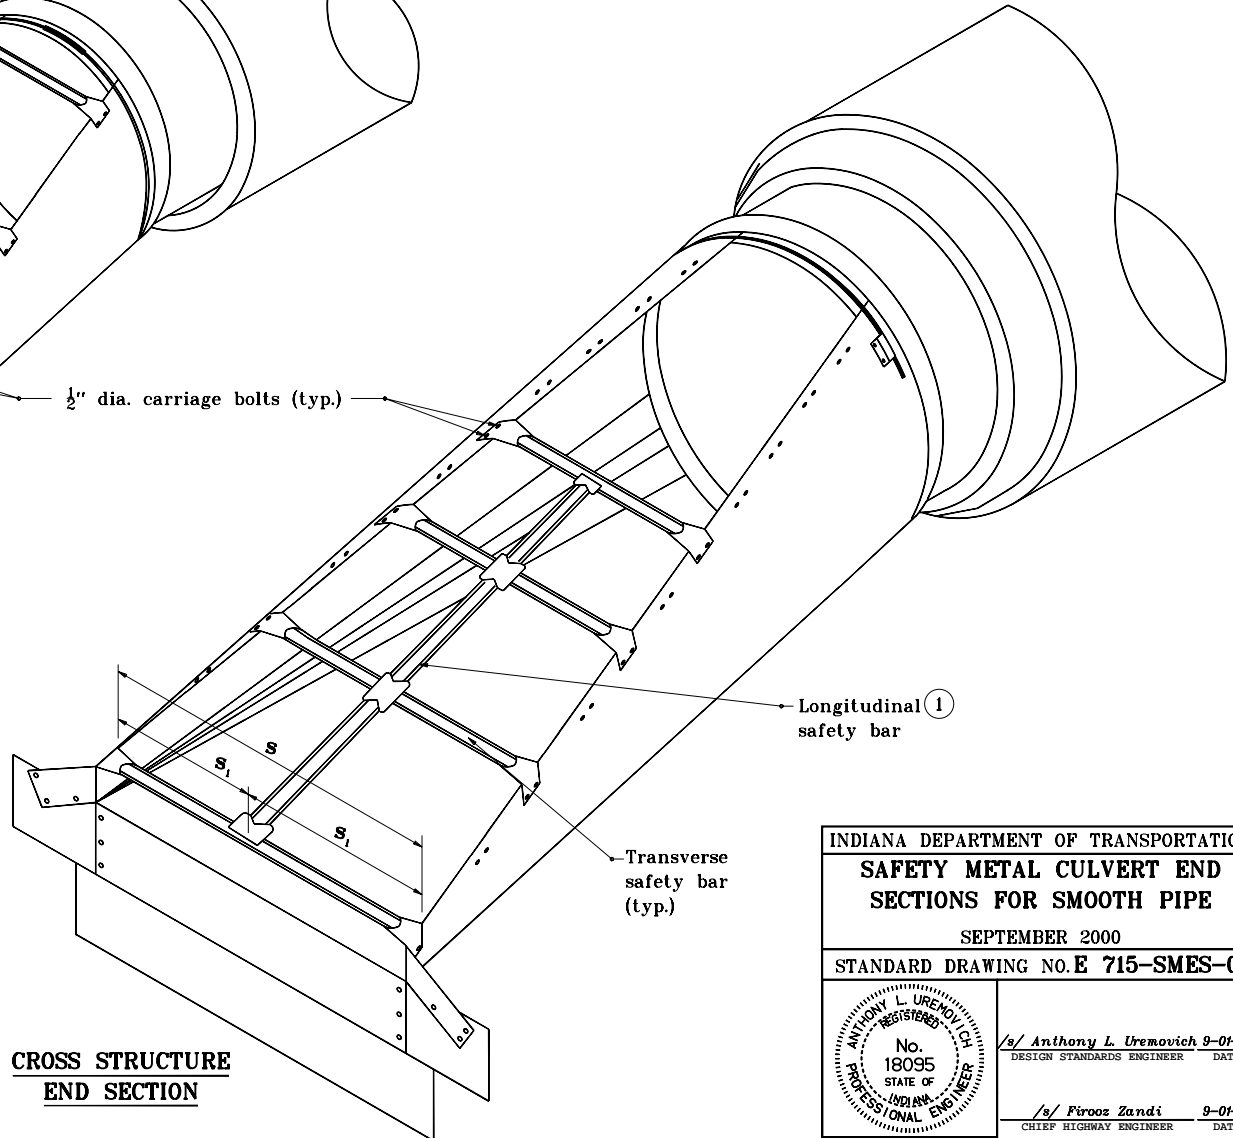

INDIANA DEPARTMENT OF TRANSPORTATION  
**SAFETY METAL CULVERT END  
SECTIONS FOR SMOOTH PIPE**

SEPTEMBER 2000


STANDARD DRAWING NO. **E 715-SMES-07**




/s/ *Anthony L. Uremovich* 9-01-00  
DESIGN STANDARDS ENGINEER DATE

/s/ *Firooz Zandi* 9-01-00  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

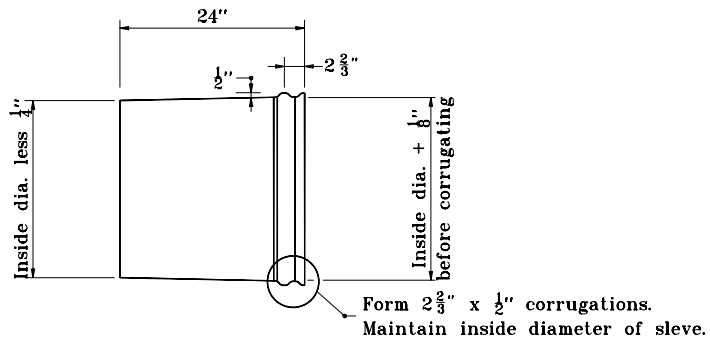


**SMOOTH TAPERED SLEEVE DETAIL**

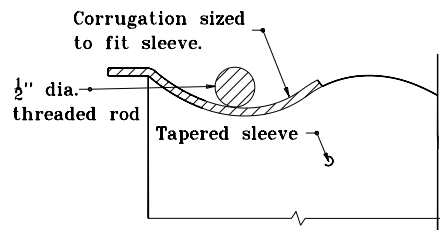


**SECTION B-B**

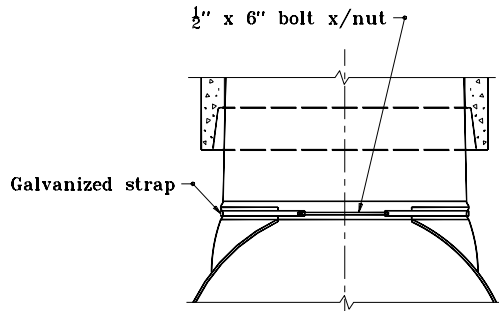

**TYPE 1 CONNECTOR DETAIL**  
for all circular pipes through 24"

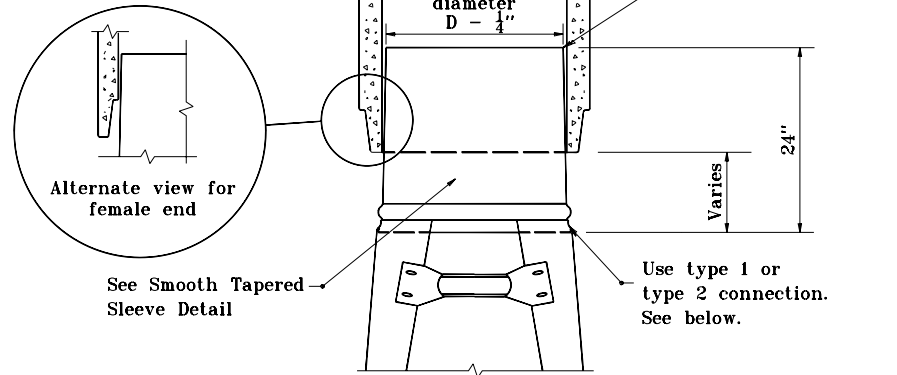

**TAPERED SLEEVE FOR ATTACHING  
STEEL END SECTION TO SMOOTH INTERIOR PIPE**

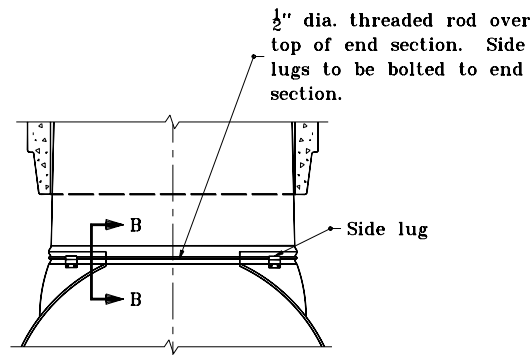


**TYPE 2 CONNECTOR DETAIL**  
all circular pipes larger than 24"  
and all horizontal elliptical pipes


**GENERAL NOTES**

1. For circular pipe diameters through 24", attach end section to pipe with type 1 connector. For all other sizes, attach end section to pipe with type 2 connector.


INDIANA DEPARTMENT OF TRANSPORTATION	
SAFETY METAL CULVERT END SECTIONS FOR SMOOTH PIPE	
JANUARY 1998	
STANDARD DRAWING NO. E 715-SMES-08	
DETAILS PLACED IN THIS FORMAT 7-27-99	
	/s/ Anthony L. Uremovich 7-27-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 7-27-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 1-02-98

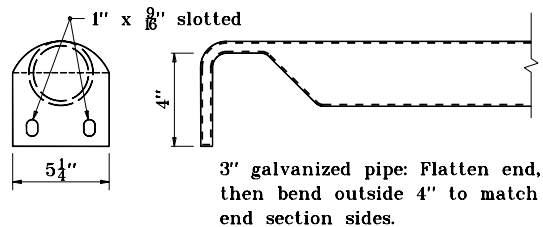

OR

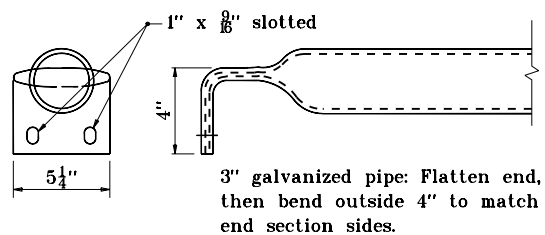

### TRANSVERSE SAFETY BAR DETAILS




### LONGITUDINAL SAFETY BAR DETAIL

INDIANA DEPARTMENT OF TRANSPORTATION

### SAFETY METAL CULVERT END SECTIONS FOR SMOOTH PIPE

JANUARY 1998


STANDARD DRAWING NO. **E 715-SMES-09**




DETAILS PLACED IN THIS FORMAT 7-27-99

/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE  
ORIGINALLY APPROVED 1-02-98

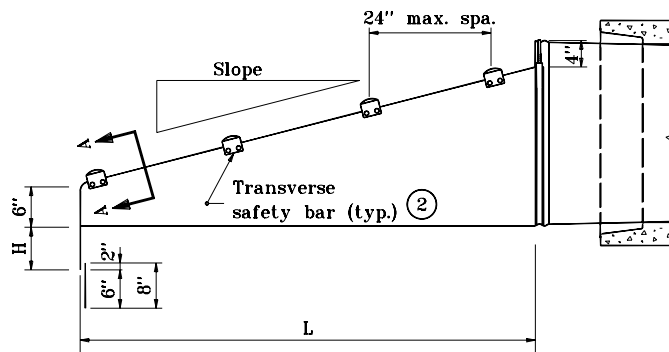

**SIDE ELEVATION OF PARALLEL STRUCTURE END SECTION**

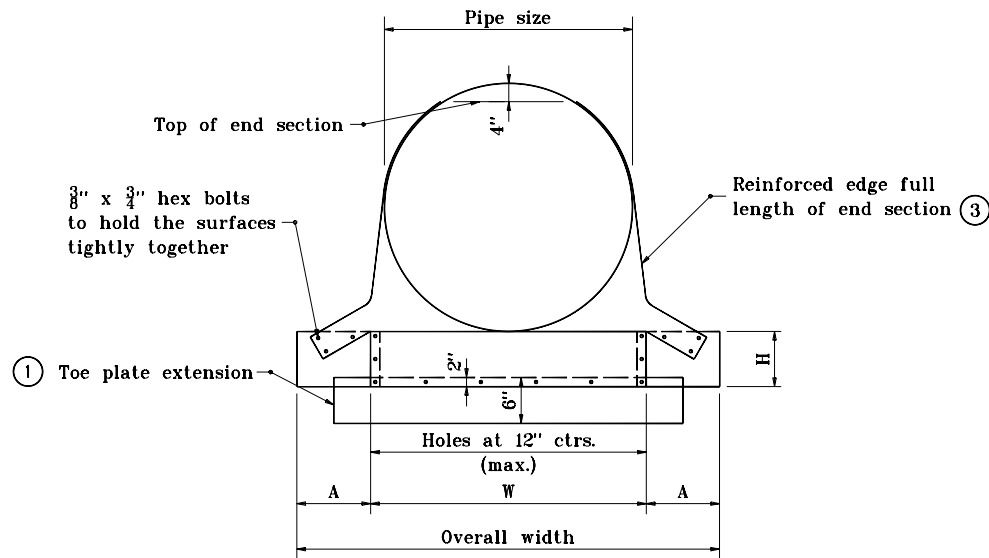

**FRONT VIEW**

**GENERAL NOTES**

- ① Toe plate extension is to be the same thickness as the end section. Dimension shall be end section overall width less 6".
- ② Transverse safety bars shall be Schedule 40 galvanized steel pipe. Pipe to be galvanized after forming. Number of bars req'd will vary depending on the length of the end section.
- ③ See Standard Drawing E 715-SMES-11 for Section A-A.
4. See Standard Drawing E 715-SMES-12 for variable dimensions.

INDIANA DEPARTMENT OF TRANSPORTATION

**SAFETY METAL CULVERT END SECTIONS FOR SMOOTH PIPE**

JANUARY 1998


STANDARD DRAWING NO. **E 715-SMES-10**

<p>ANTHONY L. UREMОВИЧ REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER</p>	<p>DETAILS PLACED IN THIS FORMAT 7-27-99</p> <p>/s/ Anthony L. Uremovich 7-27-99 DESIGN STANDARDS ENGINEER DATE</p> <p>/s/ Firooz Zandi 7-27-99 CHIEF HIGHWAY ENGINEER DATE</p> <p>DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98</p>
--	--




## GENERAL NOTES

- ① Toe plate extension is to be the same thickness as the end section. Dimensions shall be overall width less 6", by 8" high.
- ② Transverse safety bars shall be Schedule 40 galvanized steel pipe. Pipe to be galvanized after forming. Number of bars req'd. will vary depending on the length of the end section.
3. Slotted holes for safety bar attachment shall be provided for all end sections.
4. See Standard Drawing E 715-SMES-12 for variable dimensions.
- ⑤ See Standard Drawing E 715-SMES-07 for warrant of longitudinal safety bar.

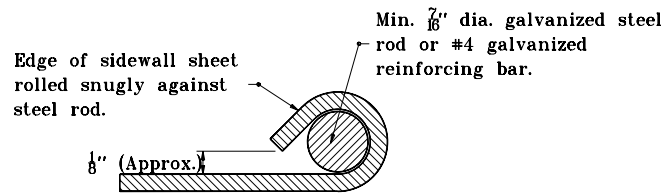

**SECTION A-A**

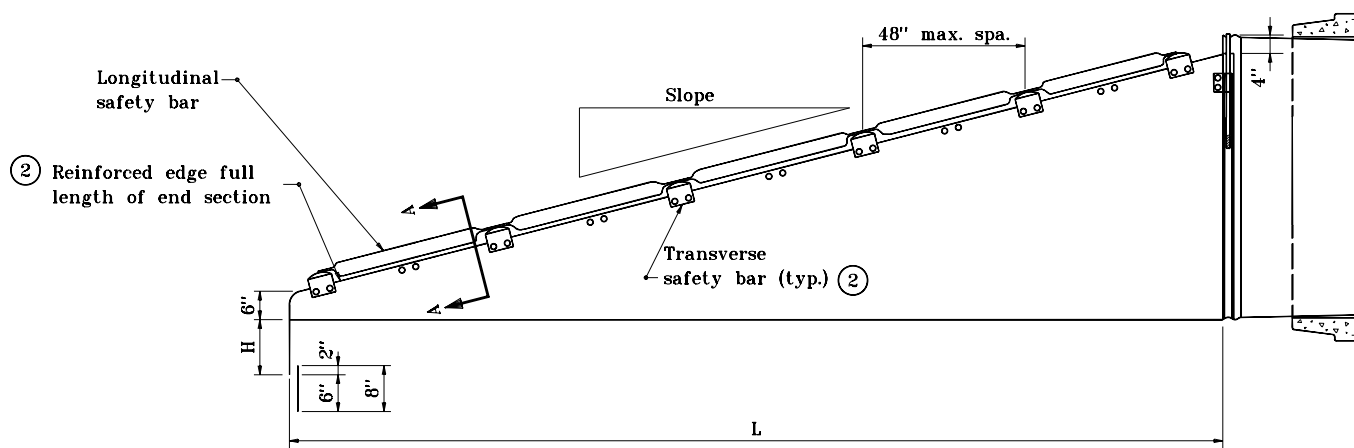


**SIDE ELEVATION FOR CROSS STRUCTURE END SECTION**

INDIANA DEPARTMENT OF TRANSPORTATION

## SAFETY METAL CULVERT END SECTIONS FOR SMOOTH PIPE

JANUARY 1998

STANDARD DRAWING NO. E 715-SMES-11




DETAILS PLACED IN THIS FORMAT 7-27-99

/s/ Anthony L. Uremovich 7-27-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 7-27-99  
CHIEF HIGHWAY ENGINEER DATE  
ORIGINALLY APPROVED 1-02-98

SAFETY METAL END SECTIONS FOR CIRCULAR PIPES									
Pipe Dia. (in.)	Min. Thick.	Dimensions, in.				L Dimensions			
		A	H	W	Overall Width	Slope	Length (in.)	Slope	Length (in.)
15	.064	8	6	21	37	4:1	20	6:1	30
18	.064	8	6	24	40	4:1	32	6:1	48
21	.064	8	6	27	43	4:1	44	6:1	66
24	.064	8	6	30	46	4:1	56	6:1	84
27	.109	12	9	33	57	4:1	68	6:1	102
30	.109	12	9	36	60	4:1	80	6:1	120
33	.109	12	9	39	63	4:1	92	6:1	138
36	.109	12	9	42	66	4:1	104	6:1	156
42	.109	16	12	48	80	4:1	128	6:1	192
48	.109	16	12	54	86	4:1	152	6:1	228
54	.109	16	12	60	92	4:1	176	6:1	264
60	.109	16	12	66	98	4:1	200	6:1	300

SAFETY METAL END SECTIONS FOR HORIZONTAL ELLIPTICAL PIPE											
Equiv. Dia. (in.)	(inches)		Min. Thick.	Dimensions (inches)				L Dimension			
	Span	Rise		A	H	W	Overall Width	Slope	Length (in.)	Slope	Length (in.)
18	23	14	.064	8	6	29	45	4:1	16	6:1	24
24	30	19	.064	8	6	36	52	4:1	36	6:1	54
27	34	22	.079	12	9	40	64	4:1	48	6:1	72
30	38	24	.079	12	9	44	68	4:1	56	6:1	84
33	42	27	.109	12	9	48	72	4:1	68	6:1	102
36	45	29	.109	16	12	51	83	4:1	76	6:1	114
42	53	34	.109	16	12	59	91	4:1	96	6:1	144
48	60	38	.109	16	12	66	98	4:1	112	6:1	168
54	68	43	.109	16	12	74	106	4:1	132	6:1	198
60	76	48	.109	16	12	80	112	4:1	152	6:1	228

INDIANA DEPARTMENT OF TRANSPORTATION	
SAFETY METAL CULVERT END SECTIONS FOR SMOOTH PIPE	
JANUARY 1998	
STANDARD DRAWING NO. E 715-SMES-12	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98




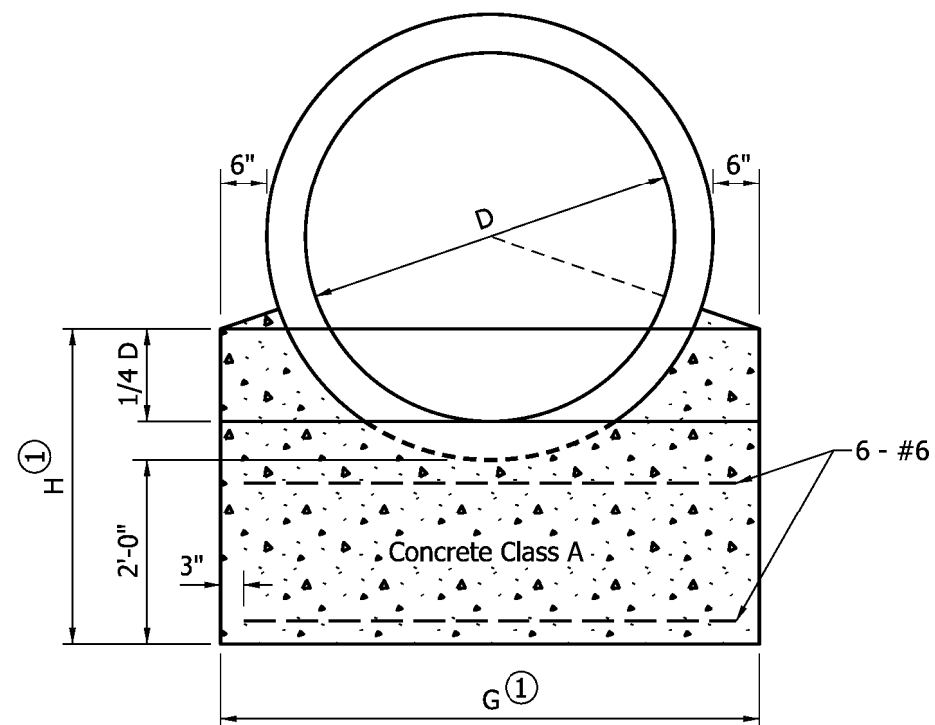
1. Anchor straps shall be used at both upstream and downstream ends of all C.M. pipes with a diameter or span of 42" or greater.
2. See Standard Drawing E 715-PASD-01 for anchor strap details.
3. Hook bolts and anchor straps shall be used for all C.M. pipes with a diameter or span of 84" or greater.
4. See Standard Drawing E 715-PAHB-01 for hook bolt details.
5. Riprap shall be placed at the ends of pipe structures when shown on plans.

- ⑥ For dimension chart see Standard Drawing E 715-ANCH-01.
- ⑦ For dimension chart see Standard Drawing E 715-ANCH-02.


### LEGEND

C.M. = Corrugated Metal


INDIANA DEPARTMENT OF TRANSPORTATION	
<h1 style="margin: 0;">SINGLE PIPE</h1> <h1 style="margin: 0;">CONCRETE ANCHOR</h1> <p style="margin: 10px 0 0 0;">JANUARY 1998</p>	
STANDARD DRAWING NO. <b>E 715-SPCA-01</b>	
	<p style="text-align: right;">DETAILS PLACED IN THIS FORMAT      7-27-99</p> <p style="text-align: right;"><u>s/ Anthony L. Uremovich</u>      7-27-99</p> <p style="text-align: right;">DESIGN STANDARDS ENGINEER      DATE</p>  <p style="text-align: right;"><u>s/ Firooz Zandi</u>      7-27-99</p> <p style="text-align: right;">CHIEF HIGHWAY ENGINEER      DATE</p> <p style="text-align: center; margin-top: 10px;"><b>ORIGINALLY APPROVED</b></p>
DESIGN STANDARDS ENGINEER	1-02-98



ANCHOR FOR  
REINFORCED CONCRETE PIPE  
FRONT ELEVATION

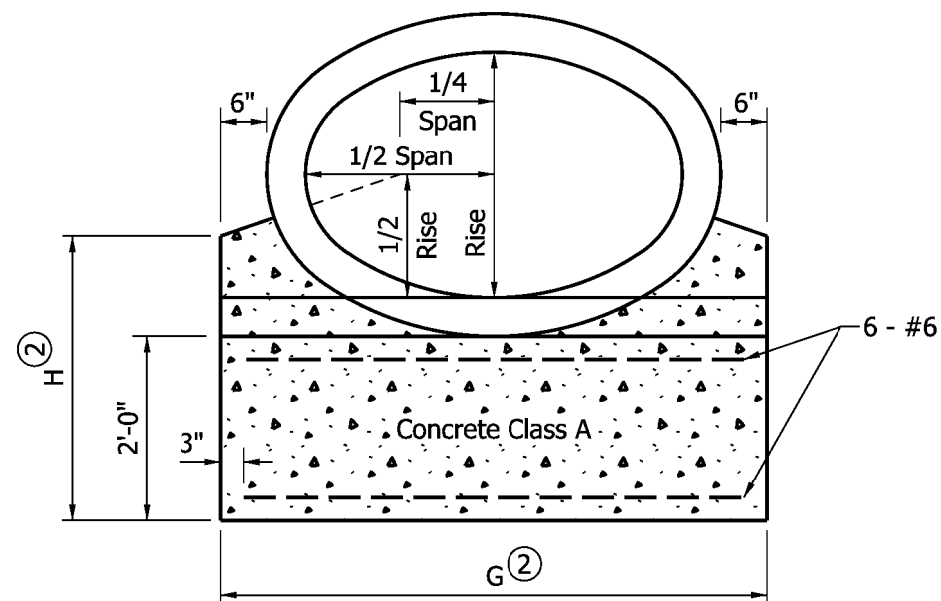

ANCHOR FOR  
REINFORCED CONCRETE HORIZONTAL ELLIPTICAL PIPE  
FRONT ELEVATION

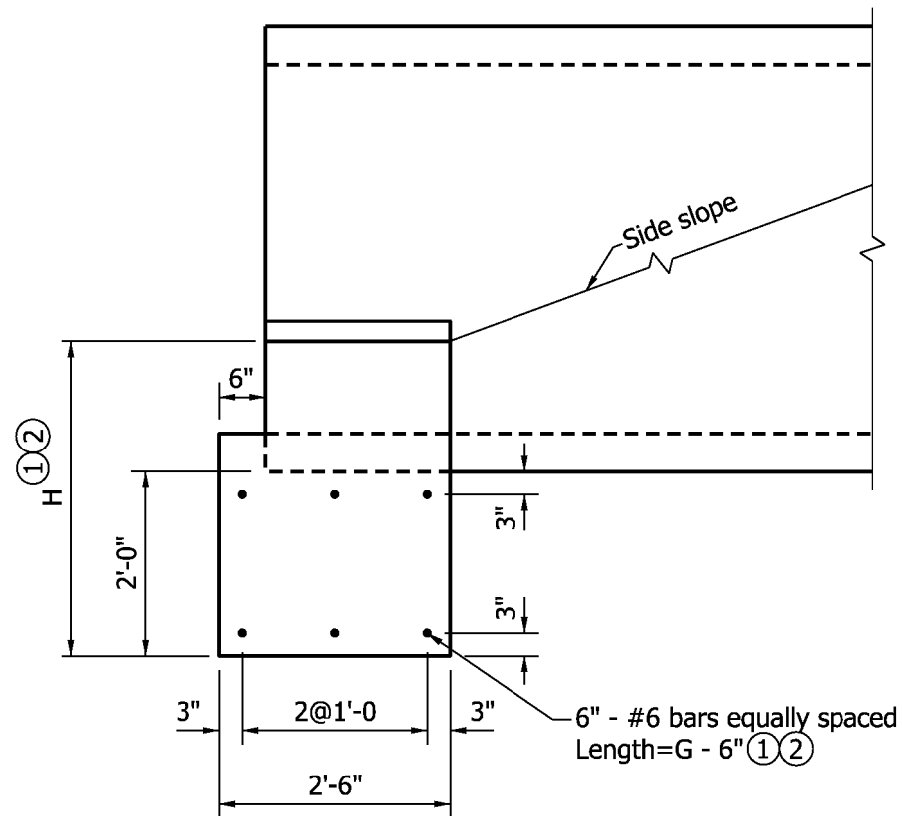

SIDE ELEVATION

#### GENERAL NOTES


- ① For dimension, enter chart on Standard Drawing E 715-ANCH-01 with known dimension D.
- ② For dimension enter chart on Standard Drawing E 715-ANCH-02 with known span and rise.
3. Riprap shall be placed at the ends of pipe structures when shown on plans.

INDIANA DEPARTMENT OF TRANSPORTATION

SINGLE PIPE  
CONCRETE ANCHOR

SEPTEMBER 2009

STANDARD DRAWING NO. E 715-SPCA-02




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

STEEL STRUCTURAL PLATE PIPE-ARCH										
SPAN	RISE	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
					G	CU.YDS. CONC. 2 ANCHORS	G	CU.YDS. CONC. 2 ANCHORS	G	CU.YDS. CONC. 2 ANCHORS
6'-1	4'-7	3'-11	3'-7½	9'-6	7'-5	3.5	16'-11	8.4	26'-5	13.3
6'-4	4'-9	3'-11	3'-10	9'-10	7'-8	3.6	17'-5	8.6	27'-4	13.6
6'-9	4'-11	4'-0	4'-0½	10'-6	8'-1	3.8	18'-7	9.3	29'-1	14.8
7'-0	5'-1	4'-0	4'-2	10'-10	8'-4	3.9	19'-2	9.5	30'-0	15.1
7'-3	5'-3	3'-11	4'-3½	11'-3	8'-7	4.0	19'-10	9.7	31'-1	15.4
7'-8	5'-5	4'-0	4'-6	11'-10	9'-0	4.2	20'-10	10.4	32'-8	16.5
7'-11	5'-7	4'-0	4'-7½	12'-3	9'-3	4.3	21'-6	10.6	33'-9	16.9
8'-2	5'-9	3'-11	4'-9	12'-6	9'-6	4.4	22'-0	10.7	34'-6	17.0
8'-7	5'-11	4'-1	4'-11½	12'-11	9'-11	4.6	22'-10	11.3	35'-9	18.0
8'-10	6'-1	4'-0	5'-1	13'-2	10'-2	4.7	23'-4	11.4	36'-6	18.1
9'-4	6'-3	4'-2	5'-4	13'-8	10'-8	5.0	24'-4	12.1	38'-0	19.3
9'-6	6'-5	4'-1	5'-5	13'-10	10'-10	5.0	24'-8	12.1	38'-6	19.2
9'-9	6'-7	4'-0	5'-6½	14'-1	11'-1	5.1	25'-2	12.1	39'-3	19.2
10'-3	6'-9	4'-2	5'-9½	14'-7	11'-7	5.4	26'-2	12.9	40'-9	20.4
10'-8	6'-11	4'-4	6'-0	15'-0	12'-0	5.8	27'-0	13.7	42'-0	21.6
10'-11	7'-1	4'-3	6'-1½	15'-3	12'-3	5.8	27'-6	13.7	42'-9	21.6
11'-5	7'-3	4'-6	6'-4½	15'-9	12'-9	6.2	28'-6	14.6	44'-3	23.0
11'-7	7'-5	4'-5	6'-5½	15'-11	12'-11	6.2	28'-10	14.5	44'-9	22.9
11'-10	7'-7	4'-3	6'-7	16'-2	13'-2	6.2	29'-4	14.5	45'-6	22.8
12'-4	7'-9	4'-6	6'-10	16'-8	13'-8	6.6	30'-4	15.4	47'-0	24.3
12'-6	7'-11	4'-4	6'-11	16'-10	13'-10	6.6	30'-8	15.3	47'-6	24.0
12'-8	8'-1	4'-3	7'-0	17'-0	14'-0	6.5	31'-0	15.2	48'-0	23.8
12'-10	8'-4	4'-2	7'-1	17'-2	14'-2	6.5	31'-4	15.1	48'-6	23.7
13'-3	9'-4	5'-0	7'-3½	17'-7	14'-7	7.3	32'-2	17.1	49'-9	26.9
13'-6	9'-6	5'-0	7'-5	17'-10	14'-10	7.4	32'-8	17.2	50'-6	27.0
14'-0	9'-8	5'-0	7'-8	18'-4	15'-4	7.7	33'-8	17.9	52'-0	28.1
14'-2	9'-10	5'-0	7'-9	18'-6	15'-6	7.7	34'-0	17.9	52'-6	28.1
14'-5	10'-0	5'-0	7'-10½	18'-9	15'-9	7.8	34'-6	18.0	53'-3	28.2
14'-11	10'-2	5'-2	8'-1½	19'-3	16'-3	8.2	35'-6	18.9	54'-9	29.6
15'-4	10'-4	5'-2	8'-4	19'-8	16'-8	8.6	36'-4	19.6	56'-0	30.7
15'-7	10'-6	5'-2	8'-5½	19'-11	16'-11	8.6	36'-10	19.7	56'-9	30.8
15'-10	10'-8	5'-2	8'-7	20'-2	17'-2	8.6	37'-4	19.7	57'-6	30.9
16'-3	10'-10	5'-2	8'-9½	20'-7	17'-7	9.0	38'-2	20.5	58'-9	32.0
16'-6	11'-0	5'-5	8'-11	20'-10	17'-10	9.1	38'-8	20.7	59'-6	32.4
17'-0	11'-2	5'-5	9'-2	21'-4	18'-4	9.5	39'-8	21.6	61'-0	33.7
17'-2	11'-4	5'-5	9'-3	21'-6	18'-6	9.5	40'-0	21.5	61'-6	33.6
17'-5	11'-6	5'-5	9'-4½	21'-9	18'-9	9.5	40'-6	21.6	62'-3	33.7
17'-11	11'-8	5'-5	9'-7½	22'-3	19'-3	9.9	41'-6	22.5	63'-9	35.0
18'-1	11'-10	5'-6	9'-8½	22'-5	19'-5	9.9	41'-10	22.7	64'-3	35.4
18'-7	12'-0	5'-6	9'-11½	22'-11	19'-11	10.3	42'-10	23.4	65'-9	36.7
18'-9	12'-2	5'-6	10'-0½	23'-1	20'-1	10.3	43'-2	23.6	66'-3	36.7
19'-3	12'-4	5'-6	10'-3½	23'-7	20'-7	10.8	44'-2	24.6	67'-9	38.8
19'-6	12'-6	5'-6	10'-5	23'-10	20'-10	10.8	44'-8	24.6	68'-6	38.2
19'-8	12'-8	5'-6	10'-6	24'-0	21'-0	10.7	45'-0	24.4	69'-0	37.9
19'-11	12'-10	5'-6	10'-7½	24'-3	21'-3	10.7	45'-6	24.2	69'-9	37.7
20'-5	13'-0	5'-6	10'-10½	24'-9	21'-9	11.2	46'-5	25.4	71'-3	39.4
20'-7	13'-2	5'-6	10'-11½	24'-11	21'-11	11.1	46'-10	25.3	71'-9	39.5

INDIANA DEPARTMENT OF TRANSPORTATION	
<p align="center"><b>CONCRETE ANCHOR TABLES</b></p> <p align="center">JANUARY 1998</p>	
STANDARD DRAWING NO. <b>E 717-ANCH-01</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 1-02-96

# STEEL OR ALUMINUM ALLOY STRUCTURAL PLATE PIPE

D	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
				G	CU.YDS. CONC. 2 ANCHORS	G	CU.YDS. CONC. 2 ANCHORS	G	CU.YDS. CONC. 2 ANCHORS
5'-0	3'-5	3'-2	7'-10	6'-4	3.1	14'-2	7.1	22'-0	11.0
5'-6	3'-7	3'-5	8'-7	6'-10	3.4	15'-5	7.9	24'-0	12.4
6'-0	3'-8	3'-8	9'-4	7'-4	3.7	16'-8	8.6	26'-0	13.6
6'-6	3'-10	3'-11	10'-1	7'-10	4.1	17'-11	9.5	28'-0	15.0
7'-0	3'-11	4'-2	10'-10	8'-4	4.3	19'-2	10.3	30'-0	16.2
7'-6	4'-1	4'-5	11'-7	8'-10	4.7	20'-5	11.3	32'-0	17.8
8'-0	4'-2	4'-8	12'-4	9'-4	5.0	21'-8	12.1	34'-0	19.1
8'-6	4'-4	4'-11	12'-10	9'-10	5.4	22'-8	12.9	35'-6	20.4
9'-0	4'-5	5'-2	13'-4	10'-4	5.7	23'-8	13.5	37'-0	21.4
9'-6	4'-7	5'-5	13'-10	10'-10	6.1	24'-8	14.4	38'-6	22.7
10'-0	4'-8	5'-8	14'-4	11'-4	6.4	25'-8	15.1	40'-0	23.7
10'-6	4'-10	5'-11	14'-10	11'-10	6.8	26'-8	16.0	41'-6	25.2
11'-0	4'-11	6'-2	15'-4	12'-4	7.2	27'-8	16.7	43'-0	26.2
11'-6	5'-1	6'-5	15'-10	12'-10	7.6	28'-8	17.6	44'-6	27.7
12'-0	5'-2	6'-8	16'-4	13'-4	7.9	29'-8	18.3	46'-0	28.7
12'-6	5'-4	6'-11	16'-10	13'-10	8.4	30'-8	19.3	47'-6	30.3
13'-0	5'-5	7'-2	17'-4	14'-4	8.7	31'-8	20.0	49'-0	31.3
13'-6	5'-7	7'-5	17'-10	14'-10	9.2	32'-8	21.1	50'-6	32.9
14'-0	5'-8	7'-8	18'-4	15'-4	9.6	33'-8	21.8	52'-0	34.0
14'-6	5'-10	7'-11	18'-10	15'-10	10.1	34'-8	22.9	53'-6	35.7
15'-0	5'-11	8'-2	19'-4	16'-4	10.4	35'-8	23.6	55'-0	36.8
15'-6	6'-1	8'-5	19'-10	16'-10	10.9	36'-8	24.7	56'-6	38.5
16'-0	6'-2	8'-8	20'-4	17'-4	11.3	37'-8	25.5	58'-0	39.7
16'-6	6'-4	8'-11	20'-10	17'-10	11.9	38'-8	26.7	59'-0	41.5
17'-0	6'-5	9'-2	21'-4	18'-4	12.3	39'-8	27.5	61'-0	42.7
17'-6	6'-7	9'-5	21'-10	18'-10	12.8	40'-8	28.6	62'-6	44.5
18'-0	6'-8	9'-8	22'-4	19'-4	13.2	41'-8	29.5	64'-0	45.7
18'-6	6'-10	9'-11	22'-10	19'-10	13.8	42'-8	30.7	65'-6	47.6
19'-0	6'-11	10'-2	23'-4	20'-4	14.2	43'-8	31.5	67'-0	48.8
19'-6	7'-1	10'-5	23'-10	20'-10	14.8	44'-8	32.8	68'-6	50.8
20'-0	7'-2	10'-8	24'-4	21'-4	15.2	45'-8	33.6	70'-0	52.1
20'-6	7'-4	10'-11	24'-10	21'-10	15.8	46'-8	34.9	71'-6	54.2
21'-0	7'-5	11'-2	25'-4	22'-4	16.2	47'-8	35.8	73'-0	55.6


## GENERAL NOTES

1. Refer to Standard Drawing E 717-SPCA-01 for single pipe anchor details.
2. Refer to Standard Drawings E 717-MPCA-01 and E 717-MPCA-02 for multiple pipe anchor details.

INDIANA DEPARTMENT OF TRANSPORTATION

## CONCRETE ANCHOR TABLES JANUARY 1998

STANDARD DRAWING NO. **E 717-ANCH-02**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98

### ALUMINUM ALLOY STRUCTURAL PLATE PIPE-ARCH

SPAN	RISE	H	R	S	SINGLE PIPE		DOUBLE PIPE		TRIPLE PIPE	
					G	CU.YDS. CONC. 2 ANCHORS	G	m <sup>3</sup> CONC., 2 ANCHORS	G	m <sup>3</sup> CONC., 2 ANCHORS
6'-7	5'-8	5'-0	4'-0	10'-4	8'-0	4.2	18'-4	10.3	28'-8	16.4
6'-11	5'-9	5'-0	4'-2	10'-10	8'-4	4.3	19'-2	10.7	30'-0	17.1
7'-3	5'-11	5'-0	4'-4	11'-4	8'-8	4.4	20'-0	11.1	31'-4	17.7
7'-9	6'-0	5'-0	4'-7	12'-1	9'-2	4.8	21'-3	11.9	33'-4	19.1
8'-1	6'-1	5'-0	4'-9	12'-6	9'-6	4.9	22'-0	12.2	34'-6	19.6
8'-5	6'-3	5'-2	4'-11	12'-10	9'-10	5.0	22'-8	12.6	35'-6	20.1
8'-10	6'-4	5'-2	5'-1 $\frac{1}{2}$	13'-3	10'-3	5.3	23'-6	13.2	36'-9	21.1
9'-3	6'-5	5'-2	5'-4	13'-8	10'-8	5.5	24'-4	13.5	38'-0	21.6
9'-7	6'-6	5'-2	5'-6	14'-0	11'-0	5.6	25'-0	13.7	39'-0	21.9
9'-11	6'-8	5'-2	5'-8	14'-4	11'-4	5.7	25'-8	13.9	40'-0	22.2
10'-3	6'-9	5'-2	5'-10	14'-8	11'-8	5.8	26'-4	14.1	41'-0	22.4
10'-9	6'-10	5'-5	6'-1	15'-2	12'-2	6.3	27'-4	15.2	42'-6	24.2
11'-1	7'-0	5'-5	6'-3	15'-6	12'-6	6.4	28'-0	15.4	43'-6	24.4
11'-5	7'-1	5'-5	6'-5	15'-10	12'-10	6.4	28'-8	15.5	44'-6	24.6
11'-9	7'-2	5'-5	6'-7	16'-2	13'-2	6.5	29'-4	15.7	45'-6	24.8
12'-3	7'-3	5'-6	6'-10	16'-8	13'-8	7.1	30'-4	16.8	47'-0	26.6
12'-7	7'-5	5'-6	7'-0	17'-0	14'-0	7.1	31'-0	16.9	48'-0	26.8
12'-11	7'-6	5'-6	7'-2	17'-4	14'-4	7.2	31'-8	17.1	49'-0	26.9
13'-1	8'-2	5'-6	7'-3	17'-6	14'-6	7.7	32'-0	18.1	49'-6	28.5
13'-1	8'-4	5'-6	7'-3	17'-6	14'-6	7.2	32'-0	17.1	49'-6	26.9
13'-11	8'-5	5'-9	7'-8	18'-4	15'-4	8.5	33'-8	19.7	52'-0	31.0
14'-0	8'-7	5'-9	7'-8 $\frac{1}{2}$	18'-5	15'-5	7.9	33'-10	18.7	52'-3	29.4
13'-11	9'-5	5'-9	7'-8	18'-4	15'-4	8.2	33'-8	19.2	52'-0	30.2
14'-3	9'-7	5'-9	7'-10	18'-8	15'-8	8.3	34'-4	19.4	53'-0	30.5
14'-8	9'-8	5'-9	8'-0 $\frac{1}{2}$	19'-1	16'-1	8.6	35'-2	20.1	54'-3	31.5
14'-11	9'-10	5'-9	8'-2	19'-4	16'-4	8.7	35'-8	20.2	55'-0	31.7
15'-4	10'-0	6'-0	8'-4 $\frac{1}{2}$	19'-9	16'-9	9.1	36'-6	21.1	56'-3	33.1
15'-7	10'-2	6'-0	8'-6	20'-0	17'-0	9.1	37'-0	21.2	57'-0	33.2
16'-1	10'-4	6'-0	8'-9	20'-6	17'-6	9.6	38'-0	22.1	58'-6	34.5
16'-4	10'-6	6'-0	8'-10 $\frac{1}{2}$	20'-9	17'-9	9.6	38'-6	22.1	59'-3	34.6
16'-9	10'-8	6'-0	9'-1	21'-2	18'-2	10.0	39'-4	22.9	60'-6	35.8
17'-0	10'-10	6'-0	9'-2 $\frac{1}{2}$	21'-5	18'-5	10.0	39'-10	22.9	61'-3	35.9
17'-3	11'-0	6'-0	9'-4	21'-8	18'-8	10.0	40'-4	23.0	62'-0	35.9
17'-9	11'-2	6'-0	9'-7	22'-2	19'-2	10.5	41'-4	24.1	63'-6	37.7
18'-0	11'-4	6'-3	9'-8 $\frac{1}{2}$	22'-5	19'-5	10.6	41'-10	24.3	64'-3	38.0
18'-5	11'-6	6'-3	9'-11	22'-10	19'-10	11.0	42'-8	25.2	65'-6	39.5
18'-8	11'-8	6'-3	10'-0 $\frac{1}{2}$	23'-1	20'-1	11.0	43'-2	25.2	66'-3	39.4
19'-2	11'-9	6'-3	10'-3 $\frac{1}{2}$	23'-7	20'-7	11.5	44'-2	26.1	67'-9	40.7
19'-5	11'-11	6'-3	10'-5	23'-10	20'-10	11.5	44'-8	26.2	68'-6	40.9
19'-10	12'-1	6'-3	10'-7 $\frac{1}{2}$	24'-3	21'-3	12.0	45'-6	27.2	69'-9	42.5
20'-1	12'-3	6'-3	10'-9	24'-6	21'-6	12.0	46'-0	27.1	70'-6	42.3
20'-1	12'-6	6'-3	10'-9	24'-6	21'-6	11.4	46'-0	25.8	70'-6	40.1
20'-10	12'-7	6'-6	11'-1 $\frac{1}{2}$	25'-3	22'-3	12.5	47'-6	28.3	72'-9	44.0
21'-1	12'-9	6'-6	11'-3	25'-6	22'-6	12.5	48'-0	28.1	73'-6	43.8
21'-6	12'-11	6'-6	11'-5 $\frac{1}{2}$	25'-11	22'-11	13.0	48'-10	29.4	74'-9	45.9


### GENERAL NOTES

1. Refer to Standard Drawing E 717-SPCA-01 for single pipe anchor details.
2. Refer to Standard Drawings E 717-MPCA-01 and E 717-MPCA-02 for multiple pipe anchor details.

INDIANA DEPARTMENT OF TRANSPORTATION

### CONCRETE ANCHOR TABLES JANUARY 1998

STANDARD DRAWING NO. **E 717-ANCH-03**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98

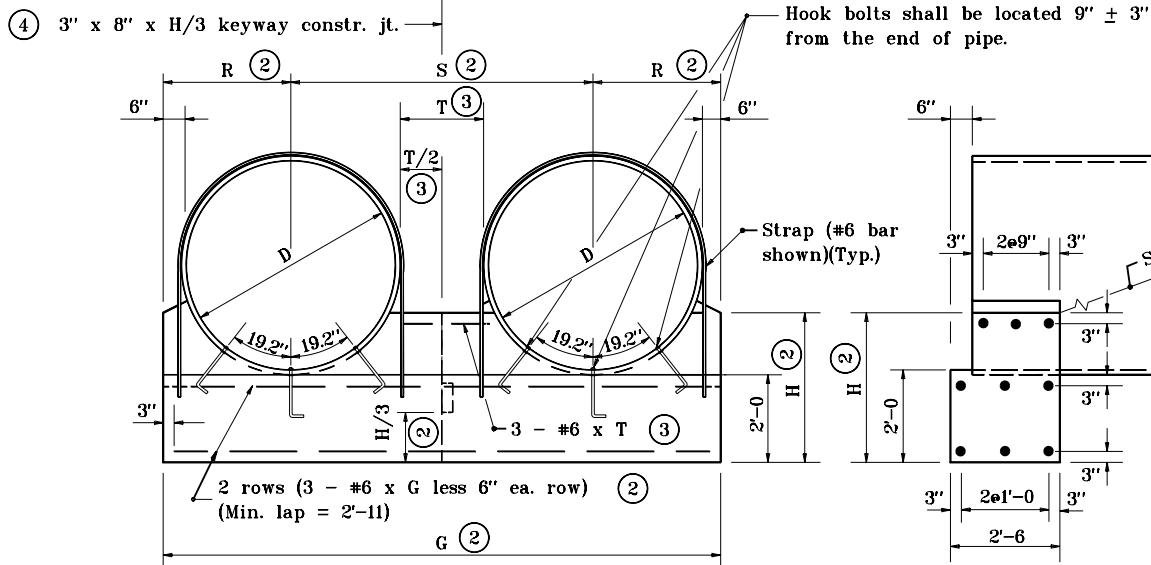


**ANCHOR FOR DOUBLE PIPE INSTALLATION**  
**FRONT ELEVATION**

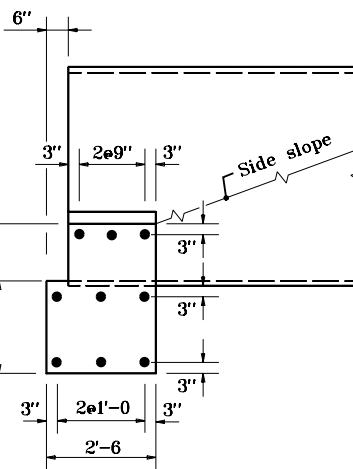

**SECTION THROUGH**  
**ANCHOR**

### GENERAL NOTES

1. Circular pipes shown. For details of structural plate pipe-arches alternates, see partial elevations on Standard Drawing E 717-MPCA-02.
- ② For dimension, enter chart on Standard Drawing E 717-ANCH-01 with known dimension D.
- ③ T = Clear distance between pipes.  
For D less than 48", T = 2'-0.  
For D of 48" to 96" T = 1/2 D  
For D greater than 96", T = 4'-0.
- ④ No joint required if G is less than or equal to 30'. One joint required if G is greater than 30' but less than or equal to 42'. Two joints required if G is greater than 42'.

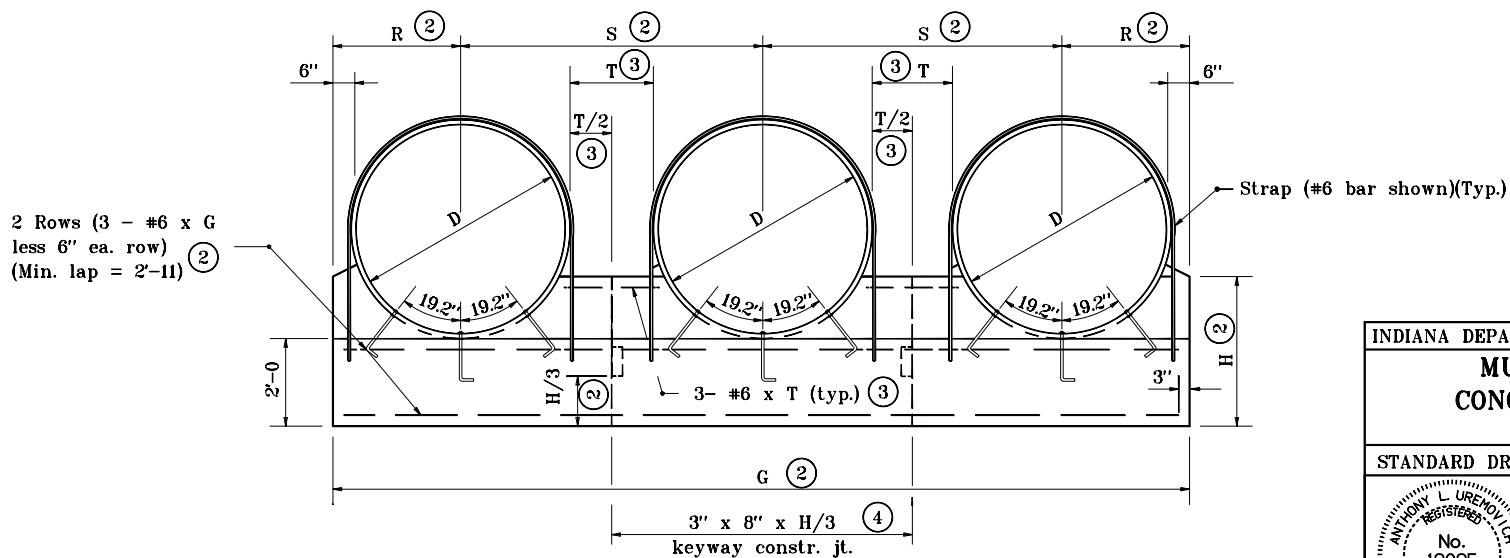


**ANCHOR FOR TRIPLE PIPE INSTALLATION**  
**FRONT ELEVATION**

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>MULTIPLE PIPE CONCRETE ANCHOR</b>	
JANUARY 1998	
STANDARD DRAWING NO. <b>E 717-MPCA-01</b>	
DETAILS PLACED IN THIS FORMAT 7-27-99	
	/s/ Anthony L. Uremovich 7-27-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 7-27-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 1-02-98



## GENERAL NOTES

1. Anchor straps shall be used at both upstream and downstream ends of all structural plate pipes and pipe-arches.
2. See Standard Drawing E 715-PASD-01 for anchor strap details.
3. Hook bolts and anchor straps shall be used for all structural plate pipes and pipe-arches with a diameter or span of 84" or greater.
4. See Standard Drawing E 715-PAHB-01 for hook bolt details.
5. Riprap shall be placed at the ends of pipe structures when shown on the plans.
- 6 For dimension, enter chart on Standard Drawings E 717-ANCH-01 or E 717-ANCH-02 with known dimension D or span and rise.

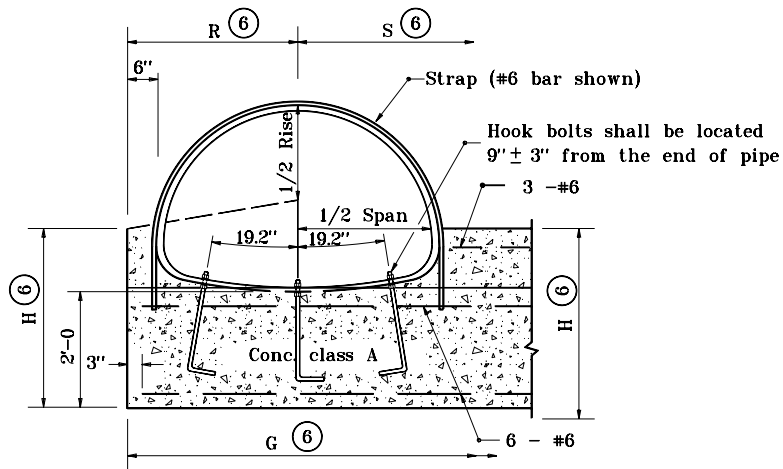

**ANCHOR FOR STRUCTURAL PLATE PIPE-ARCH  
PARTIAL ELEVATION**


INDIANA DEPARTMENT OF TRANSPORTATION			
<b>MULTIPLE PIPE CONCRETE ANCHOR</b> JANUARY 1998			
STANDARD DRAWING NO. <b>E 717-MPCA-02</b>			
	DETAILS PLACED IN THIS FORMAT 7-27-99		
	/s/ Anthony L. Uremovich 7-27-99 <small>DESIGN STANDARDS ENGINEER      DATE</small>		
	/s/ Firooz Zandi 7-27-99 <small>CHIEF HIGHWAY ENGINEER      DATE</small>		
<small>DESIGN STANDARDS ENGINEER</small>	<small>ORIGINALLY APPROVED      1-02-98</small>		

**9" x 2½" STRUCTURAL PLATE ALUMINUM ALLOY PIPE (STEEL BOLTED)  
HEIGHT OF COVER LIMITS (ft.)**

	AREA (sft)	DIAMETER (in.)	THICKNESS (in.)											
			0.100		0.125		0.150		0.175		0.200			
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
	19.6	60	1.0	31.1	1.0	45.5	1.0	60.1	1.0	70.7	1.0	81.5		
	23.8	66	1.0	28.2	1.0	41.4	1.0	54.6	1.0	64.3	1.0	74.1		
	28.3	72	1.0	25.9	1.0	37.9	1.0	50.0	1.0	58.9	1.0	67.9		
	33.2	78	1.0	23.9	1.0	35.0	1.0	46.2	1.0	54.4	1.0	62.7		
	38.5	84	1.0	22.2	1.0	32.5	1.0	42.9	1.0	50.5	1.0	58.2		
	44.2	90	1.1	20.7	1.0	30.3	1.0	40.0	1.0	47.1	1.0	54.3		
	50.3	96	1.1	19.4	1.0	28.4	1.0	37.5	1.0	44.2	1.0	50.9		
	56.7	102	1.1	18.3	1.1	26.7	1.1	35.3	1.1	41.6	1.1	47.9		
	63.6	108	1.2	17.2	1.1	25.3	1.1	33.3	1.1	39.3	1.1	45.3		
	70.9	114	1.3	16.3	1.2	23.9	1.2	31.6	1.2	37.2	1.2	42.9		
	78.5	120	1.3	15.5	1.3	22.7	1.3	30.0	1.3	35.3	1.3	40.7		
	86.6	126	1.4	14.8	1.3	21.6	1.3	28.6	1.3	33.7	1.3	38.8		
	95.0	132	1.4	14.1	1.4	20.7	1.4	27.3	1.4	32.1	1.4	37.0		
	103.9	138	1.5	13.5	1.4	19.8	1.4	26.1	1.4	30.7	1.4	35.4		
	113.1	144	1.6	12.9	1.5	18.9	1.5	25.0	1.5	29.4	1.5	33.9		
	122.7	150			1.6	18.2	1.6	24.0	1.6	28.3	1.6	32.6		
	132.7	156			1.6	17.5	1.6	23.1	1.6	27.2	1.6	31.3		
	143.1	162					1.7	22.2	1.7	26.2	1.7	30.2		
	153.9	168					1.8	21.4	1.8	25.2	1.8	29.1		
	165.1	174					1.8	20.7	1.8	24.4	1.8	28.1		
	176.7	180							1.9	23.5	1.9	27.1		
	188.7	186							1.9	22.8	1.9	26.3		
	201.1	192									2.0	25.4		
	213.8	198									2.1	24.7		
	227.0	204									2.1	23.9		
	240.5	210												
	254.5	216												
	268.8	222												
	283.5	228												

**NOTE:**

- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE HEIGHT OF COVER LIMITS</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO. E 717-PHCL-01</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 1-02-98

**9" x 2½" STRUCTURAL PLATE ALUMINUM ALLOY PIPE (STEEL BOLTED)  
HEIGHT OF COVER LIMITS (ft.)**

	AREA (sft.)	DIAMETER (in.)	THICKNESS (in.)									
			0.225		0.250							
			MIN.	MAX.	MIN.	MAX.						
	19.6	60	1.0	92.4	1.0	100.0						
	23.8	66	1.0	84.0	1.0	94.0						
	28.3	72	1.0	77.0	1.0	86.2						
	33.2	78	1.0	71.1	1.0	79.5						
	38.5	84	1.0	66.0	1.0	73.8						
	44.2	90	1.0	61.6	1.0	68.9						
	50.3	96	1.0	57.7	1.0	64.6						
	56.7	102	1.1	54.3	1.1	60.8						
	63.6	108	1.1	51.3	1.1	57.4						
	70.9	114	1.2	48.6	1.2	54.4						
	78.5	120	1.3	46.2	1.3	51.7						
	86.6	126	1.3	44.0	1.3	49.2						
	95.0	132	1.4	42.0	1.4	47.0						
	103.9	138	1.4	40.1	1.4	44.9						
	113.1	144	1.5	38.5	1.5	43.1						
	122.7	150	1.6	36.9	1.6	41.3						
	132.7	156	1.6	35.5	1.6	39.7						
	143.1	162	1.7	34.2	1.7	38.3						
	153.9	168	1.8	33.0	1.8	36.9						
	165.1	174	1.8	31.8	1.8	35.6						
	176.7	180	1.9	30.8	1.9	34.4						
	188.7	186	1.9	29.8	1.9	33.3						
	201.1	192	2.0	28.8	2.0	32.3						
	213.8	198	2.1	28.0	2.1	31.3						
	227.0	204	2.1	27.1	2.1	30.4						
	240.5	210	2.2	26.4	2.2	29.5						
	254.5	216	2.3	25.6	2.3	28.7						
	268.8	222			2.3	27.9						
	283.5	228			2.4	27.2						

**NOTE:**

- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE HEIGHT OF COVER LIMITS</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO. E 717-PHCL-02</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98

**9' x 2½" STRUCTURAL PLATE ALUMINUM ALLOY PIPE-ARCH (STEEL BOLTED)  
HEIGHT OF COVER LIMITS (ft.)**

Re (in.)	SPAN (ft.-in.)	RISE (ft.-in.)	AREA (sft.)	THICKNESS (in.)									
				0.100		0.125		0.150		0.175		0.200	
				MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
31.75	6'-7	5'-8	29	1.0	23.6	1.0	26.7	1.0	26.7	1.0	26.7	1.0	26.7
31.75	6'-11	5'-9	31	1.0	22.4	1.0	25.4	1.0	25.4	1.0	25.4	1.0	25.4
31.75	7'-3	5'-11	34	1.1	21.4	1.0	24.2	1.0	24.2	1.0	24.2	1.0	24.2
31.75	7'-9	6'-0	36	1.1	20.0	1.0	22.7	1.0	22.7	1.0	22.7	1.0	22.7
31.75	8'-1	6'-1	39	1.1	19.2	1.1	21.7	1.1	21.7	1.1	21.7	1.1	21.7
31.75	8'-5	6'-3	41	1.1	18.4	1.1	20.9	1.1	20.9	1.1	20.9	1.1	20.9
31.75	8'-10	6'-4	44	1.2	17.6	1.1	19.9	1.1	19.9	1.1	19.9	1.1	19.9
31.75	9'-3	6'-5	47	1.2	16.8	1.2	19.0	1.2	19.0	1.2	19.0	1.2	19.0
31.75	9'-7	6'-6	49	1.3	16.2	1.2	18.3	1.2	18.3	1.2	18.3	1.2	18.3
31.75	9'-11	6'-8	52	1.3	15.6	1.2	17.7	1.2	17.7	1.2	17.7	1.2	17.7
31.75	10'-3	6'-9	55	1.3	15.1	1.3	17.1	1.3	17.1	1.3	17.1	1.3	17.1
31.75	10'-9	6'-10	58	1.4	14.4	1.3	16.3	1.3	16.3	1.3	16.3	1.3	16.3
31.75	11'-1	7'-0	61	1.5	14.0	1.4	15.8	1.4	15.8	1.4	15.8	1.4	15.8
31.75	11'-5	7'-1	64	1.5	13.6	1.4	15.4	1.4	15.4	1.4	15.4	1.4	15.4
31.75	11'-9	7'-2	67	1.5	13.2	1.5	14.9	1.5	14.9	1.5	14.9	1.5	14.9
31.75	12'-3	7'-3	70	1.6	12.6	1.5	14.3	1.5	14.3	1.5	14.3	1.5	14.3
31.75	12'-7	7'-5	73	1.7	11.7	1.6	13.9	1.6	13.9	1.6	13.9	1.6	13.9
31.75	12'-11	7'-6	77	1.7	11.3	1.6	13.6	1.6	13.6	1.6	13.6	1.6	13.6
31.75	13'-1	8'-2	83	1.7	11.2	1.6	13.4	1.6	13.4	1.6	13.4	1.6	13.4
31.75	13'-1	8'-4	86	1.7	11.2	1.6	13.4	1.6	13.4	1.6	13.4	1.6	13.4
31.75	13'-11	8'-5	90	1.9	10.4	1.7	12.0	1.7	12.0	1.7	12.0	1.7	12.0
31.75	14'-0	8'-7	94	1.9	10.3	1.8	11.9	1.8	11.9	1.8	11.9	1.8	11.9
31.75	13'-11	9'-5	101	1.9	10.4	1.7	12.0	1.7	12.0	1.7	12.0	1.7	12.0
31.75	14'-3	9'-7	105	1.9	10.1	1.8	11.7	1.8	11.7	1.8	11.7	1.8	11.7
31.75	14'-8	9'-8	109			1.8	11.3	1.8	11.3	1.8	11.3	1.8	11.3
31.75	14'-11	9'-10	114			1.9	11.1	1.9	11.1	1.9	11.1	1.9	11.1

**NOTE:**


- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- A specific design shall be performed for structures with corner radii other than those tabulated above to determine the appropriate cover depth limits.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

**STANDARD DRAWING NO. E 717-PHCL-03**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 1-02-98

**9' x 2½" STRUCTURAL PLATE ALUMINUM ALLOY PIPE-ARCH (STEEL BOLTED)  
HEIGHT OF COVER LIMITS (ft.)**

Rc (in.)	RISE (ft.-in.)	RISE (ft.-in.)	AREA (sft.)	THICKNESS (in.)									
				0.225		0.250							
				MIN.	MAX.	MIN.	MAX.						
31.75	6'-7	5'-8	29	1.0	26.7	1.0	26.7						
31.75	6'-11	5'-9	31	1.0	25.4	1.0	25.4						
31.75	7'-3	5'-11	34	1.0	24.2	1.0	24.2						
31.75	7'-9	6'-0	36	1.0	22.7	1.0	22.7						
31.75	8'-1	6'-1	39	1.1	21.7	1.1	21.7						
31.75	8'-5	6'-3	41	1.1	20.9	1.1	20.9						
31.75	8'-10	6'-4	44	1.1	19.9	1.1	19.9						
31.75	9'-3	6'-5	47	1.2	19.0	1.2	19.0						
31.75	9'-7	6'-6	49	1.2	18.3	1.2	18.3						
31.75	9'-11	6'-8	52	1.2	17.7	1.2	17.7						
31.75	10'-3	6'-9	55	1.3	17.1	1.3	17.1						
31.75	10'-9	6'-10	58	1.3	16.3	1.3	16.3						
31.75	11'-1	7'-0	61	1.4	15.8	1.4	15.8						
31.75	11'-5	7'-1	64	1.4	15.4	1.4	15.4						
31.75	11'-9	7'-2	67	1.5	14.9	1.5	14.9						
31.75	12'-3	7'-3	70	1.5	14.3	1.5	14.3						
31.75	12'-7	7'-5	73	1.6	13.9	1.6	13.9						
31.75	12'-11	7'-6	77	1.6	13.6	1.6	13.6						
31.75	13'-1	8'-2	83	1.6	13.4	1.6	13.4						
31.75	13'-1	8'-4	86	1.6	13.4	1.6	13.4						
31.75	13'-11	8'-5	90	1.7	12.0	1.7	12.0						
31.75	14'-0	8'-7	94	1.8	11.9	1.8	11.9						
31.75	13'-11	9'-5	101	1.7	12.0	1.7	12.0						
31.75	14'-3	9'-7	105	1.8	11.7	1.8	11.7						
31.75	14'-8	9'-8	109	1.8	11.3	1.8	11.3						
31.75	14'-11	9'-10	114	1.9	11.1	1.9	11.1						

**NOTE:**

- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- A specific design shall be performed for structures with corner radii other than those tabulated above to determine the appropriate cover depth limits.

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE HEIGHT OF COVER LIMITS</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO.E 717-PHCL-04</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98

**9' x 2½" STRUCTURAL PLATE ALUMINUM ALLOY PIPE-ARCH (STEEL BOLTED)  
HEIGHT OF COVER LIMITS (ft.)**

Re (in.)	SPAN (ft.-in.)	RISE (ft.-in.)	AREA (sft )	THICKNESS (in.)									
				0.100		0.125		0.150		0.175		0.200	
				MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
31.75	15-4	10-0	118			1.9	10.7	1.9	10.7	1.9	10.7	1.9	10.7
31.75	15-7	10-2	123			2.0	10.5	2.0	10.5	2.0	10.5	2.0	10.5
31.75	16-1	10-4	127			2.0	10.1	2.0	10.1	2.0	10.1	2.0	10.1
31.75	16-4	10-6	132					2.0	9.9	2.0	9.9	2.0	9.9
31.75	16-9	10-8	136					2.1	9.6	2.1	9.6	2.1	9.6
31.75	17-0	10-10	141					2.1	9.5	2.1	9.5	2.1	9.5
31.75	17-3	11-0	146					2.2	9.3	2.2	9.3	2.2	9.3
31.75	17-9	11-2	151							2.2	8.9	2.2	8.9
31.75	18-0	11-4	156							2.3	8.8	2.3	8.8
31.75	18-5	11-6	161							2.3	8.5	2.3	8.5
31.75	18-8	11-8	167							2.3	8.4	2.3	8.4
31.75	19-2	11-9	172									2.4	8.0
31.75	19-5	11-11	177									2.4	7.9
31.75	19-10	12-1	182									2.5	7.7
31.75	20-1	12-3	188									2.5	7.5
31.75	20-1	12-6	194										
31.75	20-10	12-7	199										
31.75	21-1	12-9	205										
31.75	21-6	12-11	211										
47.00	20-1	13-11	216										
47.00	20-7	14-3	224										
47.00	21-5	14-7	241										
47.00	21-11	14-11	254										
47.00	22-8	15-3	267										

**NOTE:**


- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- A specific design shall be performed for structures with corner radii other than those tabulated above to determine the appropriate cover depth limits.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

**STANDARD DRAWING NO. E 717-PHCL-05**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98

**9' x 2½" STRUCTURAL PLATE ALUMINUM ALLOY PIPE-ARCH (STEEL BOLTED)  
HEIGHT OF COVER LIMITS (ft.)**

Re (in.)	SPAN (ft.-in.)	RISE (ft.-in.)	AREA (sft)	THICKNESS (in.)									
				0.225		0.250							
				MIN.	MAX.	MIN.	MAX.						
31.75	15-4	10-0	118	1.9	10.7	1.9	10.7						
31.75	15-7	10-2	123	2.0	10.5	2.0	10.5						
31.75	16-1	10-4	127	2.0	10.1	2.0	10.1						
31.75	16-4	10-6	132	2.0	9.9	2.0	9.9						
31.75	16-9	10-8	136	2.1	9.6	2.1	9.6						
31.75	17-0	10-10	141	2.1	9.5	2.1	9.5						
31.75	17-3	11-0	146	2.2	9.3	2.2	9.3						
31.75	17-9	11-2	151	2.2	8.9	2.2	8.9						
31.75	18-0	11-4	156	2.3	8.8	2.3	8.8						
31.75	18-5	11-6	161	2.3	8.5	2.3	8.5						
31.75	18-8	11-8	167	2.3	8.4	2.3	8.4						
31.75	19-2	11-9	172	2.4	8.0	2.4	8.0						
31.75	19-5	11-11	177	2.4	7.9	2.4	7.9						
31.75	19-10	12-1	182	2.5	7.7	2.5	7.7						
31.75	20-1	12-3	188	2.5	7.5	2.5	7.5						
31.75	20-1	12-6	194	2.5	7.5	2.5	7.5						
31.75	20-10	12-7	199	2.6	7.1	2.6	7.1						
31.75	21-1	12-9	205	2.6	7.0	2.6	7.0						
31.75	21-6	12-11	211	2.7	6.7	2.7	6.7						
47.00	20-1	13-11	216			2.5	12.4						
47.00	20-7	14-3	224			2.6	12.1						
47.00	21-5	14-7	241			2.7	11.5						
47.00	21-11	14-11	254			2.7	11.2						
47.00	22-8	15-3	267			2.8	10.8						

**NOTE:**


- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- A specific design shall be performed for structures with corner radii other than those tabulated above to determine the appropriate cover depth limits.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

**STANDARD DRAWING NO. E 717-PHCL-06**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-98

**6" x 2" STRUCTURAL PLATE STEEL PIPE (BOLTED)  
HEIGHT OF COVER LIMITS (ft)**

	AREA (sft)	DIAMETER (in.)	THICKNESS (in.)									
			0.111		0.140		0.170					
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.				
	19.6	60	1.0	47.7	1.0	68.8	1.0	90.0				
	23.8	66	1.0	43.4	1.0	62.6	1.0	81.8				
	28.3	72	1.0	39.8	1.0	57.4	1.0	75.0				
	33.2	78	1.0	36.7	1.0	52.9	1.0	69.2				
	38.5	84	1.0	34.1	1.0	49.2	1.0	64.2				
	44.2	90	1.0	31.8	1.0	45.9	1.0	60.0				
	50.3	96	1.0	29.8	1.0	43.0	1.0	56.2				
	56.7	102	1.1	28.1	1.1	40.5	1.1	52.9				
	63.6	108	1.1	26.5	1.1	38.2	1.1	50.0				
	70.9	114	1.2	25.1	1.2	36.2	1.2	47.3				
	78.5	120	1.3	23.8	1.3	34.4	1.3	45.0				
	86.6	126	1.3	22.7	1.3	32.8	1.3	42.8				
	95.0	132	1.4	21.7	1.4	31.3	1.4	40.9				
	103.9	138	1.4	20.7	1.4	29.9	1.4	39.1				
	113.1	144	1.5	19.9	1.5	28.7	1.5	37.5				
	122.7	150	1.6	19.1	1.6	27.5	1.6	36.0				
	132.7	156	1.6	18.3	1.6	26.4	1.6	34.6				
	143.1	162	1.7	17.6	1.7	25.5	1.7	33.3				
	153.9	168	1.8	17.0	1.8	24.6	1.8	32.1				
	165.1	174	1.8	16.4	1.8	23.7	1.8	31.0				
	176.7	180	1.9	15.9	1.9	22.9	1.9	30.0				
	188.7	186	1.9	15.4	1.9	22.2	1.9	29.0				
	201.1	192			2.0	21.5	2.0	28.1				
	213.8	198			2.1	20.8	2.1	27.2				
	227.0	204			2.1	20.2	2.1	26.4				
	240.5	210			2.2	19.6	2.2	25.7				
	254.5	216					2.3	25.0				
	268.8	222					2.3	24.3				
	283.5	228					2.4	23.0				
	298.6	234					2.4	7.0				
	314.2	240										
	330.1	246										
	346.4	252										

**NOTE:**


- The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
- The tabulated plate thickness reflects the required thickness for top and side plates. Refer to 908.09 (a) for the required bottom plate thickness.

INDIANA DEPARTMENT OF TRANSPORTATION

**PIPE HEIGHT OF  
COVER LIMITS**

JANUARY 1998

**STANDARD DRAWING NO. E 717-PHCL-07**



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-02-96




**6" x 2" STRUCTURAL PLATE STEEL PIPE (BOLTED)**  
**HEIGHT OF COVER LIMITS (in.)**

AREA (sft)	DIAMETER (in.)	THICKNESS (in.)											
		0.188		0.218		0.249		0.280					
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.				
19.6	60	1.0	100.0	1.0	100.0	1.0	100.0	1.0	100.0				
23.8	66	1.0	93.9	1.0	100.0	1.0	100.0	1.0	100.0				
28.3	72	1.0	86.1	1.0	100.0	1.0	100.0	1.0	100.0				
33.2	78	1.0	79.4	1.0	95.7	1.0	100.0	1.0	100.0				
38.5	84	1.0	73.8	1.0	88.8	1.0	100.0	1.0	100.0				
44.2	90	1.0	68.8	1.0	82.9	1.0	97.7	1.0	100.0				
50.3	96	1.0	64.5	1.0	77.7	1.0	91.6	1.0	100.0				
56.7	102	1.1	60.7	1.1	73.2	1.1	86.2	1.1	94.1				
63.6	108	1.1	57.4	1.1	69.1	1.1	84.1	1.1	88.8				
70.9	114	1.2	54.3	1.2	65.4	1.2	77.1	1.2	84.2				
78.5	120	1.3	51.6	1.3	62.2	1.3	73.3	1.3	80.0				
86.6	126	1.3	49.2	1.3	59.2	1.3	69.8	1.3	76.1				
95.0	132	1.4	46.9	1.4	56.5	1.4	66.6	1.4	72.7				
103.9	138	1.4	44.9	1.4	54.1	1.4	63.7	1.4	69.5				
113.1	144	1.5	43.0	1.5	51.8	1.5	61.1	1.5	66.6				
122.7	150	1.6	41.3	1.6	49.7	1.6	58.6	1.6	64.0				
132.7	156	1.6	39.7	1.6	47.8	1.6	56.4	1.6	61.5				
143.1	162	1.7	38.2	1.7	46.0	1.7	54.3	1.7	59.2				
153.9	168	1.8	36.9	1.8	44.4	1.8	52.3	1.8	57.1				
165.1	174	1.8	35.6	1.8	42.9	1.8	50.5	1.8	55.1				
176.7	180	1.9	34.4	1.9	41.4	1.9	48.8	1.9	53.3				
188.7	186	1.9	33.3	1.9	40.1	1.9	47.3	1.9	51.6				
210.1	192	2.0	32.2	2.0	38.8	2.0	45.8	2.0	50.0				
213.8	198	2.1	31.3	2.1	37.7	2.1	44.4	2.1	48.4				
227.0	204	2.1	30.3	2.1	36.6	2.1	43.1	2.1	47.0				
240.5	210	2.1	29.5	2.1	35.5	2.1	41.9	2.1	45.7				
254.5	216	2.3	28.7	2.3	34.5	2.3	40.7	2.3	44.4				
268.8	222	2.3	27.9	2.3	33.6	2.3	39.6	2.3	43.2				
283.5	228	2.4	27.1	2.4	32.7	2.4	38.5	2.4	42.1				
298.6	234	2.4	26.4	2.4	31.9	2.4	37.6	2.4	41.0				
314.2	240	2.5	25.8	2.5	31.1	2.5	36.6	2.5	40.0				
330.1	246	2.5	25.2	2.6	30.3	2.6	35.7	2.6	39.0				
346.4	252			2.6	28.8	2.6	34.0	2.6	38.0				

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. The tabulated thickness reflects the required thickness for top and side plates. Refer to 908.08 (a) for the required bottom plate thickness.


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE HEIGHT OF COVER LIMITS</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO. E 717-PHCL-08</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  <i>/s/ Anthony L. Uremovich</i> 11-15-99 DESIGN STANDARDS ENGINEER DATE
	<i>/s/ Firooz Zandi</i> 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER <b>ORIGINALLY APPROVED</b> 1-02-98

**6" x 2" STRUCTURAL PLATE STEEL PIPE-ARCH (BOLTED)**  
**HEIGHT OF COVER LIMITS (ft.)**

Rc (in.)	SPAN (ft.-in.)	RISE (ft.-in.)	AREA (sft)	THICKNESS (in.)							
				0.111		0.140 thru 0.280					
				MIN.	MAX.	MIN.	MAX.				
18	6-1	4-7	22	1.3	16.4	1.3	16.4				
18	6-4	4-9	24	1.3	15.7	1.3	15.7				
18	6-9	4-11	26	1.4	14.8	1.4	14.8				
18	7-0	5-1	28	1.4	14.2	1.4	14.2				
18	7-3	5-3	31	1.5	13.7	1.5	13.7				
18	7-8	5-5	33	1.6	13.0	1.6	13.0				
18	7-11	5-7	35	1.6	12.6	1.6	12.6				
18	8-2	5-9	38	1.7	12.2	1.7	12.2				
18	8-7	5-11	40	1.8	11.6	1.8	11.6				
18	8-10	6-1	43	1.8	11.3	1.8	11.3				
18	9-4	6-3	46	2.0	10.7	2.0	10.7				
18	9-6	6-5	49	2.0	10.5	2.0	10.5				
18	9-9	6-7	52	2.1	10.2	2.1	10.2				
18	10-3	6-9	55	2.1	8.7	2.1	8.7				
18	10-8	6-11	58	2.1	8.3	2.1	8.3				
18	10-11	7-1	61	2.2	8.0	2.2	8.0				
18	11-5	7-3	64	2.3	7.5	2.3	7.5				
18	11-7	7-5	67	2.4	7.3	2.4	7.3				
18	11-10	7-7	71	2.5	7.1	2.5	7.1				
18	12-4	7-9	74	2.6	6.6	2.6	6.6				
18	12-6	7-11	78	2.7	6.5	2.7	6.5				
18	12-8	8-1	81	2.8	6.3	2.8	6.3				
18	12-10	8-4	85	2.8	6.2	2.8	6.2				
31	13-3	9-4	97	1.7	12.4	1.7	12.4				
31	13-6	9-6	102	1.7	12.1	1.7	12.1				
31	14-0	9-8	105	1.8	11.6	1.8	11.6				
31	14-2	9-10	109	1.8	11.5	1.8	11.5				
31	14-5	10-0	114	1.8	11.2	1.8	11.2				
31	14-11	10-2	118	1.9	10.8	1.9	10.8				

**NOTE:**

1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. A specific design shall be performed for structures with corner radii other than those tabulated above to determine the appropriate cover depth limits.
3. The tabulated plate thickness reflects the required thickness for top and side plates. Refer to 908.09 (a) for the required bottom plate thickness.

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE HEIGHT OF COVER LIMITS</b>	
JANUARY 1998	
<b>STANDARD DRAWING NO. E 717-PHCL-09</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99  /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE  /s/ Feroos Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 1-02-98

6" x 2" STRUCTURAL PLATE STEEL PIPE-ARCH (BOLTED)	
HEIGHT OF COVER LIMITS (ft.)	
1	1.0
2	1.5
3	2.0
4	2.5
5	3.0
6	3.5
7	4.0
8	4.5
9	5.0
10	5.5
11	6.0
12	6.5
13	7.0
14	7.5
15	8.0
16	8.5
17	9.0
18	9.5
19	10.0
20	10.5
21	11.0
22	11.5
23	12.0
24	12.5
25	13.0
26	13.5
27	14.0
28	14.5
29	15.0
30	15.5
31	16.0
32	16.5
33	17.0
34	17.5
35	18.0
36	18.5
37	19.0
38	19.5
39	20.0
40	20.5
41	21.0
42	21.5
43	22.0
44	22.5
45	23.0
46	23.5
47	24.0
48	24.5
49	25.0
50	25.5
51	26.0
52	26.5
53	27.0
54	27.5
55	28.0
56	28.5
57	29.0
58	29.5
59	30.0
60	30.5
61	31.0
62	31.5
63	32.0
64	32.5
65	33.0
66	33.5
67	34.0
68	34.5
69	35.0
70	35.5
71	36.0
72	36.5
73	37.0
74	37.5
75	38.0
76	38.5
77	39.0
78	39.5
79	40.0
80	40.5
81	41.0
82	41.5
83	42.0
84	42.5
85	43.0
86	43.5
87	44.0
88	44.5
89	45.0
90	45.5
91	46.0
92	46.5
93	47.0
94	47.5
95	48.0
96	48.5
97	49.0
98	49.5
99	50.0
100	50.5

[illegible]

**NOTE:**


1. The tabulated cover depths shall be measured from the bottom of the asphalt or concrete pavement to the top of the pipe.
2. A specific design shall be performed for structures with corner radii other than those tabulated above to determine the appropriate cover depth limits.
3. The tabulated plate thickness reflects the required thickness for top and side plates. Refer to 908.09 (a) for the required bottom plate thickness.

INDIANA DEPARTMENT OF TRANSPORTATION

### PIPE HEIGHT OF COVER LIMITS

JANUARY 1998

STANDARD DRAWING NO. E 717-PHCL-10



DETAILS PLACED IN THIS FORMAT	11-15-99
-------------------------------	----------


/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

<u>/s/ Firooz Zandi</u>	<u>11-15-99</u>
CHIEF HIGHWAY ENGINEER	DATE


<p> <b>ORIGINALY APPROVED</b> </p>	<p> <b>1-02-98</b> </p>
------------------------------------	-------------------------

## GENERAL NOTES


1. Anchor straps shall be used at both upstream and downstream ends of all structural plate pipes and pipe-arches.
2. See Standard Drawing E 715-PASD-01 for anchor strap details.
3. Hook bolts, and anchor straps shall be used at all structural plate pipes and pipe arches with a diameter or span of 84" or greater.
4. See Standard Drawing E 715-PAHB-01 for hook bolt details.
5. For dimension, enter chart on Standard Drawing E 717-ANCH-01 or E 717-ANCH-03 with known span and rise.
6. For dimension, enter chart on Standard Drawing E 717-ANCH-02 with known dimension D.

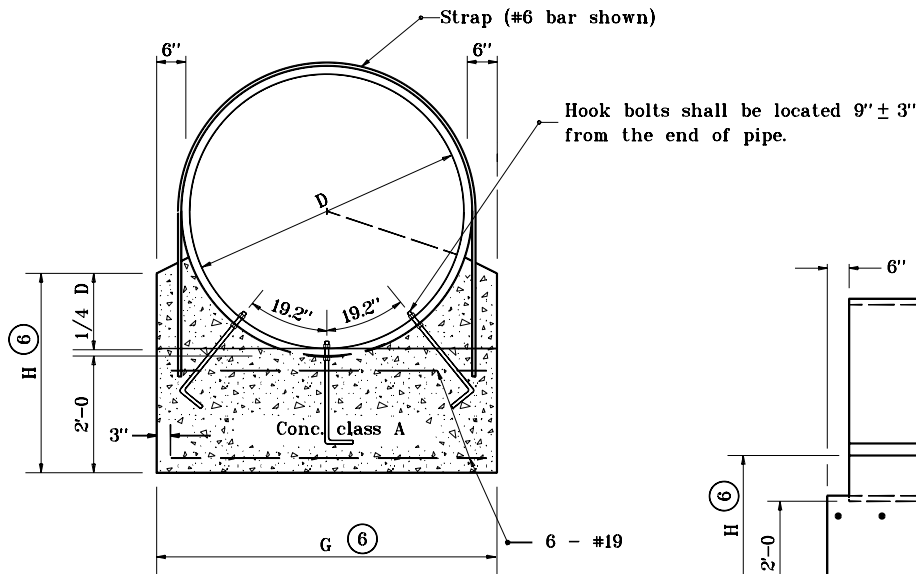


**ANCHOR FOR STRUCTURAL PLATE PIPE**  
**FRONT ELEVATION**

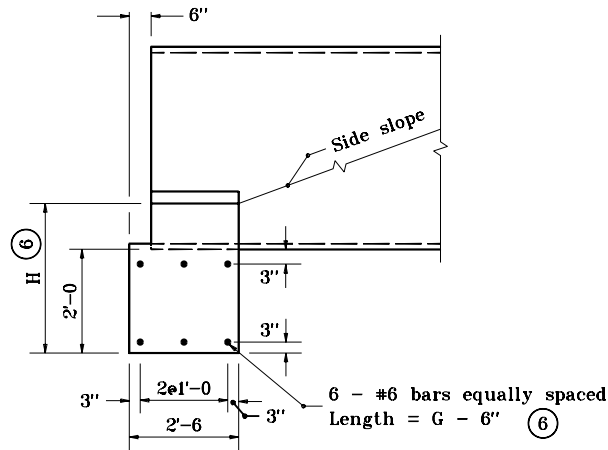


### SIDE ELEVATION

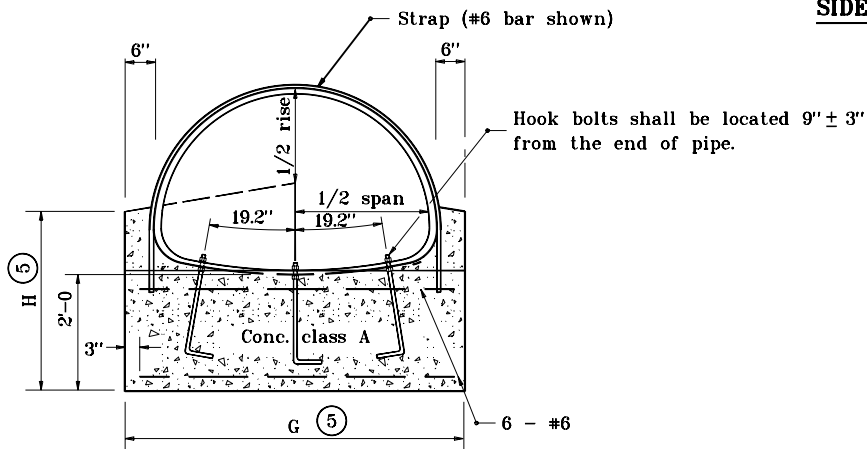



**ANCHOR FOR STRUCTURAL**  
**PLATE PIPE-ARCH**  
**FRONT ELEVATION**

INDIANA DEPARTMENT OF TRANSPORTATION						
<h1 style="margin: 0;">SINGLE STRUCTURAL PLATE</h1> <h1 style="margin: 0;">PIPE CONCRETE ANCHOR</h1>						
JANUARY 1998						
STANDARD DRAWING NO. <b>E 717-SPCA-01</b>						
	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%; padding: 5px;">DETAILS PLACED IN THIS FORMAT</td> <td style="width: 30%; text-align: right; padding: 5px;">7-27-99</td> </tr> <tr> <td style="padding: 10px;"> <u>/s/ Anthony L. Uremovich</u> 7-27-99            DESIGN STANDARDS ENGINEER      DATE         </td> </tr> <tr> <td style="padding: 10px;"> <u>/s/ Firooz Zandi</u> 7-27-99            CHIEF HIGHWAY ENGINEER      DATE         </td> </tr> <tr> <td style="padding: 5px;">           ORIGINALLY APPROVED      1-02-98         </td> </tr> </table>	DETAILS PLACED IN THIS FORMAT	7-27-99	<u>/s/ Anthony L. Uremovich</u> 7-27-99 DESIGN STANDARDS ENGINEER      DATE	<u>/s/ Firooz Zandi</u> 7-27-99 CHIEF HIGHWAY ENGINEER      DATE	ORIGINALLY APPROVED      1-02-98
DETAILS PLACED IN THIS FORMAT	7-27-99					
<u>/s/ Anthony L. Uremovich</u> 7-27-99 DESIGN STANDARDS ENGINEER      DATE						
<u>/s/ Firooz Zandi</u> 7-27-99 CHIEF HIGHWAY ENGINEER      DATE						
ORIGINALLY APPROVED      1-02-98						
DESIGN STANDARDS ENGINEER						

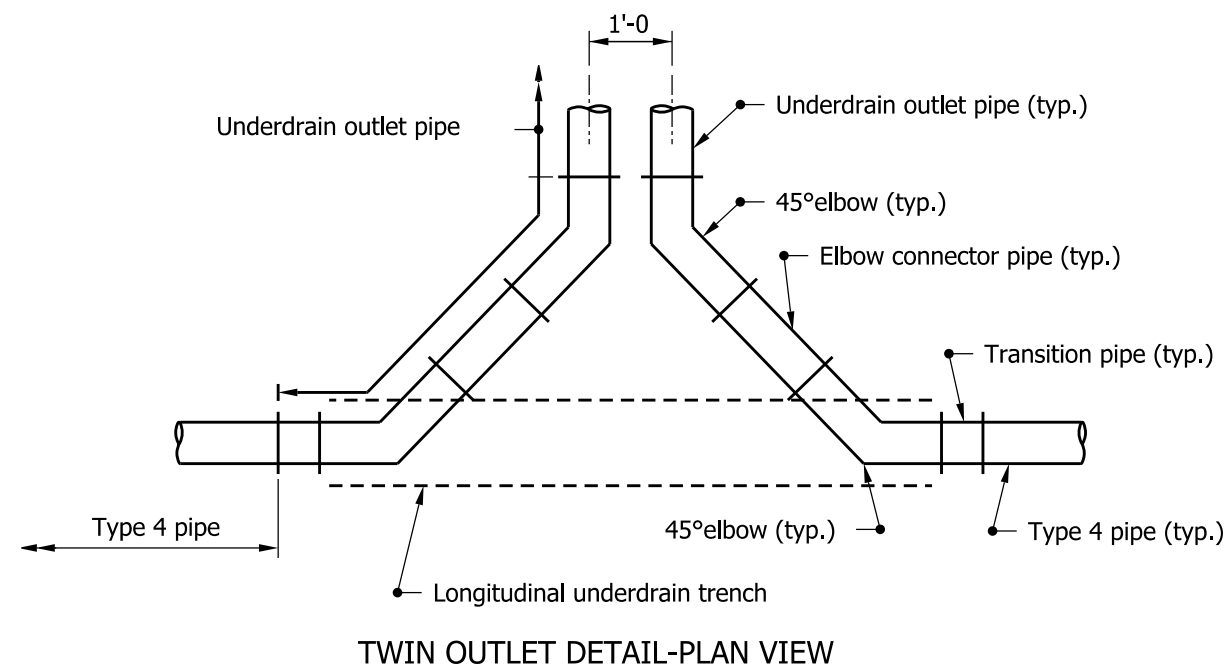

**NOTE:**

1. See Standard Drawing E 718-UNDR-07 for General Notes.

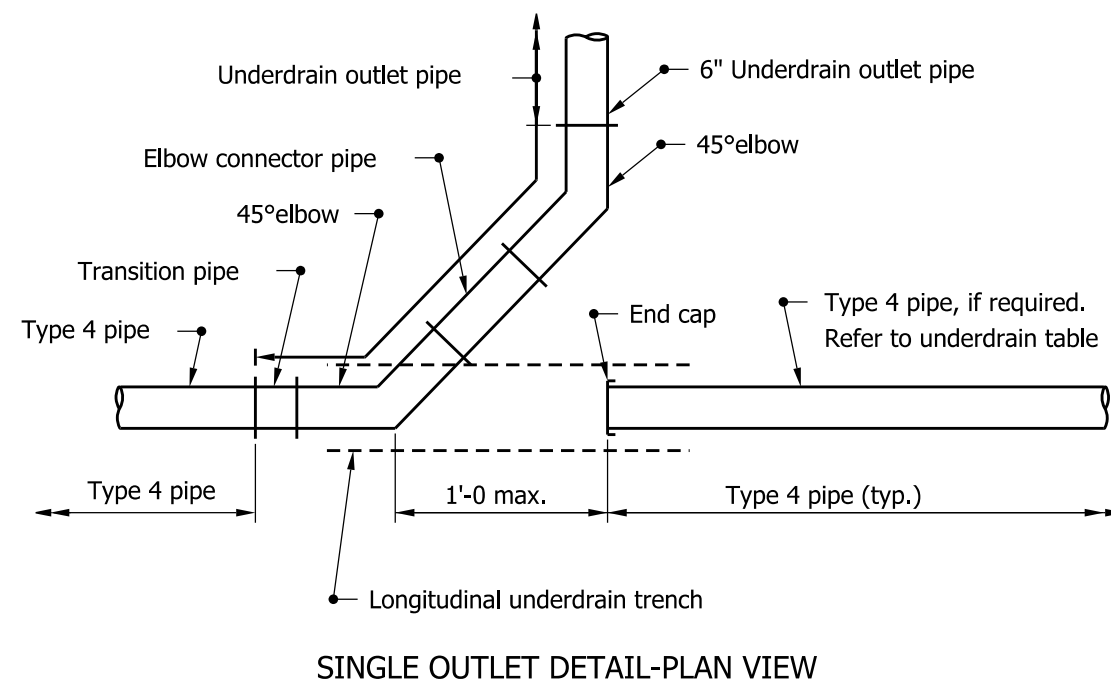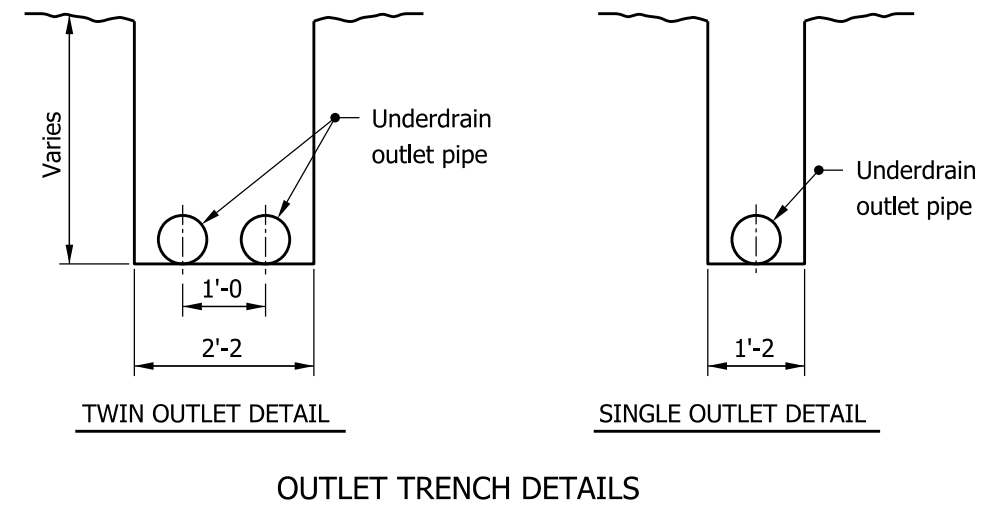


INDIANA DEPARTMENT OF TRANSPORTATION

UNDERDRAIN DETAILS

SEPTEMBER 2009


STANDARD DRAWING NO. E 718-UNDR-01




DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave* 09/01/09  
DESIGN STANDARDS ENGINEER DATE


*/s/ Mark A. Miller* 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

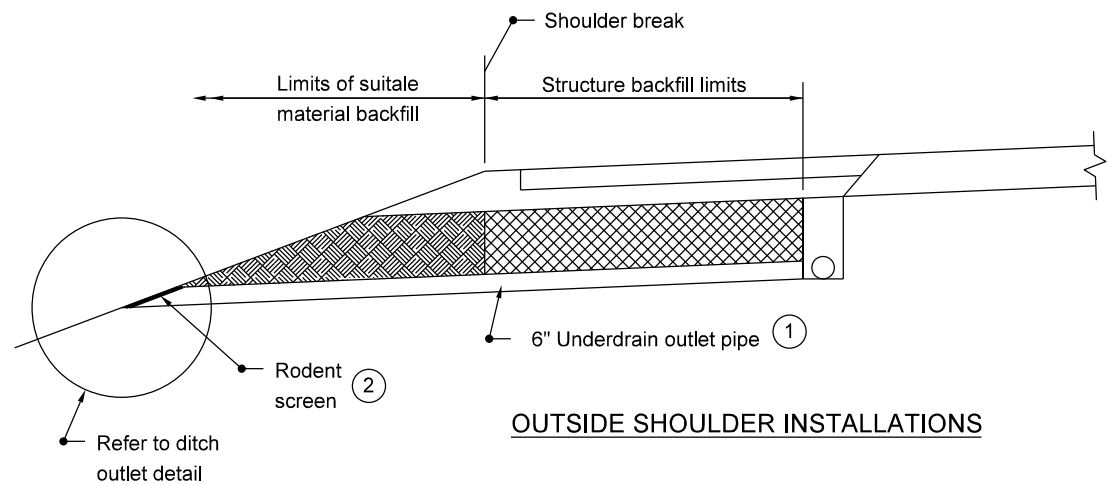


OUTSIDE SHOULDER INSTALLATIONS

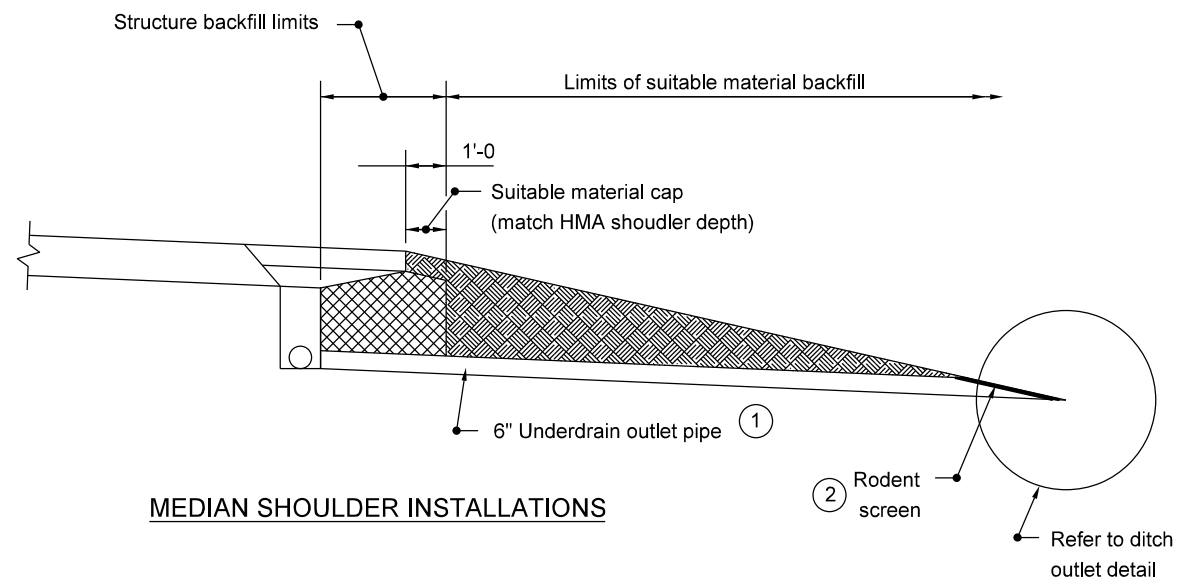


MEDIAN SHOULDER INSTALLATIONS

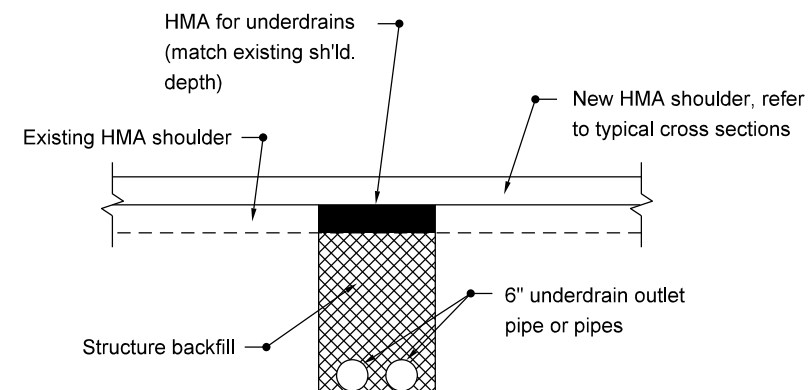

RETROFIT UNDERDRAIN OUTLET DETAIL (UNDER PAVED SHOULDER)

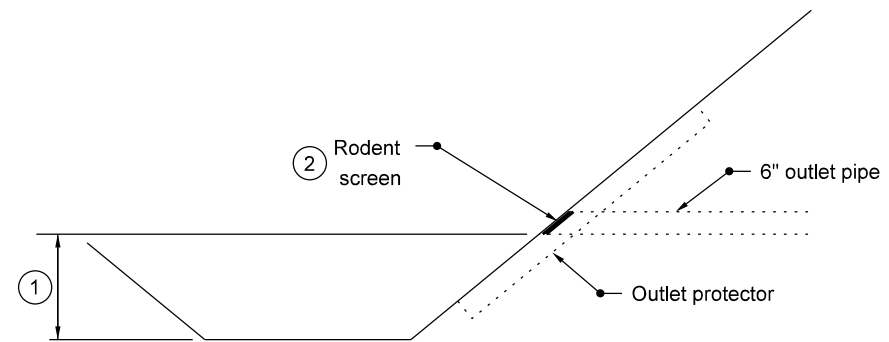

DITCH OUTLET DETAIL

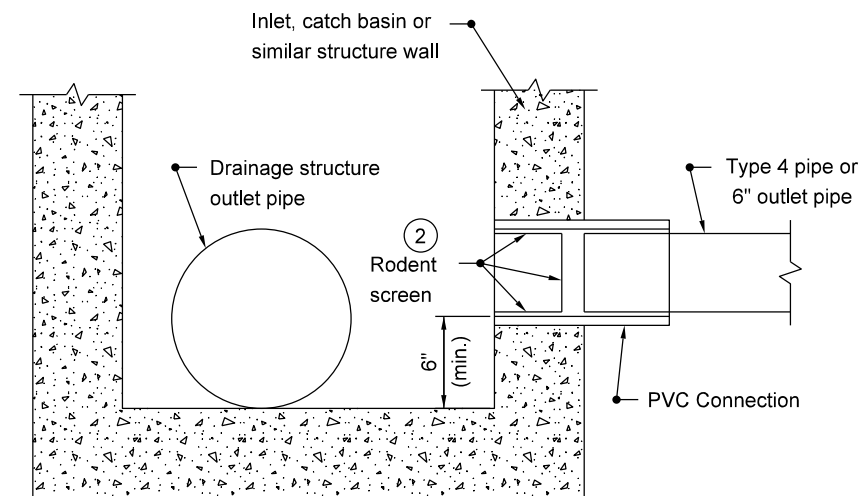

DRAINAGE STRUCTURE OUTLET DETAIL

NOTE:


1. See Standard Drawing E 718-UNDR-07 for General Notes.

INDIANA DEPARTMENT OF TRANSPORTATION

UNDERDRAIN DETAILS

SEPTEMBER 2009

STANDARD DRAWING NO. E 718-UNDR-02




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE


/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

**NOTE:**


1. See Standard Drawing E 718-UNDR-07 for General Notes.

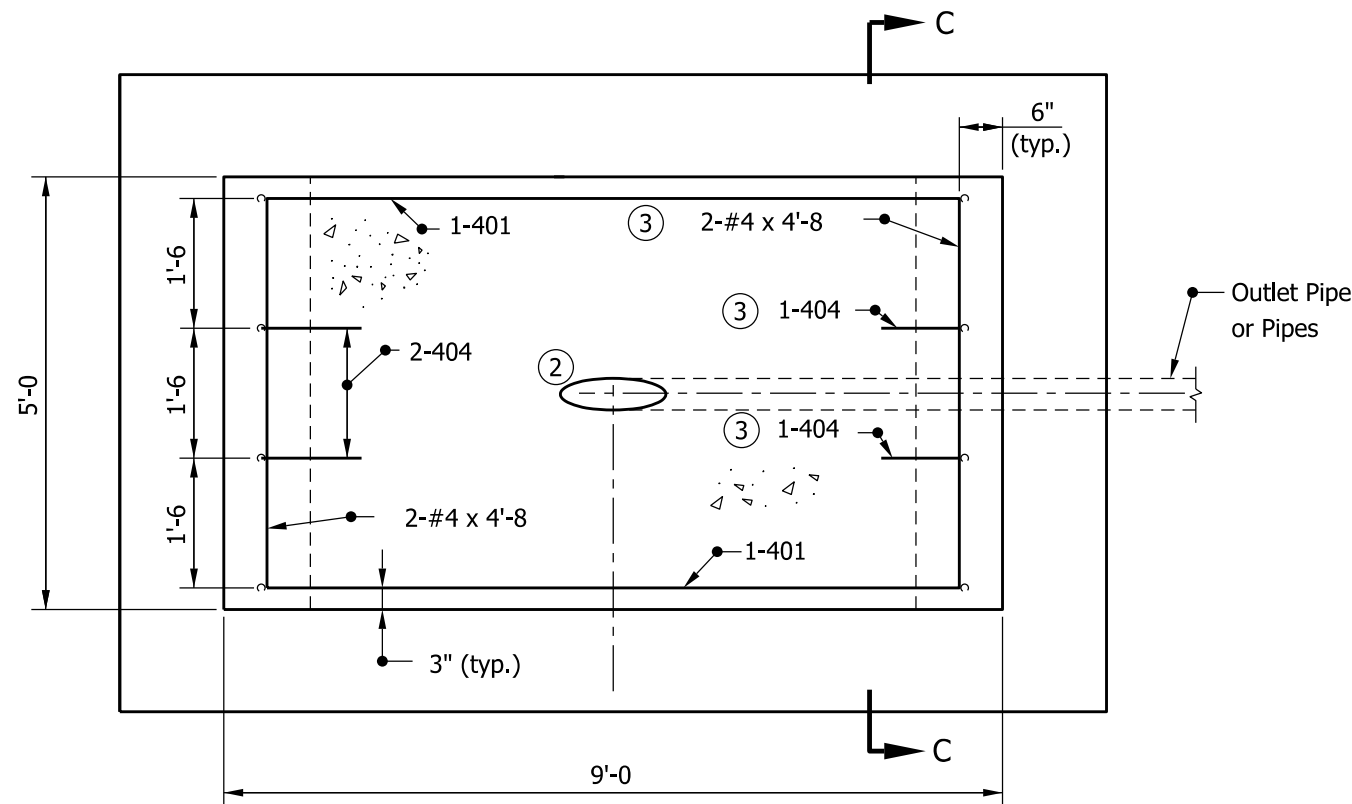


**PLAN VIEW**

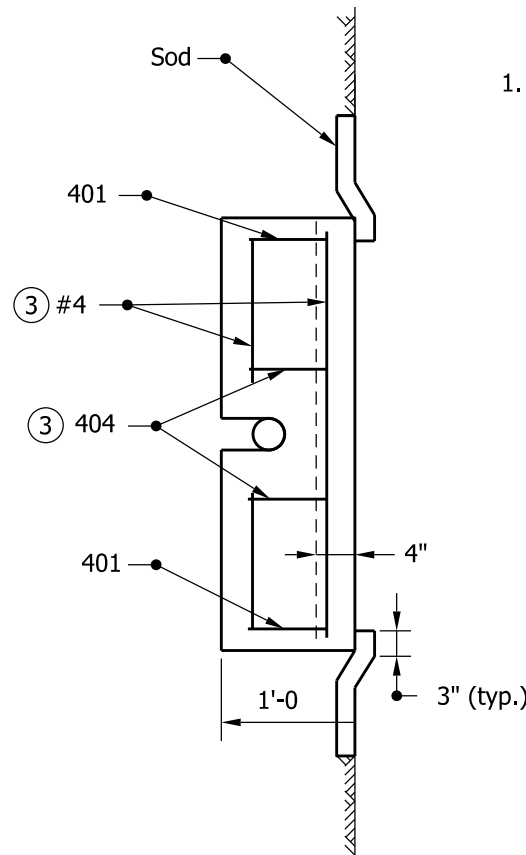

**SECTION C-C**

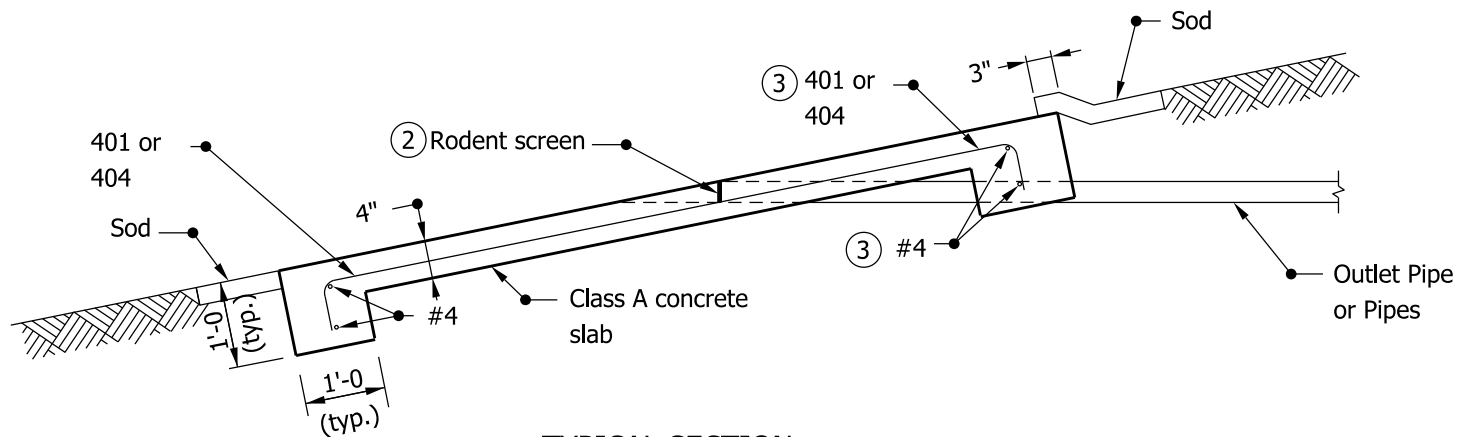

**TYPICAL SECTION**

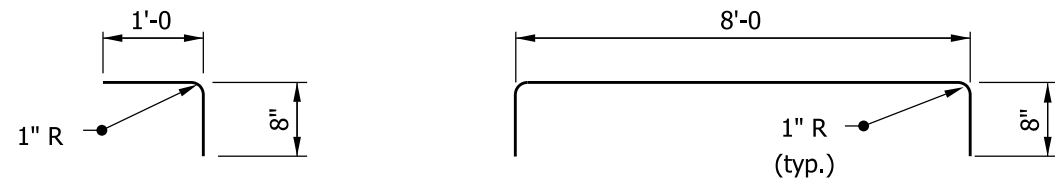

**404 x 1'-8**


**401 x 9'-4**

INDIANA DEPARTMENT OF TRANSPORTATION

OUTLET PROTECTOR, TYPE 1

SEPTEMBER 2009


STANDARD DRAWING NO. E 718-UNDR-03




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

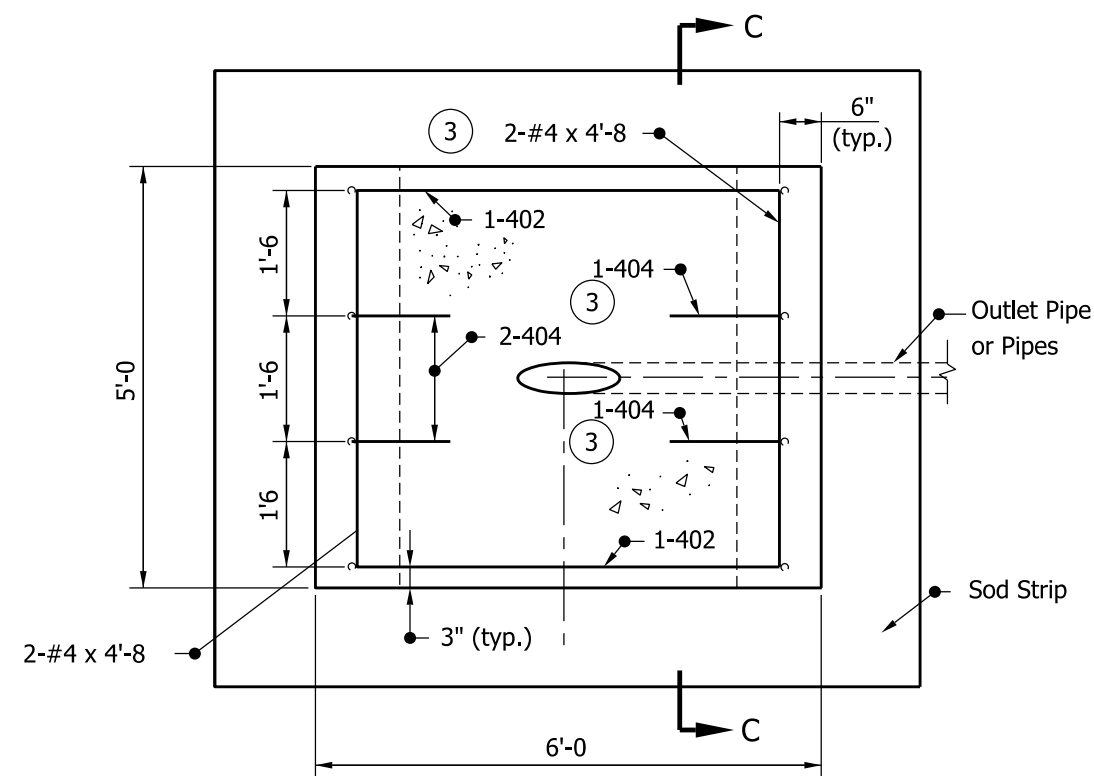


PLAN VIEW

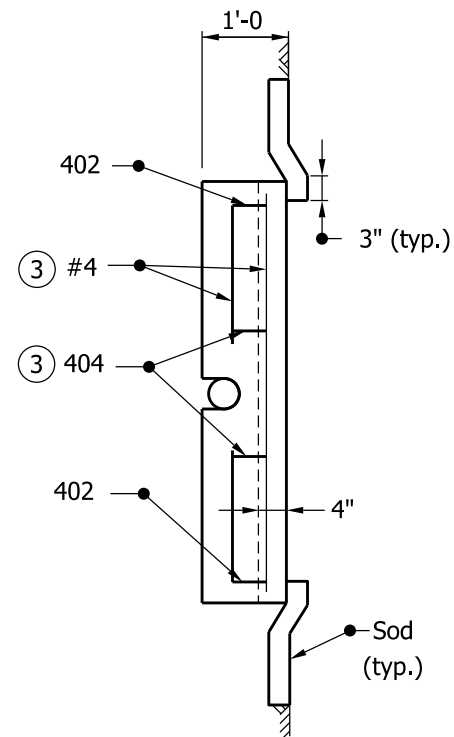


SECTION C-C

NOTE:

1. See Standard Drawing E 718-UNDR-07 for General Notes.

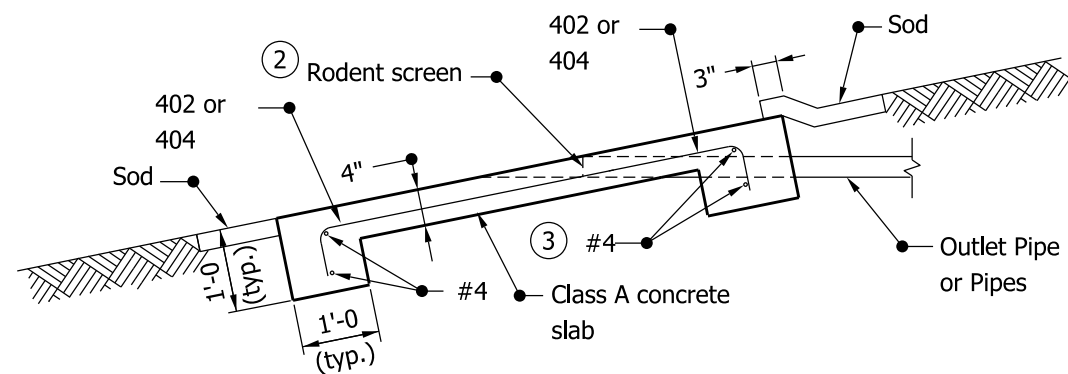

TYPICAL SECTION

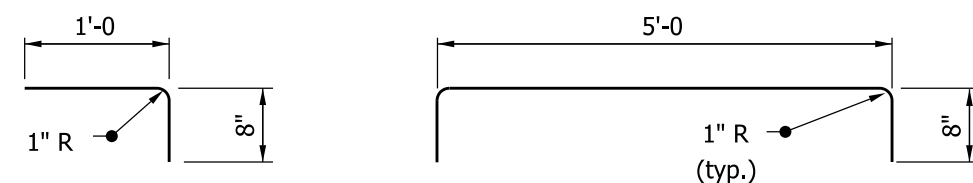

404 x 1'-8


402 x 6'-4

INDIANA DEPARTMENT OF TRANSPORTATION

OUTLET PROTECTOR, TYPE 2

SEPTEMBER 2009

STANDARD DRAWING NO. E 718-UNDR-04




DESIGN STANDARDS ENGINEER


/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE




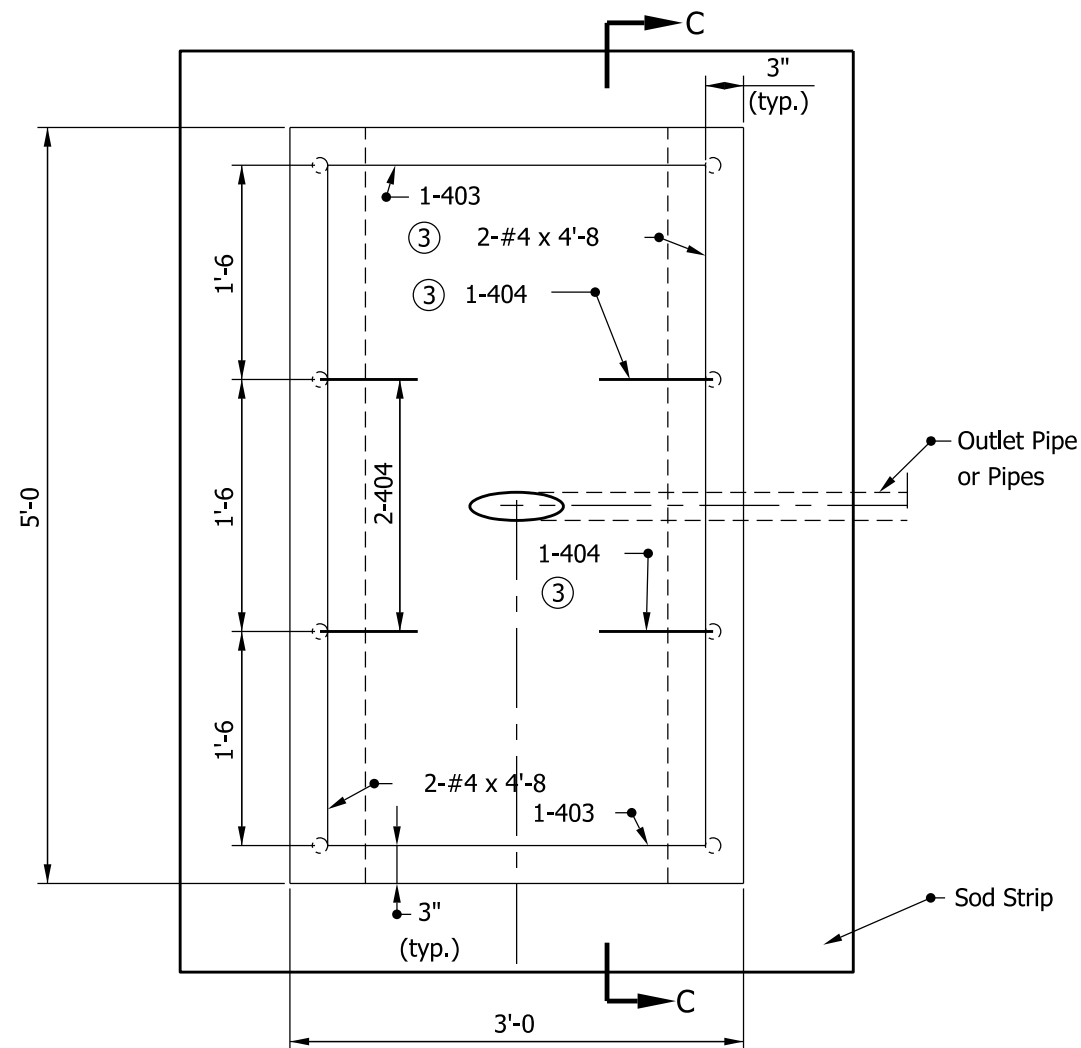

PLAN VIEW

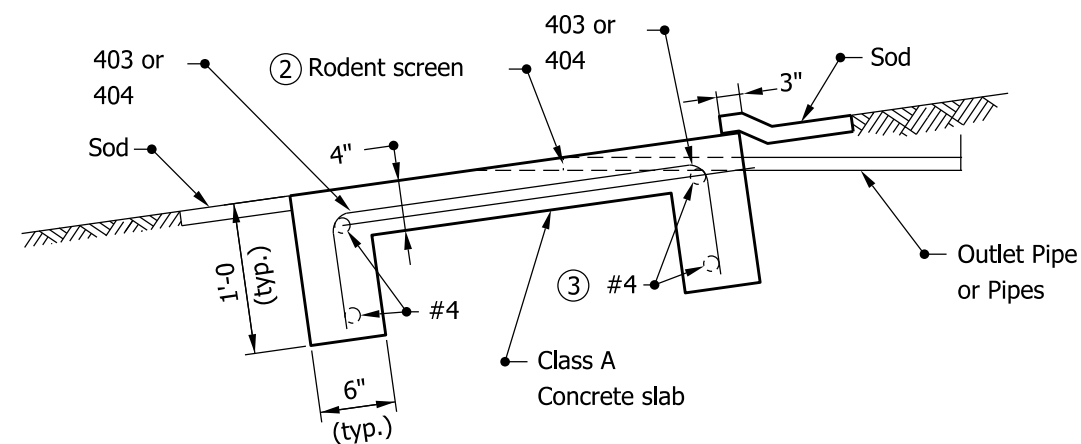


TYPICAL SECTION

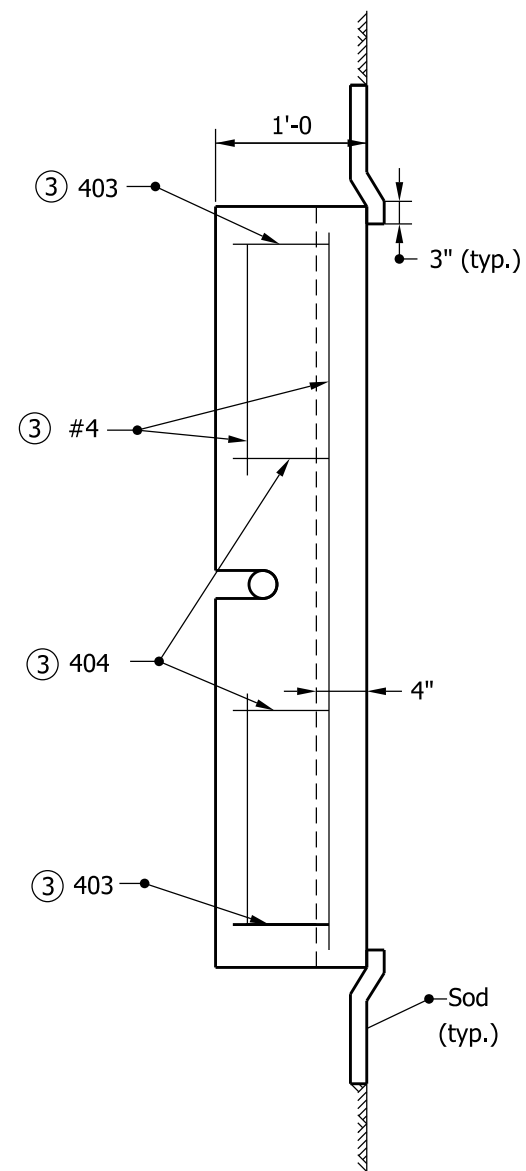


SECTION C-C

NOTE:

1. See Standard Drawing E 718-UNDR-07 for General Notes.

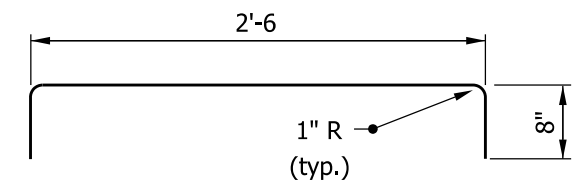

403 x 3'-10




404 x 1'-8

INDIANA DEPARTMENT OF TRANSPORTATION

OUTLET PROTECTOR, TYPE 3

SEPTEMBER 2009




STANDARD DRAWING NO. E 718-UNDR-05



DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

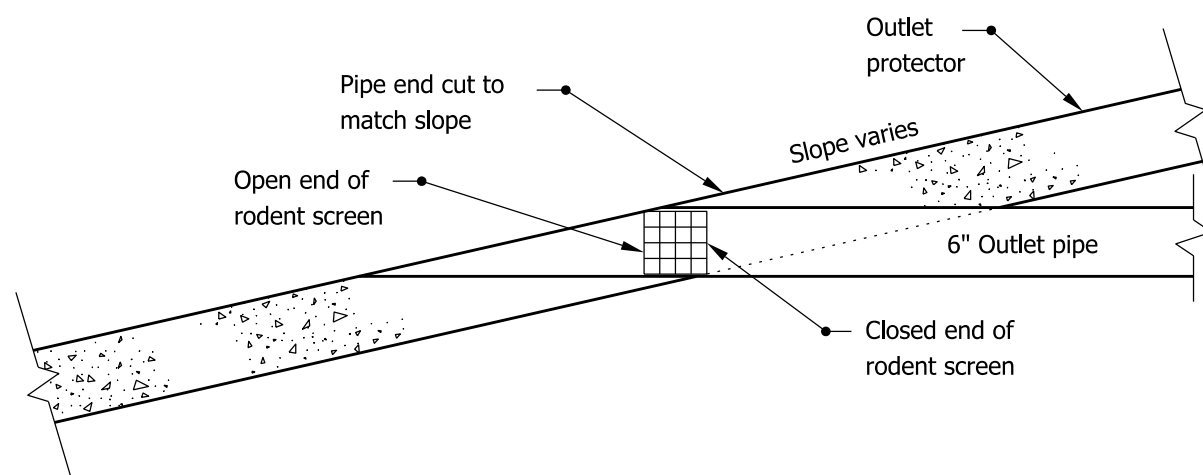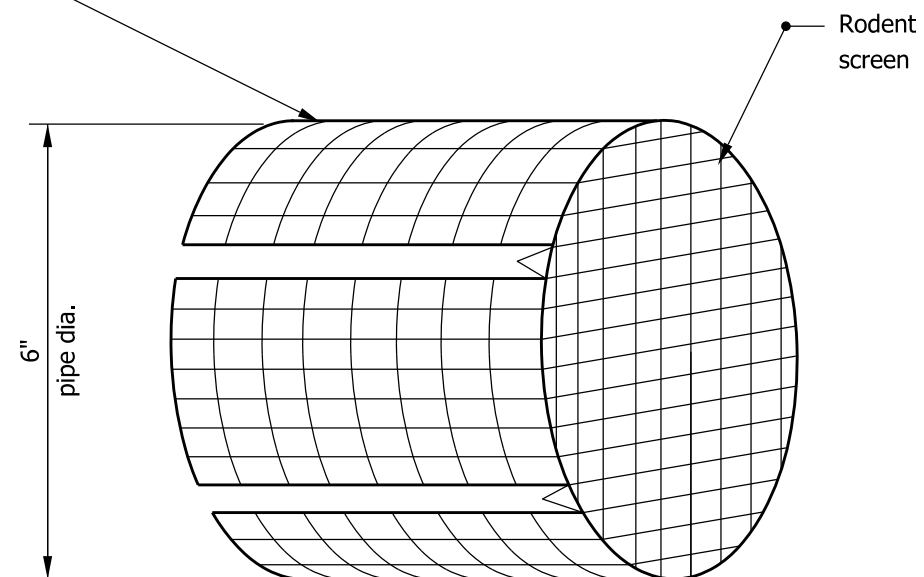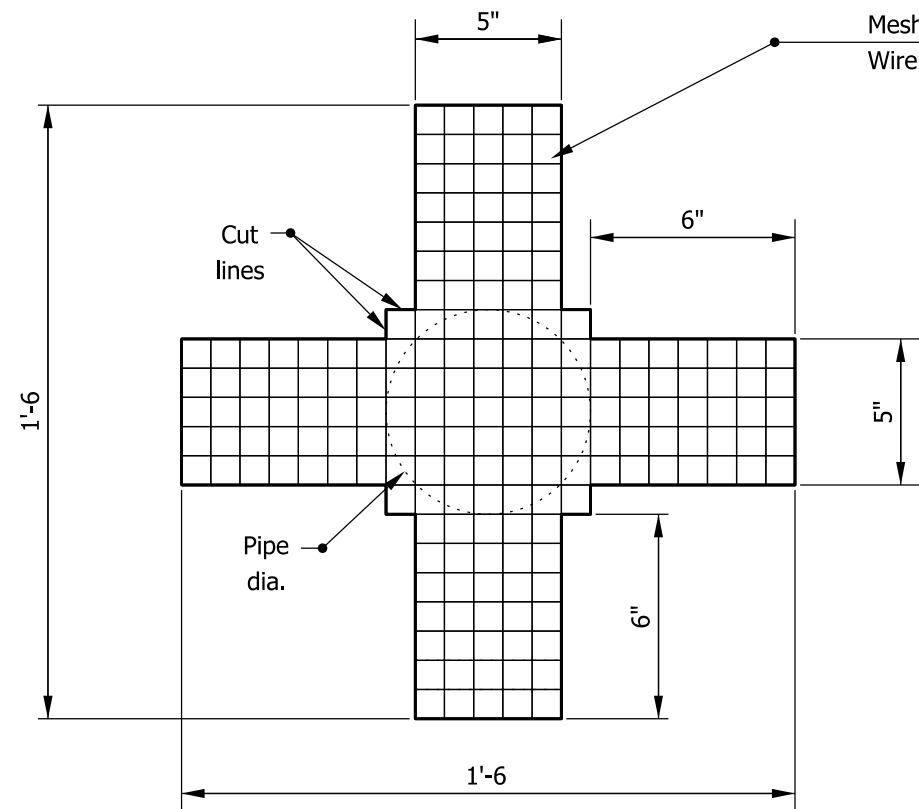


INDIANA DEPARTMENT OF TRANSPORTATION

## OUTLET PROTECTOR RODENT SCREEN

SEPTEMBER 2009

STANDARD DRAWING NO. E 718-UNDR-06



DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

GENERAL NOTES

- 1

If underdrain outlet-pipe elevations are not shown on Underdrain Table, the minimum outlet-pipe slope shall be 0.3%. The minimum freeboard between the outlet-pipe outfall and the ditch line shall be 1'-0 for median ditches and 2'-0 for side ditches.
- 2

See Standard Drawing E 718-UNDR-06 for rodent screen details.
- 3

The #4 transverse bars in the upslope lug may be field cut to accomodate the outlet pipe or pipes. The 404 bars in the upslope lug may be moved to accomodate the outlet pipe or pipes.

APPROXIMATE OUTLET PROTECTEOR QUANTITIES			
TYPE	CONCRETE, CLASS A (cys)	REINFORCING BARS (lb)	SODDING (sys)
1	0.8	29	4.9
2	0.6	25	4.0
3	0.3	22	3.2

INDIANA DEPARTMENT OF TRANSPORTATION	
UNDERDRAIN NOTES	
SEPTEMBER 2009	
STANDARD DRAWING NO. E 718-UNDR-07	
<div><div><div><div><div><div></div><div>REGISTERED</div><div>No.</div><div>9750</div><div>STATE OF</div><div>INDIANA</div><div>PROFESSIONAL ENGINEER</div></div></div><div><div></div><div>RICHARD L. VANCLEAVE</div></div></div></div><div>DESIGN STANDARDS ENGINEER</div></div>	<div><div><div>/s/ Richard L. VanCleave</div><div>DESIGN STANDARDS ENGINEER</div></div><div><div>09/01/09</div><div>DATE</div></div></div> <div><div><div>/s/ Mark A. Miller</div><div>CHIEF HIGHWAY ENGINEER</div></div><div><div>09/01/09</div><div>DATE</div></div></div>

EXTRA-QUALITY																					
COVER (ft.)	3		4		5		6		7		8		9		10		11		12		
SIZE	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	
6"													X	X	X	X	X	X	X	X	
8"									X	X	X	X	X	X			X	X	X	X	
10"							X	X	X	X	X	X									
12"					X	X	X	X													
15"		X	X	X	X	X															
18"	X	X	X	X	X	X															
21"	X	X	X	X	X	X		X													
24"	X	X	X	X	X	X		X													
27"	X		X		X																
30"	X		X		X		X														

EXTRA-DUTY EXTRA-QUALITY																	
COVER (ft.)	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
SIZE	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	CLAY	CONC.	
6"					X	X	X	X	X	X	X	X	X	X	X	X	
8"			X	X	X	X	X	X	X	X	X	X	X	X	X	X	
10"		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
12"	X	X	X	X	X	X	X	X	X	X	X	X	X				
15"	X	X	X	X	X	X	X	X	X	X	X	X					
18"	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
21"	X	X	X	X	X	X	X	X	X								
24"	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
27"	X	X	X	X	X	X	X	X									
30"	X	X	X	X	X	X	X	X	X	X	X						


SPECIAL-QUALITY						
COVER (ft.)	UP TO 5	UP TO 6	UP TO 7	UP TO 8	UP TO 9	UP TO 15
SIZE	CONC.	CONC.	CONC.	CONC.	CONC.	CONC.
6"	X	X	X	X	X	X
8"	X	X	X	X	X	
10"	X	X	X	X	X	
12"	X	X				
15"	X					
18"	X					
21"	X	X				
24"	X	X				

INDIANA DEPARTMENT OF TRANSPORTATION

## DRAINTILE CLASSES

JANUARY 1998

STANDARD DRAWING NO. E 719-DTCL-01



DETAILS PLACED IN THIS FORMAT 11-15-99



/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER



ORIGINALLY APPROVED

1-02-98

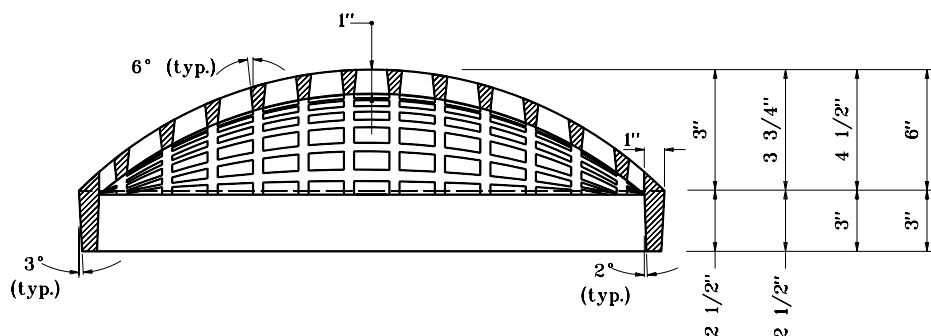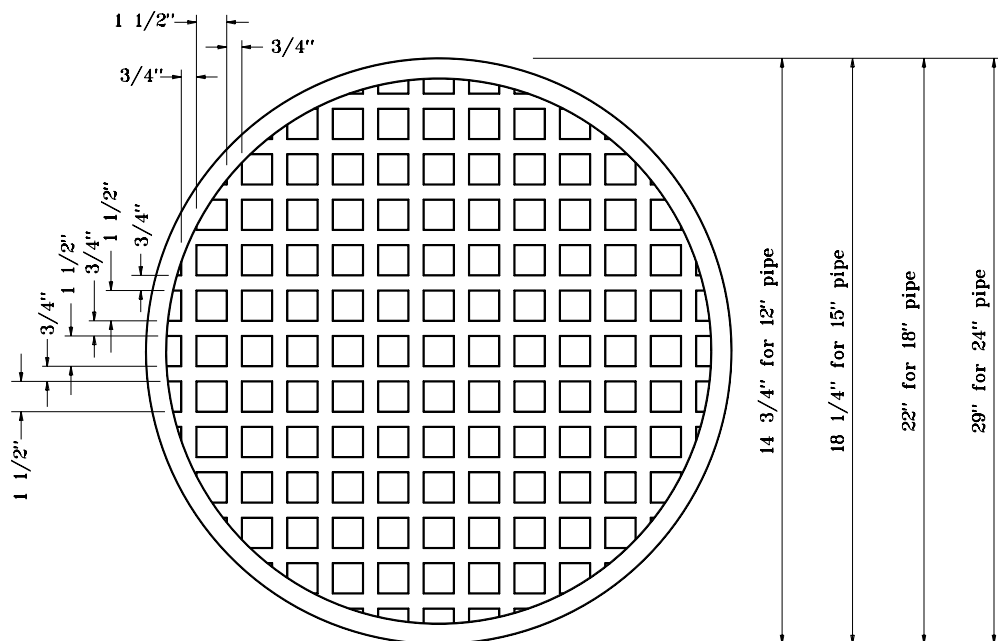



**PIPE CATCH BASIN CASTING**

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PIPE CATCH BASIN CASTING</b>	
APRIL 1995	
<b>STANDARD DRAWING NO. E 720-CBCA-01</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 4-03-95

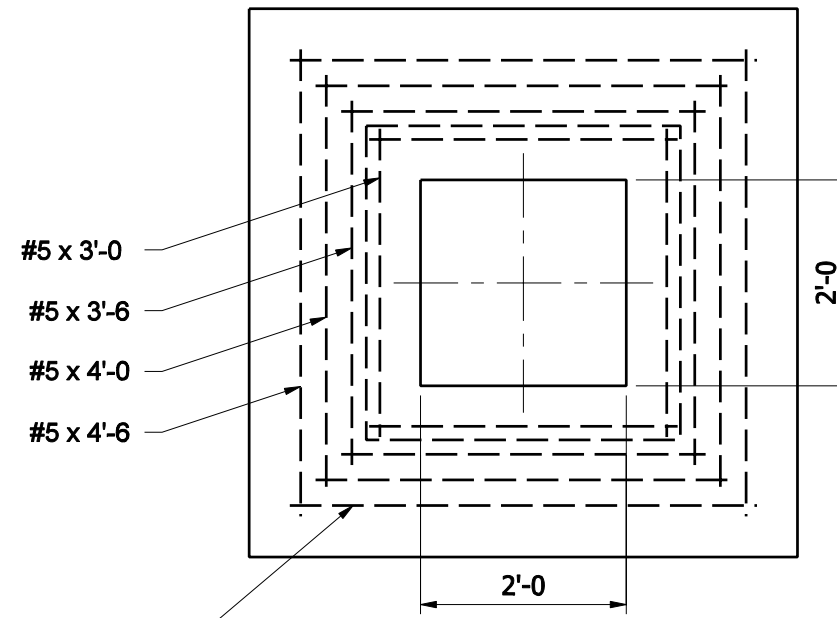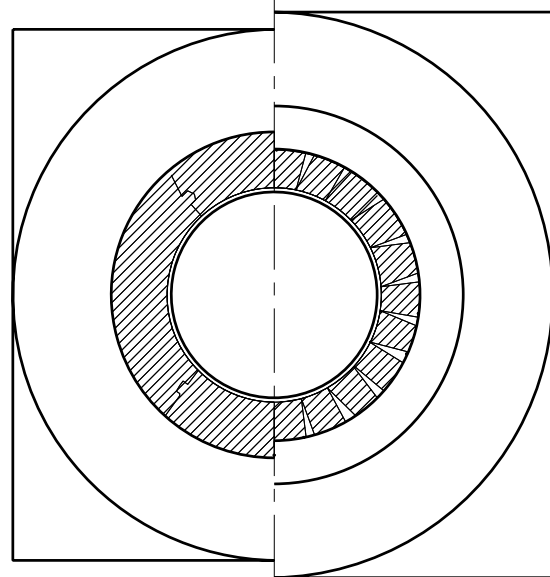

#### GENERAL NOTES

1. Brick, block, or concrete may be used.
2. Precast catch basin type W may be substituted for catch basin type A.
3. 2" dia. pipe drain from bottom of curb to inlet. Aggregate to be placed around inlet end of pipe.
4. 3" dia. pipe to be kept open for drainage of subgrade or base until surface is placed.
5. Reinforcement required if Dim. A < 2'-6. Reinforcement not required if Dim. A ≥ 2'-6.
6. T = 8" for brick structure  
T = 6" for segmental block structure

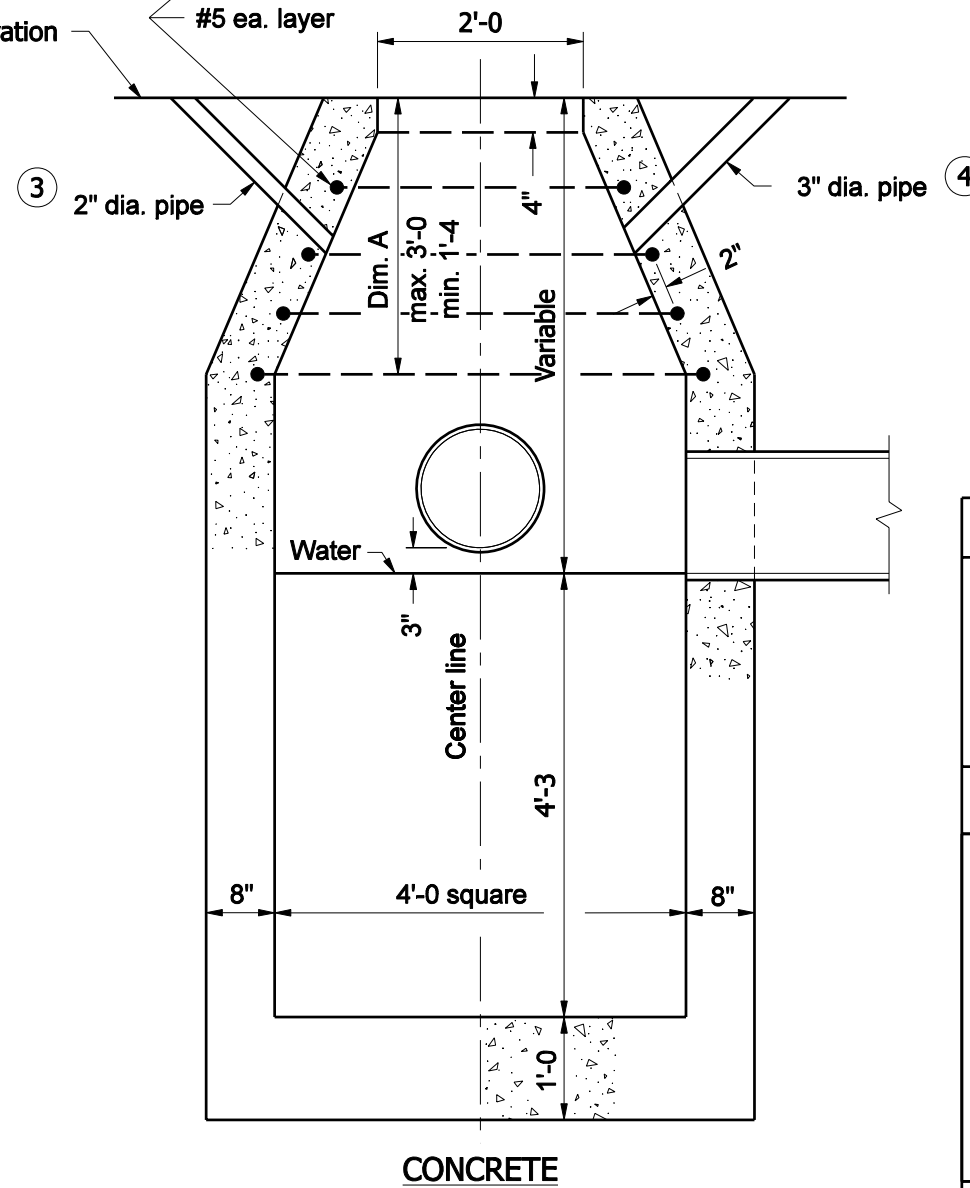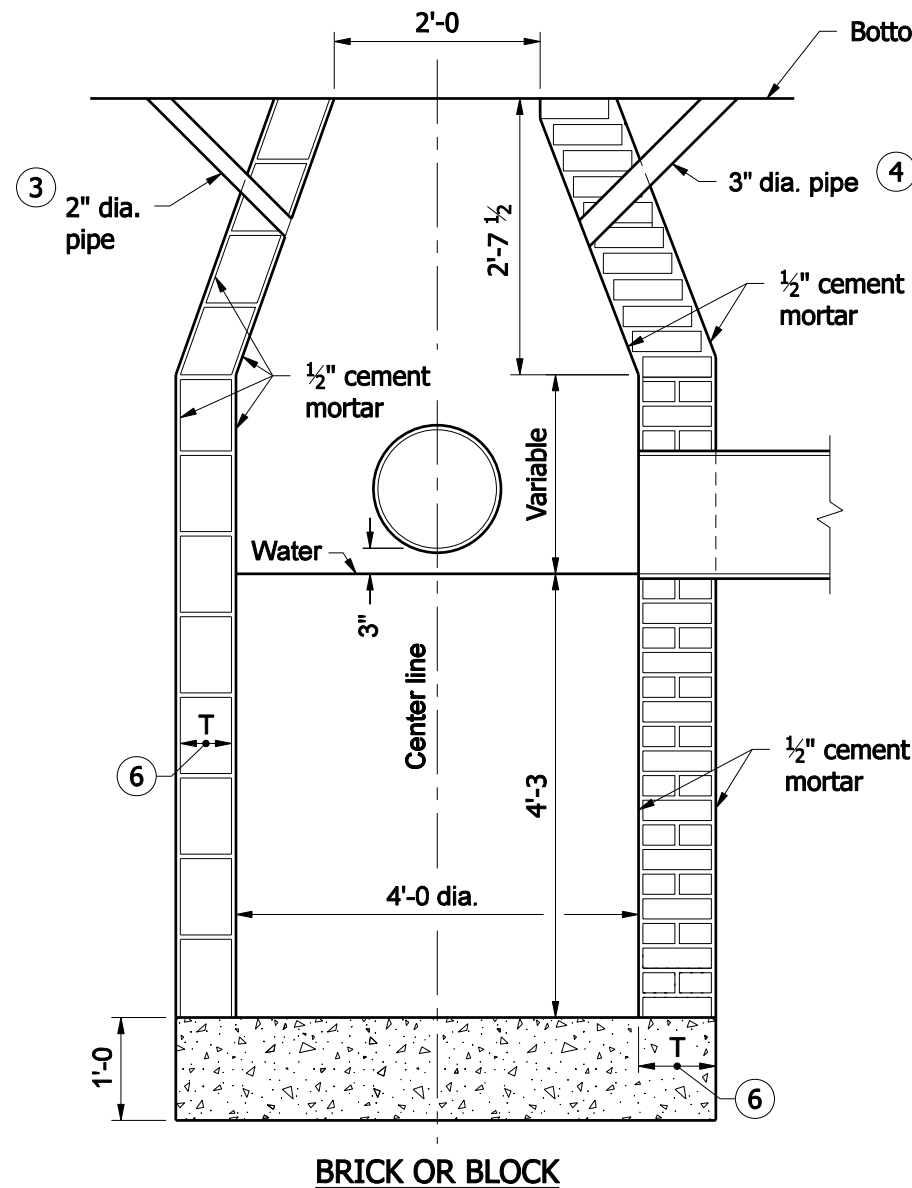


INDIANA DEPARTMENT OF TRANSPORTATION

CATCH BASIN  
TYPE A

SEPTEMBER 2008

STANDARD DRAWING NO. E 720- CBST-01




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/02/08  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/02/08  
CHIEF HIGHWAY ENGINEER DATE



① These dimensions may be increased or decreased by 1'-0", as directed.


INDIANA DEPARTMENT OF TRANSPORTATION									
CATCH BASIN TYPE D									
SEPTEMBER 2003									
STANDARD DRAWING NO. E 720-CBST-02									
	<table><tr><td><i>/s/ Anthony L. Uremovich</i></td><td><i>3-02-03</i></td></tr><tr><td>DESIGN STANDARDS ENGINEER</td><td>DATE</td></tr><tr><td> <i>/s/ Richard K. Smutzer</i></td><td> <i>3-02-03</i></td></tr><tr><td>CHIEF HIGHWAY ENGINEER</td><td>DATE</td></tr></table>	<i>/s/ Anthony L. Uremovich</i>	<i>3-02-03</i>	DESIGN STANDARDS ENGINEER	DATE	 <i>/s/ Richard K. Smutzer</i>	 <i>3-02-03</i>	CHIEF HIGHWAY ENGINEER	DATE
<i>/s/ Anthony L. Uremovich</i>	<i>3-02-03</i>								
DESIGN STANDARDS ENGINEER	DATE								
 <i>/s/ Richard K. Smutzer</i>	 <i>3-02-03</i>								
CHIEF HIGHWAY ENGINEER	DATE								
DESIGN STANDARDS ENGINEER									








GENERAL NOTES


- 1 T = 8" for brick structure  
T = 6" for segmental block structure
- 2 2" pipe drain from bottom of curb to inlet. Aggregate to be placed around inlet end of pipe.
- 3 3" min. dia. pipe to be kept open for drainage of subgrade or base until surface is placed.

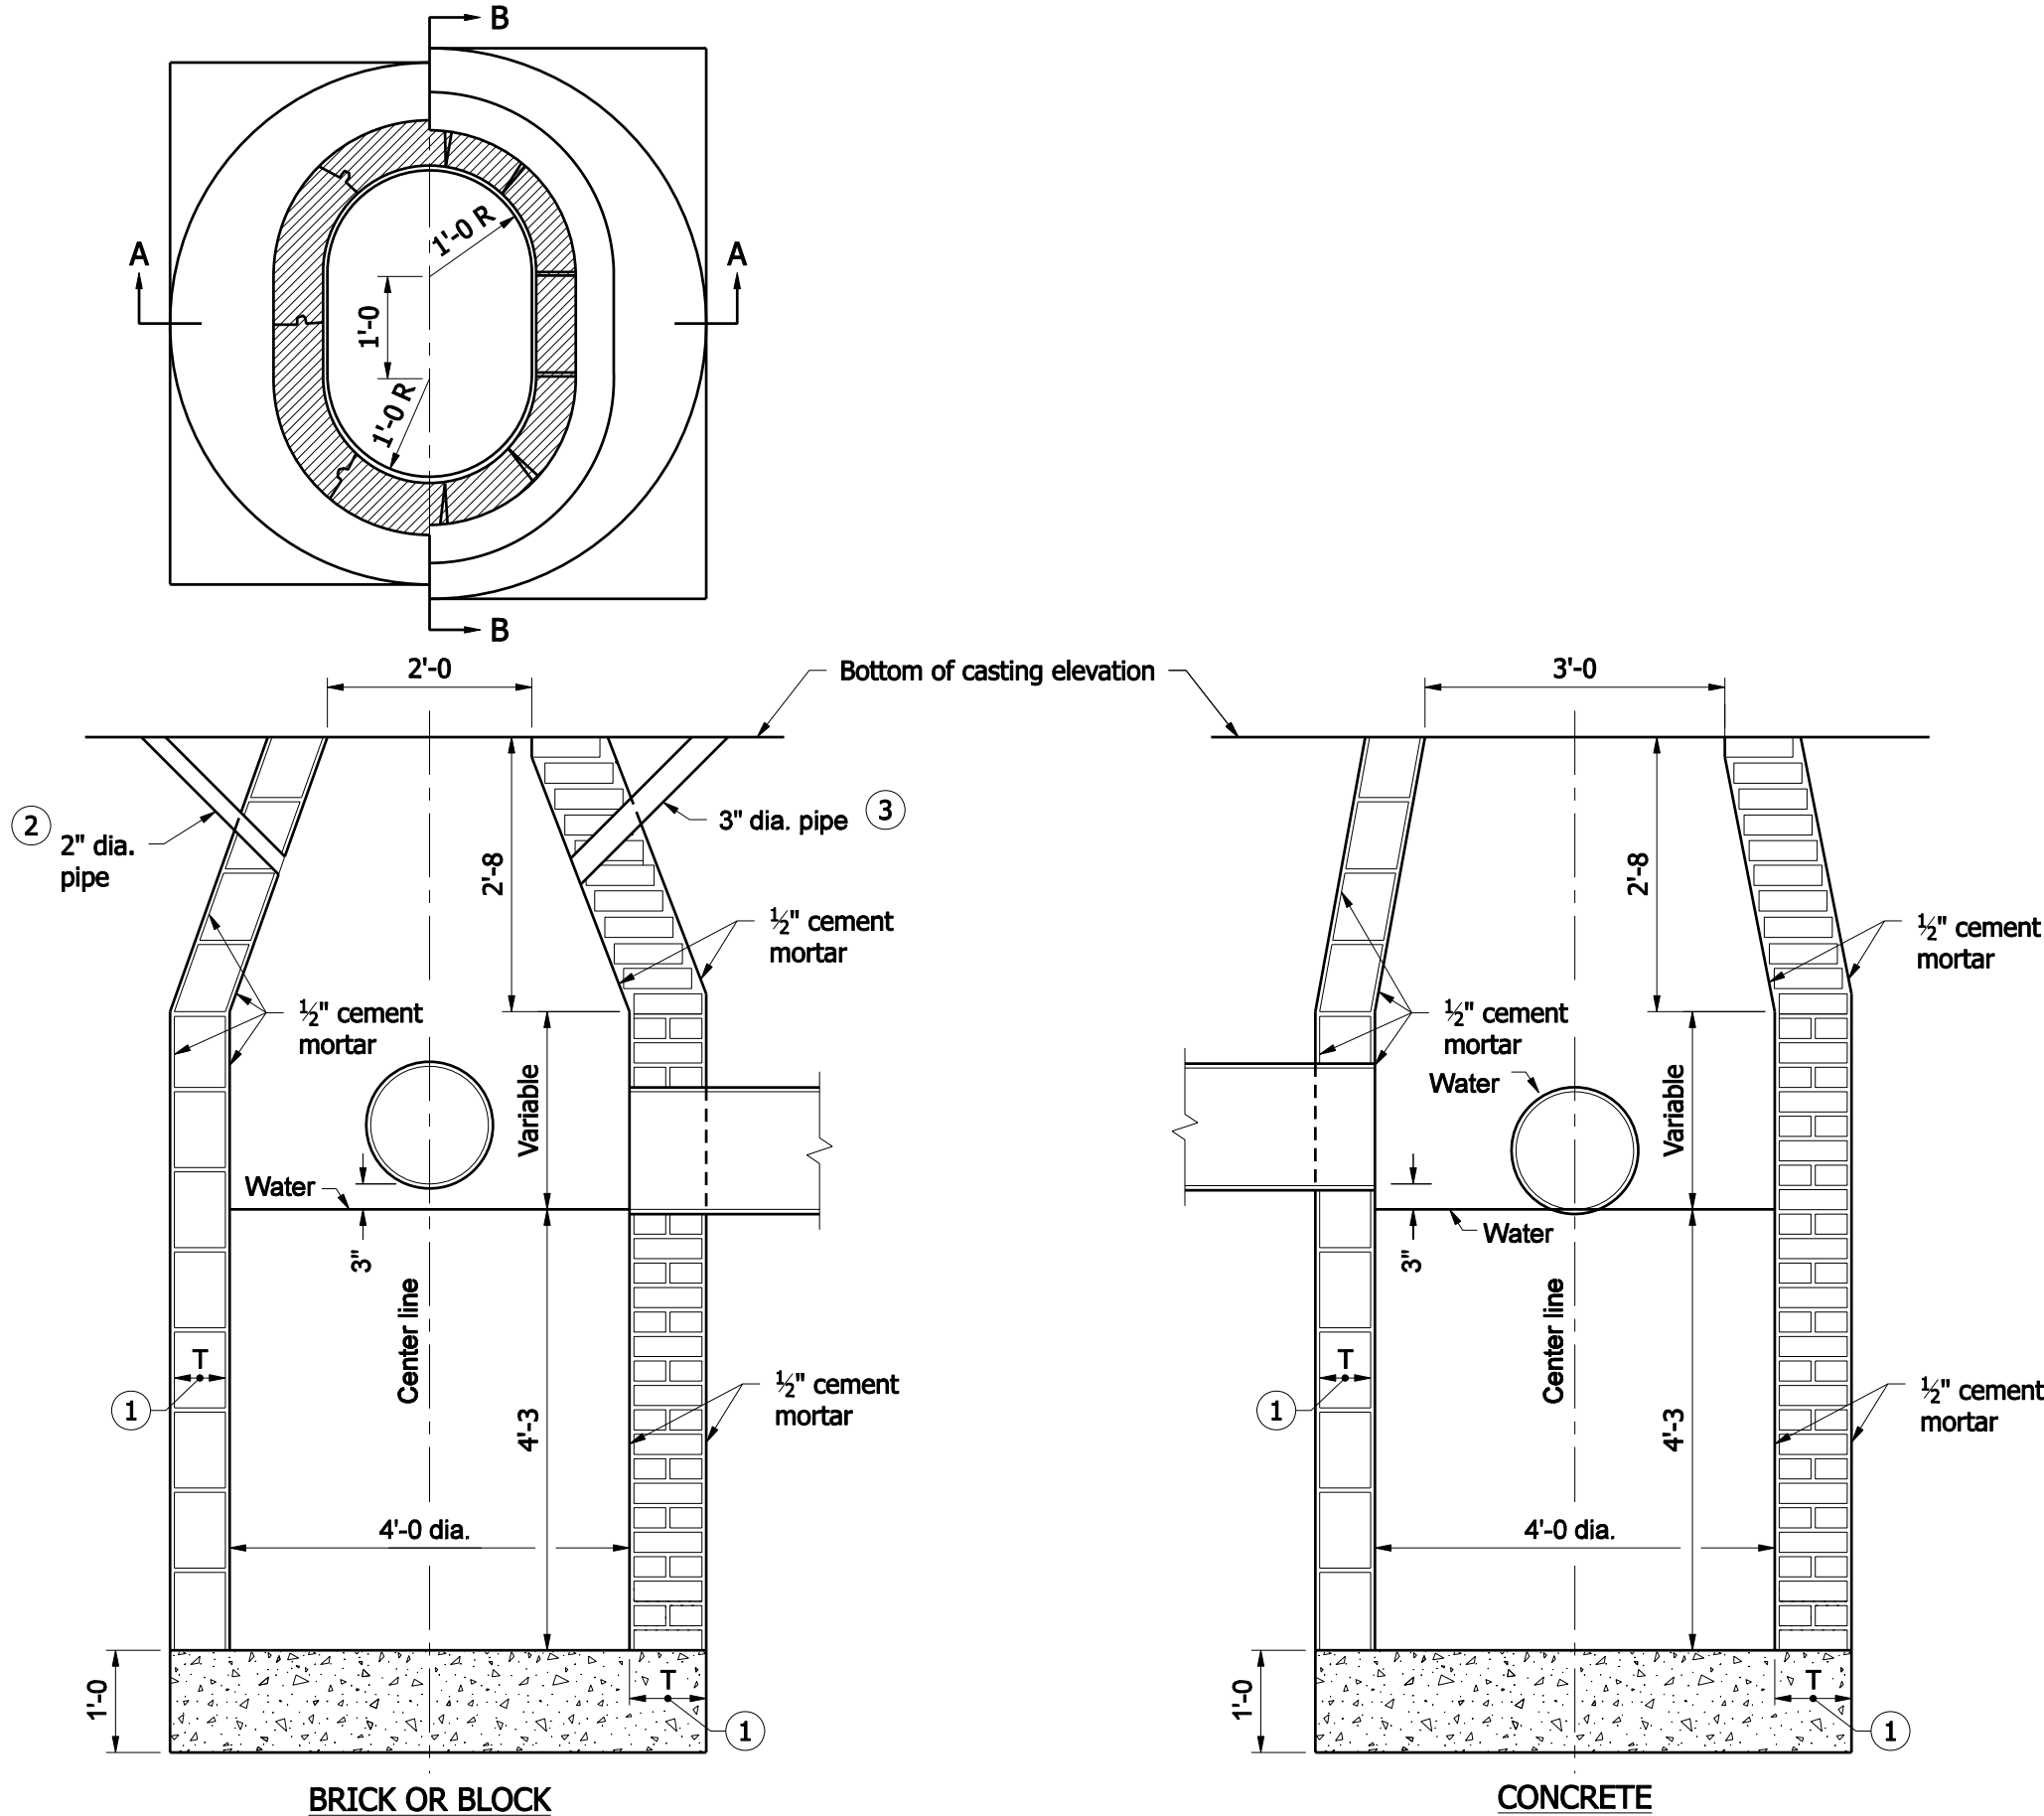

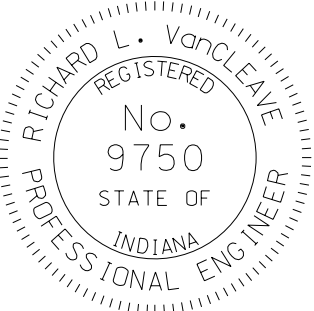INDIANA DEPARTMENT OF TRANSPORTATION	
CATCH BASIN TYPE J	
SEPTEMBER 2008	
STANDARD DRAWING NO. E 720- CBST-04	
	<div>/s/ Richard L. VanCleave 09/02/08 DESIGN STANDARDS ENGINEER DATE</div> <div>/s/ Mark A. Miller 09/02/08 CHIEF HIGHWAY ENGINEER DATE</div>
DESIGN STANDARDS ENGINEER	

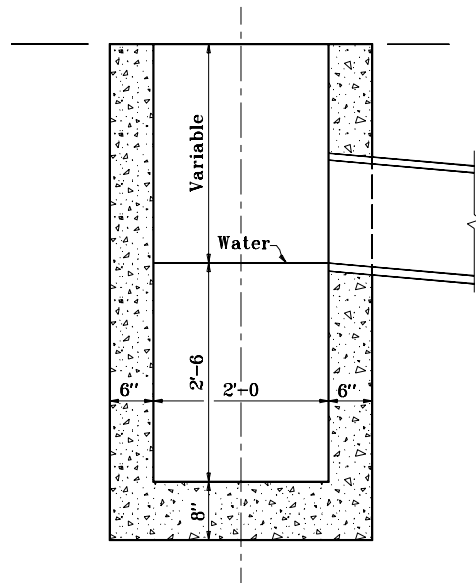
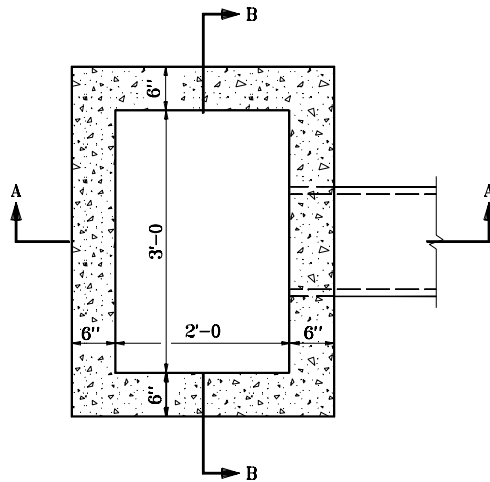


**SECTION A-A**

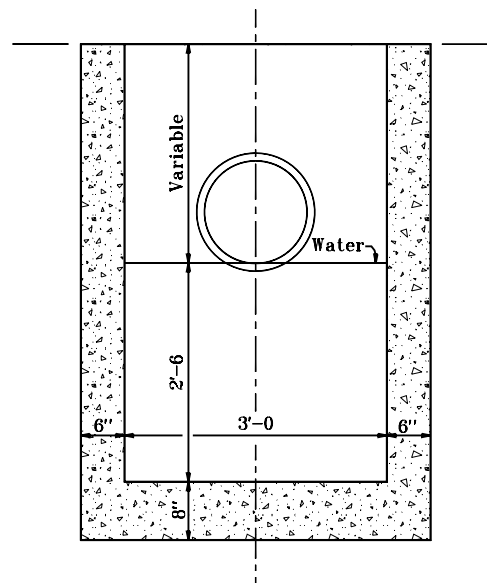


**SECTION B-B**


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>CATCH BASIN TYPE K</b>	
APRIL 1995	
STANDARD DRAWING NO. <b>E 720-CBST-05</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 4-03-95

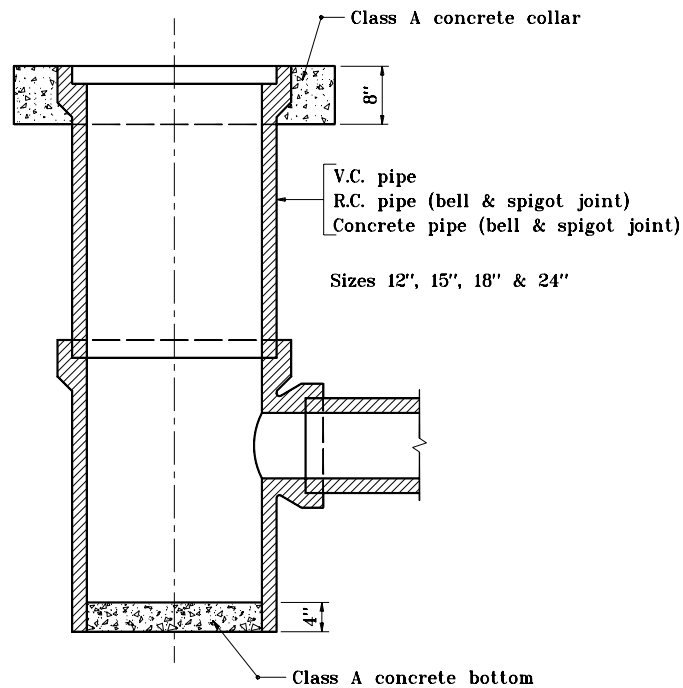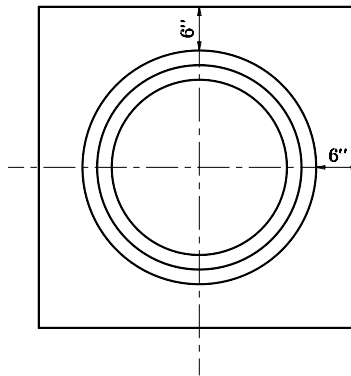


INDIANA DEPARTMENT OF TRANSPORTATION	
CATCH BASIN PIPE	
APRIL 1995	
STANDARD DRAWING NO. E 720-CBST-06	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 4-03-95

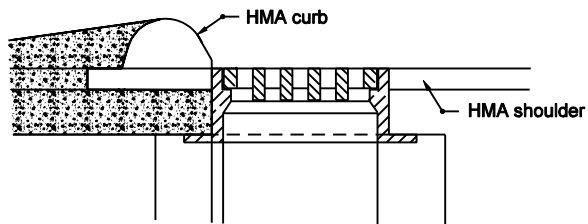

PLACEMENT DETAIL FOR  
CASTING

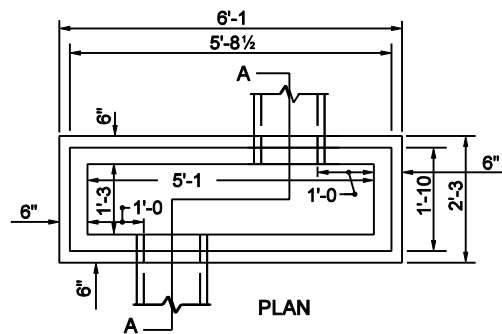

CATCH BASIN TYPE S

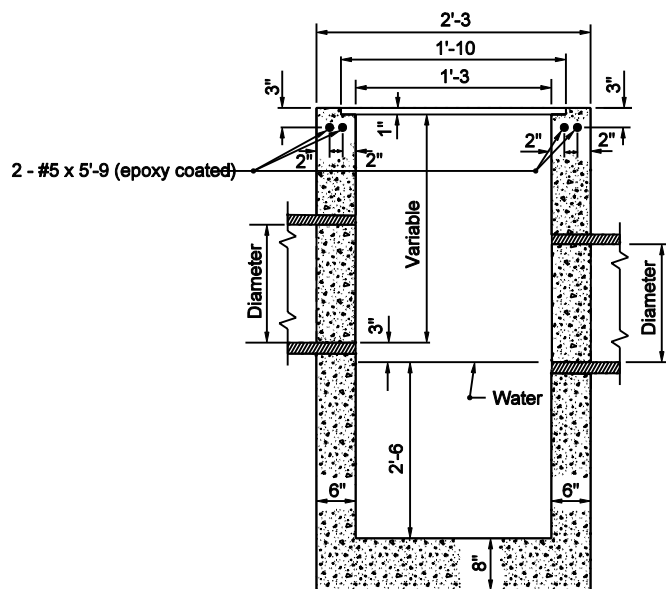


SECTION A-A

INDIANA DEPARTMENT OF TRANSPORTATION

**CATCH BASIN  
TYPE S**

SEPTEMBER 2003


STANDARD DRAWING NO. E 720-CBST-07




/s/ Richard L. VanCleave 9-02-03  
DESIGN STANDARDS ENGINEER DATE


/s/ Richard K. Smutzer 9-02-03  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

INDIANA DEPARTMENT OF TRANSPORTATION											
CATCH BASIN TYPE W											
SEPTEMBER 2003											
STANDARD DRAWING NO. E 720-CBST-08											
	<table><tr><td><i>s/ Richard L. VanCleave</i></td><td><u>9-02-03</u></td></tr><tr><td>DESIGN STANDARDS ENGINEER</td><td>DATE</td></tr><tr><td colspan="2"> </td></tr><tr><td><i>s/ Richard K. Smutzer</i></td><td><u>9-02-03</u></td></tr><tr><td>CHIEF HIGHWAY ENGINEER</td><td>DATE</td></tr></table>	<i>s/ Richard L. VanCleave</i>	<u>9-02-03</u>	DESIGN STANDARDS ENGINEER	DATE			<i>s/ Richard K. Smutzer</i>	<u>9-02-03</u>	CHIEF HIGHWAY ENGINEER	DATE
<i>s/ Richard L. VanCleave</i>	<u>9-02-03</u>										
DESIGN STANDARDS ENGINEER	DATE										
<i>s/ Richard K. Smutzer</i>	<u>9-02-03</u>										
CHIEF HIGHWAY ENGINEER	DATE										
DESIGN STANDARDS ENGINEER											

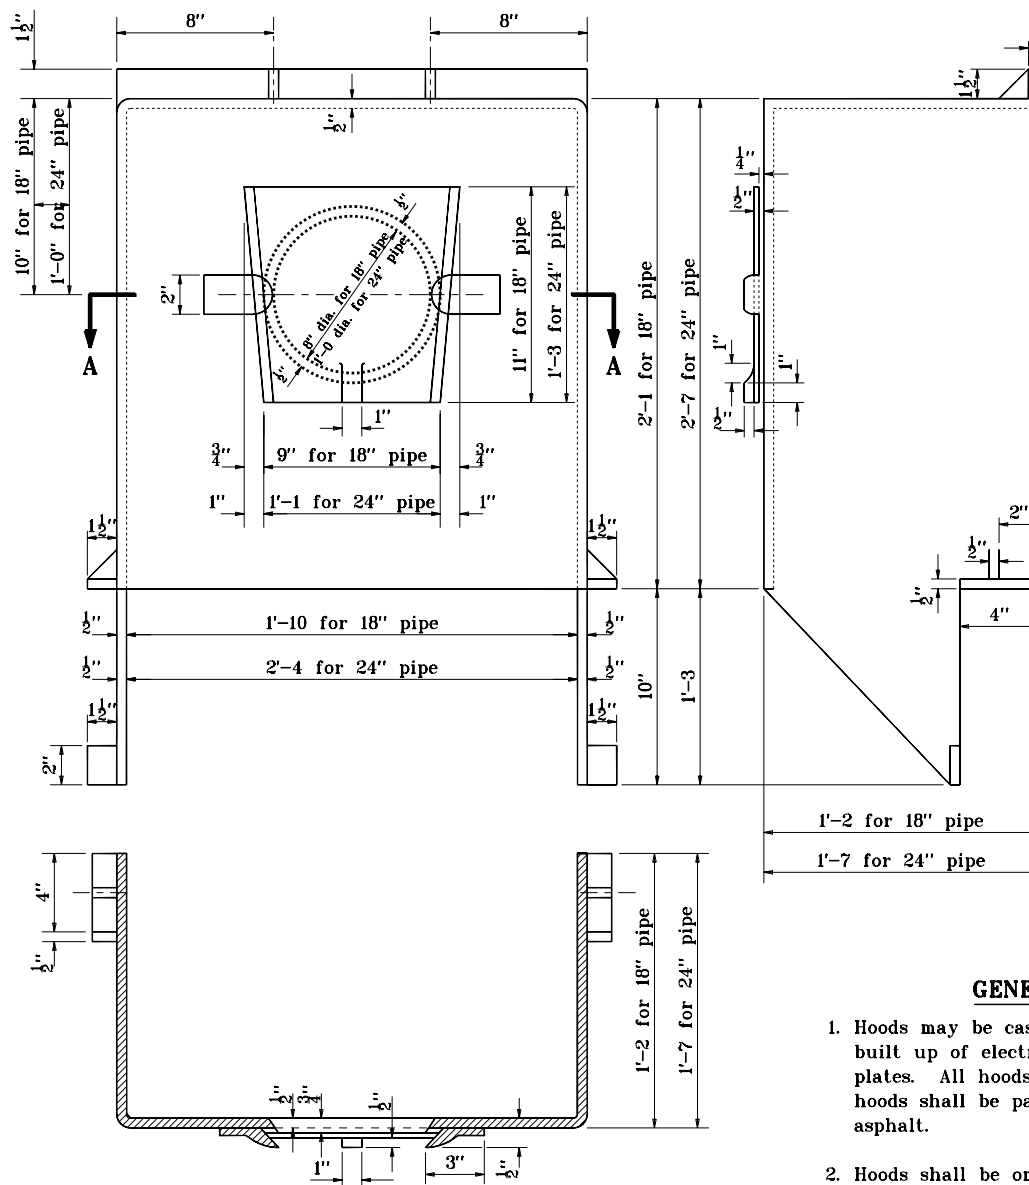

**SECTION A-A  
FOR 18" & 24" PIPE**

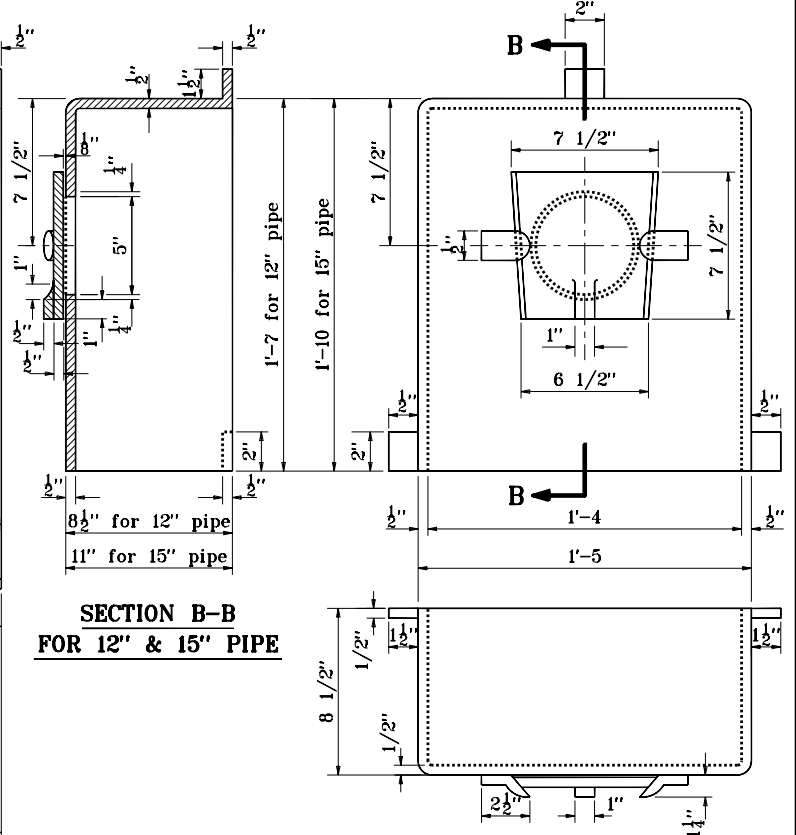

**SECTION B-B  
FOR 12" & 15" PIPE**

### GENERAL NOTES



1. Hoods may be cast in one piece or may be built up of electrically welded 1/2" steel plates. All hoods shall be gas tight. Steel hoods shall be painted with waterproofing asphalt.
2. Hoods shall be omitted on earth ditch type catch basin unless otherwise specified.



INDIANA DEPARTMENT OF TRANSPORTATION	
CATCH BASIN HOOD	
MAY 1998	
STANDARD DRAWING NO. E 720-CBST-09	
DETAILS PLACED IN THIS FORMAT 11-15-99	
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 5-01-98

Str.	Type	Casting Types												
		2	3	4	5	6	7	8	10	12	12A	13	14	15
Catch Basins	A	X	X					X						
	D					X								
	E						X							
	J								X					
	K								X					
	S												X	
	W <sup>①</sup>	X	X					X						
Inlets	A	X	X					X						
	B													X
	C													X
	D					X								
	E						X							
	F						X							
	G						X							
	H, HA				X									
	J								X					
	M								X					
	N									X				
	P										X			
	R											X		
	S												X	
T													X	
Manholes	A	X		X				X						
	B	X		X				X						
	C <sup>②</sup>	X		X				X						
	D	X		X				X						
	E	X		X				X						
	F	X		X				X						
	G	X		X				X						
	H	X		X				X						
	J	X		X				X						
	K	X		X				X						
	L	X		X				X						
	M	X		X				X						
	N	X		X				X						

#### NOTES


- ① May be substituted for catch basin type A.
- ② May be substituted for manhole type A or B.

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>COMPATIBILITY OF DRAINAGE STRUCTURES AND CASTINGS</b>	
SEPTEMBER 2006	
STANDARD DRAWING NO. E 720-CDSC-01	
	/s/ Richard L. VanCleave      9-01-06 DESIGN STANDARDS ENGINEER      DATE
	/s/ Richard K. Smutzer      9-01-06 CHIEF HIGHWAY ENGINEER      DATE
DESIGN STANDARDS ENGINEER	

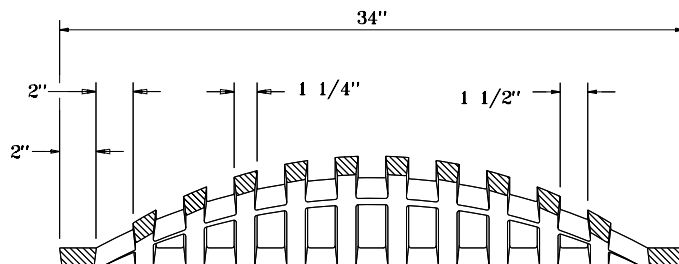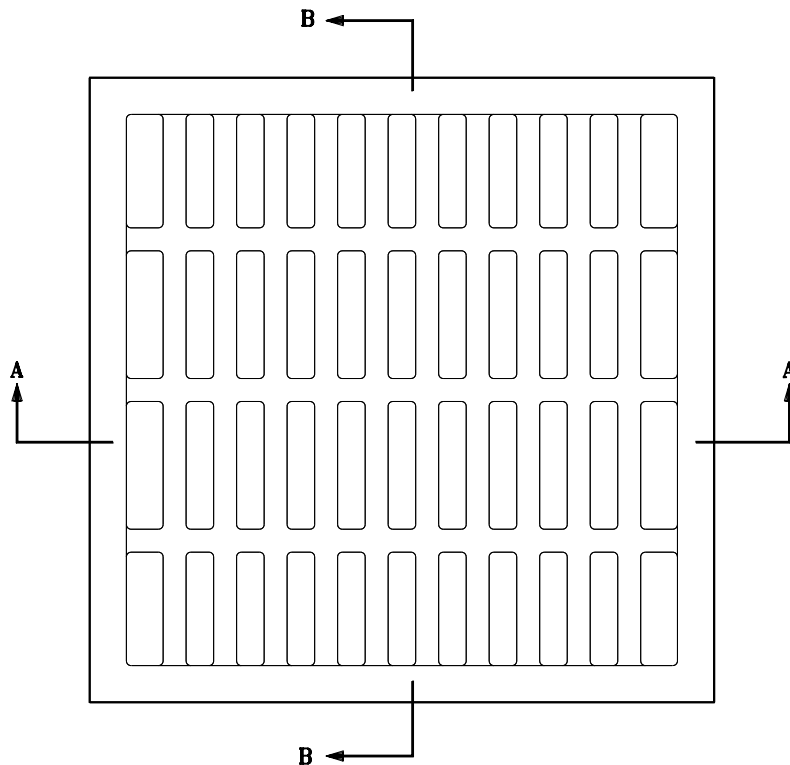

**SECTION A-A**

**EARTH DITCH CASTING TYPE 7**

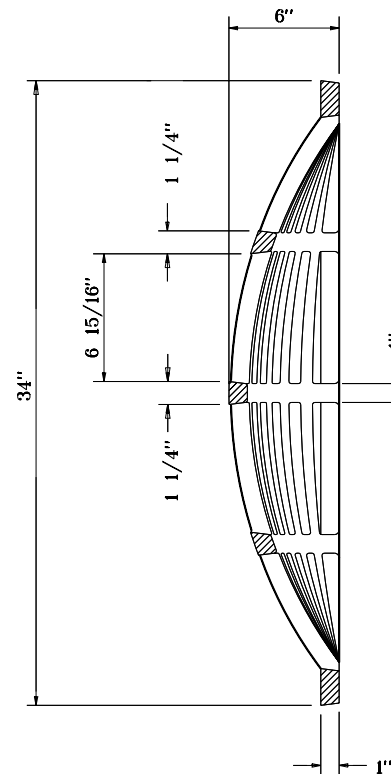


**SECTION B-B**

INDIANA DEPARTMENT OF TRANSPORTATION

**EARTH DITCH  
CASTING TYPE 7**  
SEPTEMBER 1998

STANDARD DRAWING NO. **E 720-EDCA-01**



DETAILS PLACED IN THIS FORMAT 11-15-99


/s/ *Anthony L. Uremovich* 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ *Firooz Zandi* 11-15-99  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-01-98




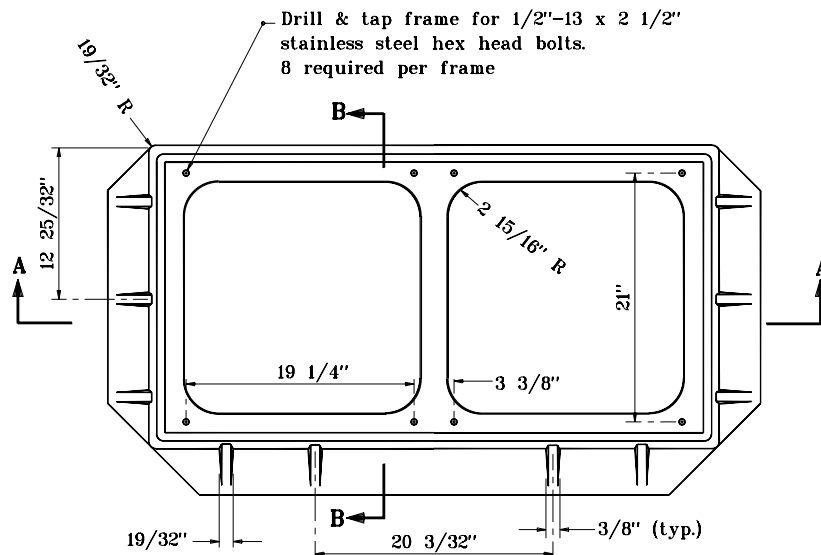

**PLAN**

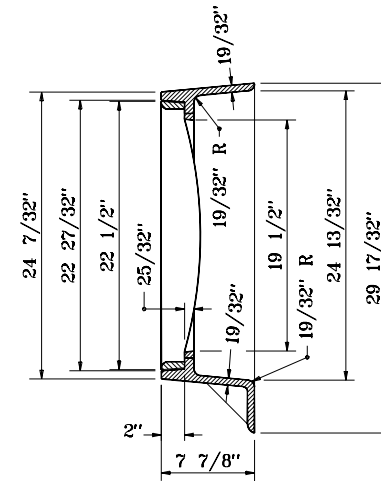


**SECTION B-B**

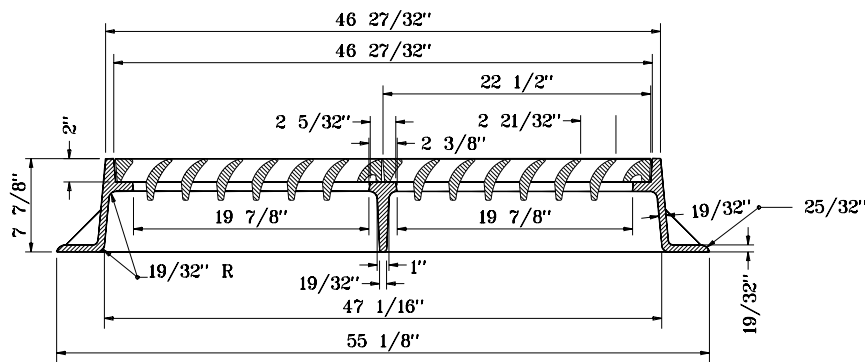


**SECTION A-A**

**FRAME  
CASTING TYPE 5**

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>CASTING TYPE 5</b>	
<b>FRAME</b>	
SEPTEMBER 2001	
STANDARD DRAWING NO. E 720-ICCA-01	
	/s/ Anthony L. Uremovich 9-04-01 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 9-04-01 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	

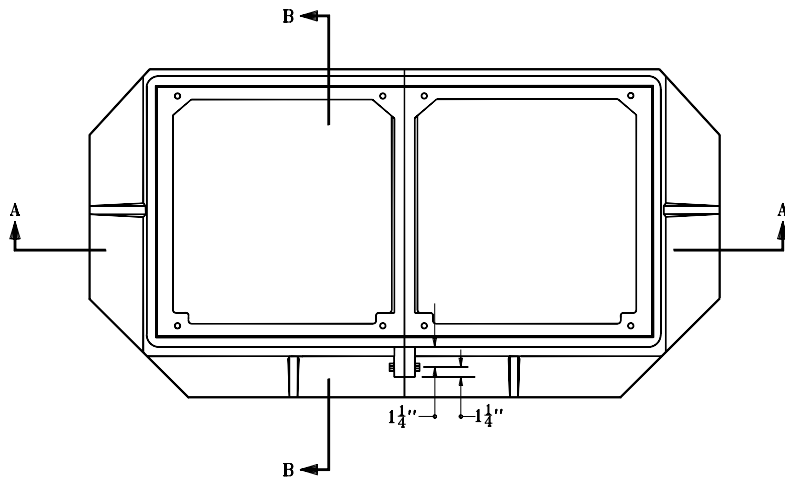


PLAN

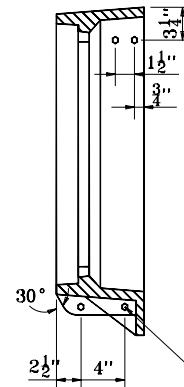


4 -  $\frac{5}{8}$ " hex head stainless steel  
cap screws and flat washers

SECTION B-B






SECTION A-A

INDIANA DEPARTMENT OF TRANSPORTATION	
CASTING TYPE 5	
ALTERNATE BOLTED FRAME	
SEPTEMBER 2001	
STANDARD DRAWING NO. E 720-ICCA-02	
	/s/ Anthony L. Uremovich 9-04-01 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 9-04-01 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	




Grate is bolted to  
frame with 1/2" hex head  
SS bolts. 4 req'd. each grate.

**BARRIER SIDE**

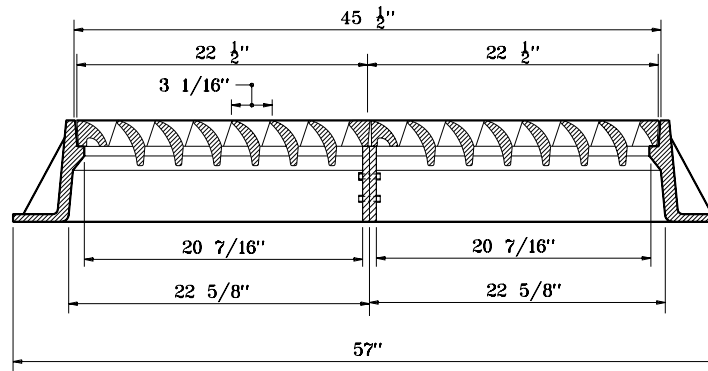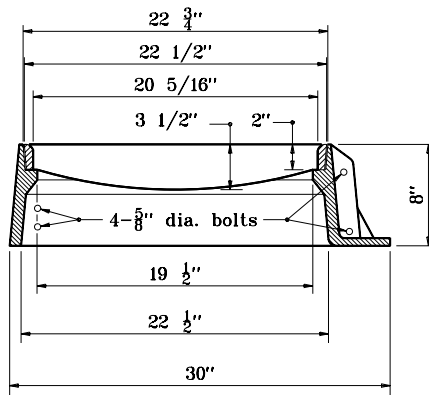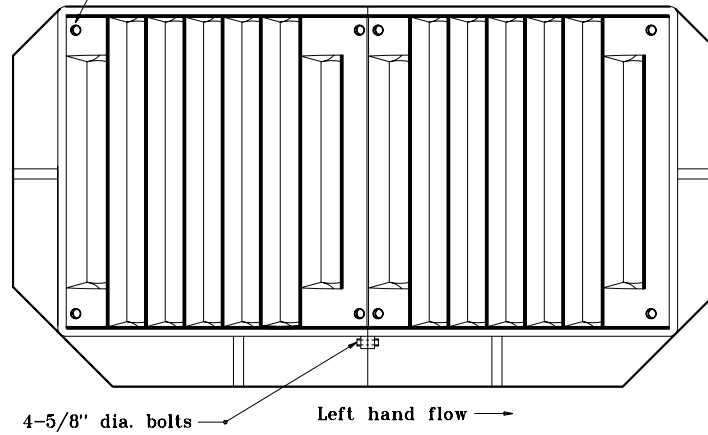


**FRAME AND GRATE  
CASTING TYPE 5 (ALTERNATE)**

INDIANA DEPARTMENT OF TRANSPORTATION		
<b>CASTING TYPE 5 (ALTERNATE)</b>		
<b>FRAME AND GRATE</b>		
SEPTEMBER 2001		
STANDARD DRAWING NO. <b>E 720-ICCA-03</b>		
	/s/ Anthony L. Uremovich 9-04-01	
	DESIGN STANDARDS ENGINEER	DATE
	/s/ Firooz Zandi 9-04-01	
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		

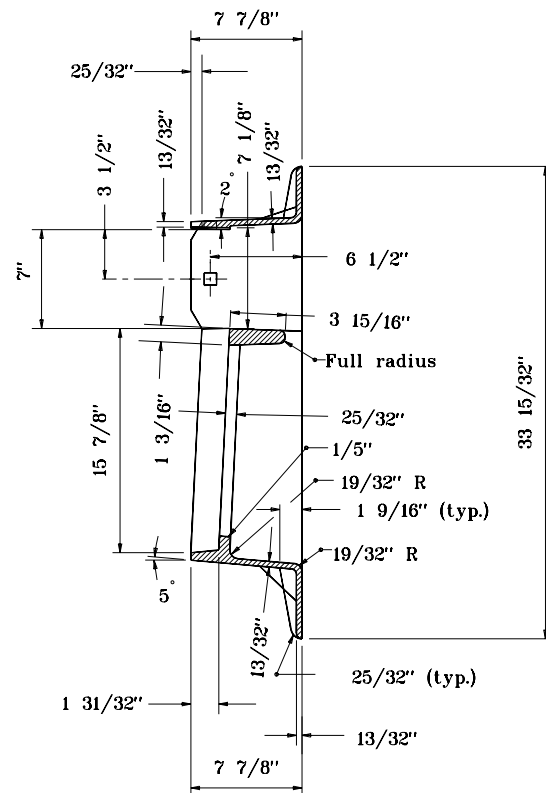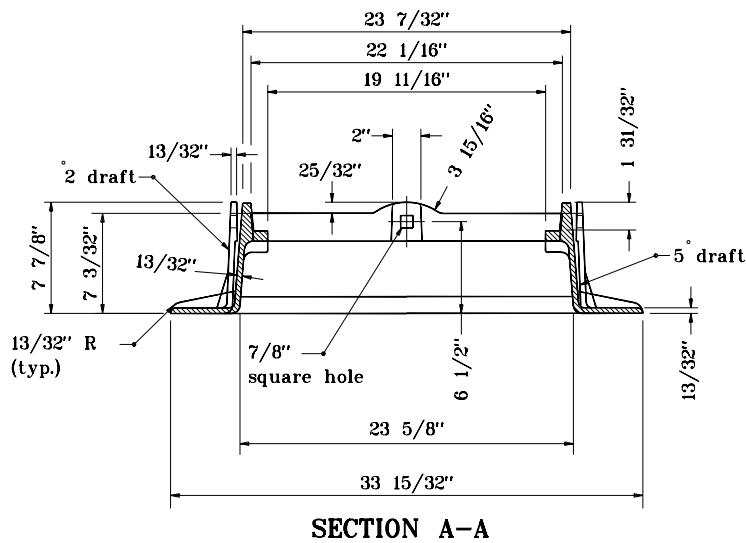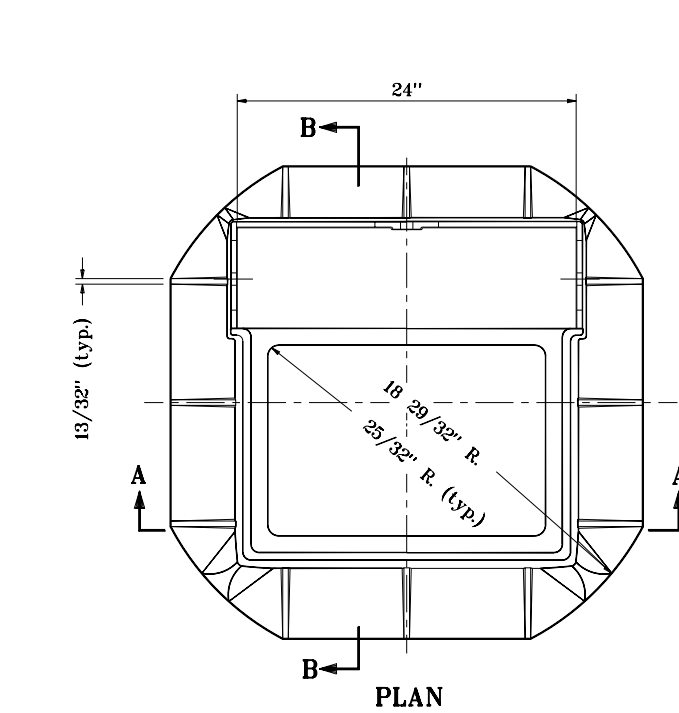


**FRAME  
CASTING TYPE 8**


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>CASTING TYPE 8</b>	
<b>FRAME</b>	
SEPTEMBER 1998	
<b>STANDARD DRAWING NO. E 720-ICCA-04</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 9-01-98

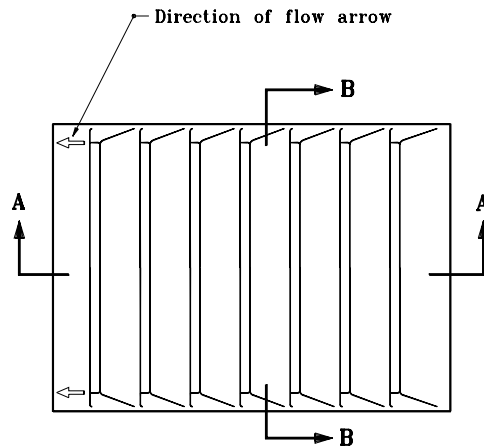


PLAN

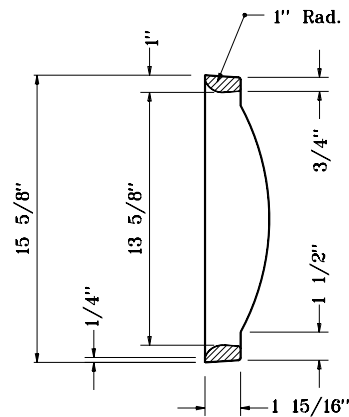

SECTION B-B

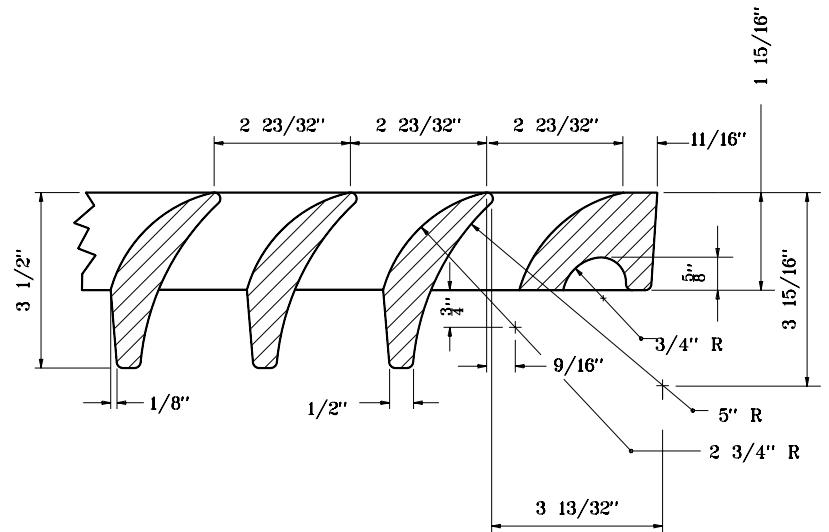

DETAIL OF SECTION A-A  
GRATE  
CASTING TYPE 8

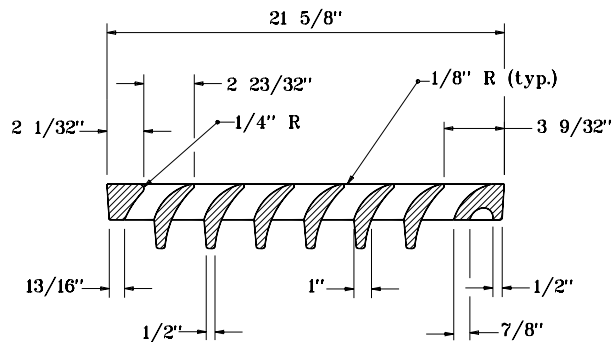


SECTION A-A


INDIANA DEPARTMENT OF TRANSPORTATION	
CASTING TYPE 8	
GRATE	
SEPTEMBER 1998	
STANDARD DRAWING NO.E 720-ICCA-05	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 9-01-98

# **GENERAL NOTES**


1. Curb box adjustable from 5 1/4" to 8 3/4".

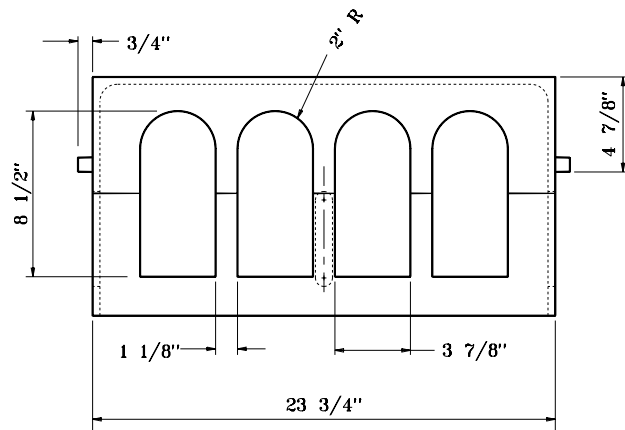

**FRONT**




**SIDE**

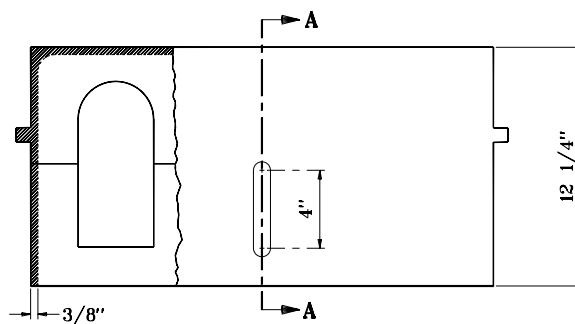


**BACK**

**CURB BOX  
CASTING TYPE 8**

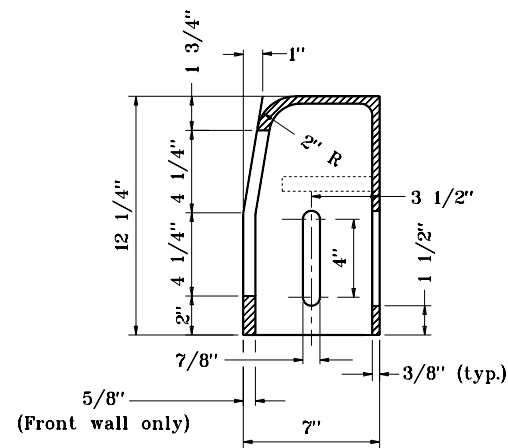


**SECTION A-A**


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>CASTING TYPE 8</b>	
<b>CURB BOX</b>	
SEPTEMBER 1998	
<b>STANDARD DRAWING NO. E 720-ICCA-06</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 9-01-98

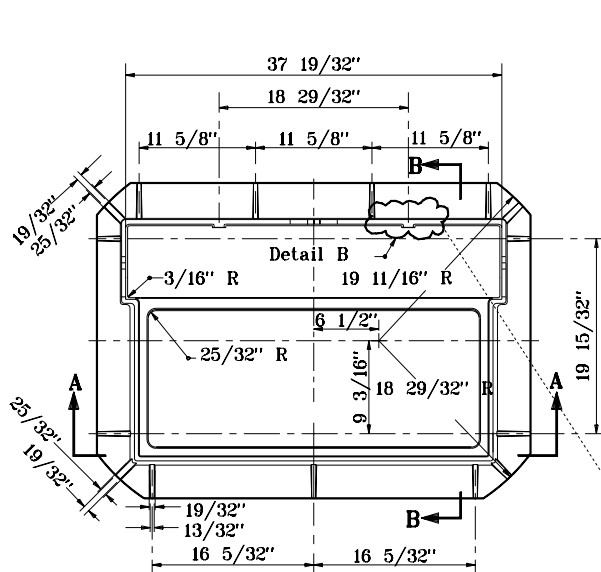


**PLAN**

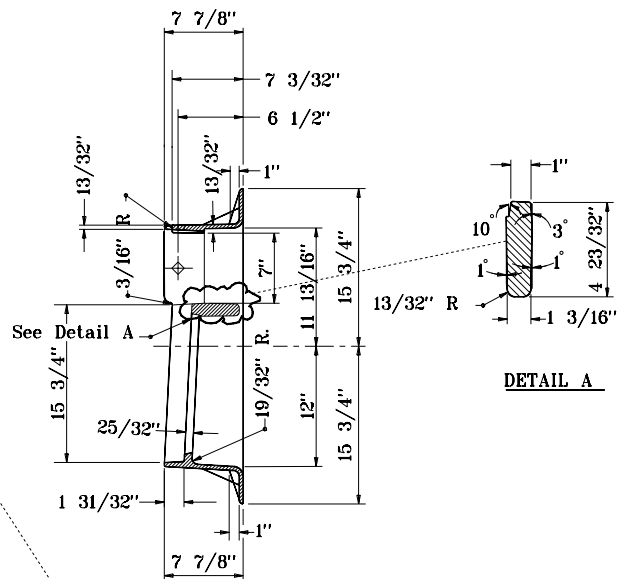

**SECTION B-B**




**DETAIL A**

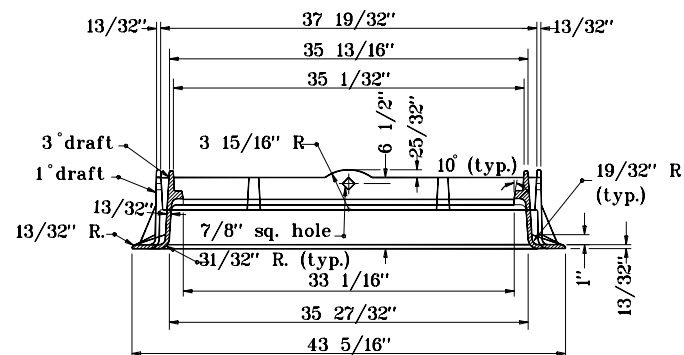

**SECTION A-A**

**FRAME  
CASTING TYPE 10**




**DETAIL B**

INDIANA DEPARTMENT OF TRANSPORTATION

**CASTINGS TYPE 10  
FRAME**

SEPTEMBER 1998

STANDARD DRAWING NO. **E 720-ICCA-08**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 9-01-98

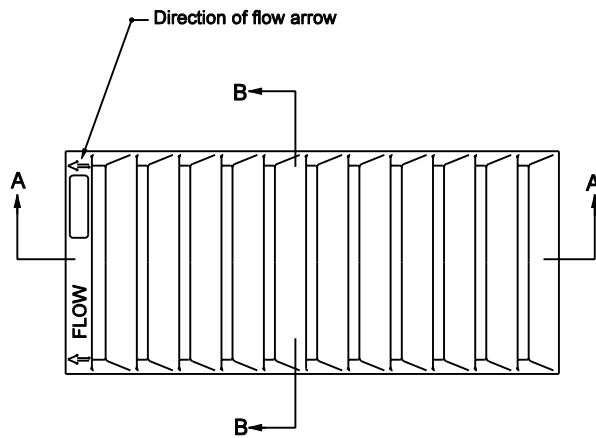


PLAN

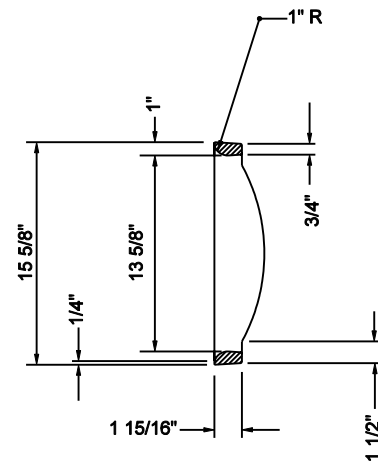

SECTION B-B

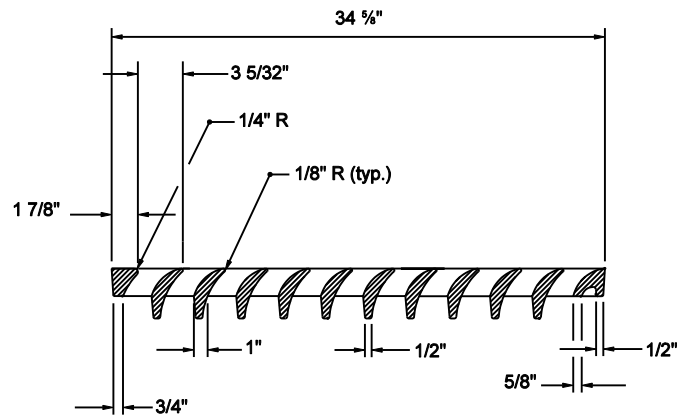

SECTION A-A

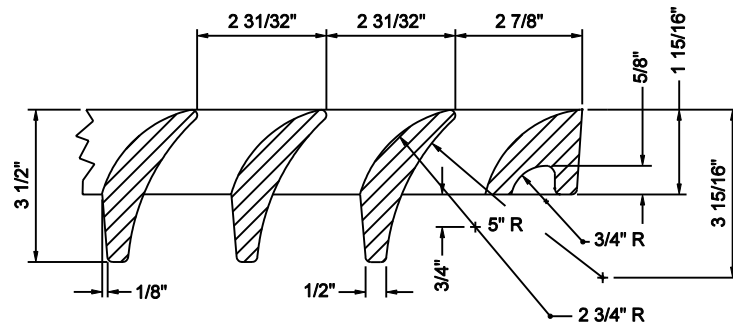

DETAIL OF SECTION A-A


GRATE  
CASTING TYPE 10

INDIANA DEPARTMENT OF TRANSPORTATION

**CASTING TYPE 10**  
**GRATE**

SEPTEMBER 2003

STANDARD DRAWING NO. E 720-ICCA-09




/s/ Richard L. VanCleave 9-02-03  
DESIGN STANDARDS ENGINEER DATE


/s/ Richard K. Smutzer 9-02-03  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER



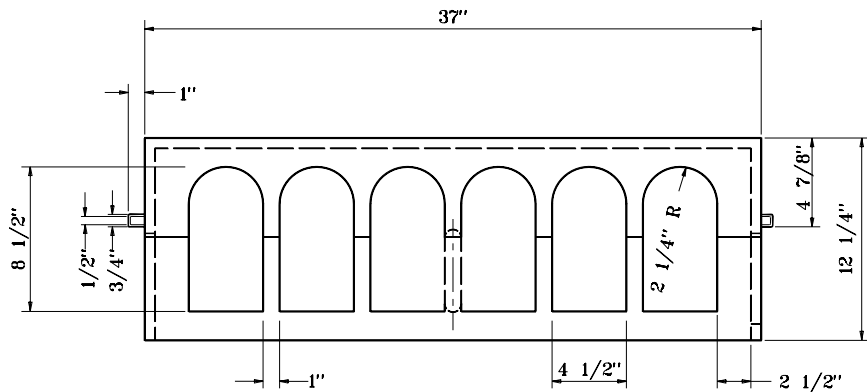

**FRONT**

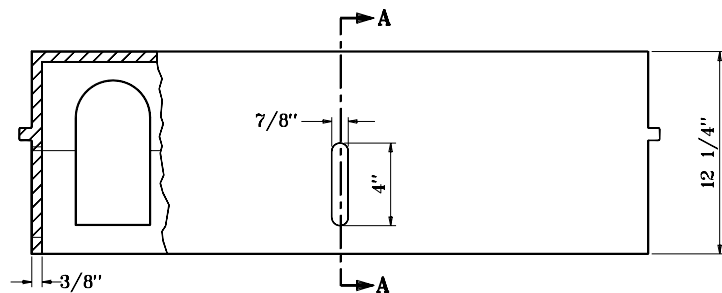


**BACK**


**CURB BOX  
CASTING 10**

**GENERAL NOTES**

1. Curb box adjustable  
5 1/4" to 8 3/4".


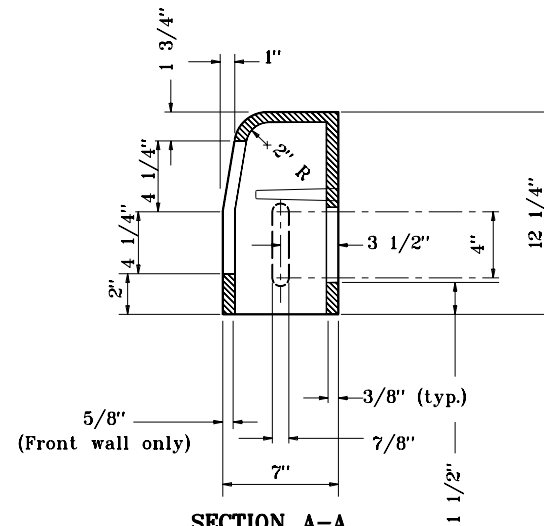


**SECTION A-A**



**SIDE**

INDIANA DEPARTMENT OF TRANSPORTATION	
CASTING TYPE 10	
CURB BOX	
SEPTEMBER 1998	
STANDARD DRAWING NO.E 720-ICCA-09A	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 9-01-98

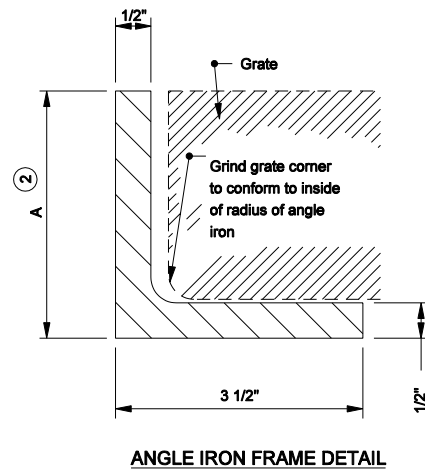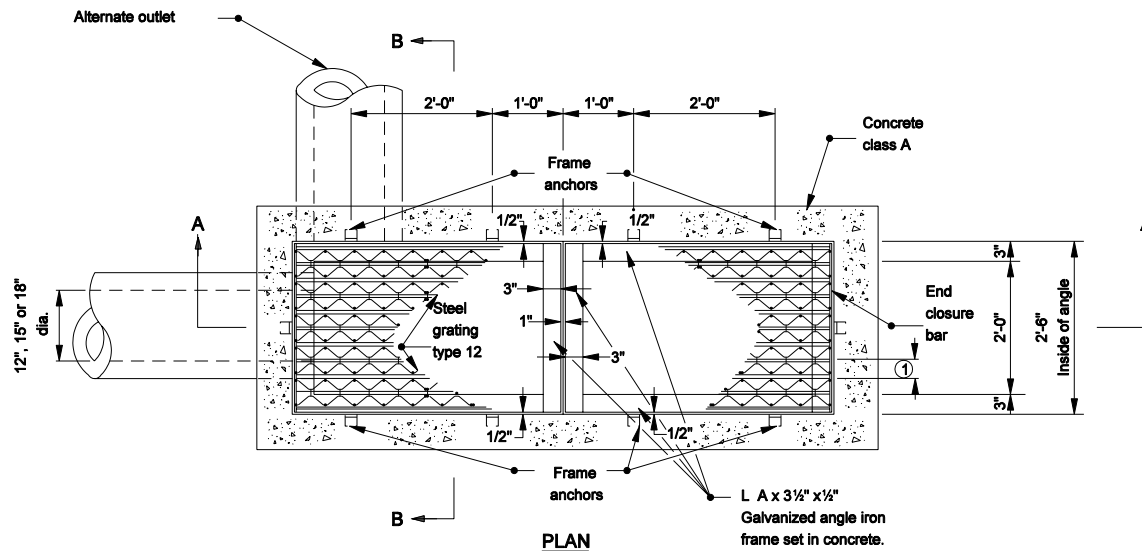

## NOTES


- ① Bar spacing shall be 1 1/4" c. to c. minimum and 2 1/4" c. to c. maximum.
- ② The dimensions of the angle iron frame shall be as shown except that the A dimension may vary according to type of grating used.
- ③ For Section A-A, Section B-B see Standard Drawing E 720-INST-08.

INDIANA DEPARTMENT OF TRANSPORTATION

## STEEL GRATING TYPE 12 FRAME AND GRATE

SEPTEMBER 2005


STANDARD DRAWING NO. E 720-ICCA-10




/s/ Richard L. VanCleave 9-01-05  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 9-01-05  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

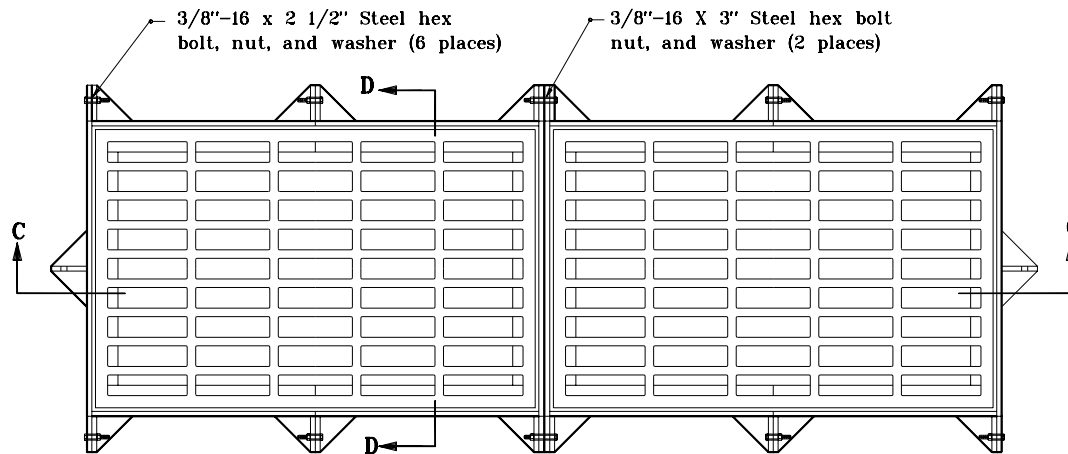

**PLAN**

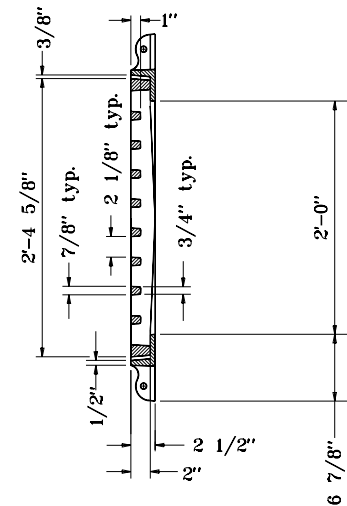


**SECTION D-D**

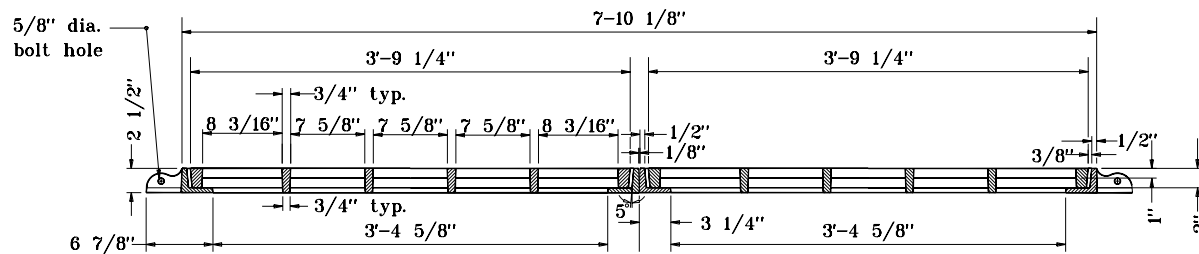


**SECTION A-A**

**GRATE AND FRAME CASTING  
ALTERNATE TYPE 12**


INDIANA DEPARTMENT OF TRANSPORTATION	
CASTING TYPE 12 (ALTERNATE)	
FRAME AND GRATE	
SEPTEMBER 1998	
STANDARD DRAWING NO. E 720-ICCA-11	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 9-01-98

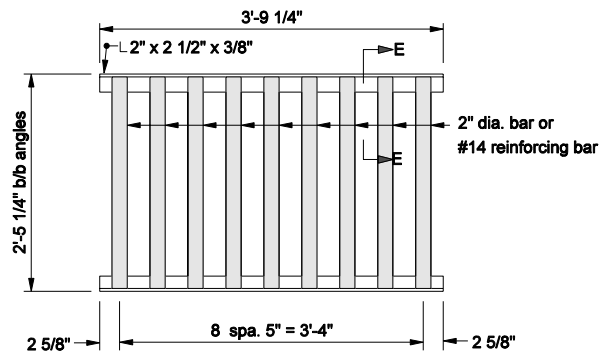


**ALTERNATE STEEL GRATING**  
(To be used with steel frame  
type 12A)

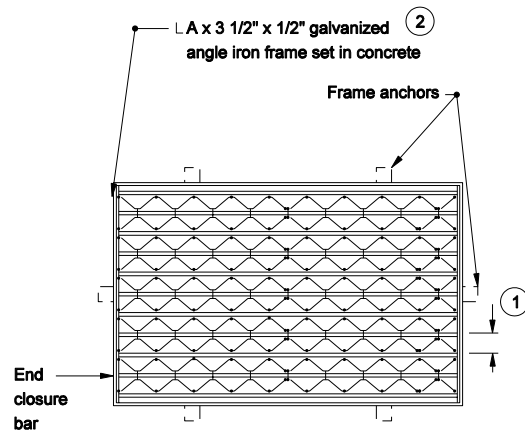

**STEEL GRATING AND FRAME**  
**TYPE 12A**

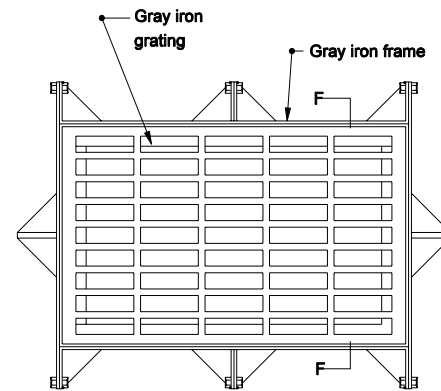


**GRATE AND FRAME CASTING**  
**ALTERNATE TYPE 12A**



**SECTION E-E**


**GENERAL NOTES**

- ① Spacing shall be 1 7/8" c. to c. min., and 2 3/8" c. to c. max.
- ② The dimensions of the angle iron frame shall be as shown except that the A dimension may vary according to type of grating used.

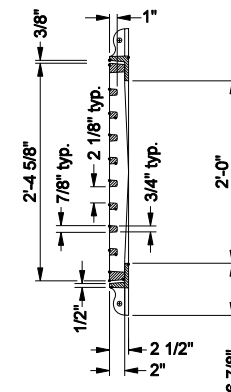


**SECTION F-F**


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>STEEL GRATING TYPE 12A FRAME AND GRATE</b>	
SEPTEMBER 2005	
STANDARD DRAWING NO. E 720-ICCA-12	
	/s/ Richard L. VanCleave 9-01-05 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ Richard K. Smutzer 9-01-05 CHIEF HIGHWAY ENGINEER DATE

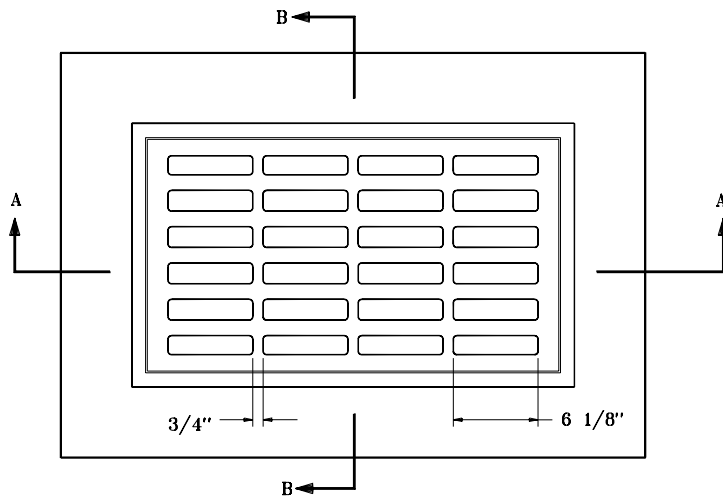

**PLAN**

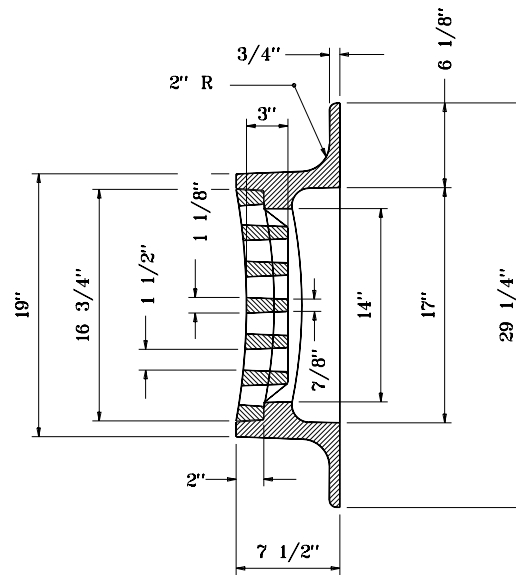

**SECTION B-B**

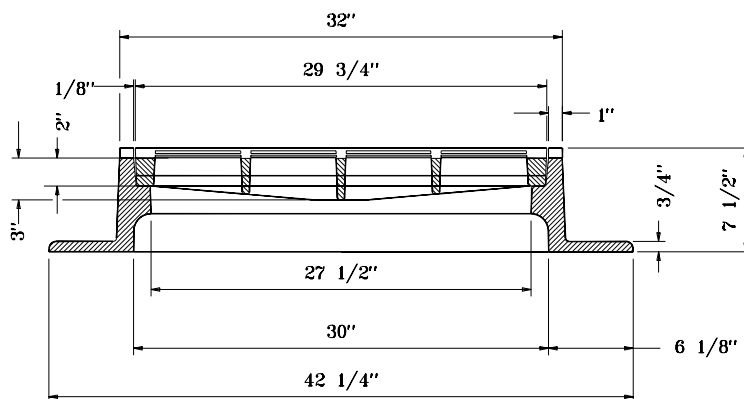


**SECTION A-A**

**FRAME AND GRATE  
CASTING TYPE 13**

INDIANA DEPARTMENT OF TRANSPORTATION

**CASTING TYPE 13  
FRAME & GRATE**  
SEPTEMBER 1998

STANDARD DRAWING NO. **E 720-ICCA-13**






DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 9-01-98

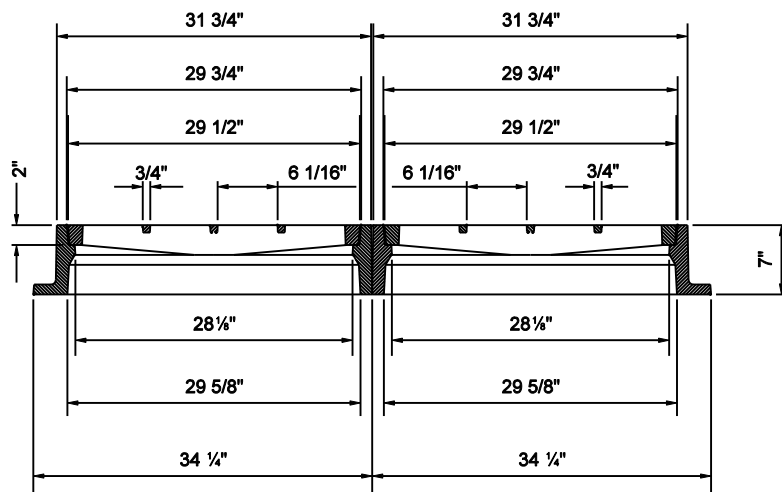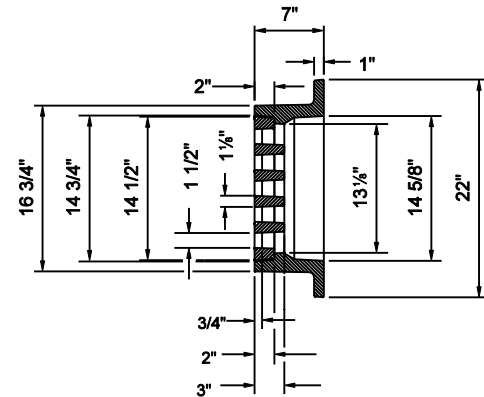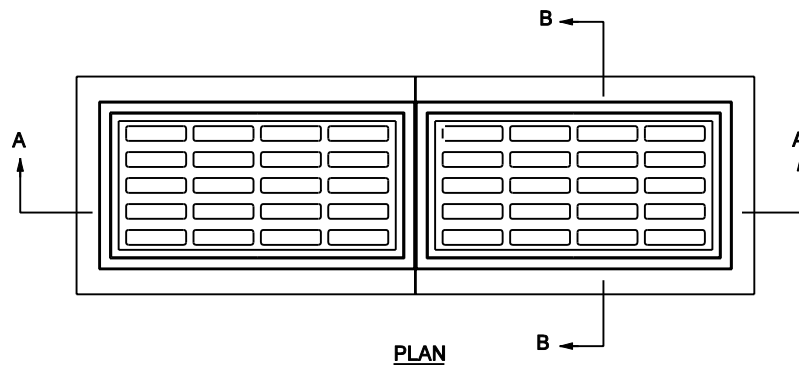


**FRAME AND GRATE**  
**CASTING TYPE 14**

INDIANA DEPARTMENT OF TRANSPORTATION

**CASTING TYPE 14**  
**FRAME AND GRATE**

SEPTEMBER 2003


STANDARD DRAWING NO. E 720-ICCA-15




/s/ Richard L. VanCleave 9-02-03  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 9-02-03  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

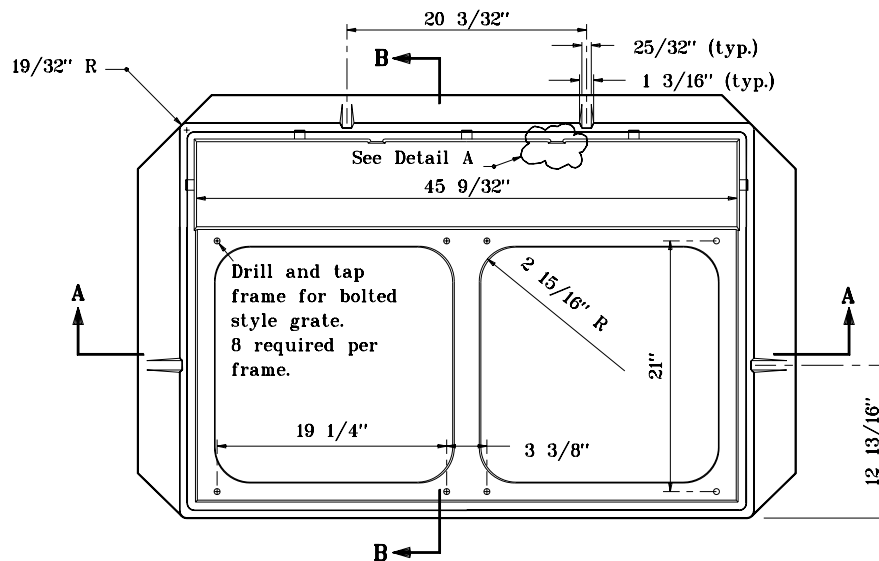


PLAN

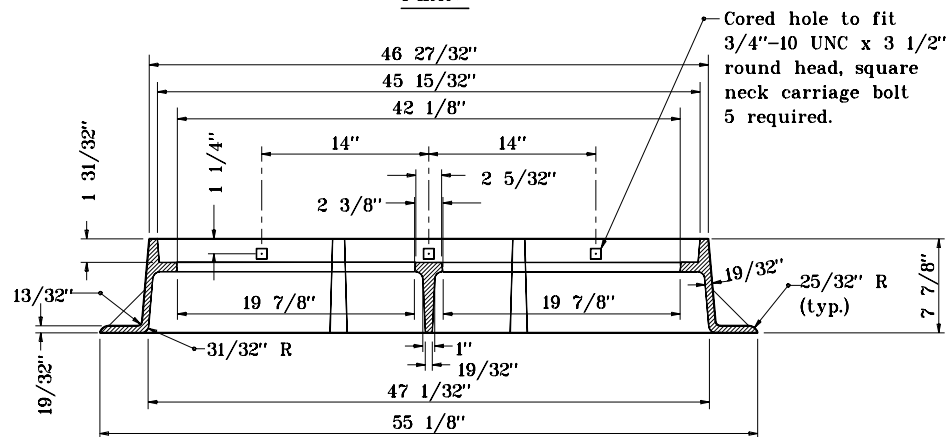


SECTION A-A

FRAME  
CASTING TYPE 15

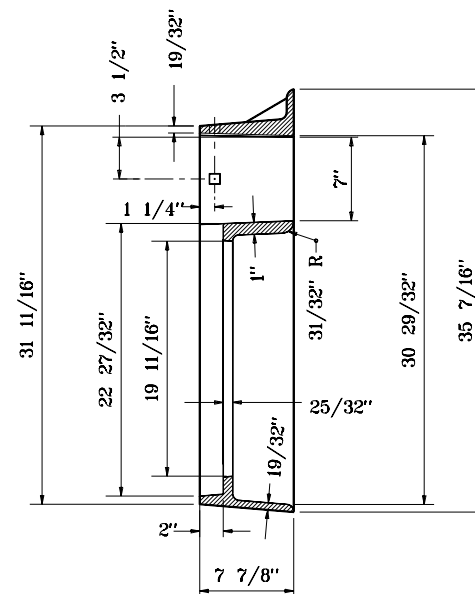



SECTION B-B




DETAIL A

INDIANA DEPARTMENT OF TRANSPORTATION	
CASTING TYPE 15	
FRAME	
SEPTEMBER 1998	
STANDARD DRAWING NO. E 720-ICCA-16	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 9-01-98

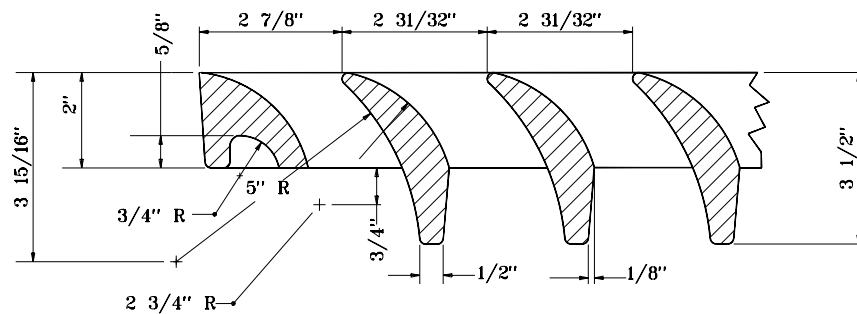


INDIANA DEPARTMENT OF TRANSPORTATION	
<p style="text-align: center;"><b>CASTING TYPE 15</b></p> <p style="text-align: center;"><b>GRATE</b></p> <p style="text-align: center;"><b>SEPTEMBER 1998</b></p>	
<b>STANDARD DRAWING NO. E 720-ICCA-17</b>	
	<p>DETAILS PLACED IN THIS FORMAT 11-15-99</p> <p><u>s/ Anthony L. Uremovich</u> <u>11-15-99</u> DESIGN STANDARDS ENGINEER DATE</p>
DESIGN STANDARDS ENGINEER	<p><u>s/ Firooz Zandi</u> <u>11-15-99</u> CHIEF HIGHWAY ENGINEER DATE</p> <p style="text-align: center;">ORIGINALLY APPROVED</p> <p>9-01-98</p>




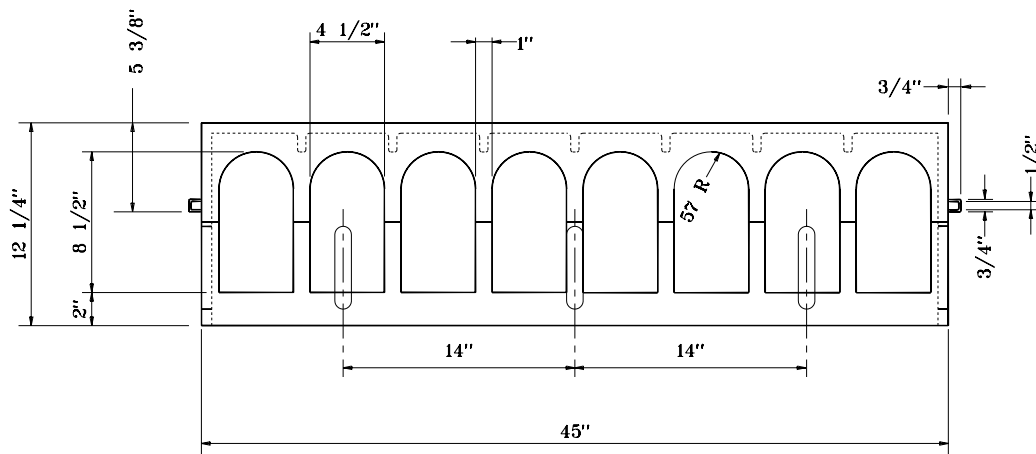


**FRONT**



**SIDE**

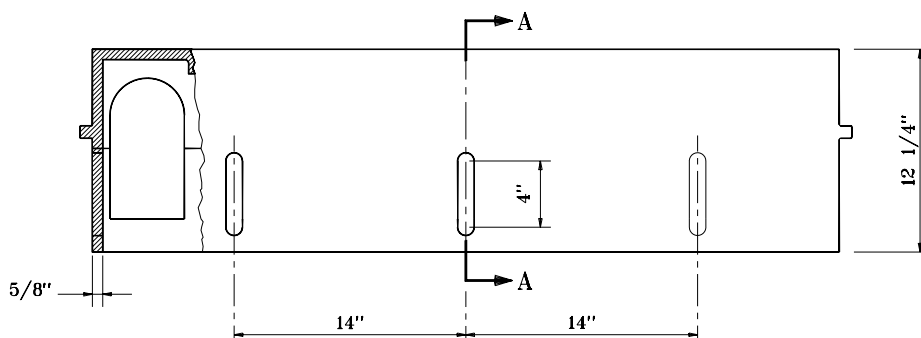

**BACK**

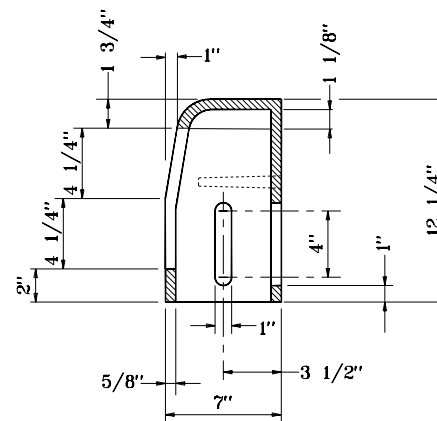

**SECTION A-A**


INDIANA DEPARTMENT OF TRANSPORTATION

**CASTING TYPE 15**

**CURB BOX**

SEPTEMBER 1998

**STANDARD DRAWING NO. E 720-ICCA-18**






DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-01-98

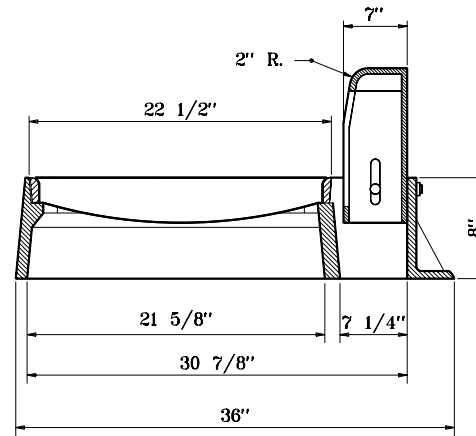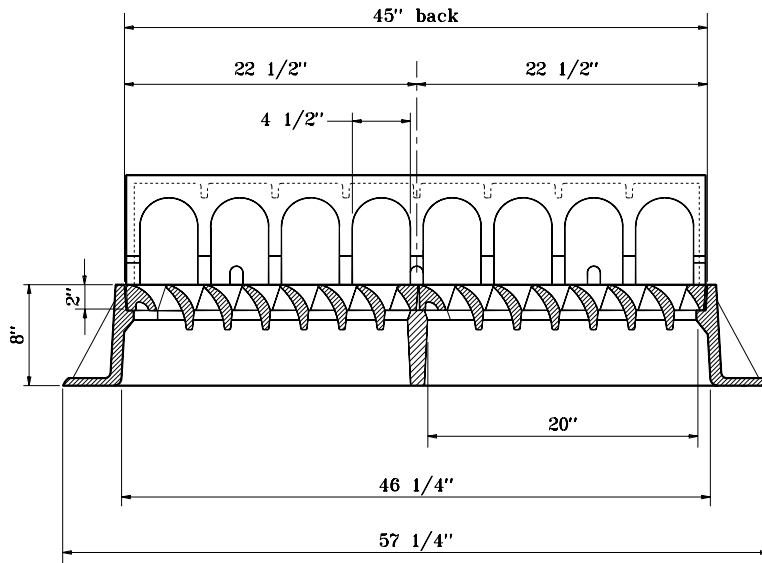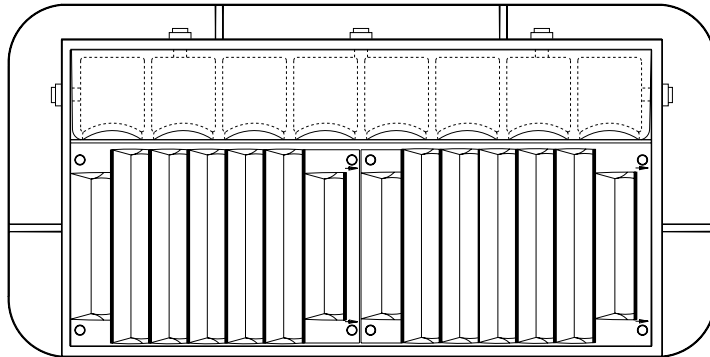


## GENERAL NOTES

1. Curb adjustment  $5\frac{1}{2}$ " to  $9\frac{1}{2}$ ".


INDIANA DEPARTMENT OF TRANSPORTATION  
CASTING TYPE 15 (ALTERNATE)  
FRAME, GRATE, AND CURB BOX  
SEPTEMBER 1998

STANDARD DRAWING NO. E 720-ICCA-19




DETAILS PLACED IN THIS FORMAT		11-15-99
/s/ Anthony L. Uremovich	DESIGN STANDARDS ENGINEER	11-15-99
/s/ Firooz Zandi	CHIEF HIGHWAY ENGINEER	11-15-99
ORIGINALLY APPROVED		9-01-98


Drill and tap for  
3/8" x 2" stainless steel  
hex bolt with washer (4 places)

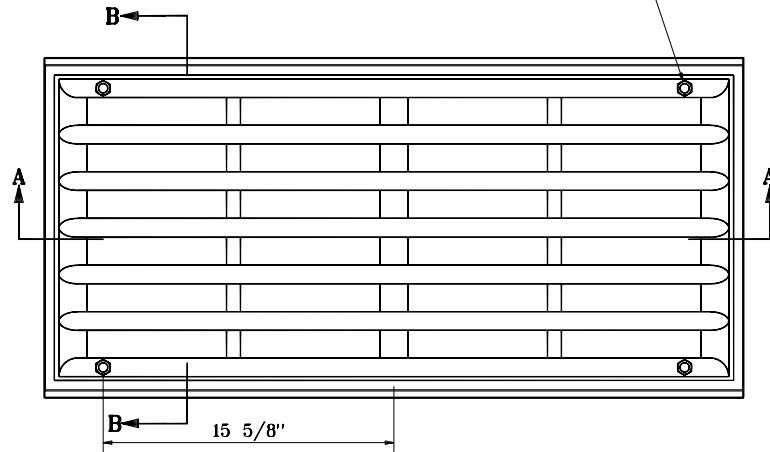

**PLAN**

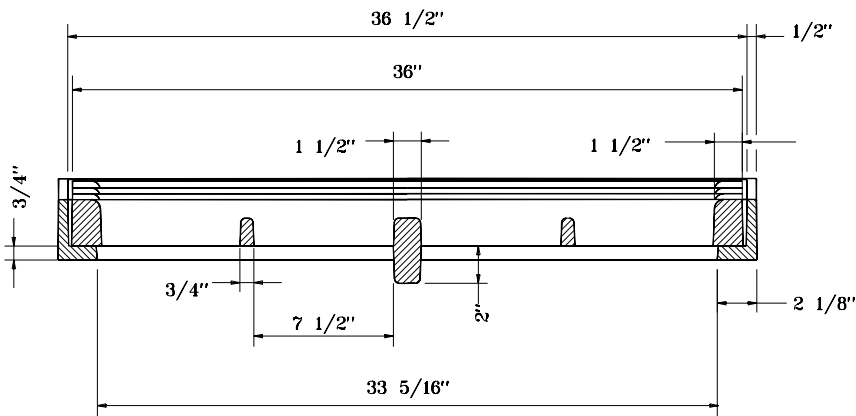

**SECTION A-A**

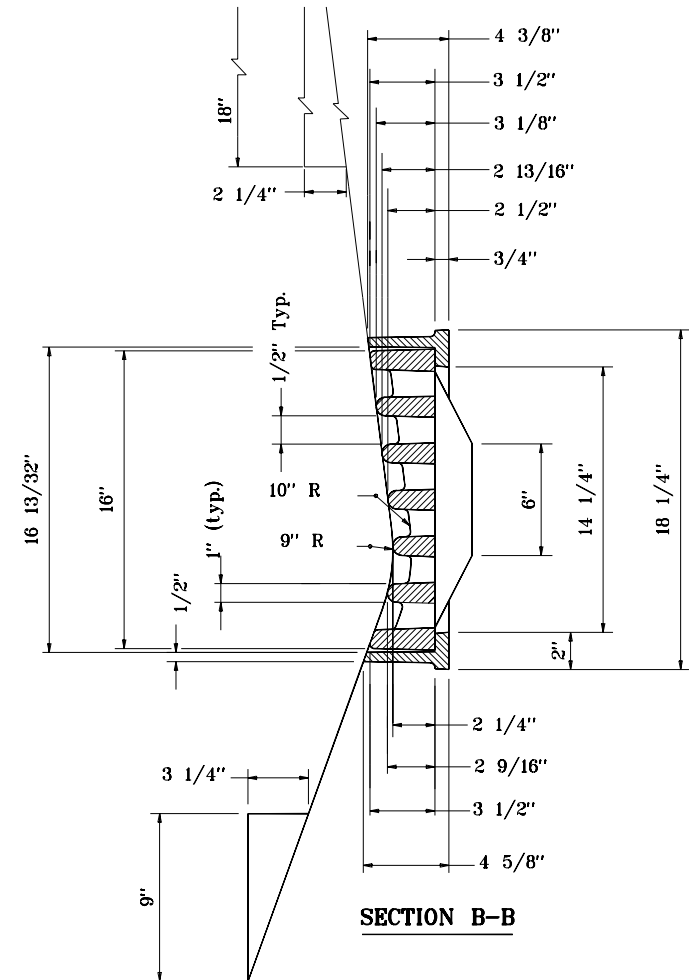


**SECTION B-B**

INDIANA DEPARTMENT OF TRANSPORTATION

**INLET CASTING  
TYPE 6**

SEPTEMBER 1998

STANDARD DRAWING NO. **E 720-INCA-01**






DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-01-98

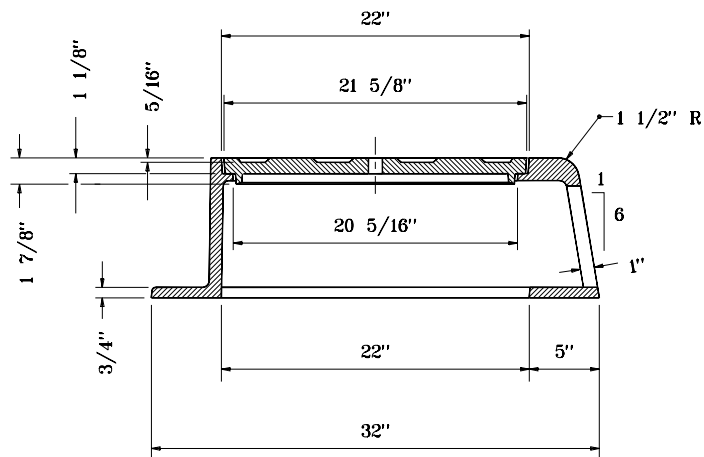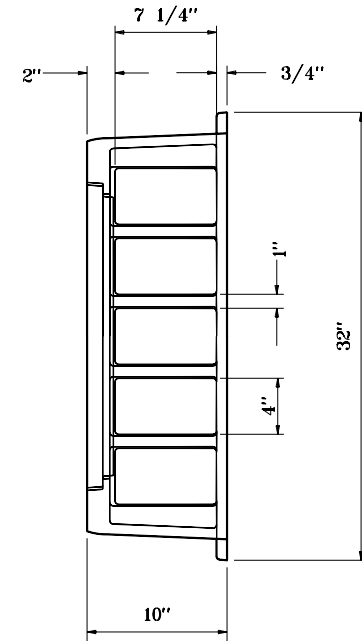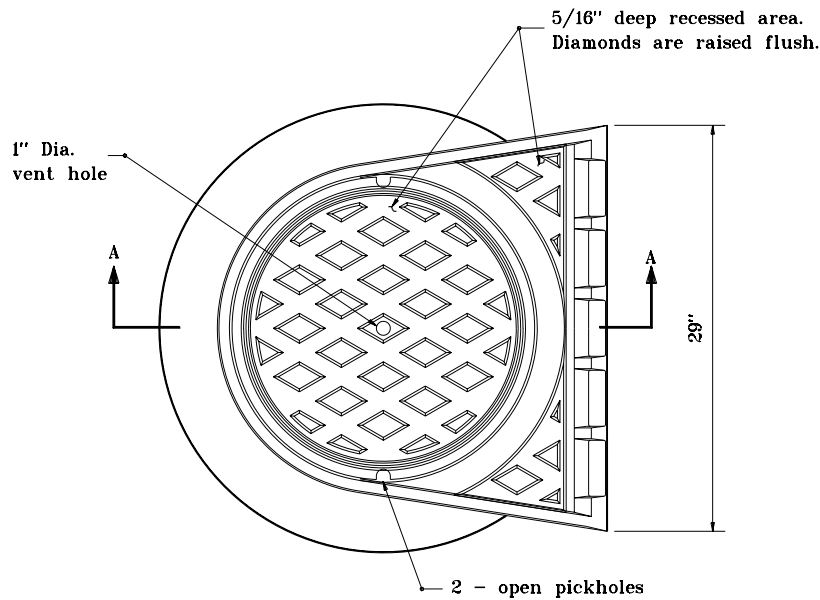


**SECTION A-A**  
**CURB CASTING TYPE 3**

INDIANA DEPARTMENT OF TRANSPORTATION

**CURB INLET CASTING  
TYPE 3**

SEPTEMBER 1998

STANDARD DRAWING NO. E 720-INCA-02



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE





/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-01-98

# GENERAL NOTES

1. Brick, block, or concrete may be used.
2. T = 8" for brick structure  
T = 6" for segmental block structure
- 3 In special cases or where inlet pipe is required, A<sub>1</sub>, B<sub>1</sub>, A<sub>2</sub>, and B<sub>2</sub> shall be increased or decreased 1'-0", as directed.
- 4 2" dia. pipe drain from bottom of curb to inlet. Aggregate to be placed around inlet end of pipe.
- 5 3" dia. pipe to be kept open for drainage of subgrade or base until surface is placed.

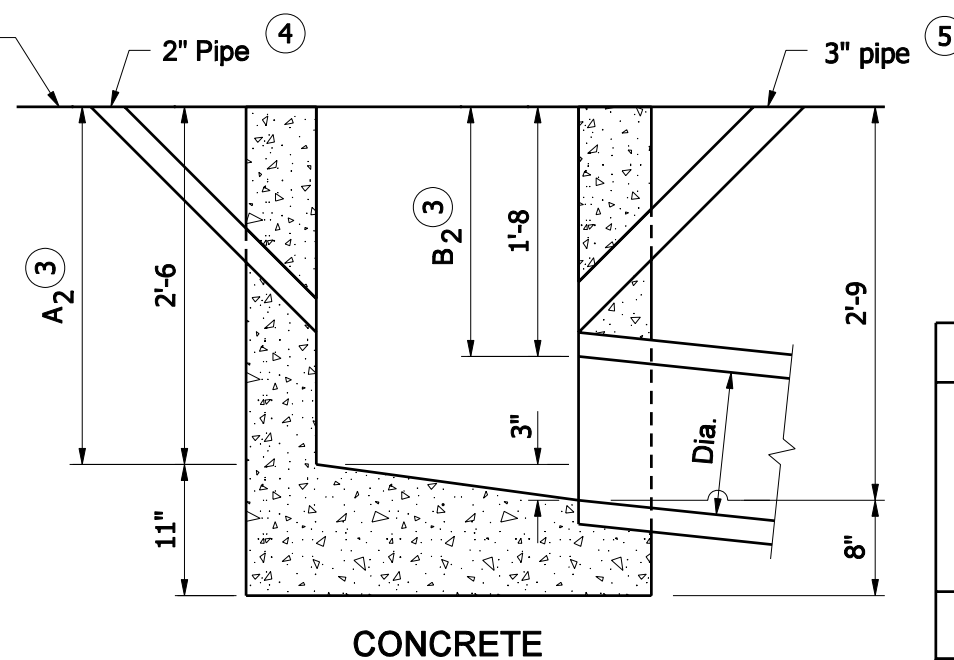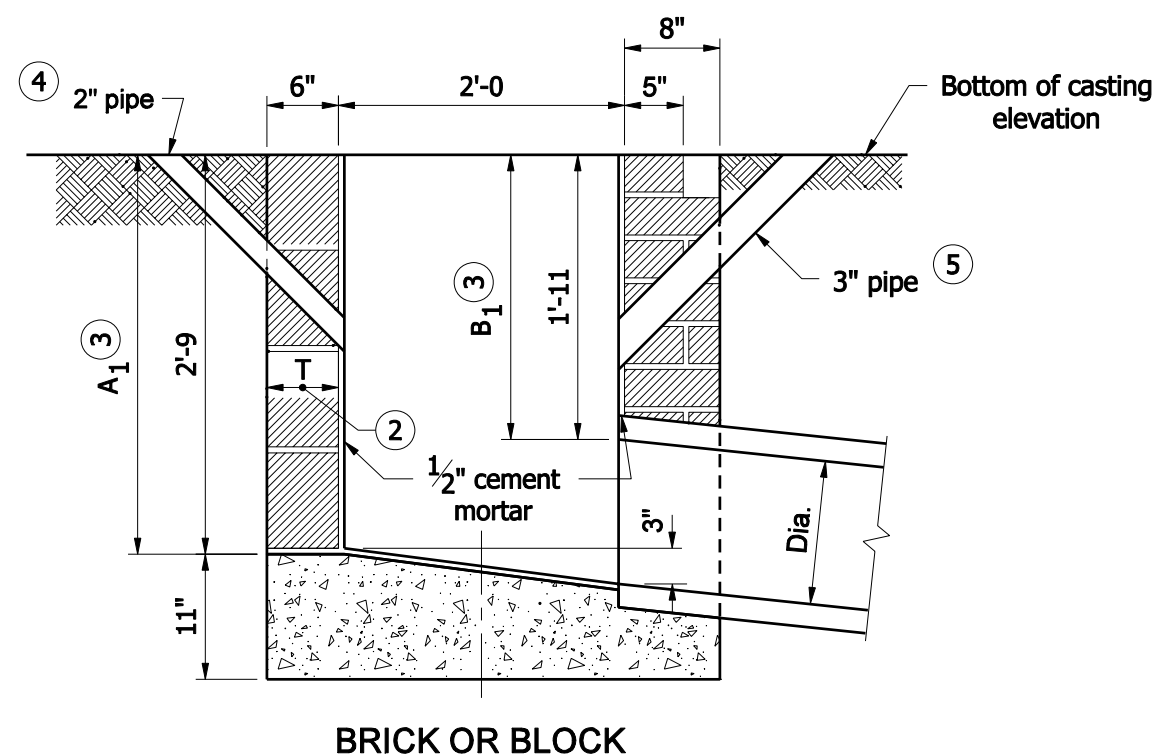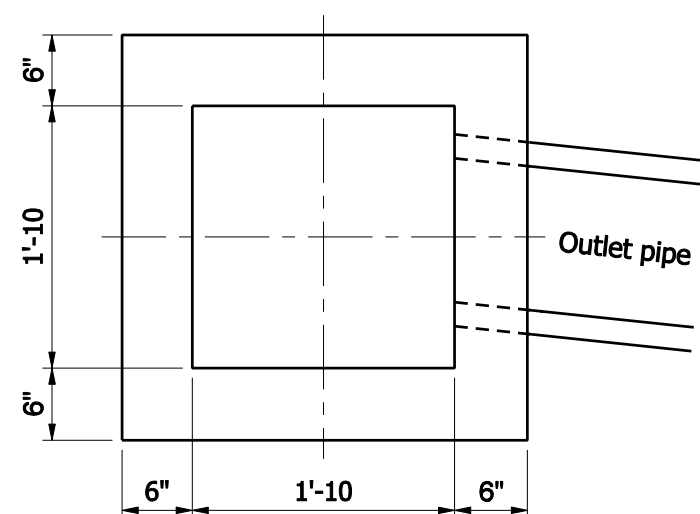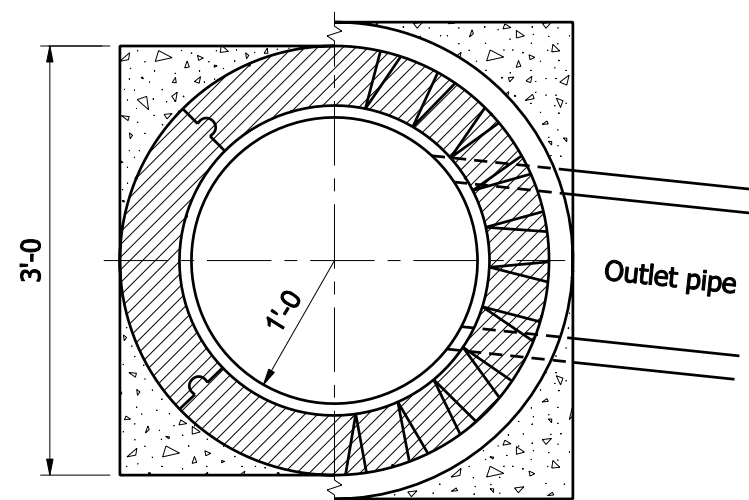


INDIANA DEPARTMENT OF TRANSPORTATION

INLET TYPE A

SEPTEMBER 2008


STANDARD DRAWING NO. E 720- INST-01




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/02/08  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/02/08  
CHIEF HIGHWAY ENGINEER DATE

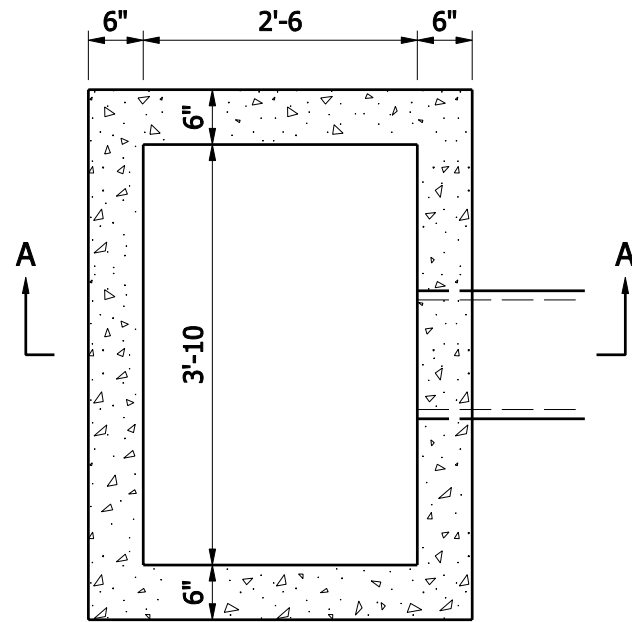


PLAN

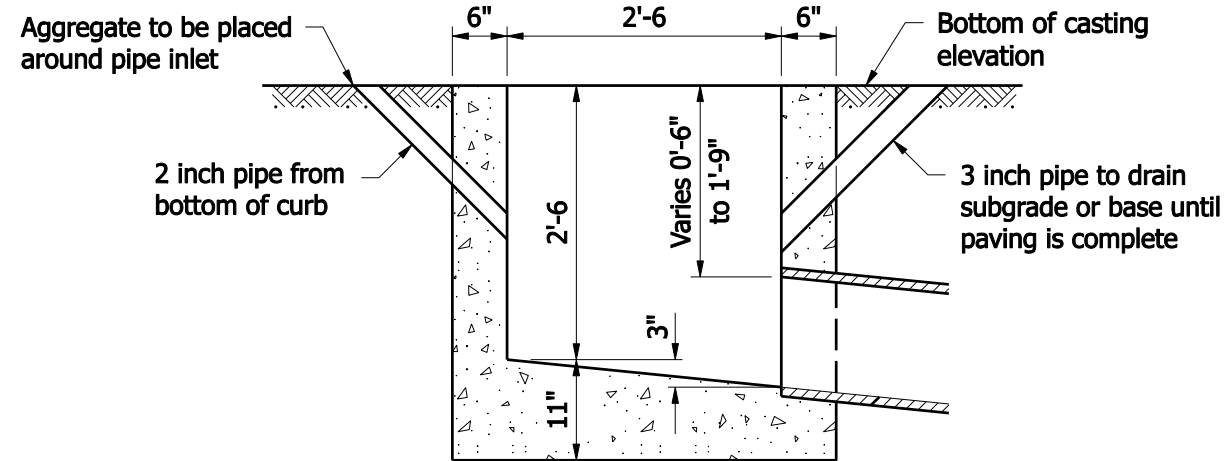


SECTION A-A

INLET-TYPE B

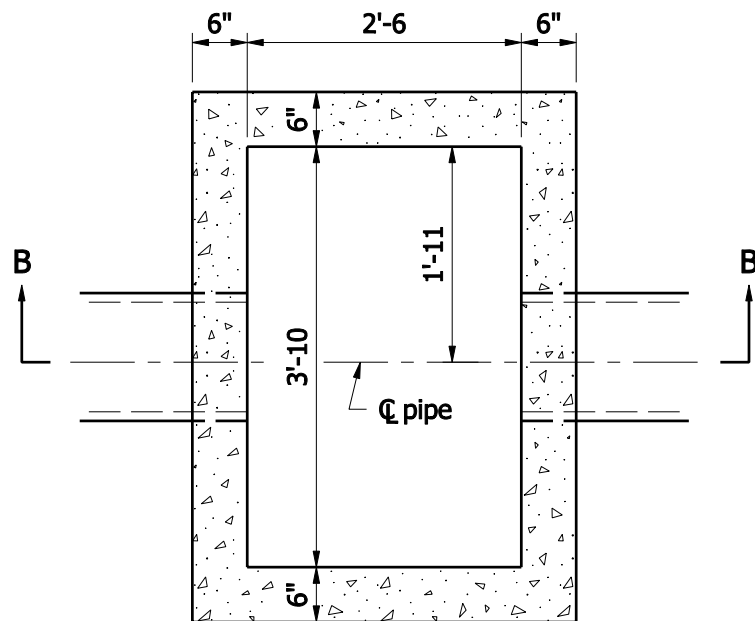

PLAN

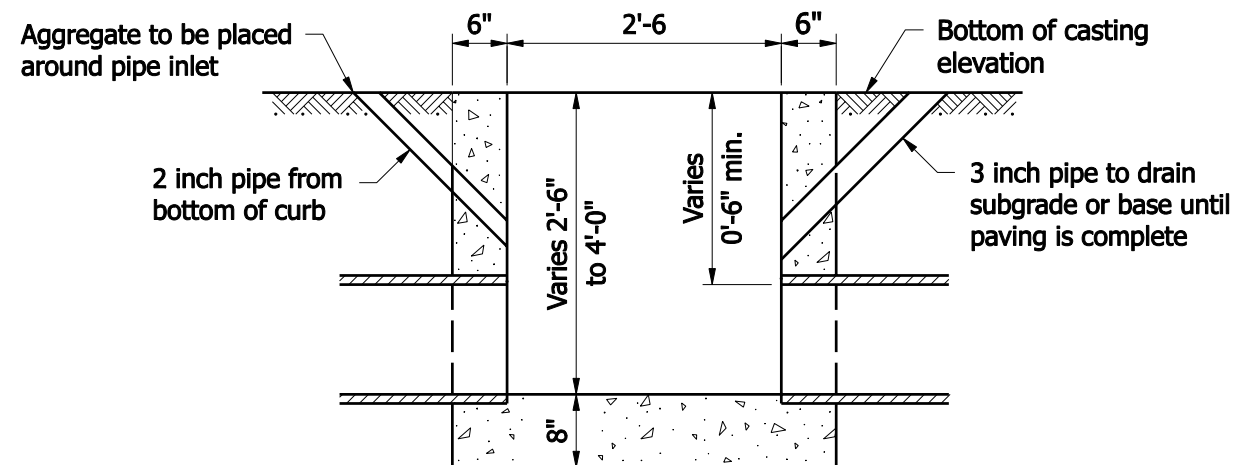

SECTION B-B


INLET-TYPE C

INDIANA DEPARTMENT OF TRANSPORTATION

INLET TYPE B AND C

SEPTEMBER 2008

STANDARD DRAWING NO. E 720- INST-02




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave  
DESIGN STANDARDS ENGINEER


09/02/08  
DATE

/s/ Mark A. Miller  
CHIEF HIGHWAY ENGINEER


09/02/08  
DATE

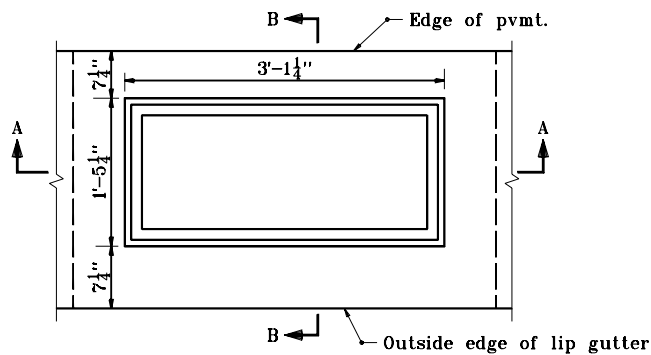

**PLAN**

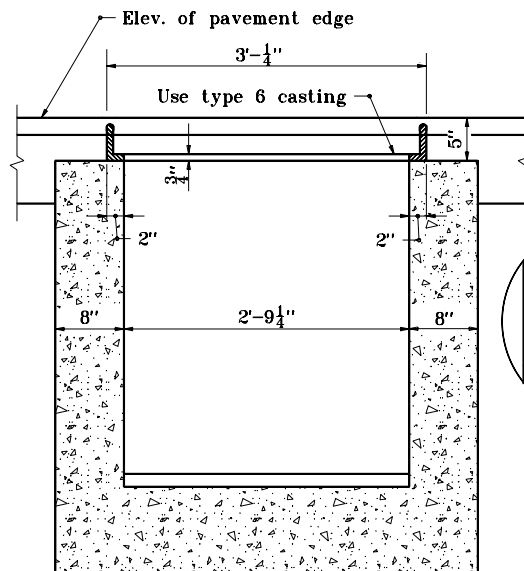

**SECTION A-A**

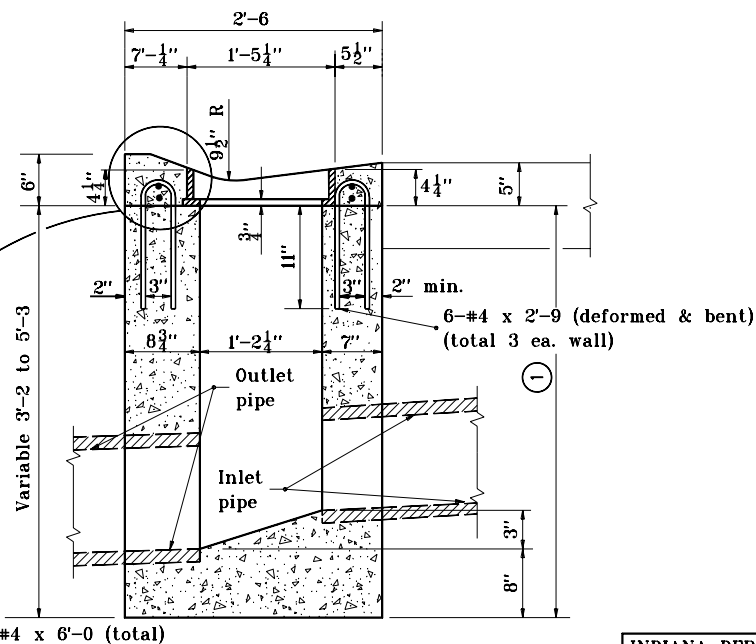

**SECTION B-B**

**GENERAL NOTES**


- ① If inlet pipe is required, this dimension shall be increased or decreased 1'-0 as directed.

INDIANA DEPARTMENT OF TRANSPORTATION

**INLET TYPE D**

SEPTEMBER 1997

STANDARD DRAWING NO. **E 720-INST-03**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE


/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED 9-01-97

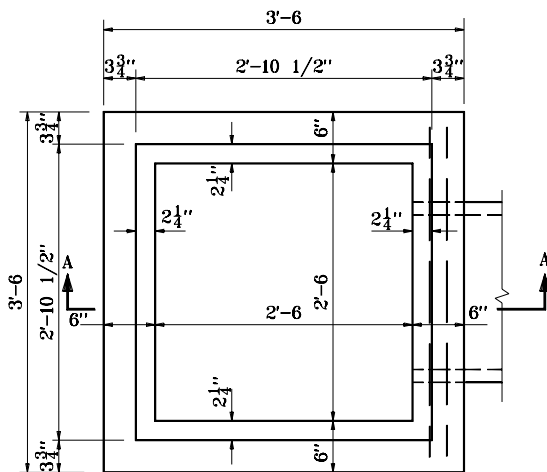

**PLAN**

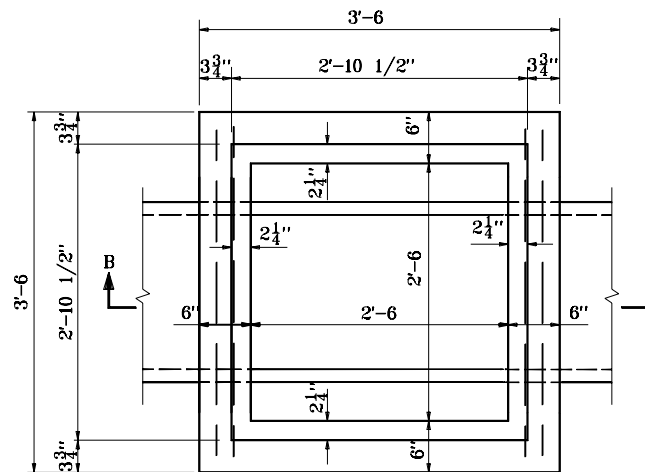


**PLAN**

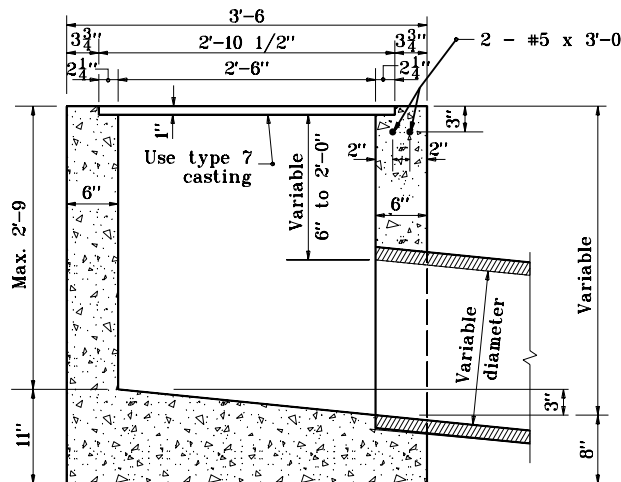

**SECTION A-A**

**INLET TYPE E (CONC.)**


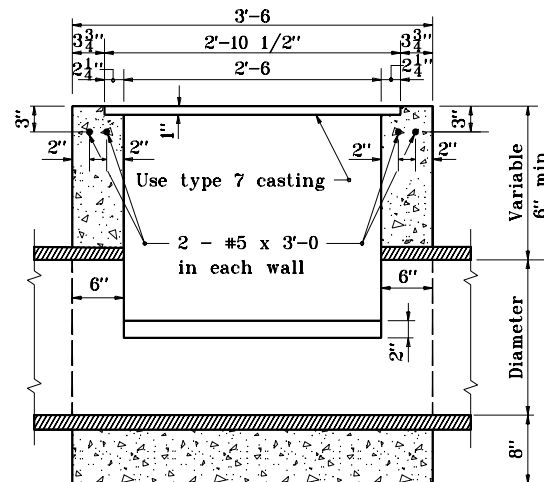


**SECTION B-B**

**INLET TYPE F (CONC.)**

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>INLETS TYPE E AND F</b>	
SEPTEMBER 1997	
<b>STANDARD DRAWING NO. E 720-INST-04</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 9-02-97



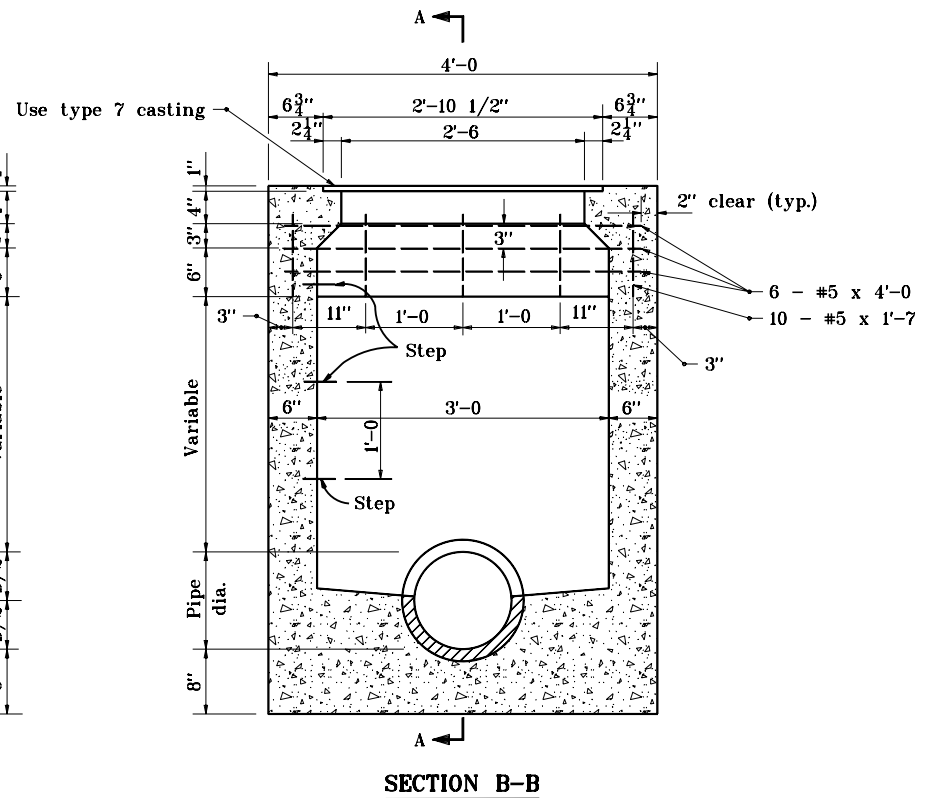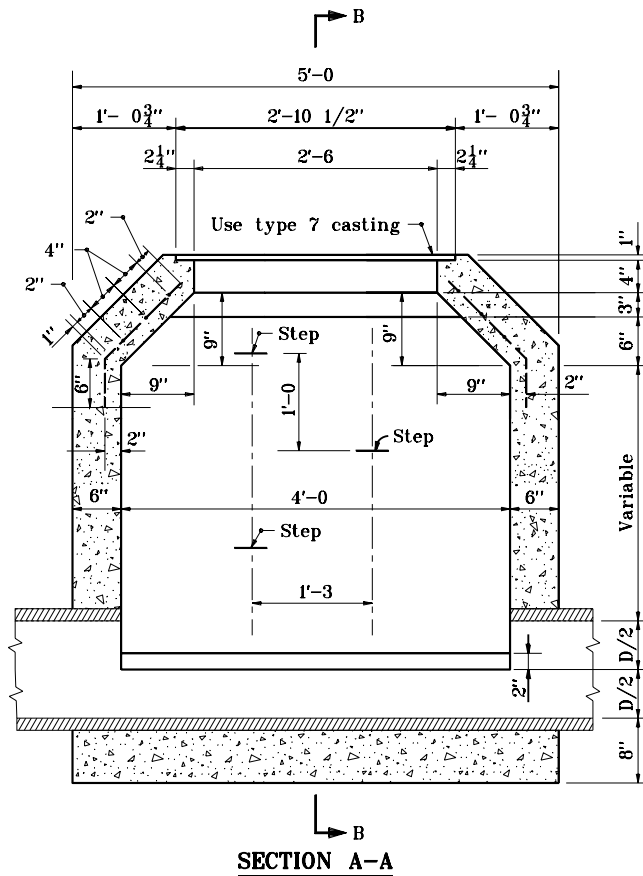


INDIANA DEPARTMENT OF TRANSPORTATION

# INLET TYPE G

SEPTEMBER 1997

STANDARD DRAWING NO. E 720-INST-05





DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-01-97

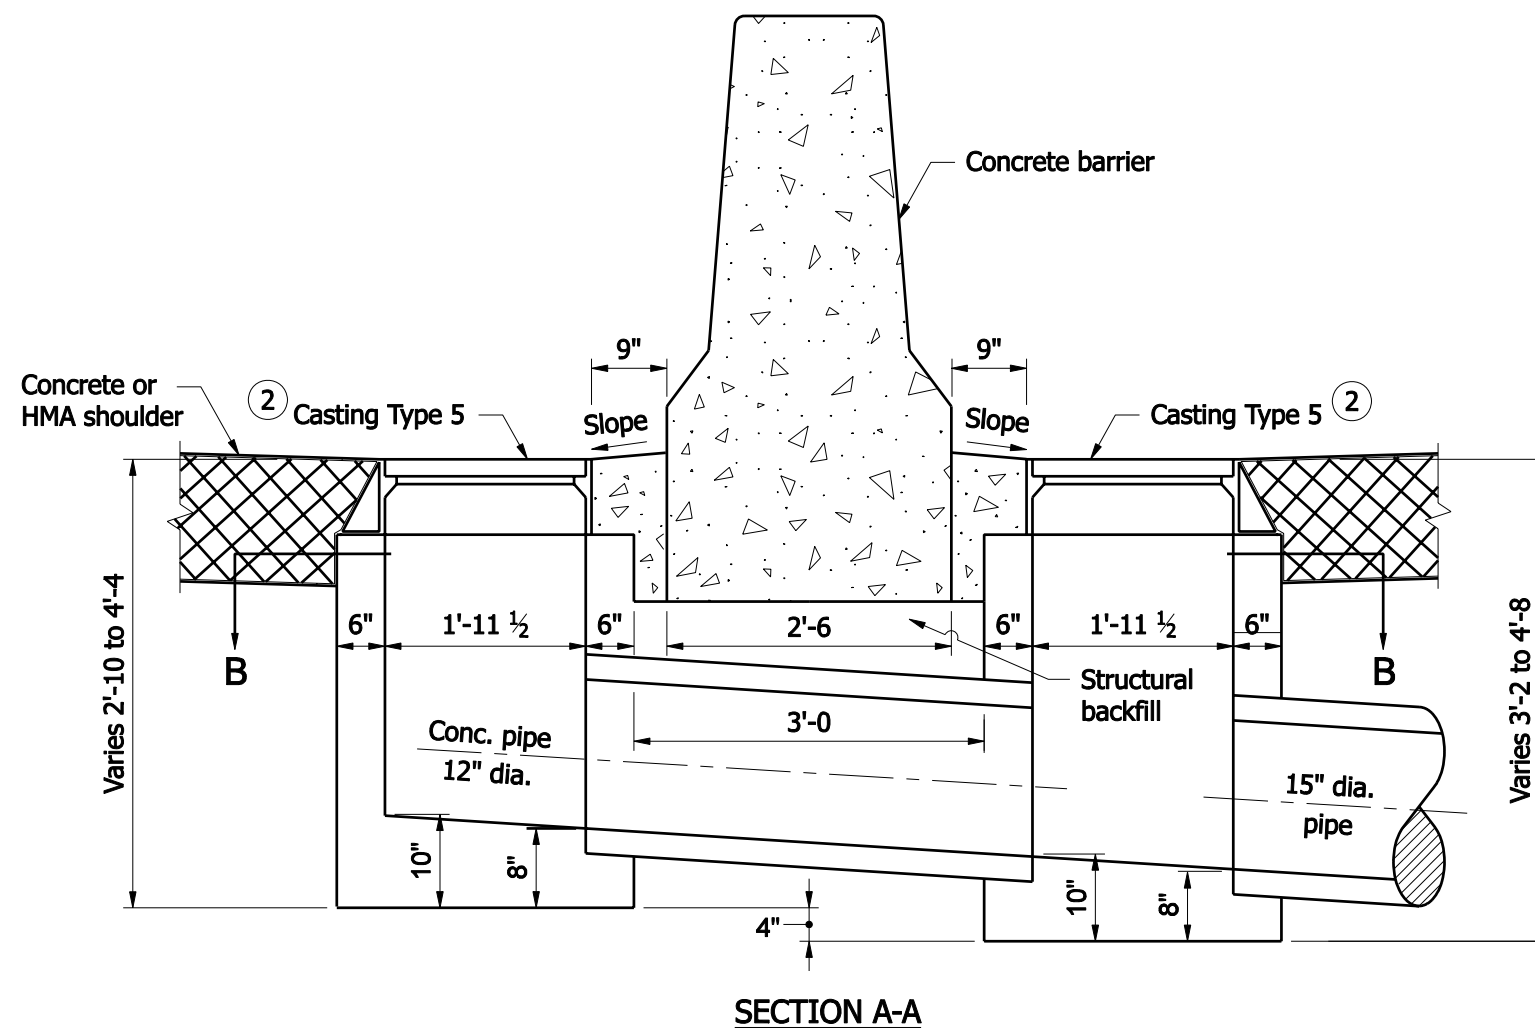


<i>/s/ Mark A. Miller</i>	<i>09/02/08</i>
CHIEF HIGHWAY ENGINEER	DATE

DESIGN STANDARDS ENGINEER

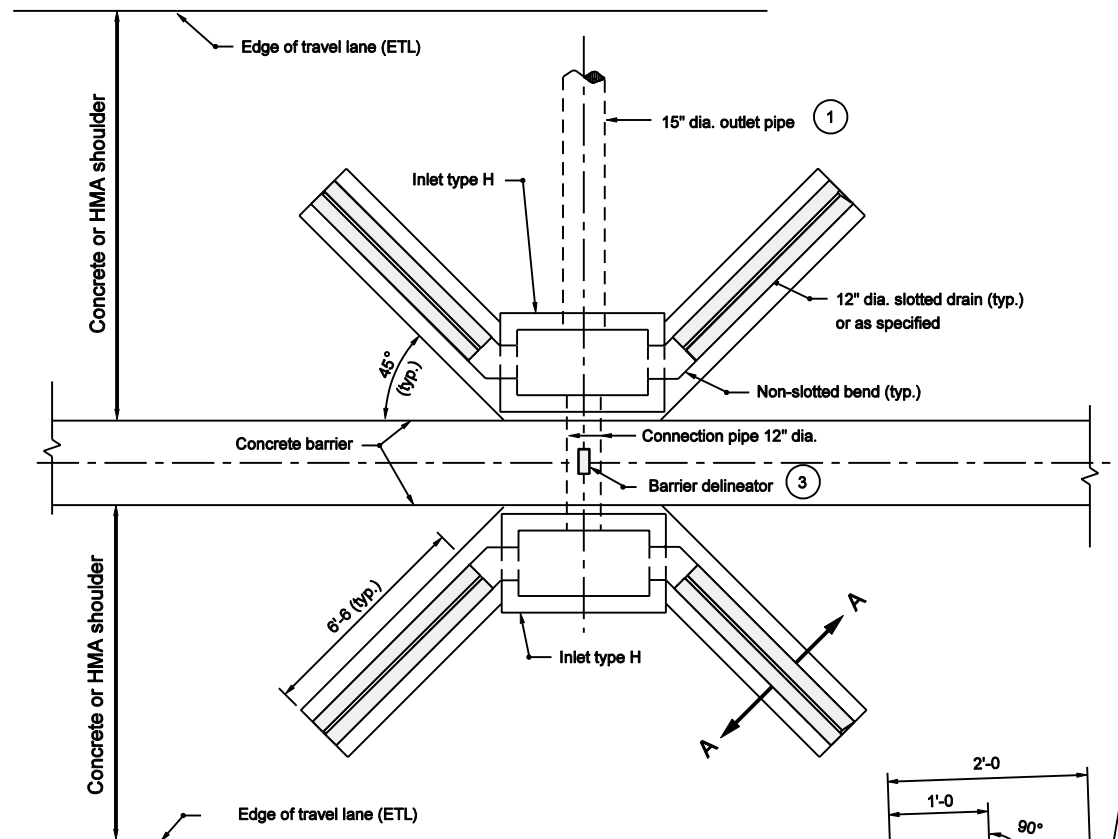

**PLAN VIEW**

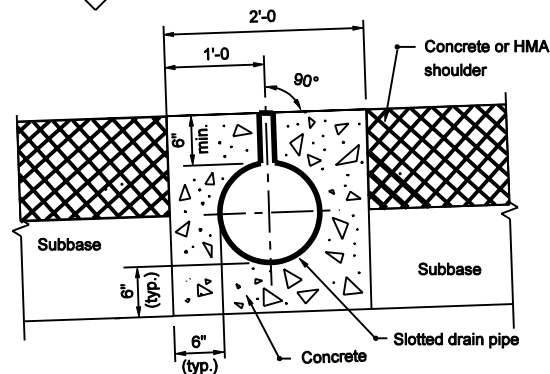

**SECTION A-A**

**NOTES :**


- ① Inlet and outlet pipe orientation to meet site conditions.
2. See Standard Drawing E 720-INST-05A for inlet Type H placement and details.
- ③ Barrier delineators provided to indicate the location of the inlets and shall be centered on top of concrete barrier at the inlets.

INDIANA DEPARTMENT OF TRANSPORTATION

**INLET TYPE H  
WITH SLOTTED DRAIN PIPE**

MARCH 2003


STANDARD DRAWING NO. E 720-INST-05B




/s/ Richard L. VanCleave 3-03-03  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-03-03  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

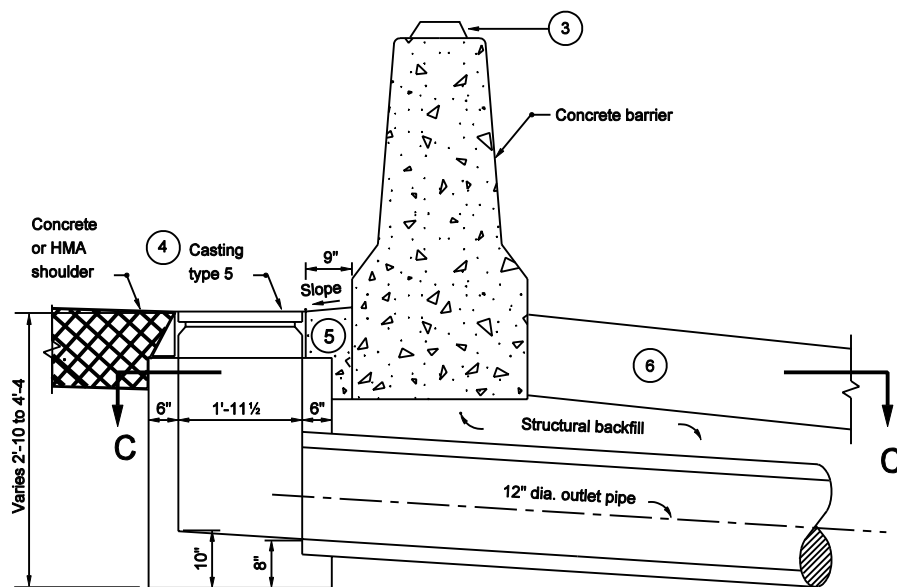

**SECTION B-B**

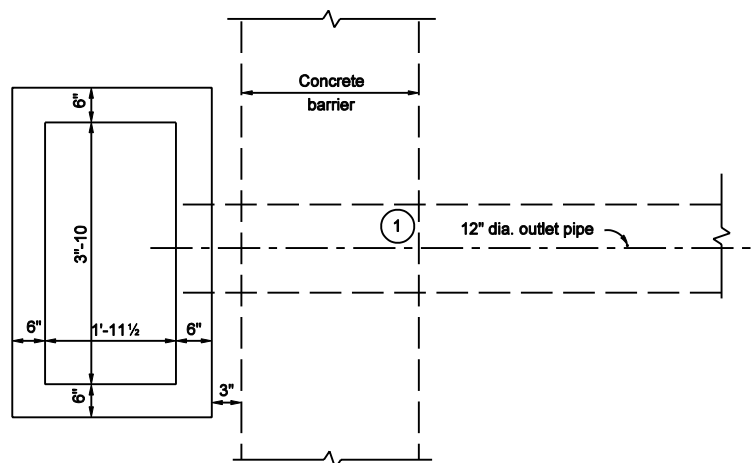

**SECTION C-C**

**NOTES :**


- ① Outlet pipe orientation to meet site conditions.
2. See Standard Drawing E 720-INST-05D for Type HA inlet with slotted drain pipe placement.
- ③ All barrier delineator assemblies shall be centered on top of concrete barrier at the inlets.
- ④ See Standard Drawing E 720-ICCA-01 to -03 for casting type 5 details.
- ⑤ Concrete shoulder or pavement between type 5 casting and concrete barrier wall.
- ⑥ Concrete, HMA or earth shoulder as appropriate at site.

INDIANA DEPARTMENT OF TRANSPORTATION

**INLET TYPE HA  
SECTION B-B**

MARCH 2003


STANDARD DRAWING NO. E 720-INST-05C



/s/ Richard L. VanCleave 3-03-03  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-03-03  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


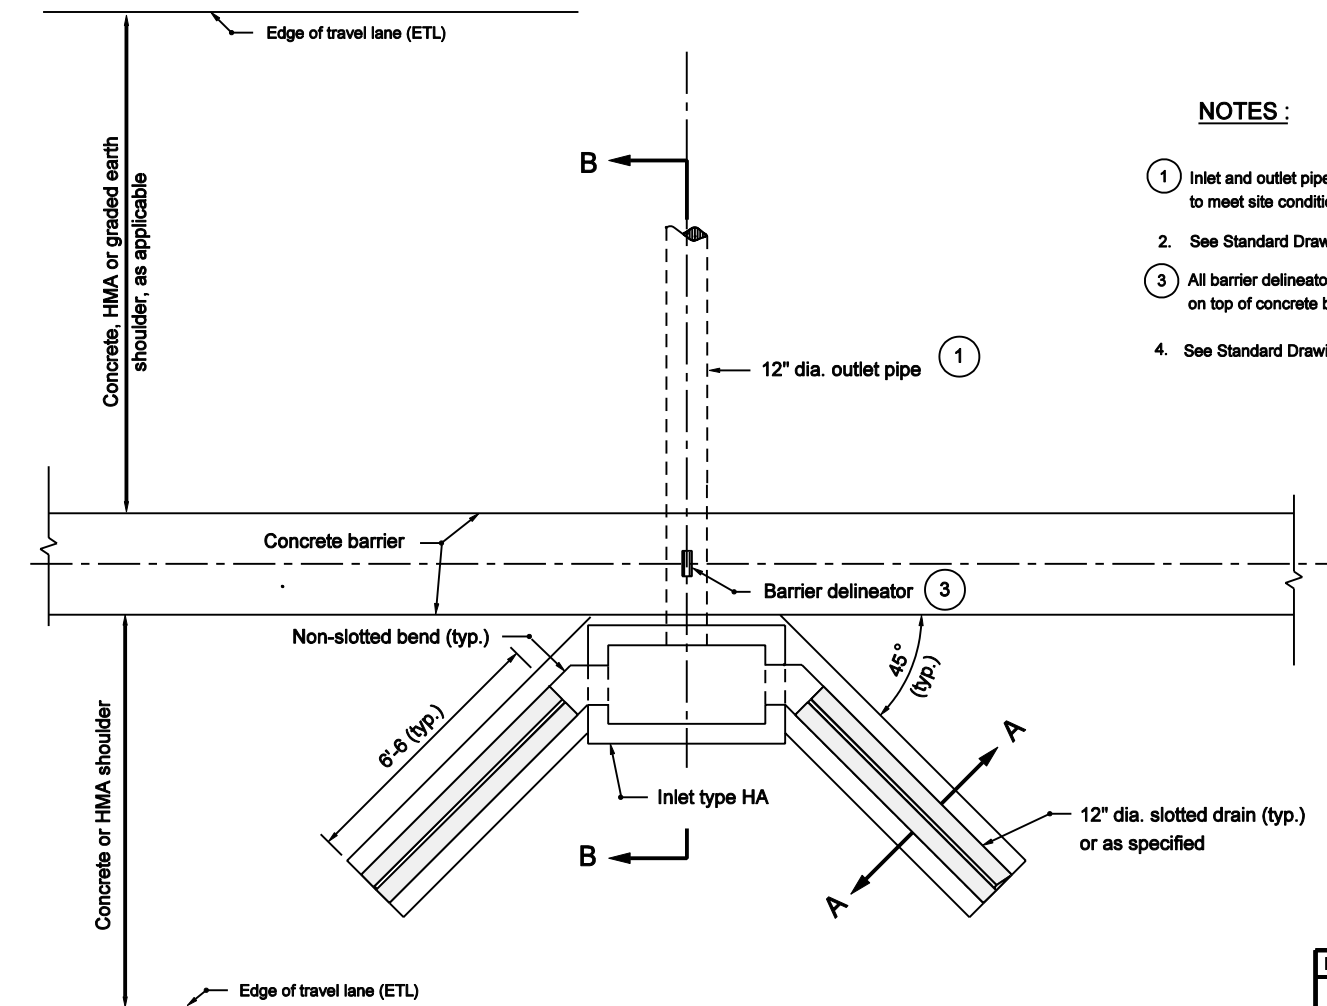


**PLAN VIEW**

**NOTES :**



- ① Inlet and outlet pipe orientation to meet site conditions.
2. See Standard Drawing E 720-INST-05B for section A-A.
- ③ All barrier delineator assemblies shall be centered on top of concrete barrier at the inlets.
4. See Standard Drawing E 720-INST-05C for section B-B.

INDIANA DEPARTMENT OF TRANSPORTATION	
INLET TYPE HA WITH SLOTTED DRAIN PIPE	
MARCH 2003	
STANDARD DRAWING NO. E 720-INST-05D	
	/s/ Richard L. VanCleave DESIGN STANDARDS ENGINEER 3-03-03 DATE
	/s/ Richard K. Smutzer CHIEF HIGHWAY ENGINEER 3-03-03 DATE

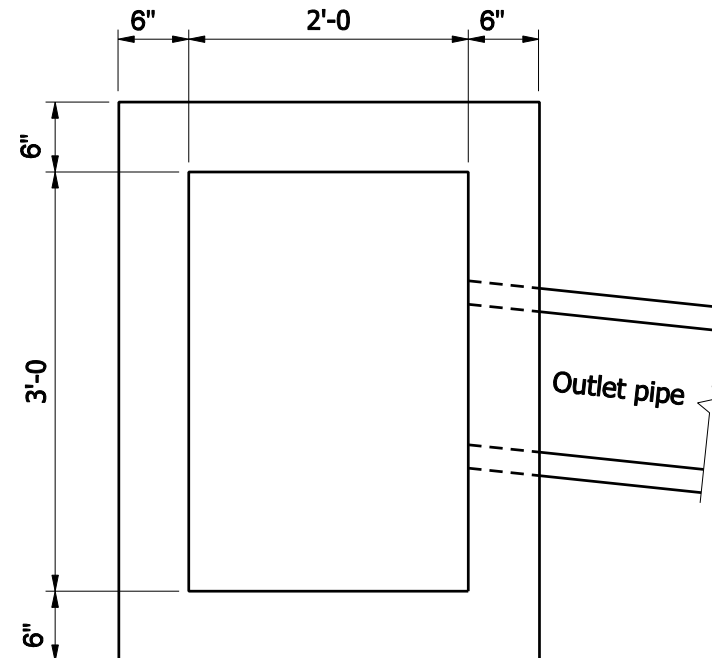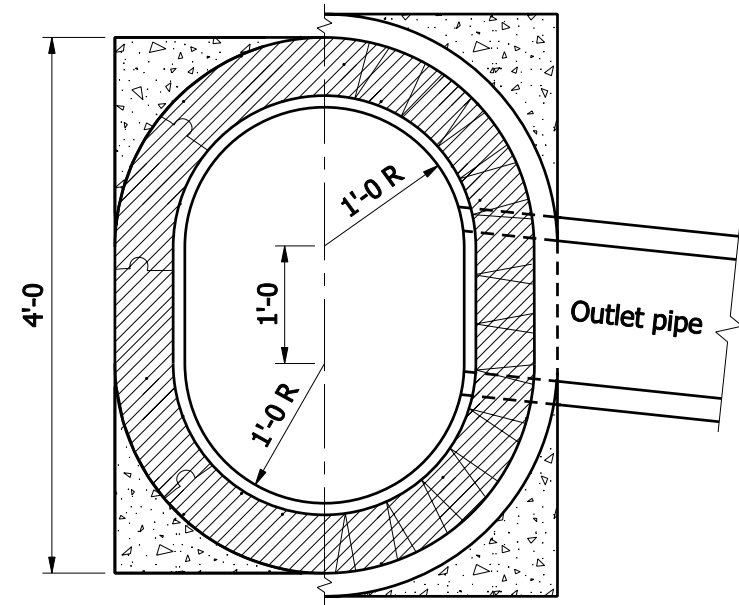

#### GENERAL NOTES

1. Brick, block, or concrete may be used.
2. T = 8" for brick structure  
T = 6" for segmental block structure
- ③ In special cases or where inlet pipe is required, A<sub>1</sub>, B<sub>1</sub>, A<sub>2</sub>, and B<sub>2</sub> shall be increased or decreased 1'-0, as directed.
- ④ 2" dia. pipe drain from bottom of curb to inlet. Aggregate to be placed around inlet end of pipe.
- ⑤ 3" dia. pipe to be kept open for drainage of subgrade or base until surface is placed.

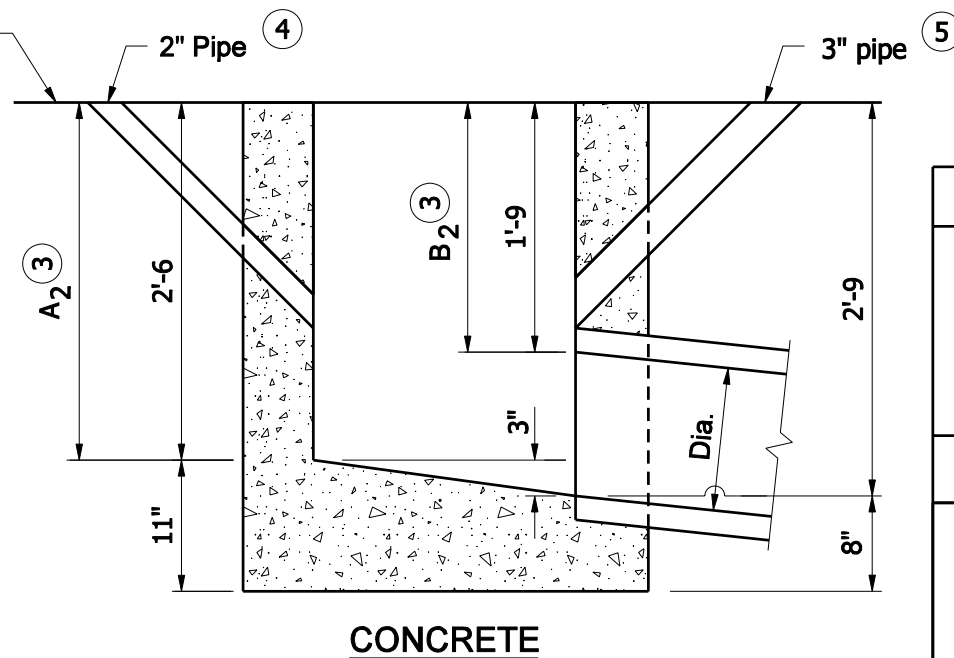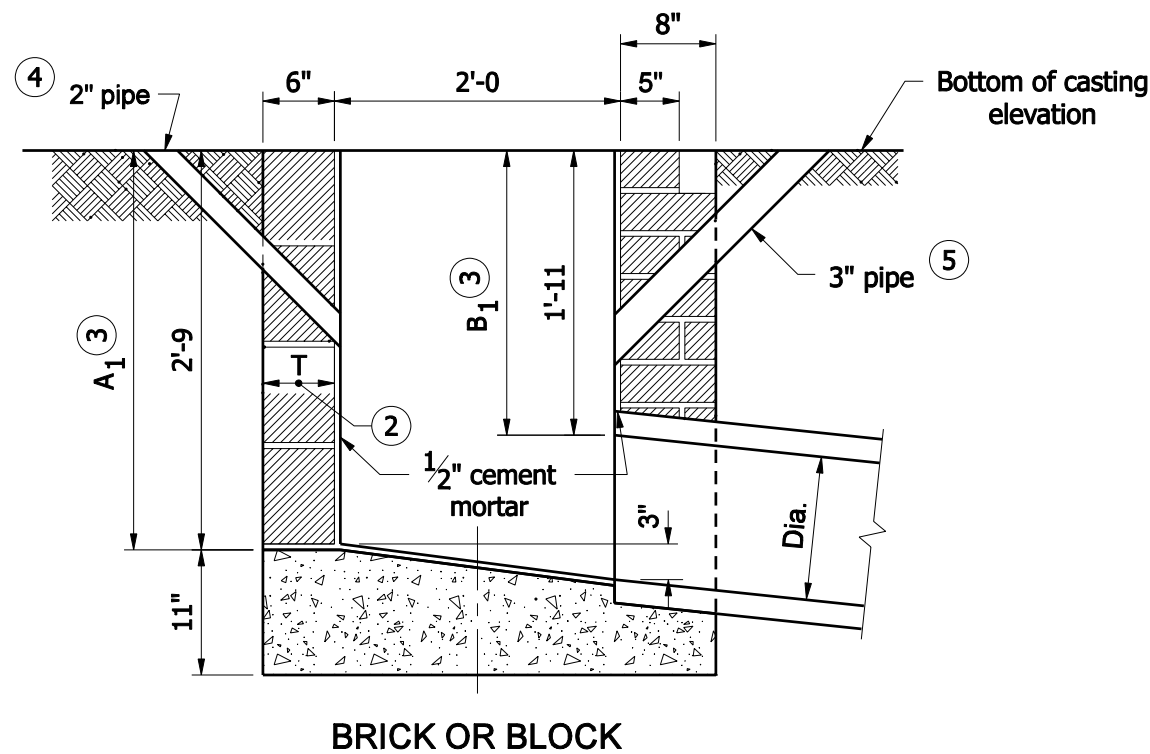


INDIANA DEPARTMENT OF TRANSPORTATION

INLET TYPE J

SEPTEMBER 2008


STANDARD DRAWING NO. E 720- INST-06

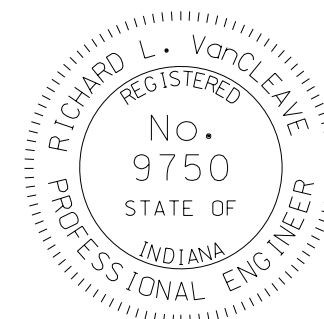

DESIGN STANDARDS ENGINEER


/s/ *Richard L. VanCleave* 09/02/08  
DESIGN STANDARDS ENGINEER DATE

/s/ *Mark A. Miller* 09/02/08  
CHIEF HIGHWAY ENGINEER DATE

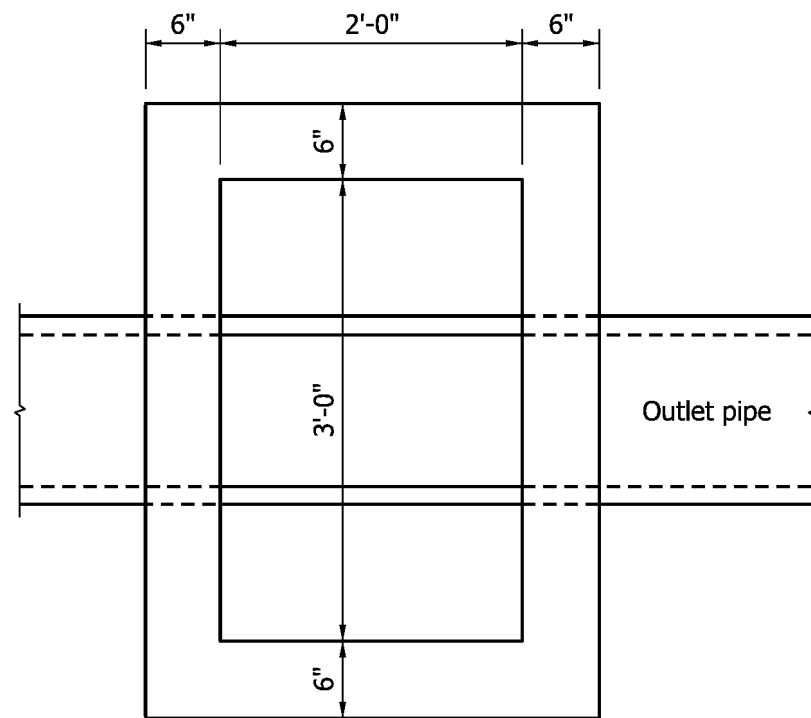


PLAN

INLET TYPE M (CONC)

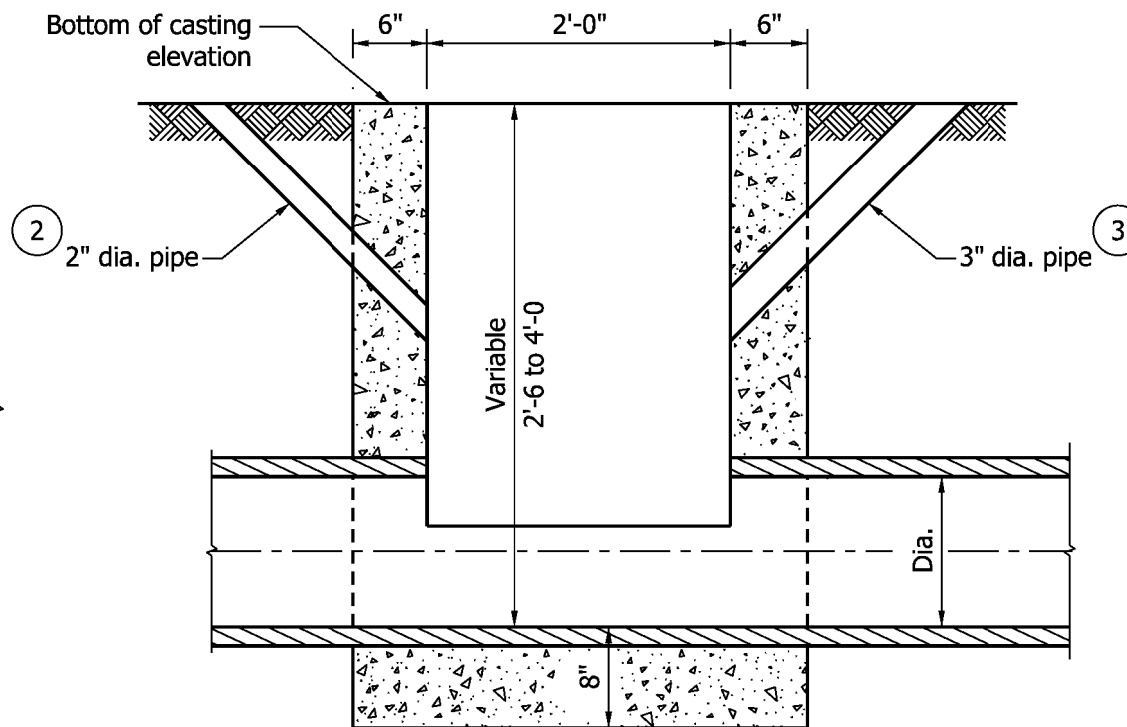


SECTION


- GENERAL NOTES**
- 1 If inlet pipe is required,  $A_1$  and  $B_1$  shall be increased or decreased 1'-0 as directed.
  - 2 2" dia. drain from bottom of curb to inlet. Aggregate to be placed around inlet end of pipe.
  - 3 3" min. dia. pipe to be kept open for drainage of subgrade or base until surface is placed.

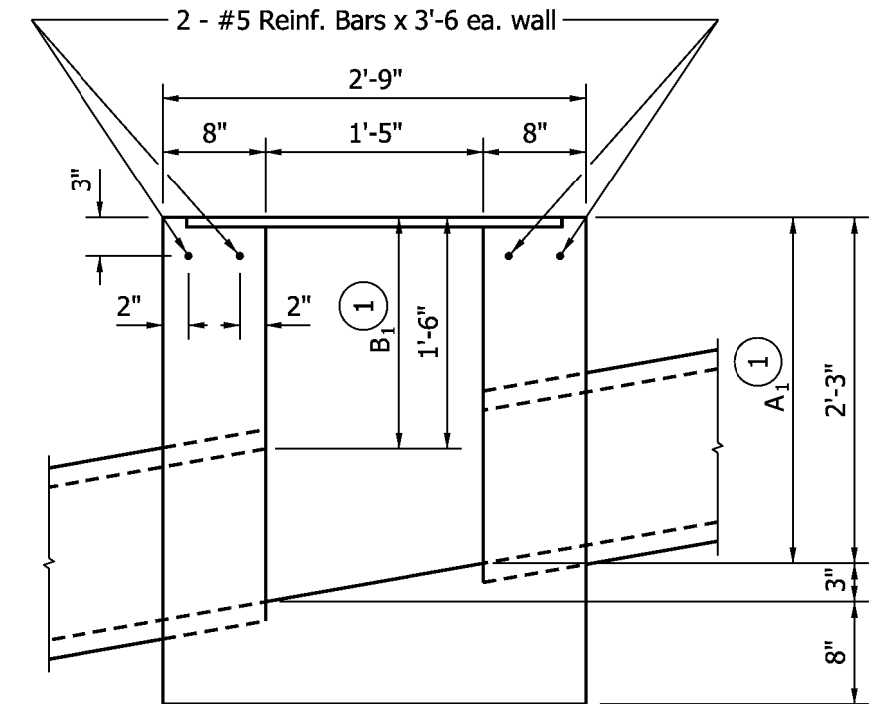

SECTION B-B

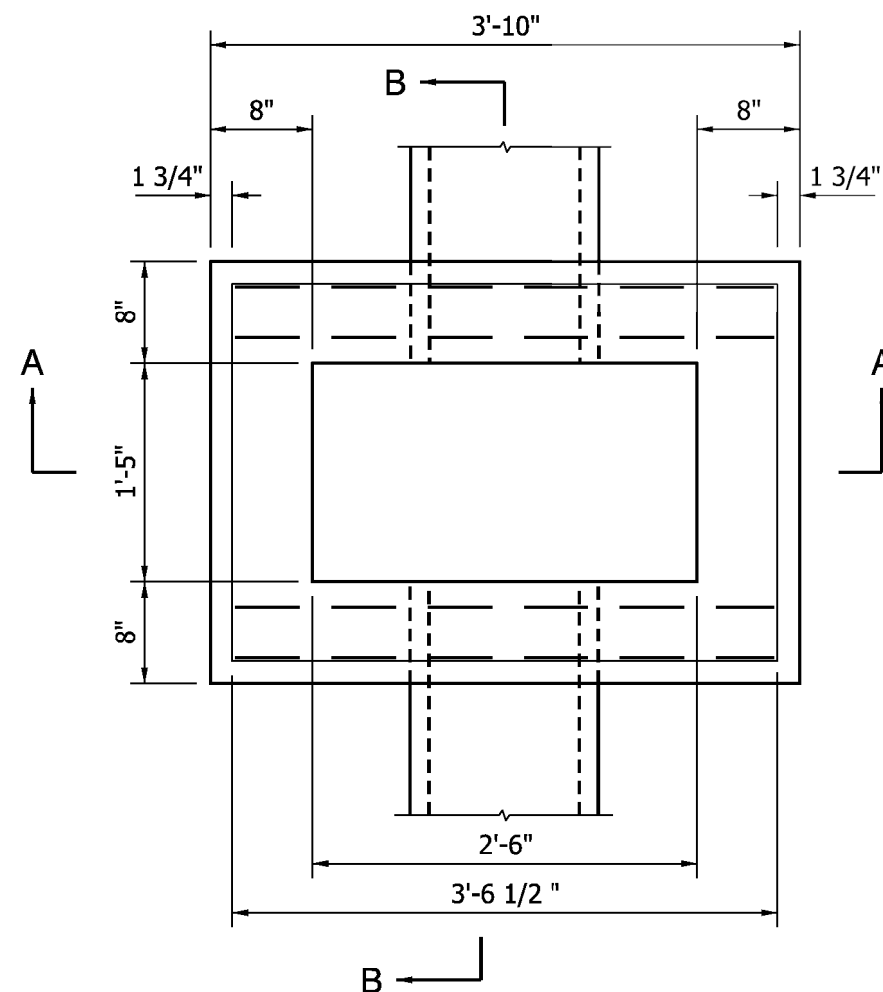

SECTION A-A  
INLET TYPE R (Conc.)

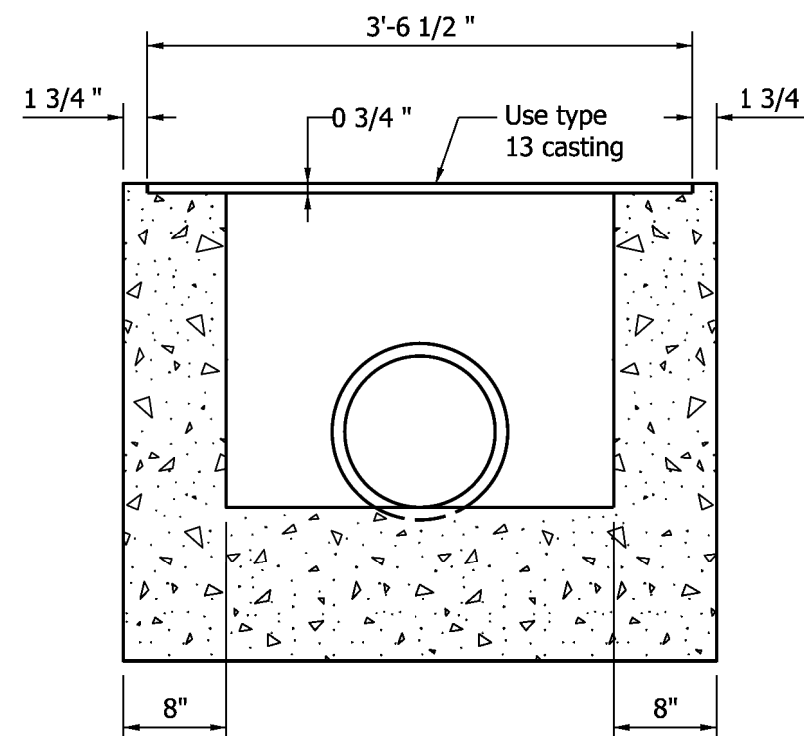


INDIANA DEPARTMENT OF TRANSPORTATION

INLET TYPE M & R

SEPTEMBER 2009



STANDARD DRAWING NO. E 720 INST-07




DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ Mark A. Miller 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

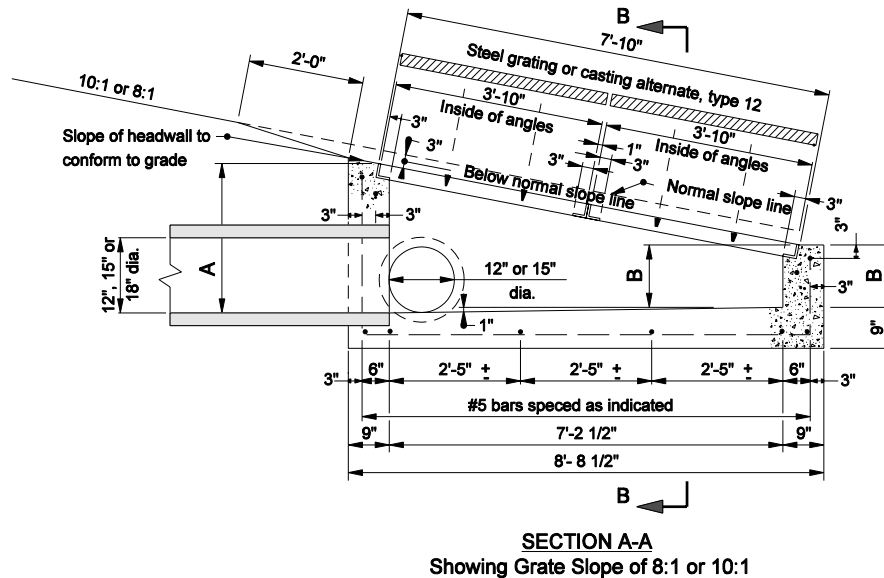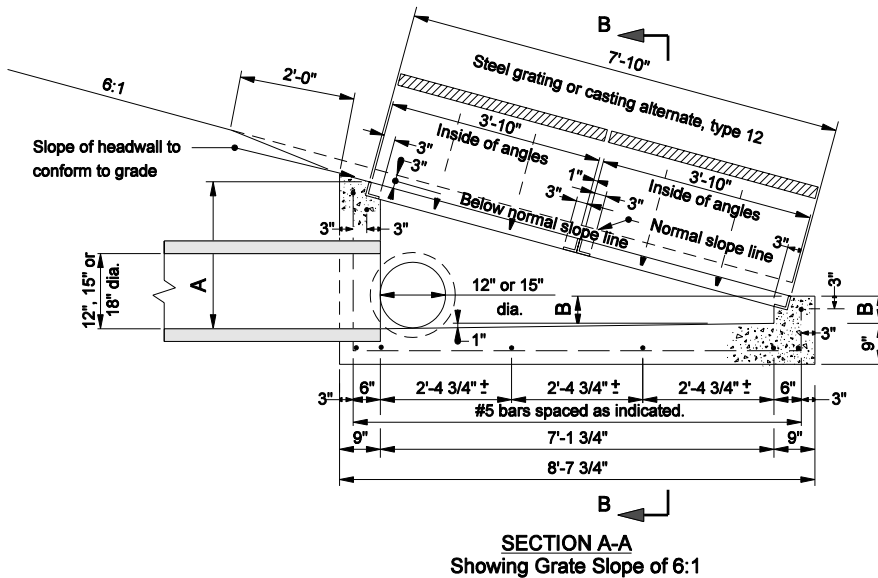

PIPE SIZE	TYPE N INLET					
	6:1		8:1		10:1	
	A	B	A	B	A	B
12"	21 1/2"	5"	21 1/2"	8 7/8"	21 1/2"	11 1/8"
15"	24 3/4"	8 1/4"	24 3/4"	12 1/8"	24 3/4"	14 3/8"
18"	28"	11 1/2"	28"	15 3/8"	28"	17 5/8"

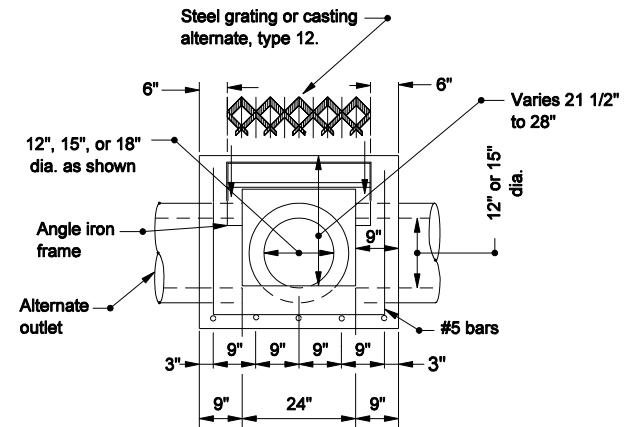


INDIANA DEPARTMENT OF TRANSPORTATION

# INLET TYPE N

SEPTEMBER 2005

STANDARD DRAWING NO. E 720-INST-08



/s/ Richard L. VanCleave	9-01-05
DESIGN STANDARDS ENGINEER	DATE
/s/ Richard K. Smutzer	9-01-05
CHIEF HIGHWAY ENGINEER	DATE

DESIGN STANDARDS ENGINEER




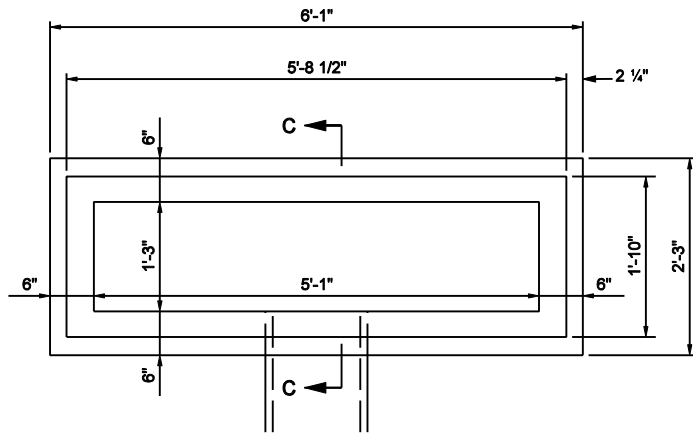


**NOTE:**


1. See Standard Drawing E 720-ICCA-10 for steel grating Type 12 or E 720-ICCA-11 for castion Type 12 Alternate.




INDIANA DEPARTMENT OF TRANSPORTATION	
INLET TYPE P	
SEPTEMBER 2005	
STANDARD DRAWING NO. E 720-INST-09	
	<i>/s/ Richard L. VanCleave</i> 9-01-05 <b>DESIGN STANDARDS ENGINEER</b> <b>DATE</b>
	<i>/s/ Richard K. Smutzer</i> 9-01-05 <b>CHIEF HIGHWAY ENGINEER</b> <b>DATE</b>
<b>DESIGN STANDARDS ENGINEER</b>	




PLAN

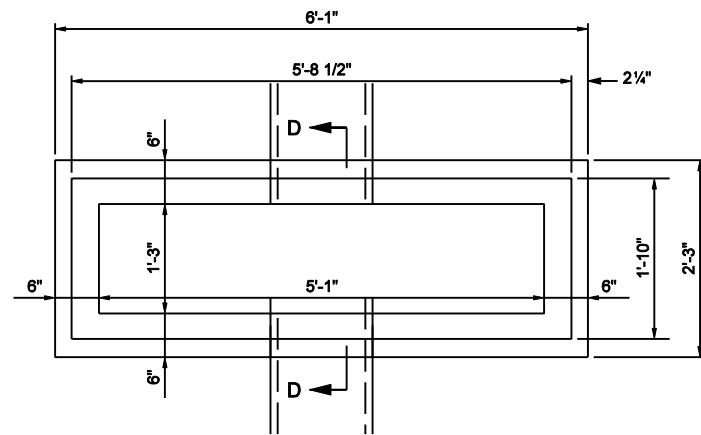

PLAN



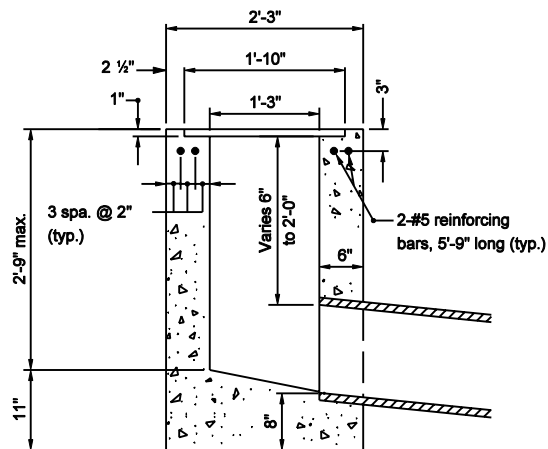


SECTION C-C  
TYPE S

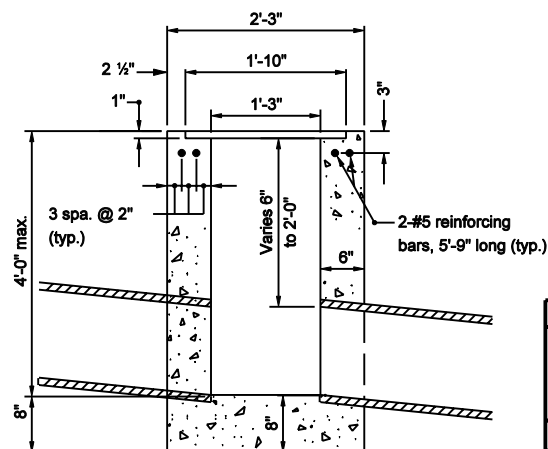

SECTION D-D  
TYPE T

INDIANA DEPARTMENT OF TRANSPORTATION	
INLETS TYPE S AND T	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 720-INST-10	
	/s/ Richard L. VanCleave 9-02-03 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard K. Smutzer 9-02-03 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	

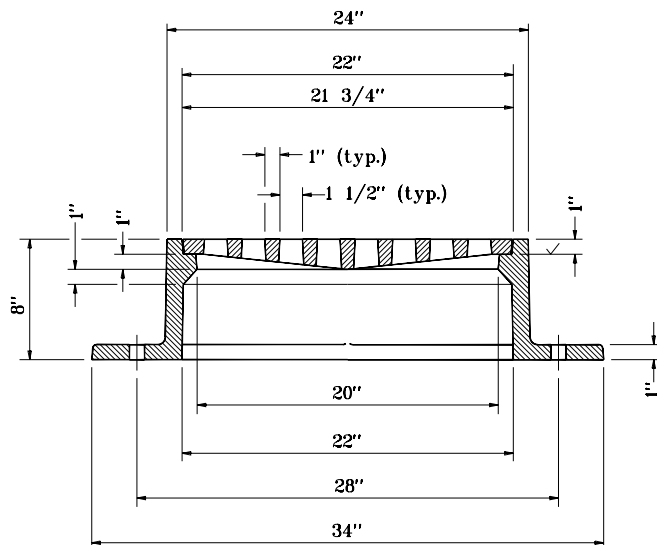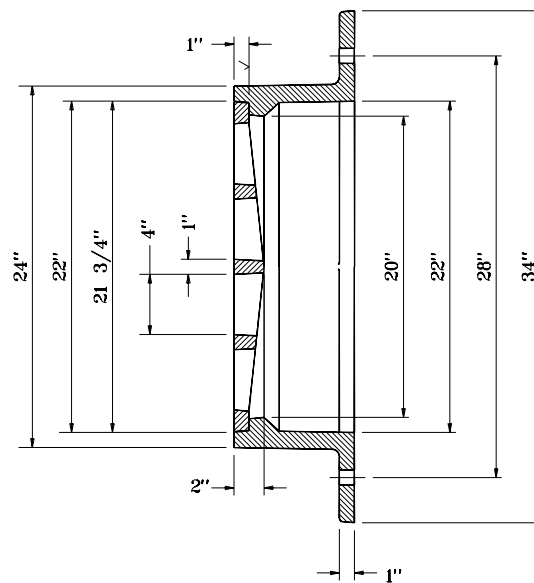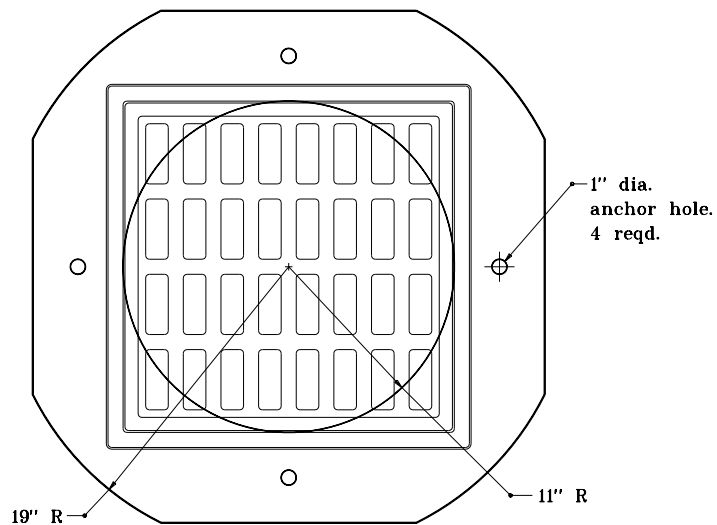


INDIANA DEPARTMENT OF TRANSPORTATION

# FLAT TOP GRATE CASTING

TYPE 2

SEPTEMBER 1998

STANDARD DRAWING NO. E 720-MHCA-01







DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE



/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-01-98

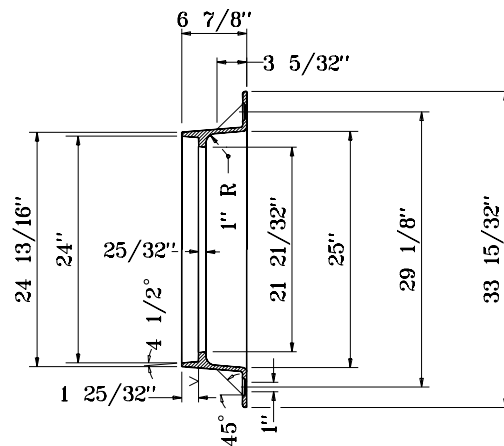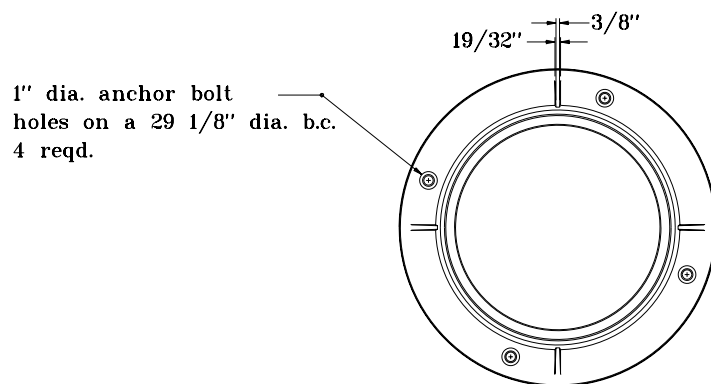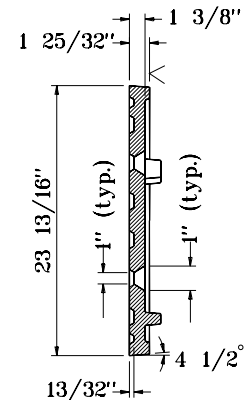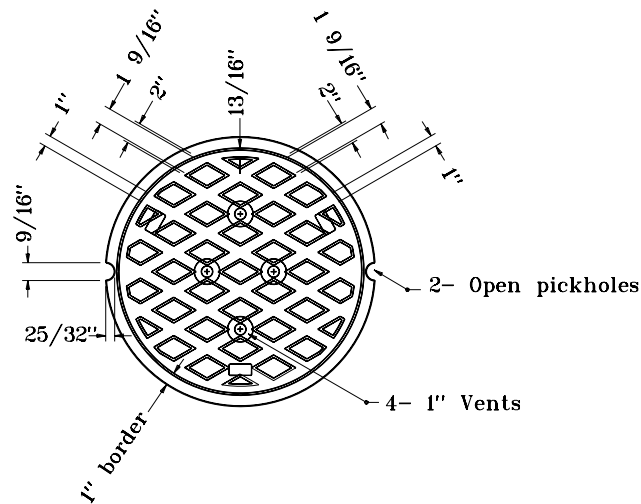


INDIANA DEPARTMENT OF TRANSPORTATION	
MANHOLE CASTING	
TYPE 4 RING AND COVER	
SEPTEMBER 1998	
STANDARD DRAWING NOE 720-MHCA-02	
	DETAILS PLACED IN THIS FORMAT 11-15-99 /s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE ORIGINALLY APPROVED 9-01-98

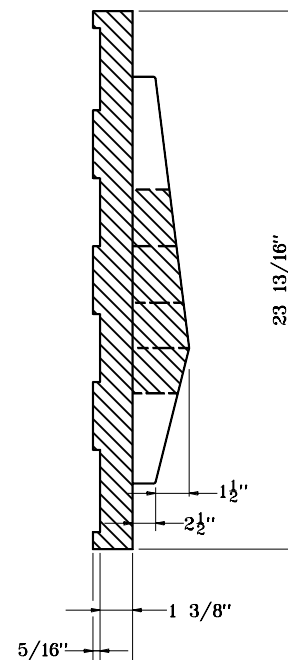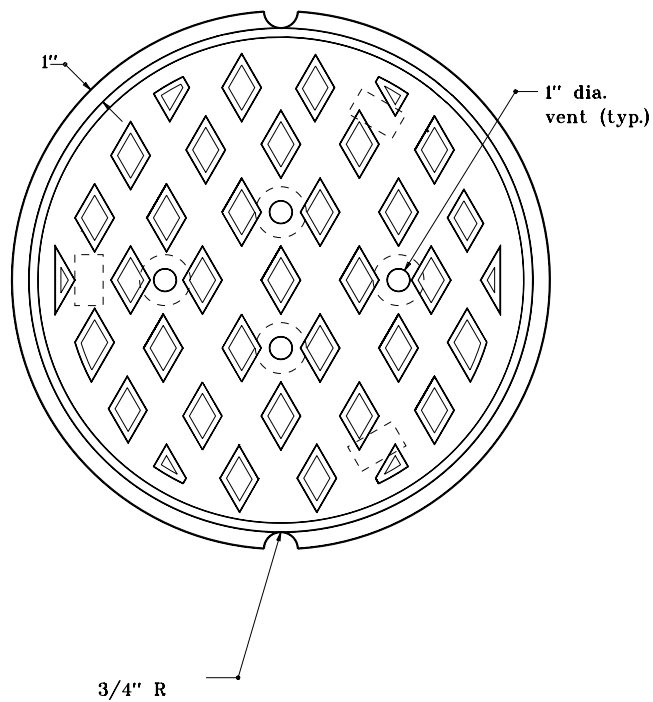

INDIANA DEPARTMENT OF TRANSPORTATION


**MANHOLE CASTING TYPE 4  
ALTERNATE COVER**  
SEPTEMBER 1998

STANDARD DRAWING NO.E 720-MHCA-03




DETAILS PLACED IN THIS FORMAT		11-15-99
/s/ Anthony L. Uremovich	11-15-99	
DESIGN STANDARDS ENGINEER	DATE	
/s/ Firooz Zandi	11-15-99	
CHIEF HIGHWAY ENGINEER	DATE	
ORIGINALLY APPROVED		9-01-98

DESIGN STANDARDS ENGINEER

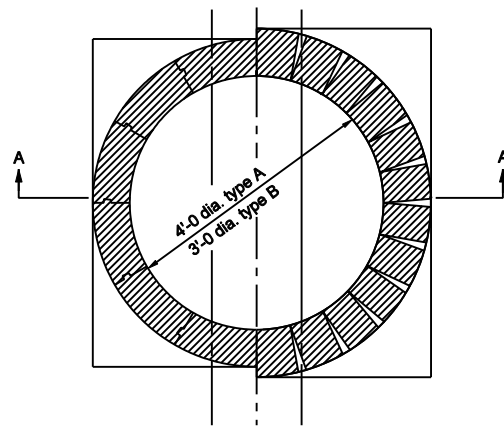

SECTION B-B

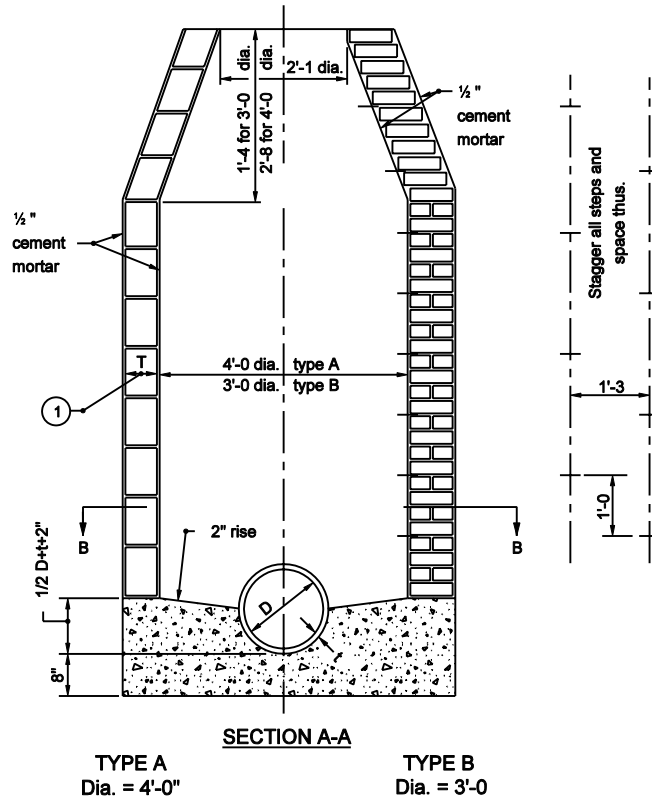

SECTION A-A

TYPE A  
Dia. = 4'-0"

TYPE B  
Dia. = 3'-0"

# NOTES

- ① T = 8" for brick structure  
T = 6" for segmental block structure

INDIANA DEPARTMENT OF TRANSPORTATION	
MANHOLES TYPE A AND B	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 720-MHST-01	
	/s/ Richard L. VanCleave DESIGN STANDARDS ENGINEER
	9-02-03 DATE
	/s/ Richard K. Smutzer CHIEF HIGHWAY ENGINEER
	9-02-03 DATE
DESIGN STANDARDS ENGINEER	

## GENERAL NOTES

- 1


INDIANA DEPARTMENT OF TRANSPORTATION

**MANHOLE TYPE C**

**SEPTEMBER 1997**

STANDARD DRAWING NO. E 720-MHST-02

	DETAILS PLACED IN THIS FORMAT 11-15-99
---	--




s/Anthony L. Uremovich 11-15-93  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi      11-15-99  
CHIEF HIGHWAY ENGINEER      DATE

ORIGINALLY APPROVED 9-02-97

# **NOTES**

- Drop pipe may be used with manhole type D, E, F, or G. Such manhole shall be referred to as drop manhole type D, E, F, or G.

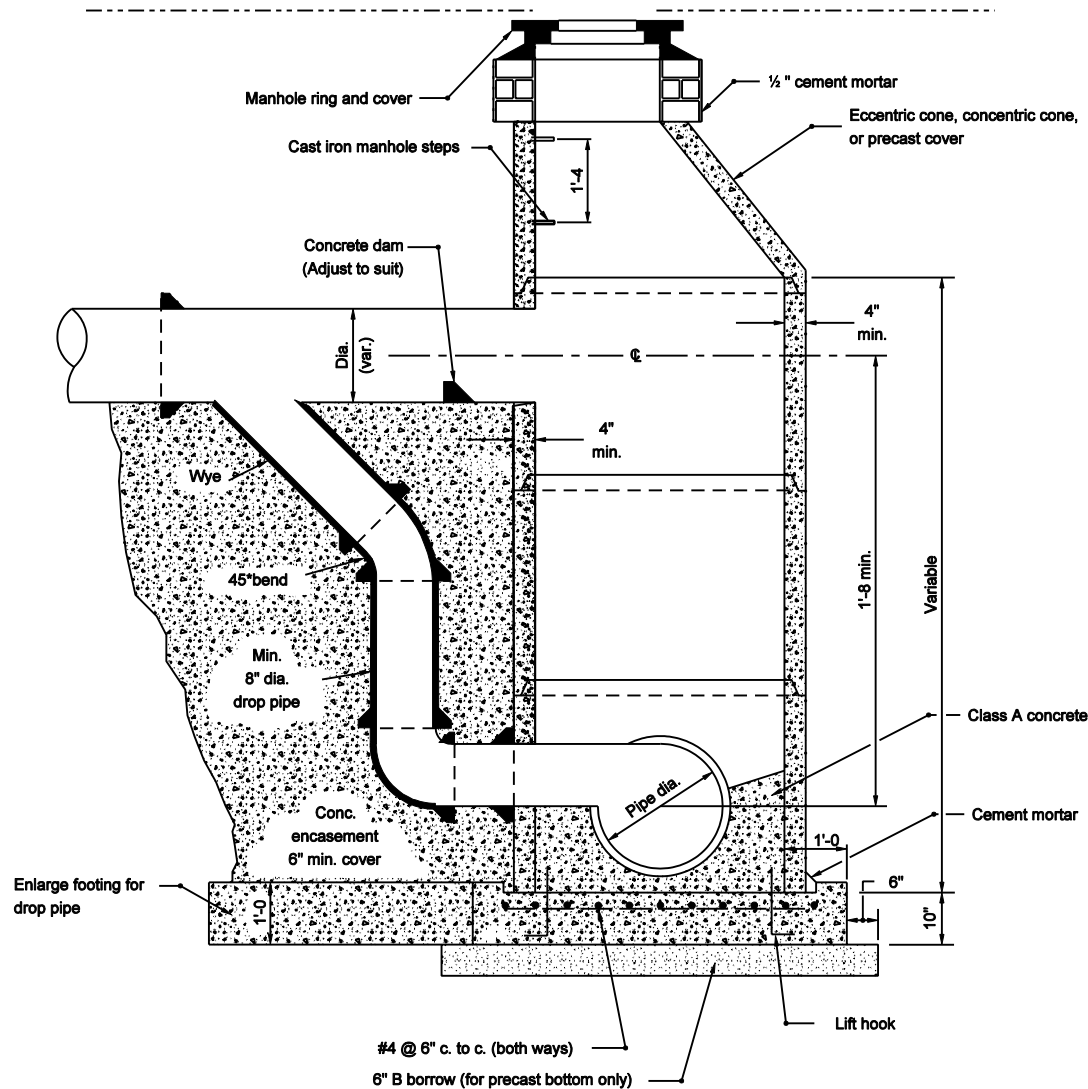

## **SECTION**


INDIANA DEPARTMENT OF TRANSPORTATION	
DROP MANHOLE TYPE C	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 720-MHST-03	
	/s/ Richard L. VanCleave 9-02-03 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard K. Smutzer 9-02-03 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	



1/2"	1/2"	1/2"
cement mortar	cement mortar	cement mortar
1/2"	1/2"	1/2"
cement mortar	cement mortar	cement mortar



1. Manhole type H, J, K, L, M, or N, may be substituted for manhole type C, D, E, or F for comparable pipe sizes. See Standard Drawing E 720-MHST-05 for manholes type H, J, K, L, M, and N details.
- ② 2. For eccentric and concentric cone heights see Cone Heights Table on Standard Drawing 720-MHST-08.
3. See Standard Drawing 720-MHST-10 for Reinforcing Steel for Manholes table.

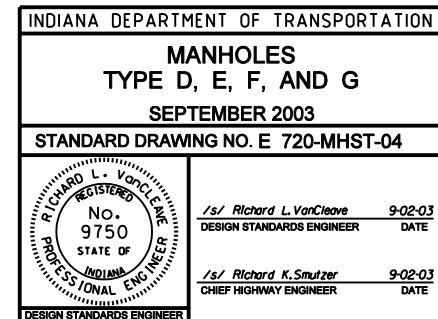


# MANHOLE PIPE SIZES

Type	G (in.)	F (ft. in.)	Maximum Pipe Size Rt. $\angle$ to Mainline (in.)	Maximum Pipe Size for Mainline (in.)
H	24 to 36		30	36
J	24 to 36	5'-0	30	36
K	36 to 48	6'-0	36	48
L	48 to 54	8'-0	48	54
M	54 to 72	8'-6	66	72
N	72 to 84	9'-0	72	84

## NOTES

- Drop pipe may be used with manholes Type H, J, K, L, M, or N. Such manhole shall be referred to as drop manholes type H, J, K, L, M, or N. For details of construction see Standard Drawing E 720-MHST-03.
- See Standard Drawing E 720-MHST-06 for Details A, B, and C.
- Manholes type C, D, E, or F. may be substituted for manholes type H, J, K, L, M, or N. for comparable pipe sizes. See Standard Drawings E 720-MHST-02 and -04 for manholes type D, E, F, and G details..

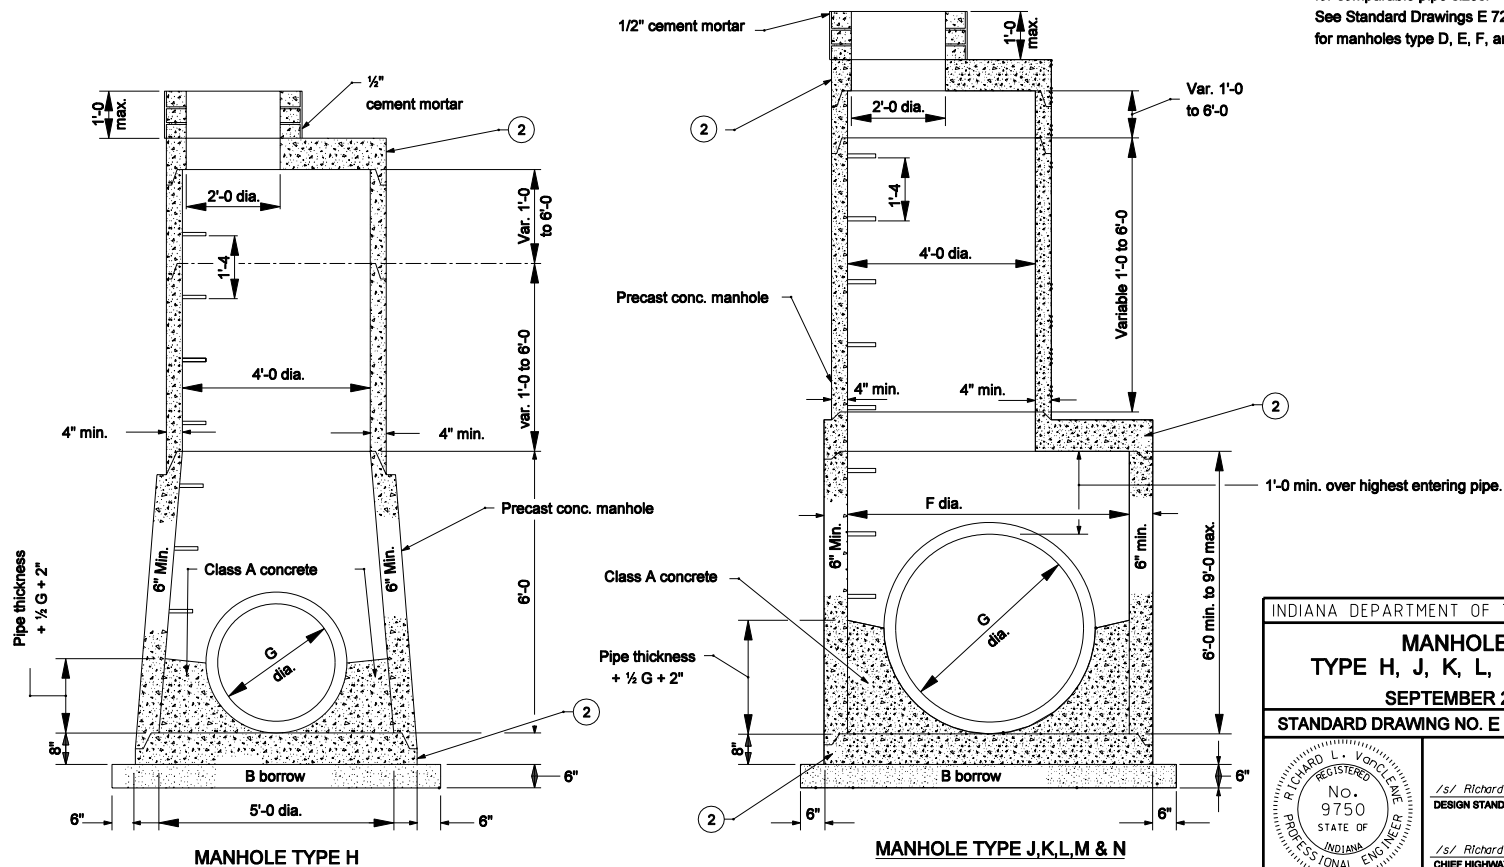


INDIANA DEPARTMENT OF TRANSPORTATION

## MANHOLES TYPE H, J, K, L, M, AND N


SEPTEMBER 2006

STANDARD DRAWING NO. E 720-MHST-05



/s/ Richard L. VanCleave 9-01-06  
DESIGN STANDARDS ENGINEER DATE


/s/ Richard K. Smutzer 9-01-06  
CHIEF HIGHWAY ENGINEER DATE

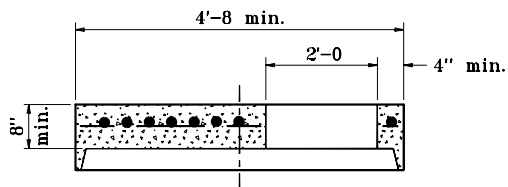

Min. steel area  $0.12 \text{ in}^2 / \text{ft}$  of width in both directions.


Opening additionally reinforced with equivalent of  $0.20 \text{ in}^2 / \text{ft} @ 90^\circ$

Straight rods, min length = dia. of opening plus 2".

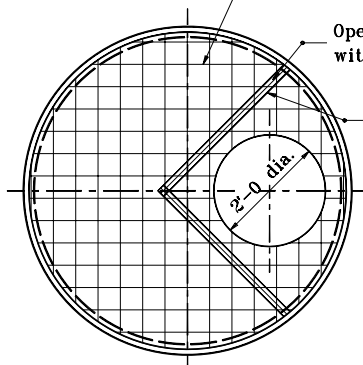

**DETAIL A**


**COVER CAP FOR PRECAST CONCRETE MANHOLE SECTION**

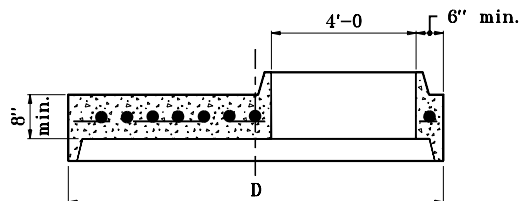

Min. steel area  $0.12 \text{ in}^2 / \text{ft}$  of width in both directions.


Opening additionally reinforced with equivalent of  $0.20 \text{ in}^2 / \text{ft} @ 90^\circ$

Straight rods, min length = dia. of opening plus 2".

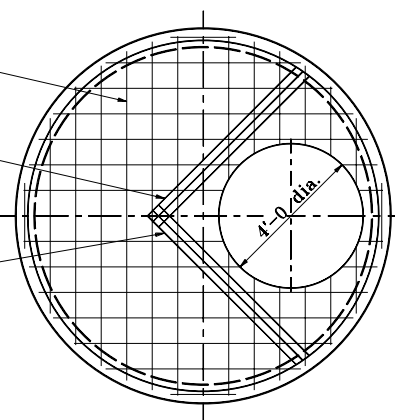


**DETAIL B**

**REDUCER CAP FOR PRECAST MANHOLE SECTION (5'-0 to 9'-0 DIA.)**

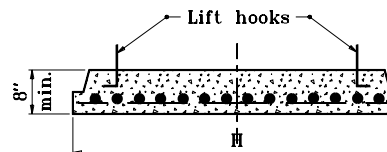

Min. steel area  $0.12 \text{ in}^2 / \text{ft}$  of width in both directions.  
Rebar or wire mesh equivalent.

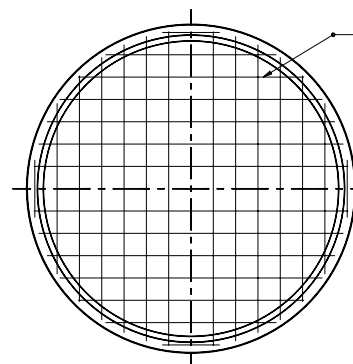





**DETAIL C**

**BASE FOR PRECAST CONCRETE MANHOLE SECTIONS (5'-0 to 9'-0 DIA.)**


Section Dia.	H
5'-0	6'-0
6'-0	7'-2
8'-0	9'-6
8'-6	10'-0
9'-0	10'-8

Section Dia.	D
5'-0	6'-0
6'-0	7'-2
8'-0	9'-6
8'-6	10'-0
9'-0	10'-8


INDIANA DEPARTMENT OF TRANSPORTATION	
<b>PRECAST CONCRETE MANHOLE SECTIONS</b>	
APRIL 1995	
STANDARD DRAWING NO. <b>E 720-MHST-06</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	DESIGN STANDARDS ENGINEER ORIGINALLY APPROVED 4-03-95

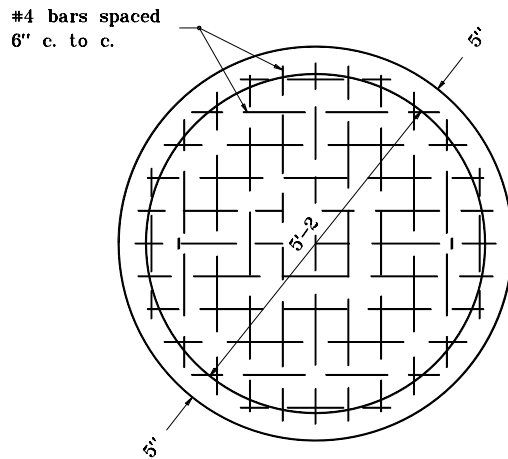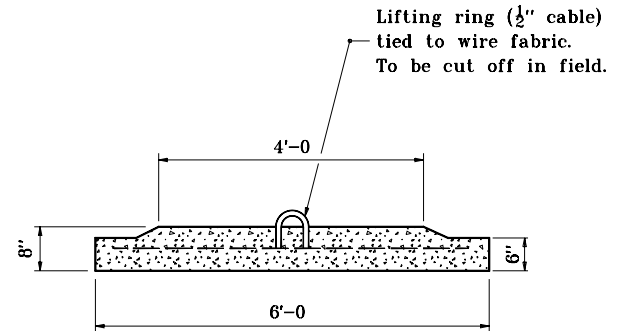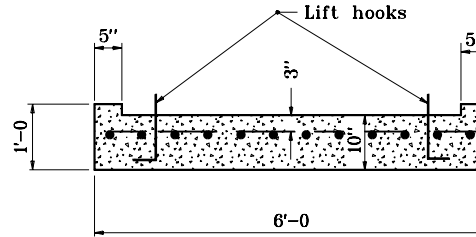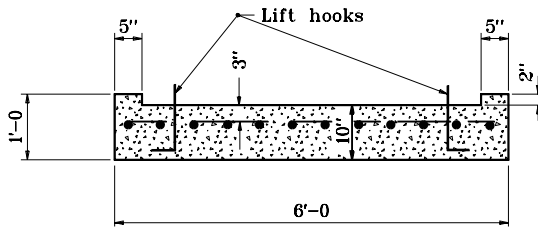

**ROUND**

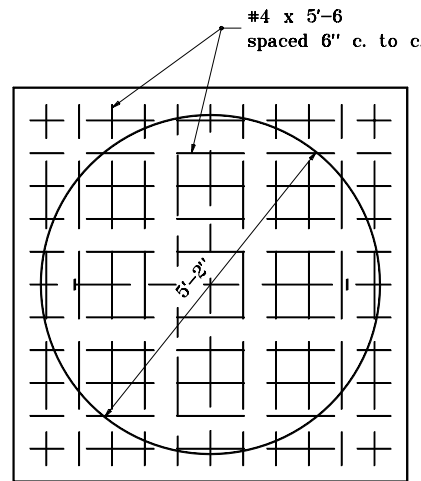

**SQUARE**

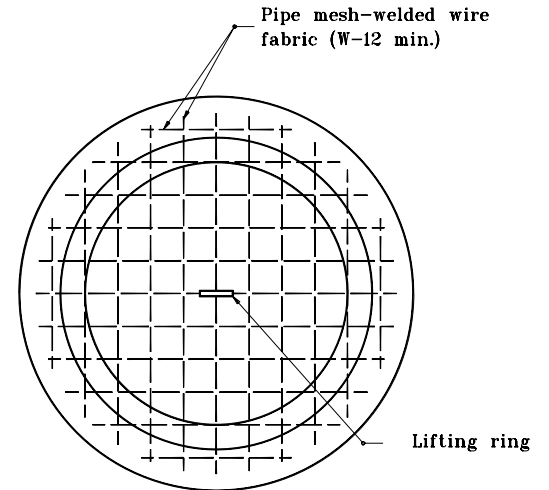


**ROUND ALTERNATE**

INDIANA DEPARTMENT OF TRANSPORTATION


**PRECAST MANHOLE  
BOTTOM SECTION  
SEPTEMBER 1997**

**STANDARD DRAWING NO. E 720-MHST-07**




DETAILS PLACED IN THIS FORMAT		11-15-99
/s/ Anthony L. Uremovich	11-15-99	DATE
DESIGN STANDARDS ENGINEER		
/s/ Firooz Zandi	11-15-99	DATE
CHIEF HIGHWAY ENGINEER		
ORIGINALLY APPROVED		9-01-97


CONE HEIGHTS	
ECCENTRIC	CONCENTRIC
2'-6	2'-6
3'-0	3'-0
3'-2	3'-2
3'-6	4'-0

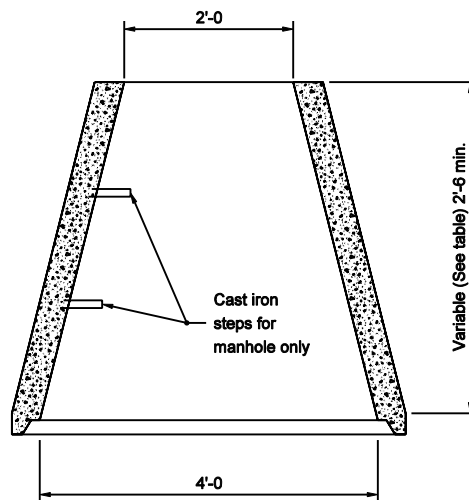


CONCENTRIC CONE



L BARS



T BARS




H BARS

# NOTES

1. The concentric concrete section will not be permitted for manholes which are under the jurisdiction of the Indianapolis Sanitary District.

INDIANA DEPARTMENT OF TRANSPORTATION	
MANHOLE BARS AND CONCENTRIC CONE	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 720-MHST-08	
	/s/ Richard L. VanCleave DESIGN STANDARDS ENGINEER 9-02-03 DATE
	/s/ Richard K. Smutzer CHIEF HIGHWAY ENGINEER 9-02-03 DATE
DESIGN STANDARDS ENGINEER	

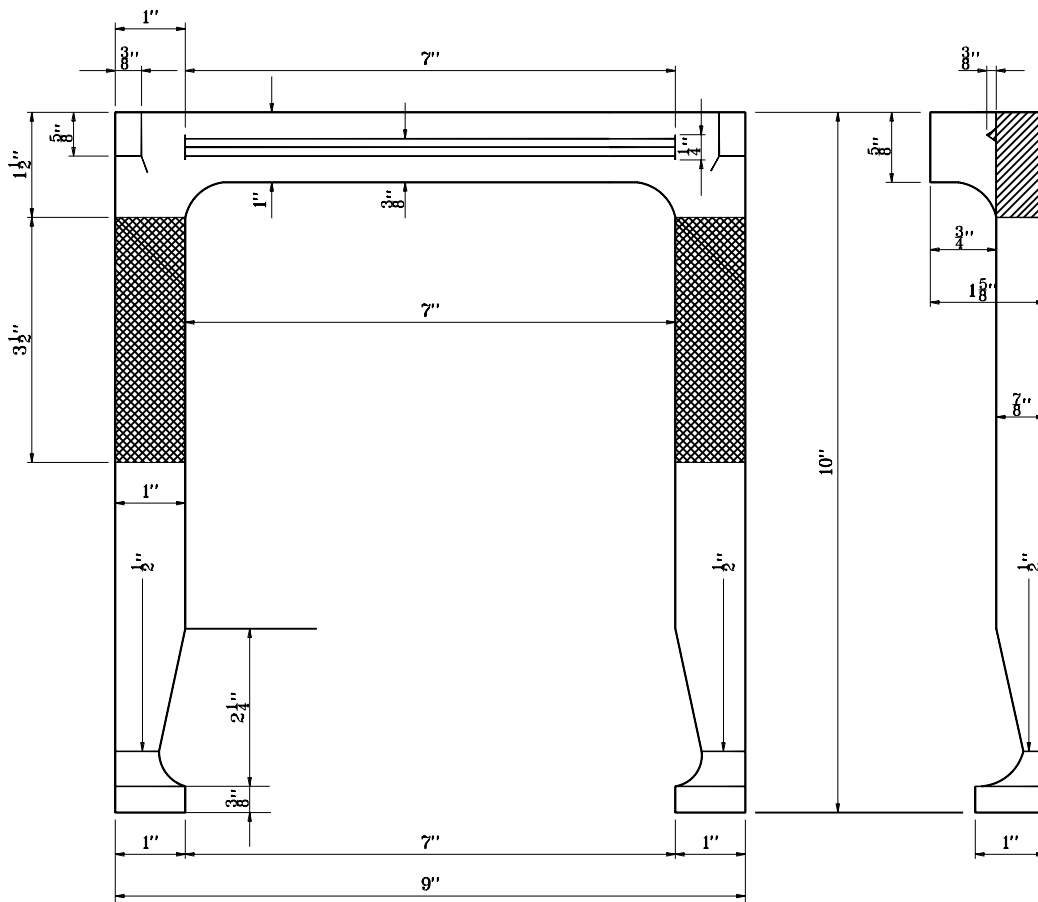

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>MANHOLE STEP</b>	
APRIL 1995	
STANDARD DRAWING NO. <b>E 720-MHST-09</b>	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ <i>Anthony L. Uremovich</i> 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ <i>Firooz Zandi</i> 11-15-99 CHIEF HIGHWAY ENGINEER DATE
	ORIGINALLY APPROVED 4-03-95


REINFORCING STEEL FOR MANHOLES																
	Manhole Type D				Manhole Type E				Manhole Type F				Manhole Type G			
Bars	Length	No.	Spa.	Size	Length	No.	Spa.	Size	Length	No.	Spa.	Size	Length	No.	Spa.	Size
B	8'-0	10	9"	#5	8'-0	12	9"	#5	8'-0	16	9"	#5	8'-0	19	9"	#5
B <sub>1</sub>	6'-9	12	9"	#5	8'-6	12	9"	#5	11'-0	12	9"	#5	13'-3	12	9"	#5
E	7'-3	3	2"	#5	7'-3	3	2"	#5	7'-3	3	2"	#5	7'-3	3	2"	#5
H	8'-6	22	6"	#5	8'-6	33	6"	#5	8'-6	41	6"	#5	8'-6	58	6"	#5
L	3'-0	16	12"	#5	3'-0	16	12"	#5	3'-0	16	12"	#5	3'-0	16	12"	#5
T	1'-3	16	6"	#5	3'-0	16	6"	#5	5'-3	16	6"	#5	7'-6	16	6"	#5
V	5'-0	16	6"	#5	6'-9	16	6"	#5	9'-0	16	6"	#5	11'-6	16	6"	#5
V <sub>1</sub>	4'-9	16	6"	#5	6'-6	16	6"	#5	8'-9	16	6"	#5	11'-3	16	6"	#5

INDIANA DEPARTMENT OF TRANSPORTATION

TABLE OF REINFORCING STEEL  
FOR MANHOLES

SEPTEMBER 1997

STANDARD DRAWING NO.E 720-MHST-10



DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE



/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-02-97

### GENERAL NOTES

- ① See Standard Drawing E 720-SDCP-02 for casting details.
- ② See Standard Drawing E 720-SDCP-03 for casting details.
- ③  $\frac{3}{8}$ " x  $1\frac{1}{2}$ " stainless steel nonthreaded hex head bolt with locknut washer. (typ.)
- ④ Class A concrete, 6" min. thick. (typ.)
5. Cleanout ports shall be spaced at 250 ft or as shown on plans.

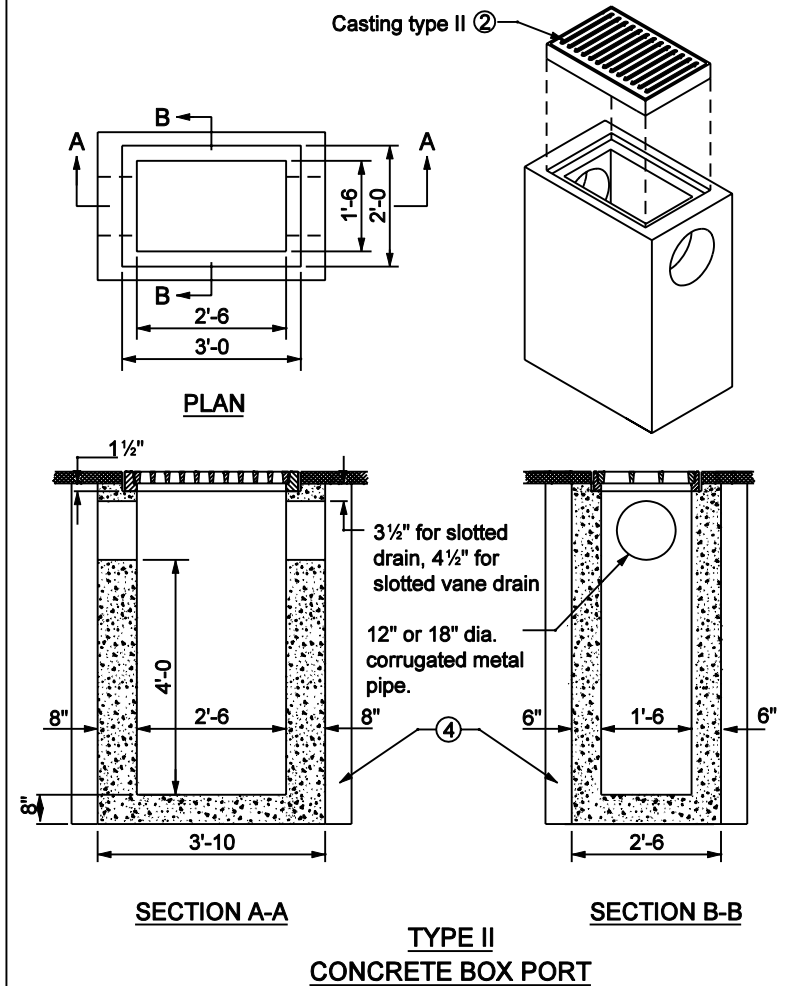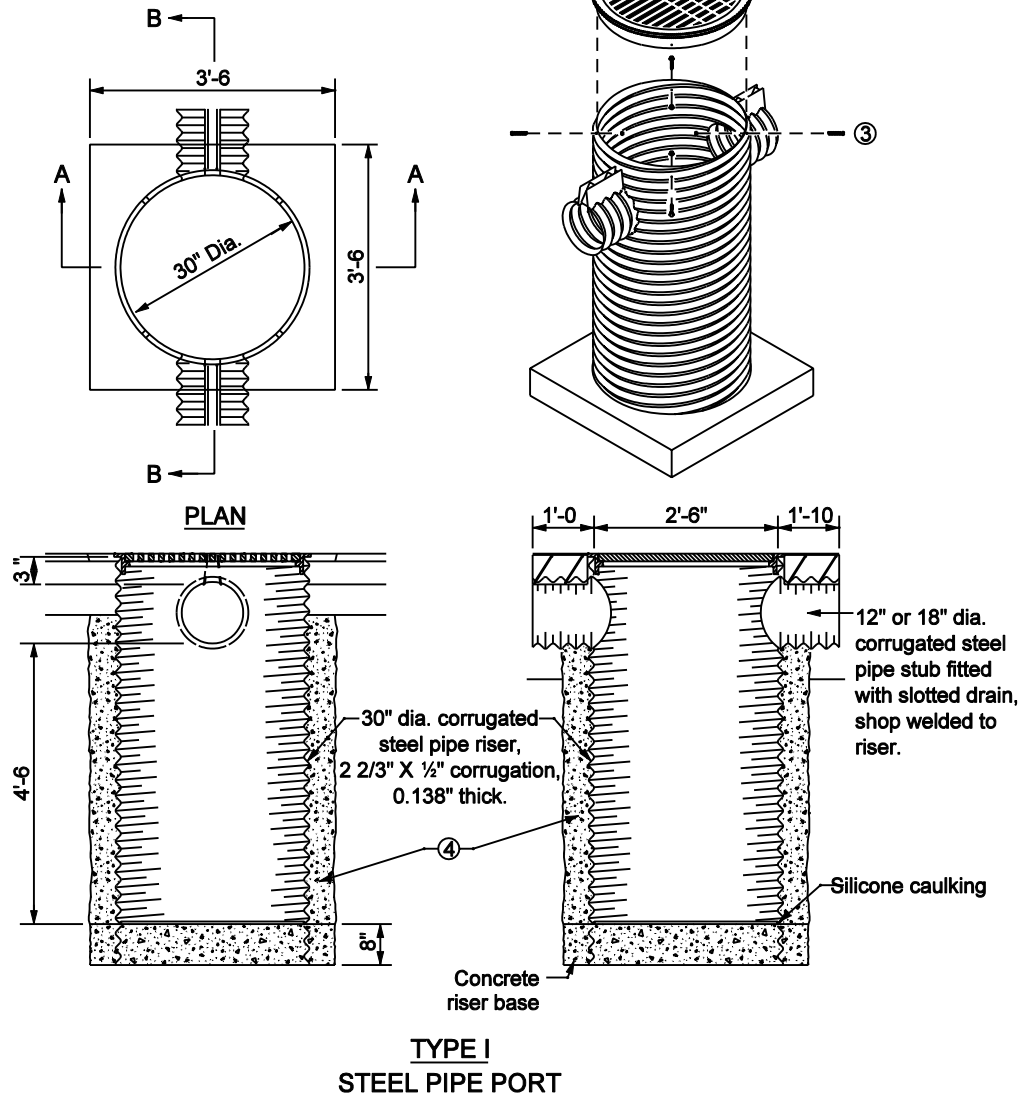


INDIANA DEPARTMENT OF TRANSPORTATION

### SLOTTED DRAIN PIPE CLEANOUT PORT

MARCH 2003

STANDARD DRAWING NO. E 720-SDCP-01





/s/ Richard L. VanCleave 3-03-03  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-03-03  
CHIEF HIGHWAY ENGINEER DATE



# GENERAL NOTES

1. Casting total weight 235 lbs.
2. Casting finish: no paint.

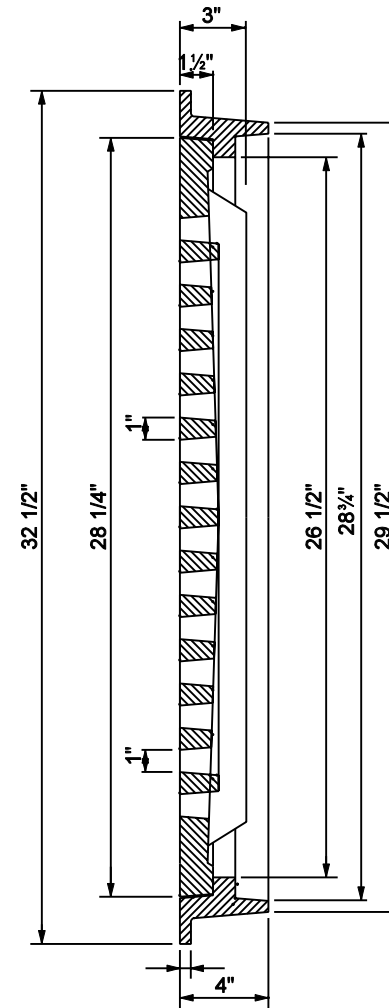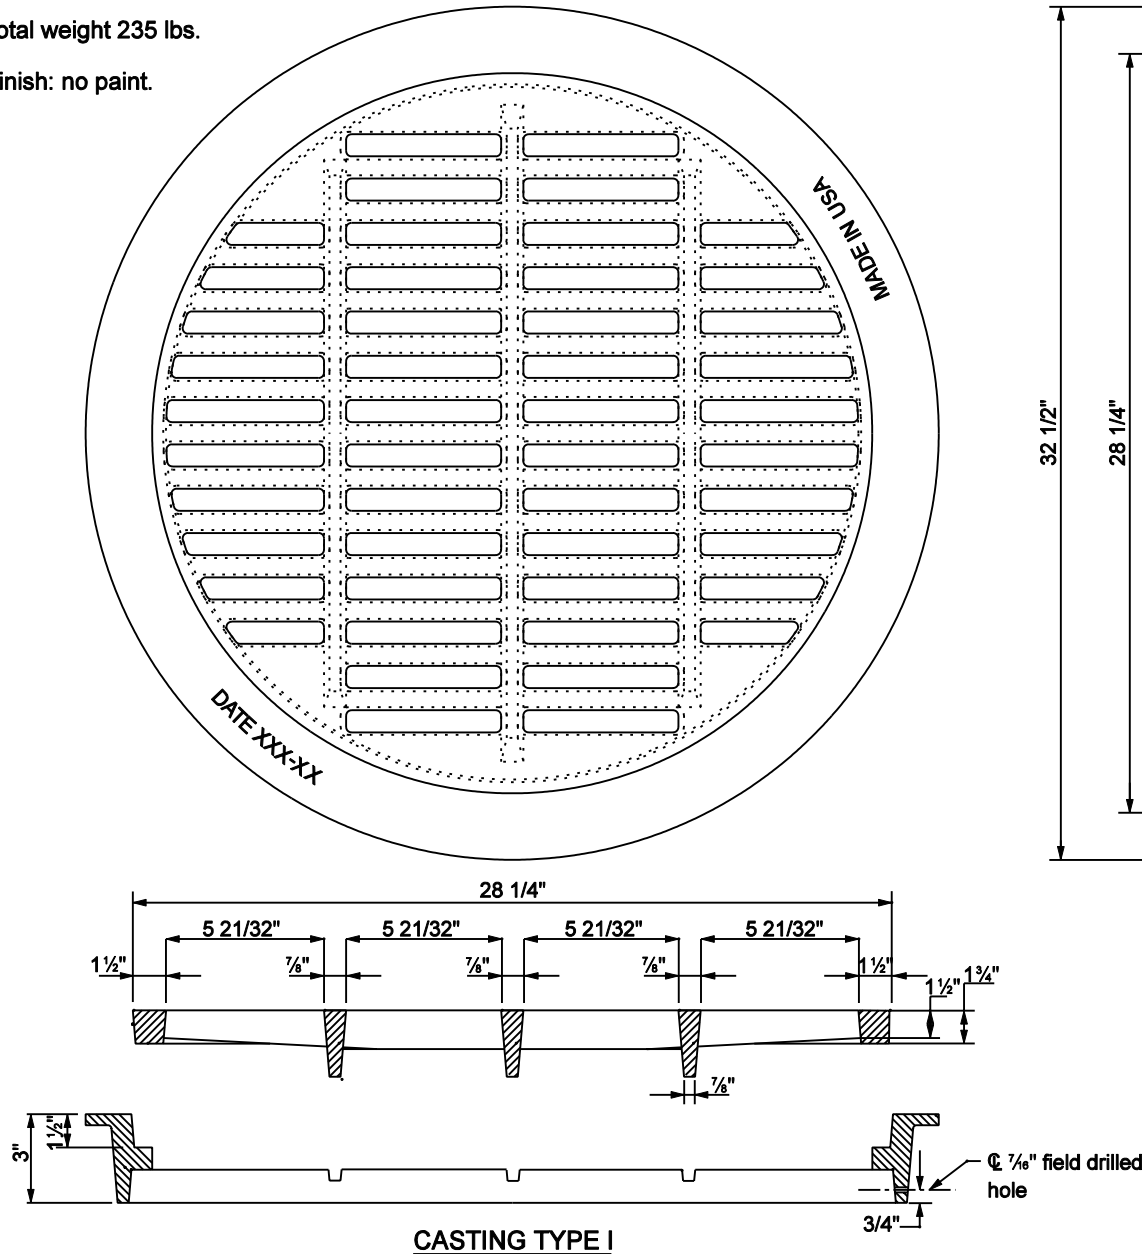


INDIANA DEPARTMENT OF TRANSPORTATION

## **CASTING TYPE I FRAME AND GRATE**




MARCH 2003

STANDARD DRAWING NO. E 720-SDCP-02




/s/ Richard L. VanCleave 3-03-03  
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-03-03  
CHIEF HIGHWAY ENGINEER DATE

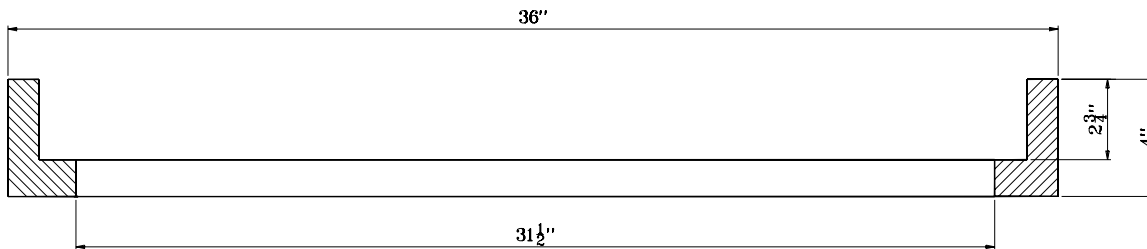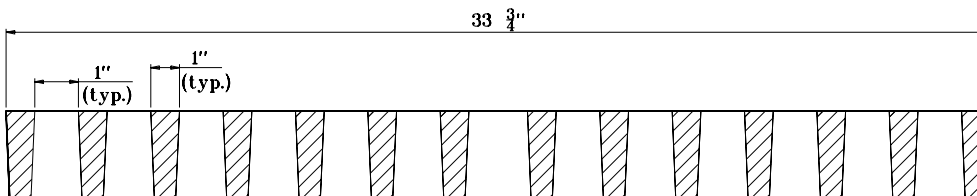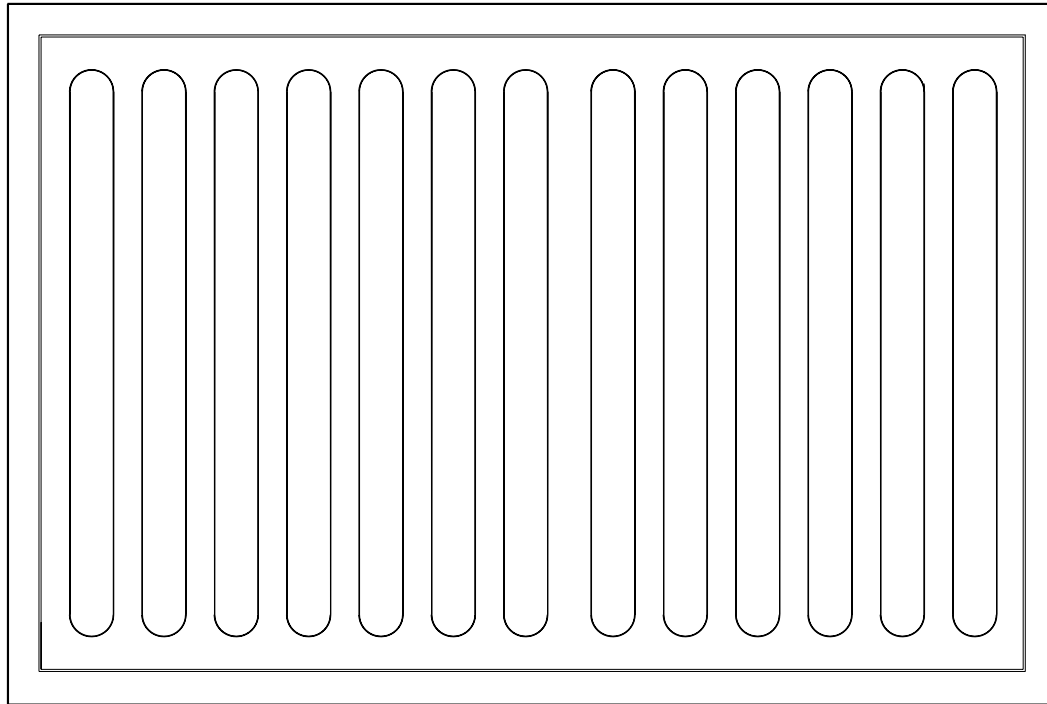

**CASTING TYPE II**

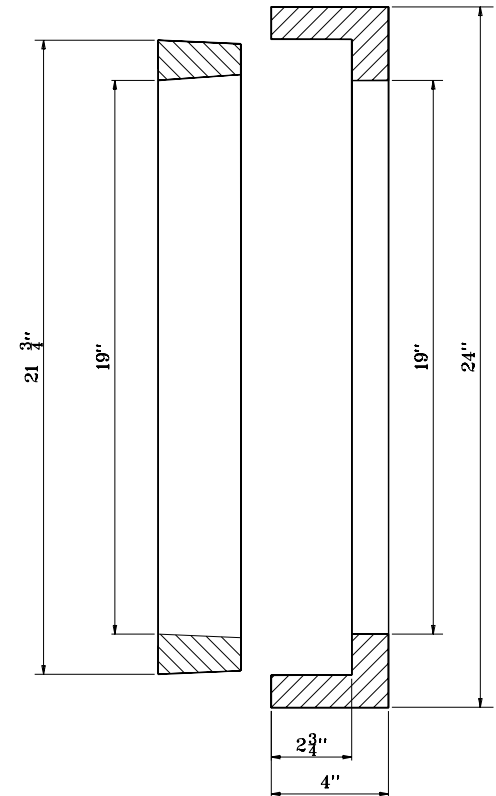

**GENERAL NOTES**


1. Casting total weight 440 lb.
2. Casting finish: no paint.

INDIANA DEPARTMENT OF TRANSPORTATION

**CASTING TYPE II  
FRAME AND GRATE**

JANUARY 1999

**STANDARD DRAWING NO. E 720-SDCP-03**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 1-04-99

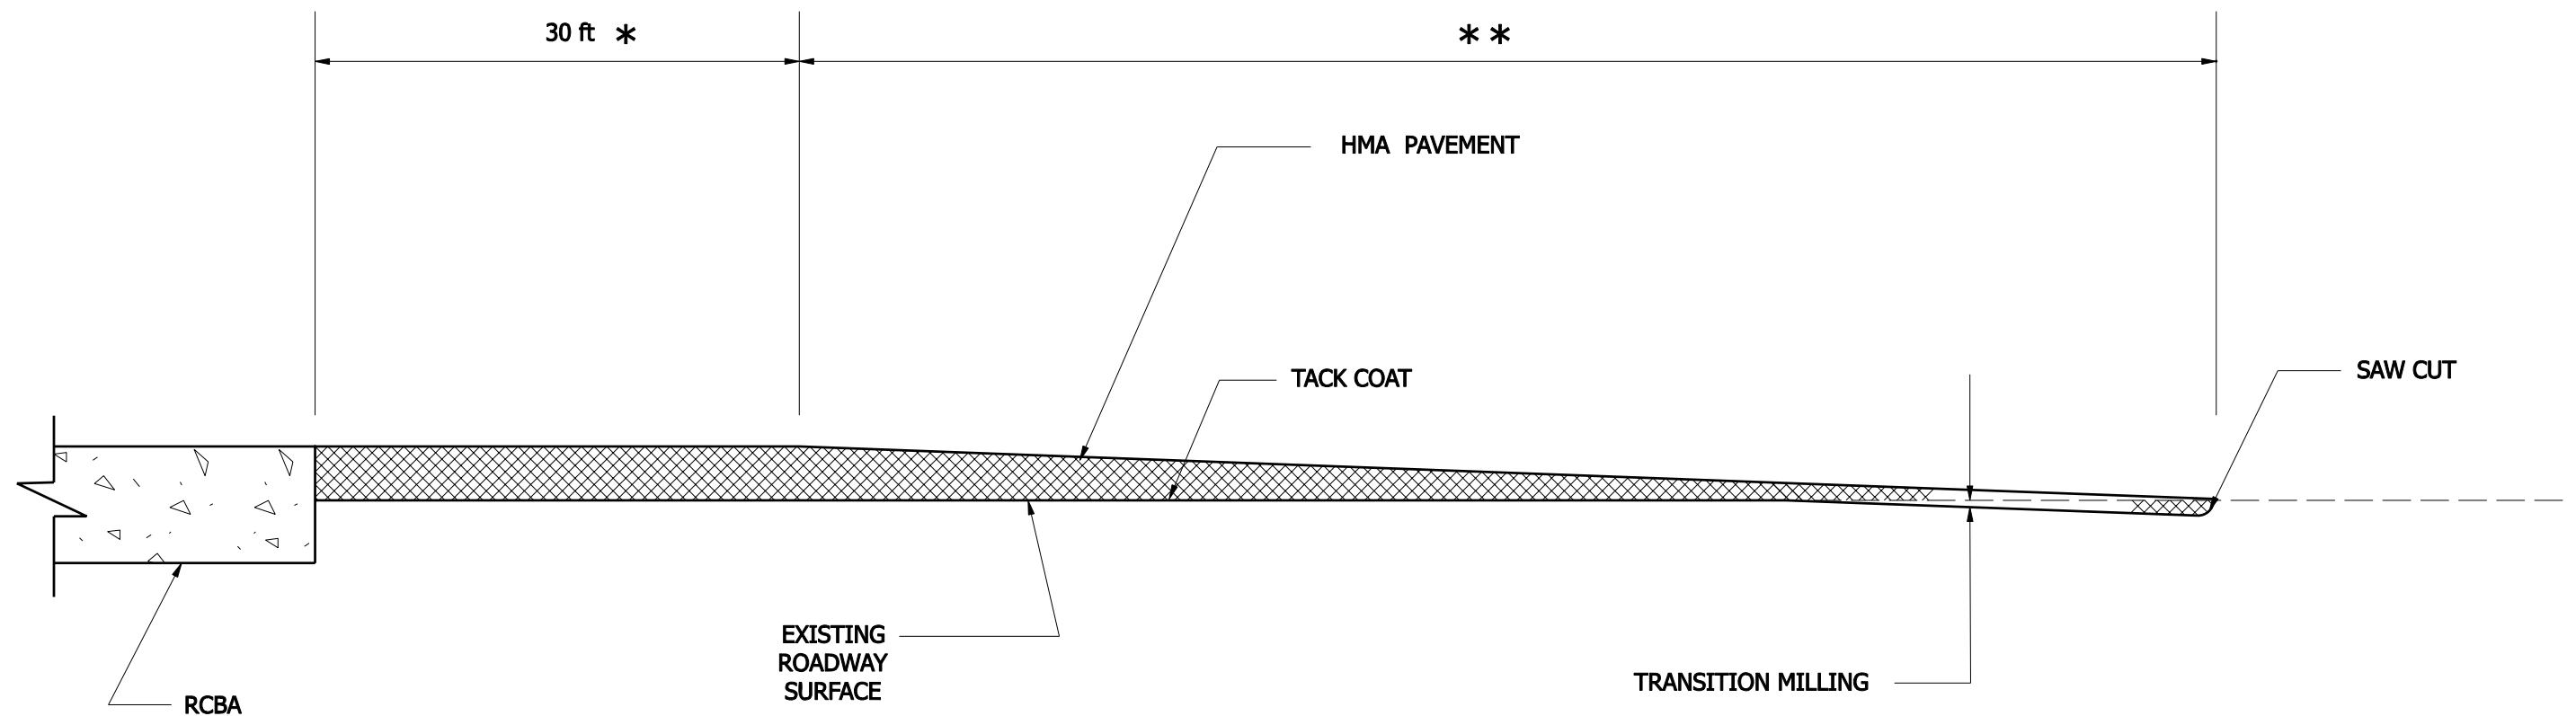

\* WEDGE TO BE A CONTINUATION OF BRIDGE DECK PROFILE.


\*\* WEDGE AND TRANSITION MILLING LIMITS PER STANDARD  
DRAWING E 306-TMPT-01.

INDIANA DEPARTMENT OF TRANSPORTATION

HMA PAVEMENT WEDGE  
AT RCBA

SEPTEMBER 2007

STANDARD DRAWING NO. E 722-HMAW-01



DESIGN STANDARDS ENGINEER

*/s/ Richard L. VanCleave* 09/04/07  
DESIGN STANDARDS ENGINEER DATE


*/s/ Mark A. Miller* 09/04/07  
CHIEF HIGHWAY ENGINEER DATE

NOTES:


- 1. See Standard Drawing E 723-CCSP-02 for Section A-A.
- ② Distance X is equal to two times the sump depth shown on plans.

LEGEND:

 Riprap on geotextiles as shown on the plans.

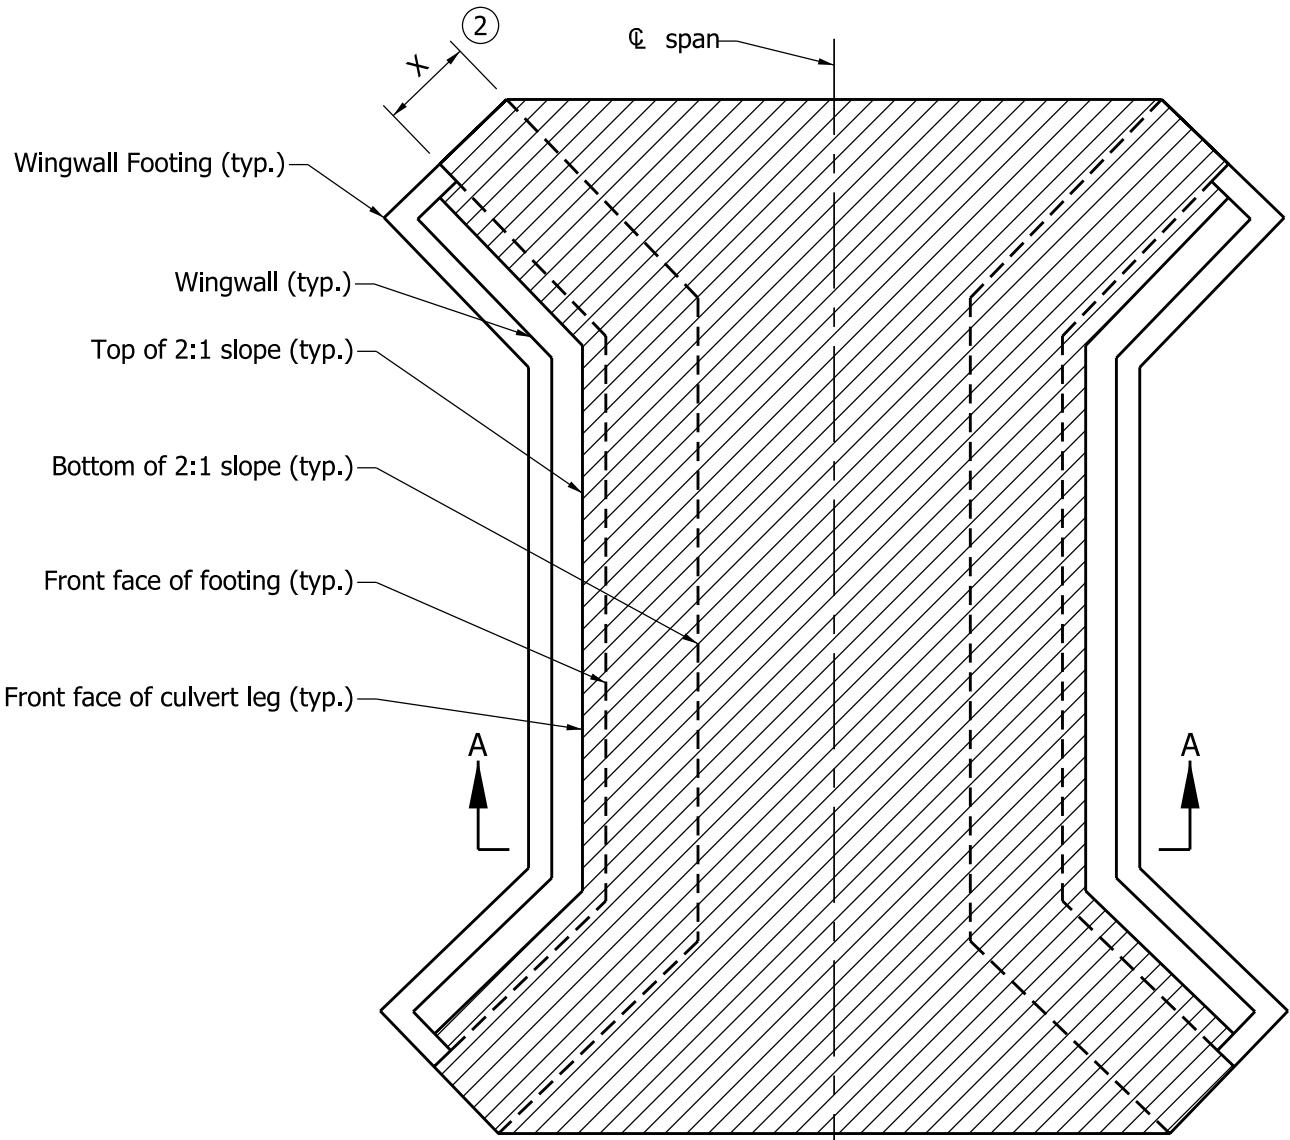


RIPRAP METHOD  
PLAN - WITH WINGWALLS


INDIANA DEPARTMENT OF TRANSPORTATION		
THREE-SIDED CONCRETE CULVERT SCOUR PROTECTION 10'-0" ≤ SPAN WIDTH < 20'-0" SEPTEMBER 2011		
STANDARD DRAWING NO. E 723-CCSP-01		
	/s/ <i>Richard L. VanCleave</i>	09/01/11
	DESIGN STANDARDS ENGINEER	DATE
	/s/ <i>Mark A. Miller</i>	09/01/11
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		


NOTES:

1. See Standard Drawing E 723-CCSP-01 for plan view of Section A-A.

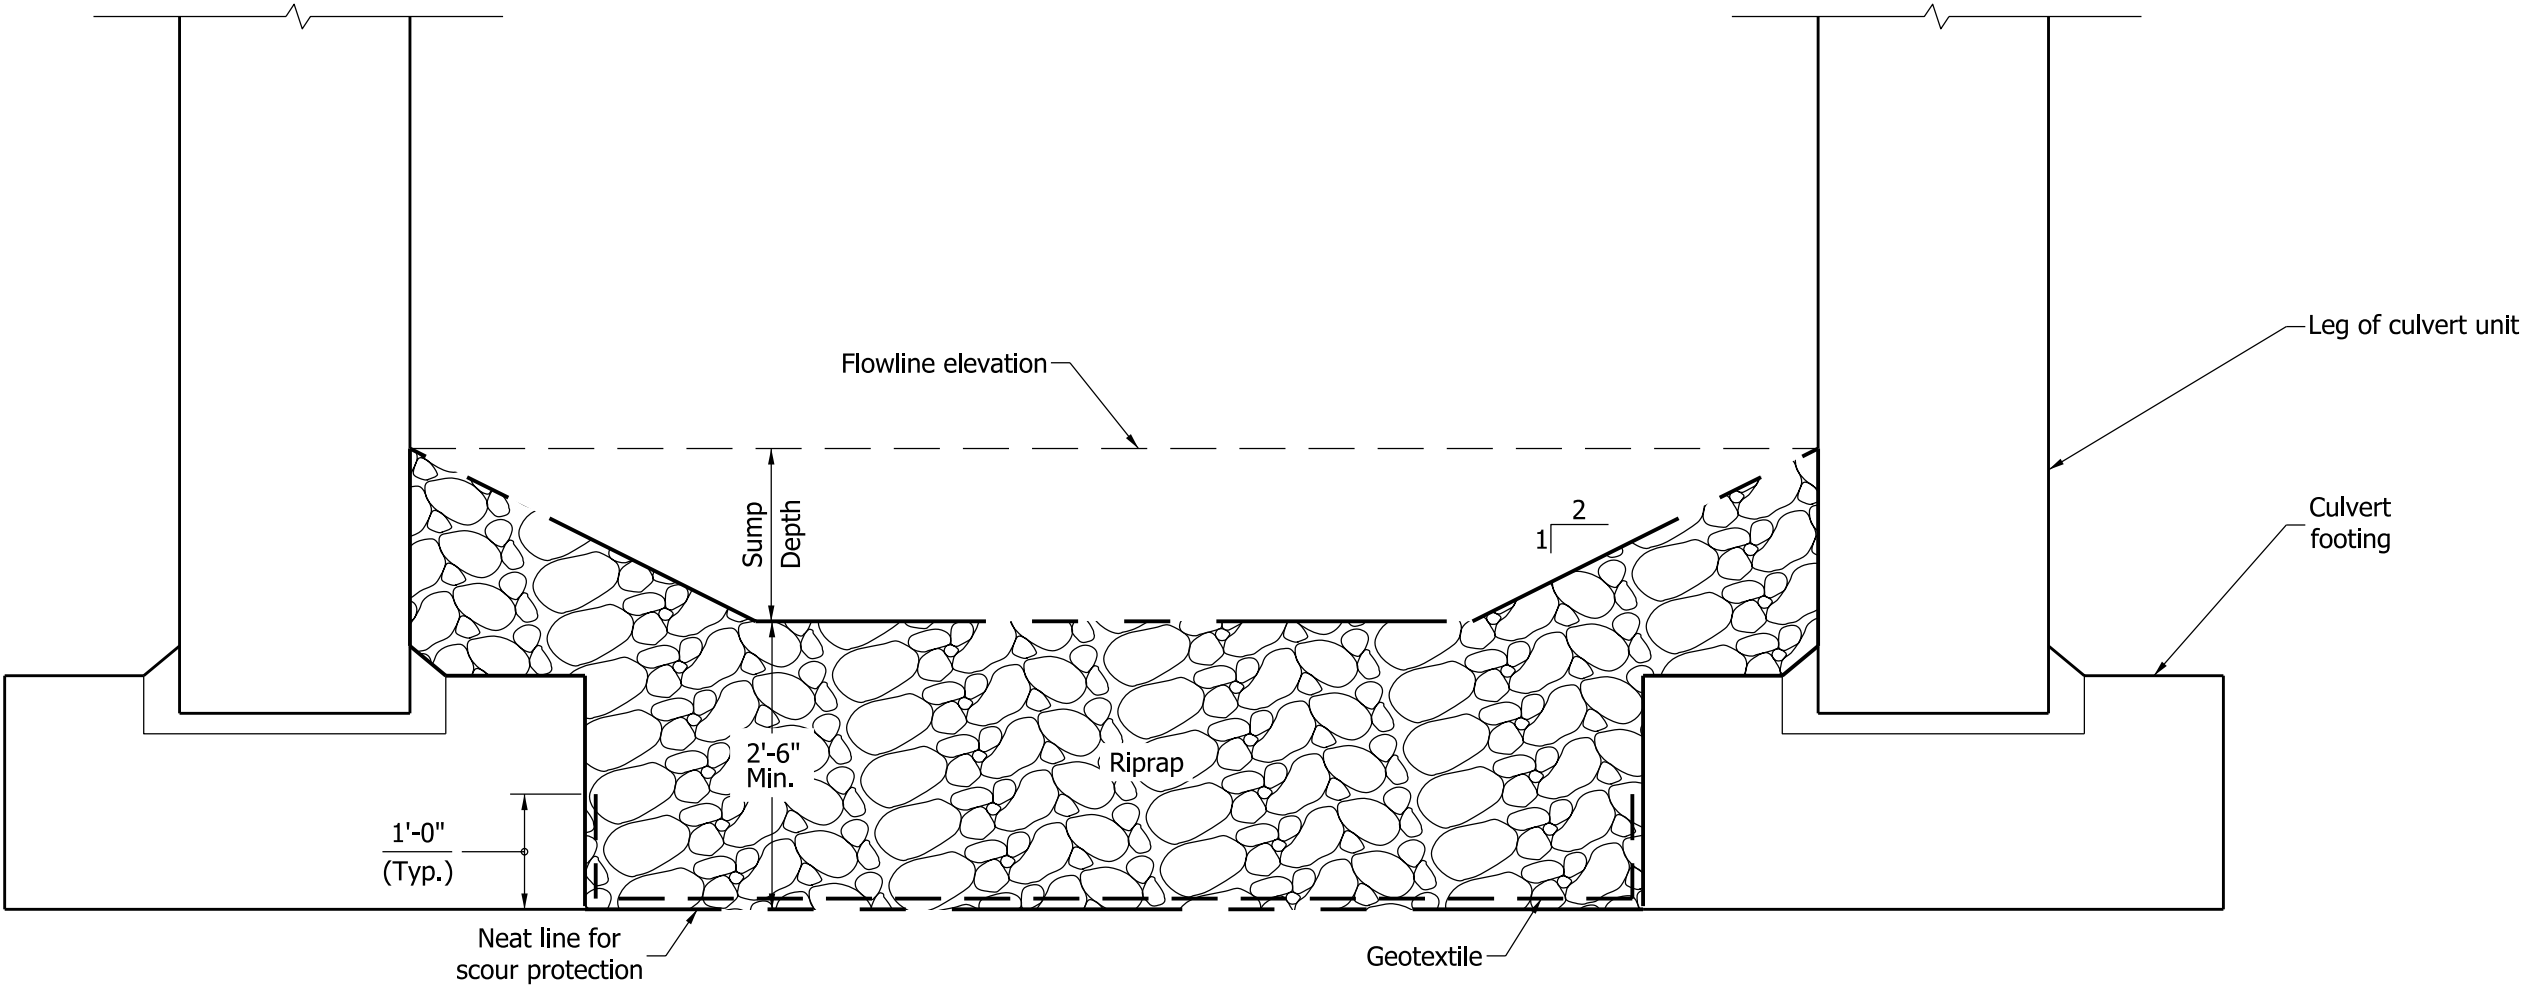

SECTION A-A  
RIPRAP METHOD

INDIANA DEPARTMENT OF TRANSPORTATION			
THREE-SIDED CONCRETE CULVERT SCOUR PROTECTION, SECTION, 10'-0" ≤ SPAN WIDTH < 20'-0" SEPTEMBER 2011			
STANDARD DRAWING NO.		E 723-CCSP-02	
	/s/ <i>Richard L. VanCleave</i>		09/01/11
	DESIGN STANDARDS ENGINEER		DATE
	/s/ <i>Mark A. Miller</i>		09/01/11
DESIGN STANDARDS ENGINEER		CHIEF HIGHWAY ENGINEER	
		DATE	

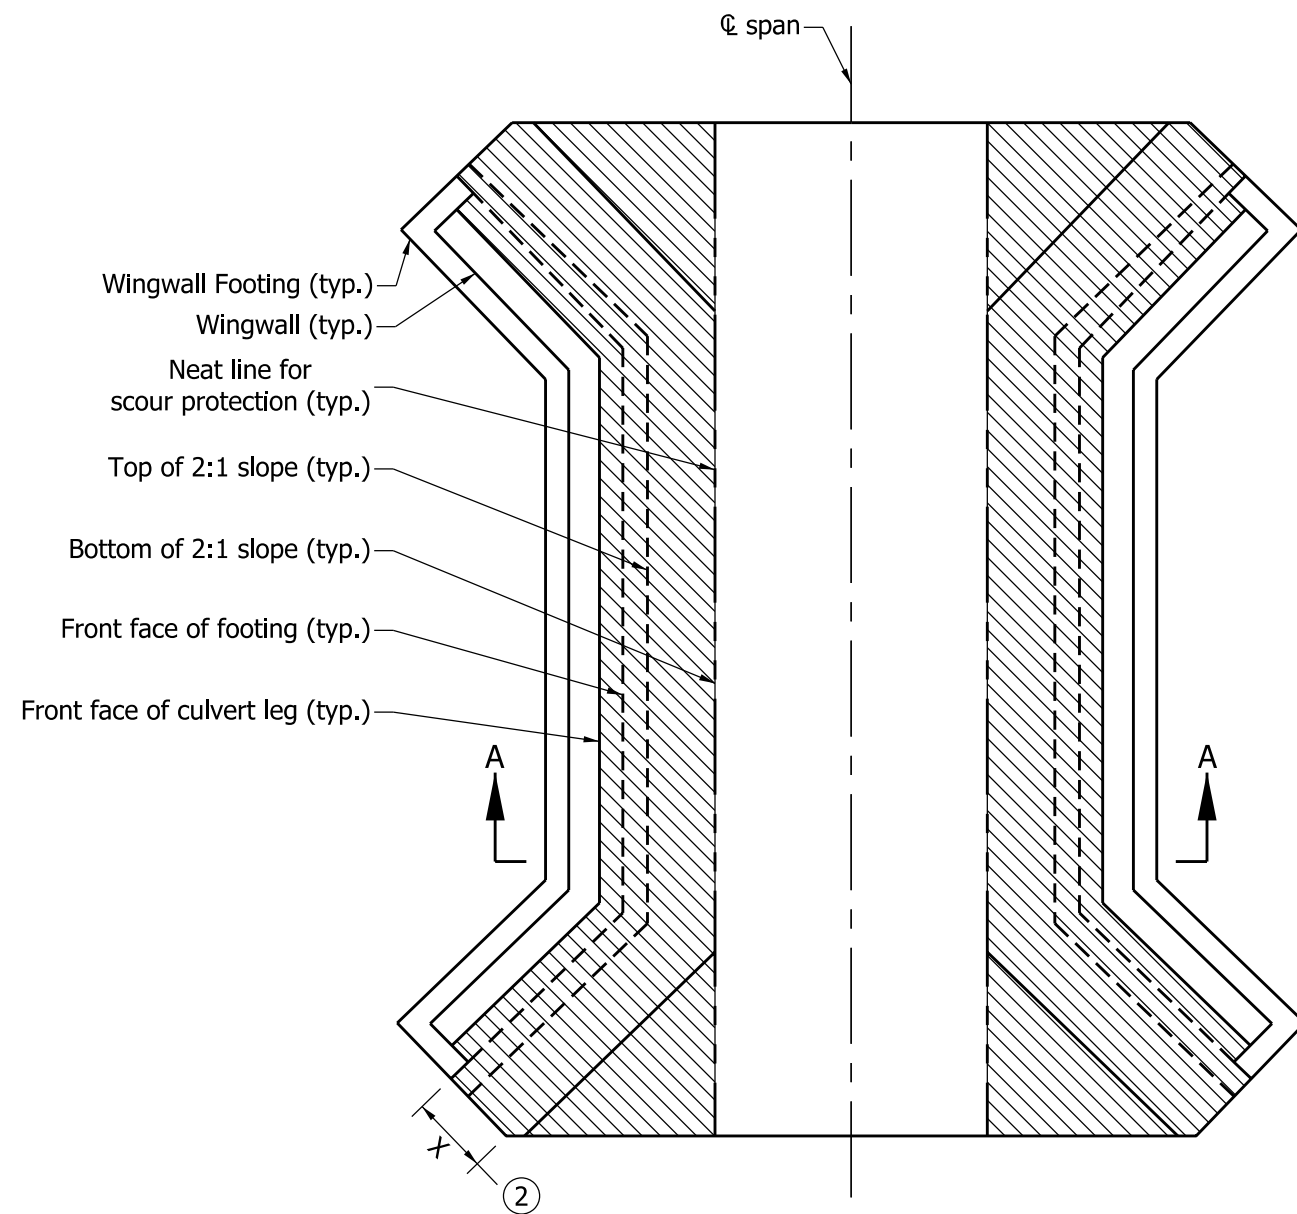

PLAN - WITH WINGWALLS  
RIPRAP METHOD

**NOTES:**

1. See Standard Drawing E723-CCSP-04 for Section A-A.
- ② Distance X is equal to two times the sump depth shown on the plans or 6'-0", whichever is greater.

**LEGEND:**

 Riprap on geotextiles as shown on the plans.

INDIANA DEPARTMENT OF TRANSPORTATION

THREE-SIDED CONCRETE STRUCTURE  
SCOUR PROTECTION, PLAN,  
SPAN WIDTH  $\geq$  20'-0"  
SEPTEMBER 2011

STANDARD DRAWING NO. E 723-CCSP-03




DESIGN STANDARDS ENGINEER

/s/ *Richard L. VanCleave* 09/01/11  
DESIGN STANDARDS ENGINEER DATE

/s/ *Mark A. Miller* 09/01/11  
CHIEF HIGHWAY ENGINEER DATE


NOTES:

1. See Standard Drawing E 723-CCSP-03 for plan view of Section A-A.

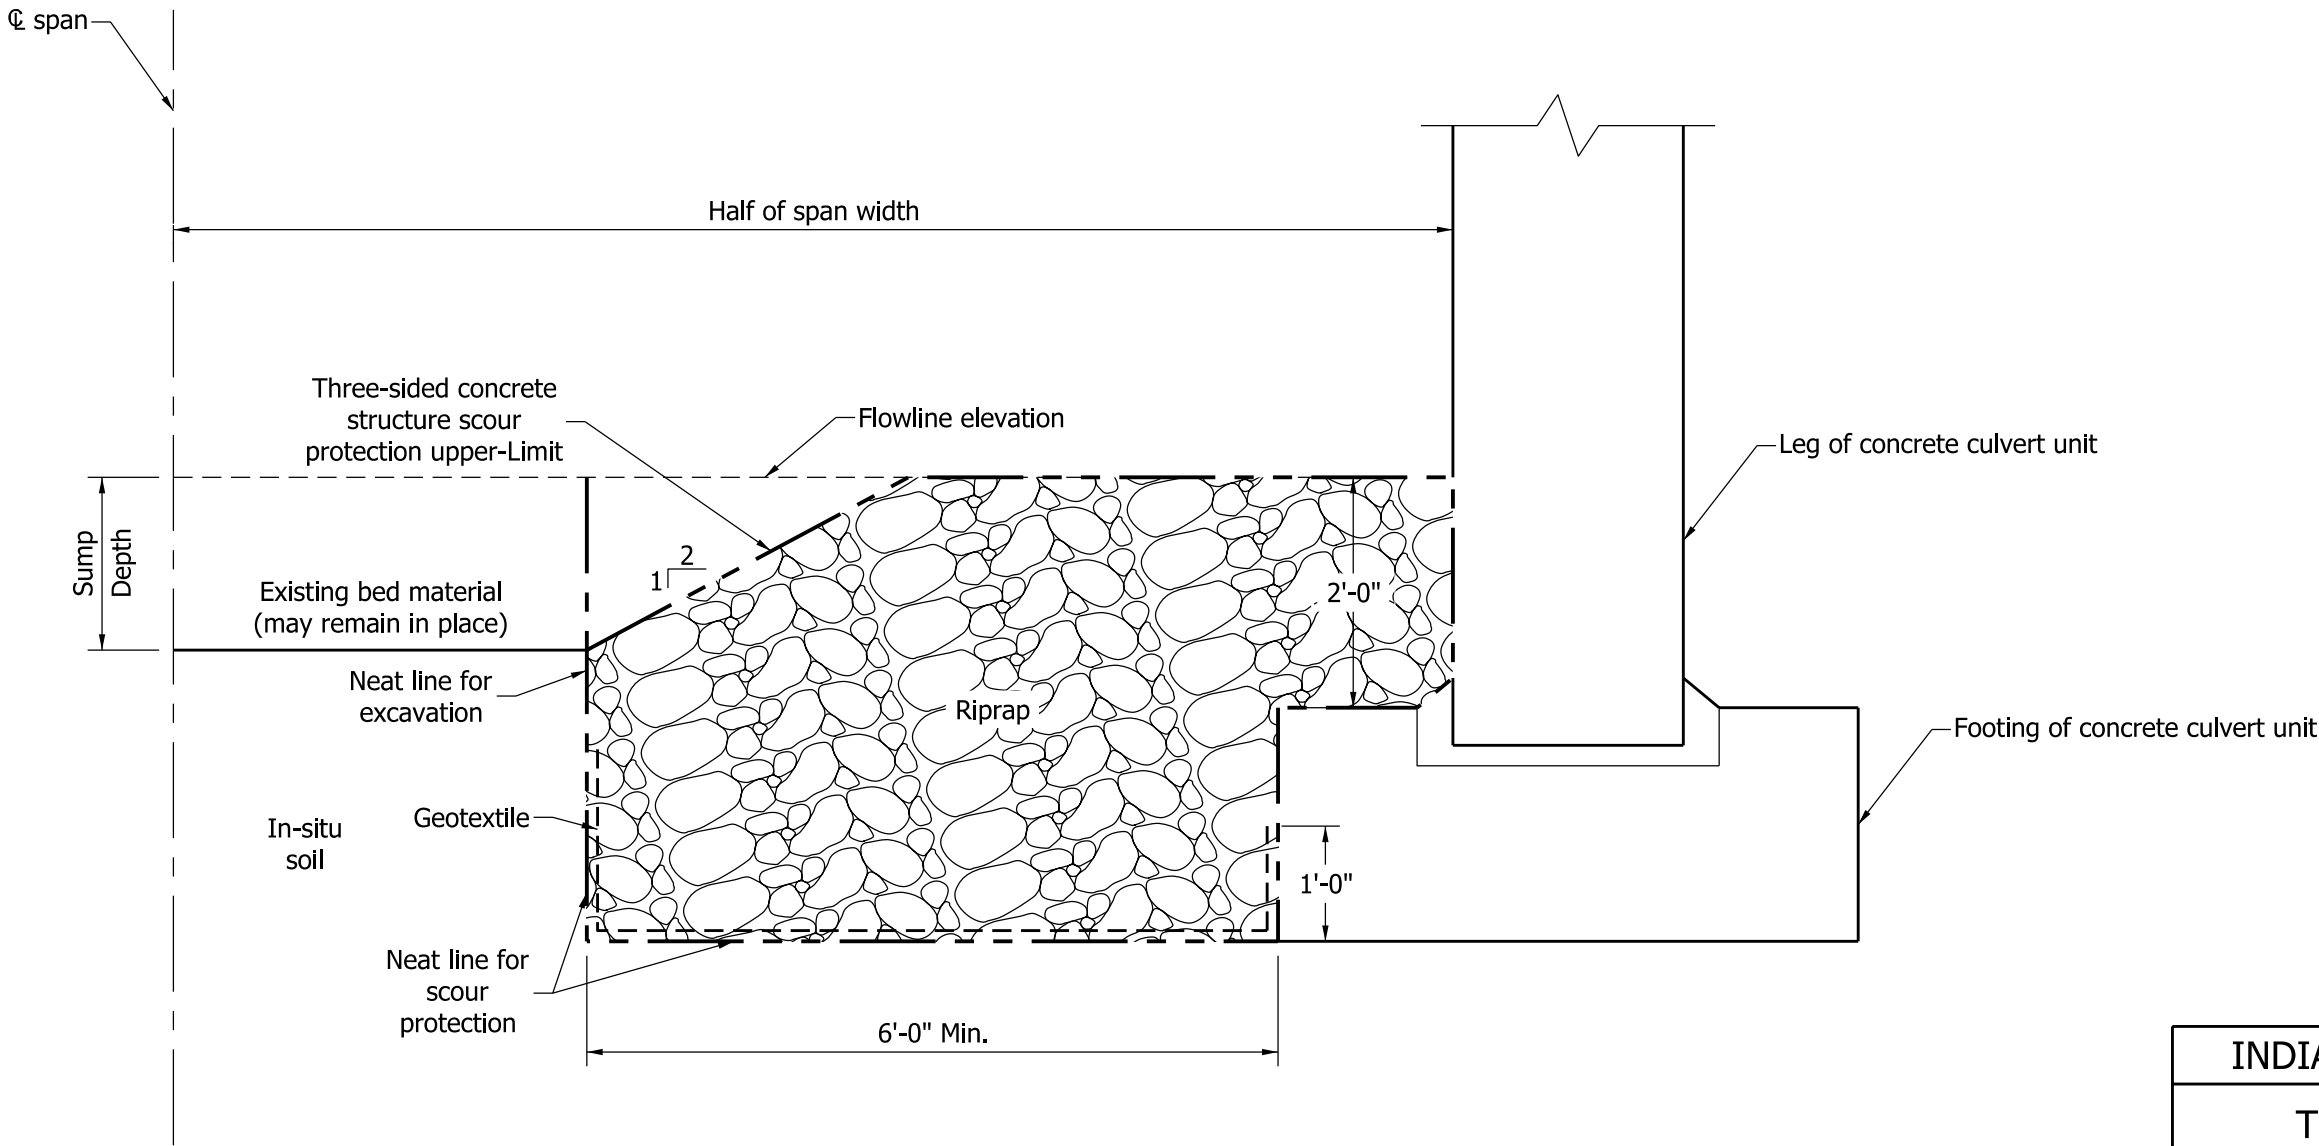

SECTION A-A  
RIPRAP METHOD

INDIANA DEPARTMENT OF TRANSPORTATION		
THREE-SIDED CONCRETE STRUCTURE SCOUR PROTECTION, SECTION, SPAN WIDTH ≥ 20'-0"		
SEPTEMBER 2011		
STANDARD DRAWING NO.		E 723-CCSP-04
	/s/ <i>Richard L. VanCleave</i>	09/01/11
	DESIGN STANDARDS ENGINEER	DATE
	/s/ <i>Mark A. Miller</i>	09/01/11
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		

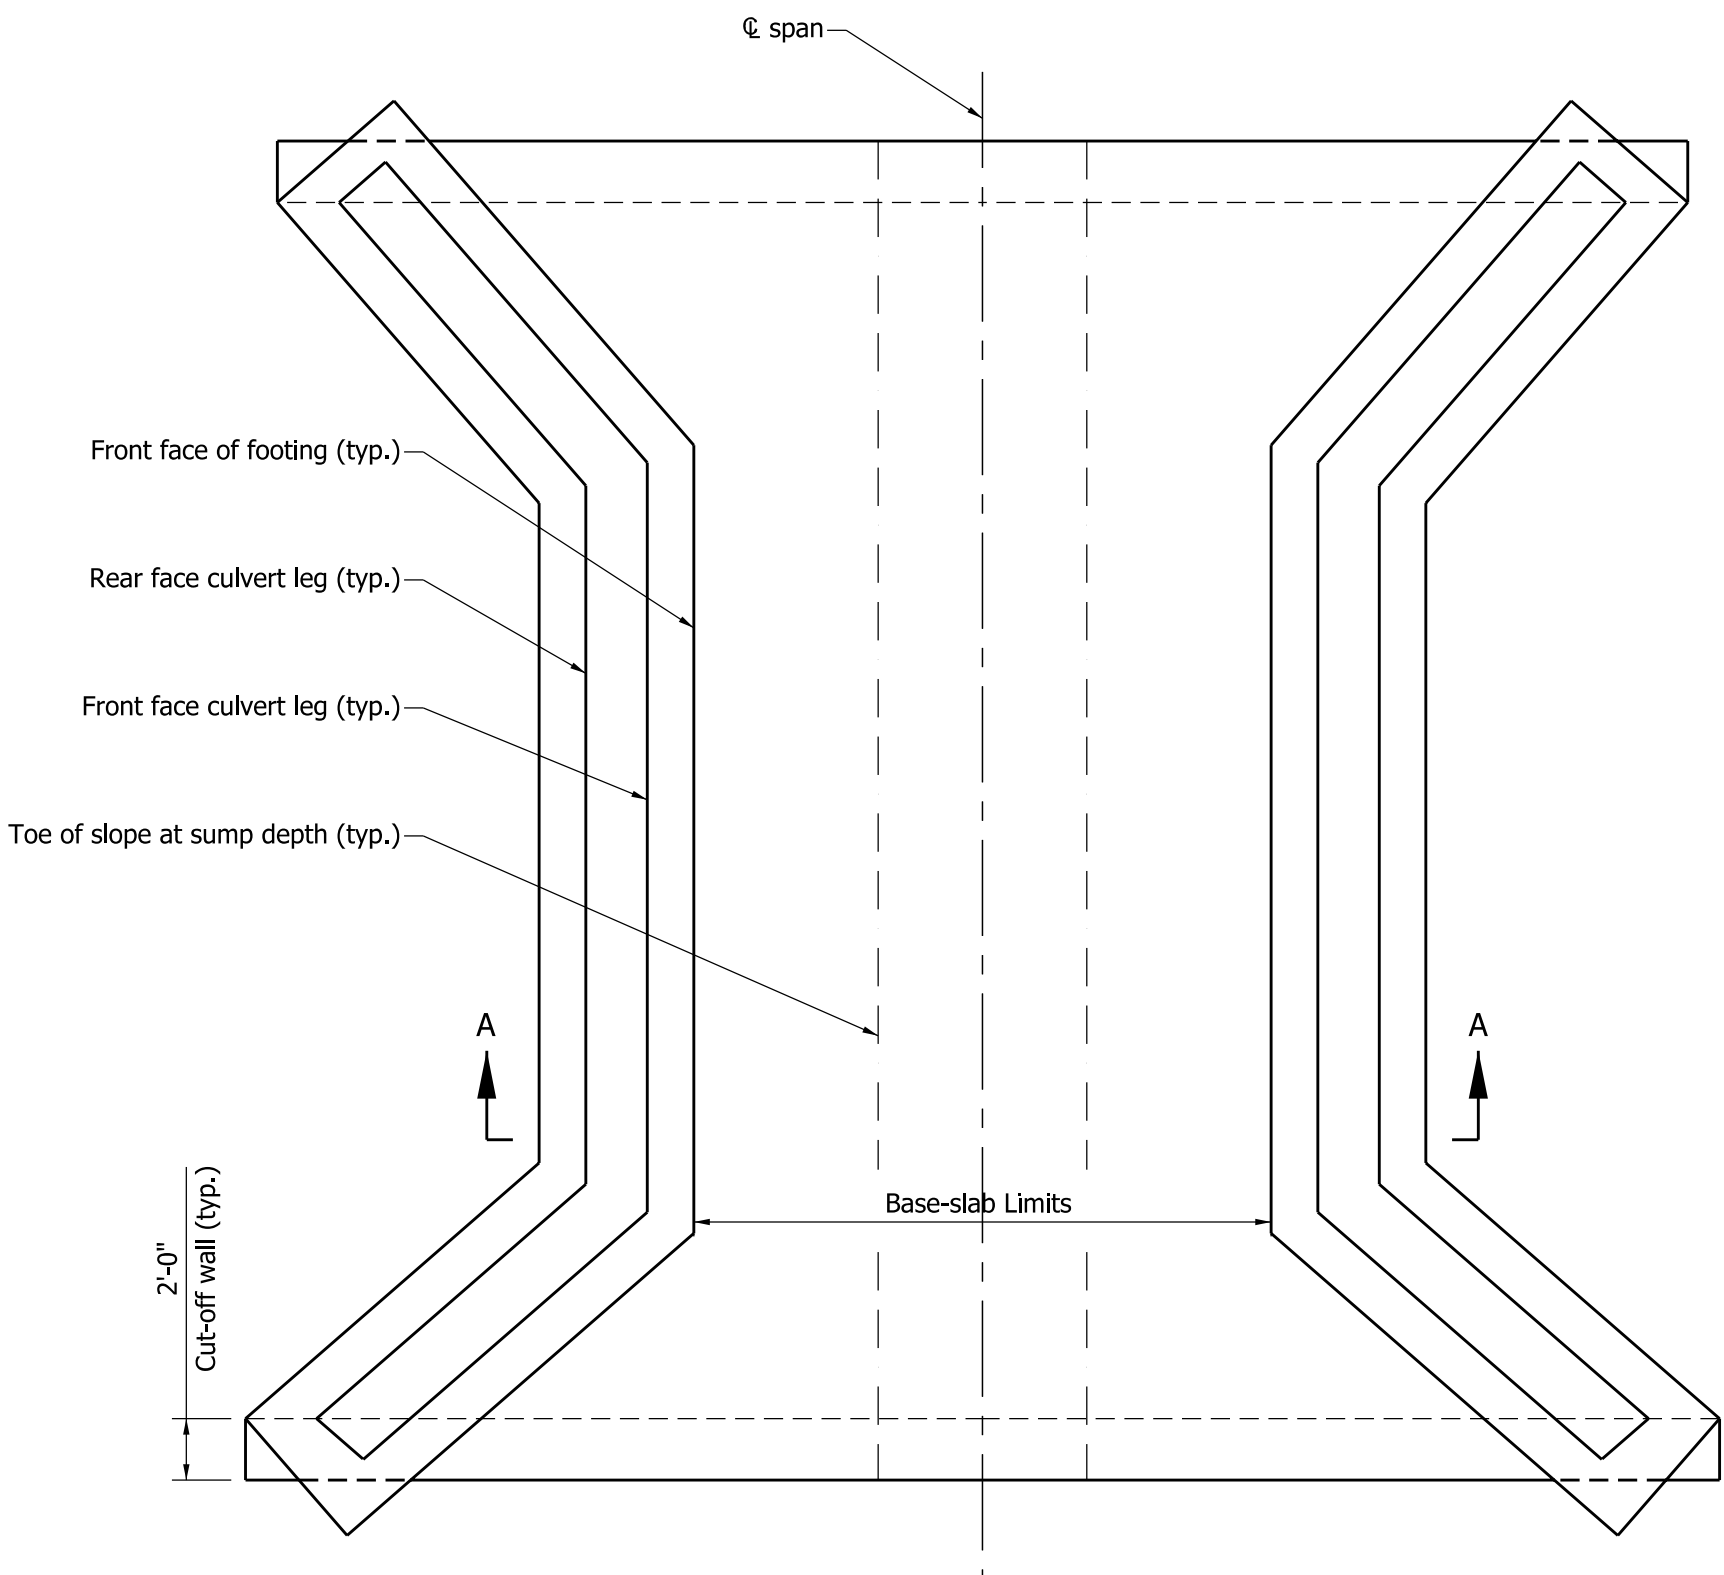


PLAN - WITH WINGWALLS  
BASE SLAB METHOD

NOTES:

1. See Standard Drawing E 723-CCSP-06 for Section A-A.

INDIANA DEPARTMENT OF TRANSPORTATION		
THREE-SIDED CONCRETE CULVERT SCOUR PROTECTION, PLAN, BASE-SLAB METHOD		
SEPTEMBER 2011		
STANDARD DRAWING NO.		E 723-CCSP-05
	/s/ <i>Richard L. VanCleave</i>	09/01/11
	DESIGN STANDARDS ENGINEER	DATE
	/s/ <i>Mark A. Miller</i>	09/01/11
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		



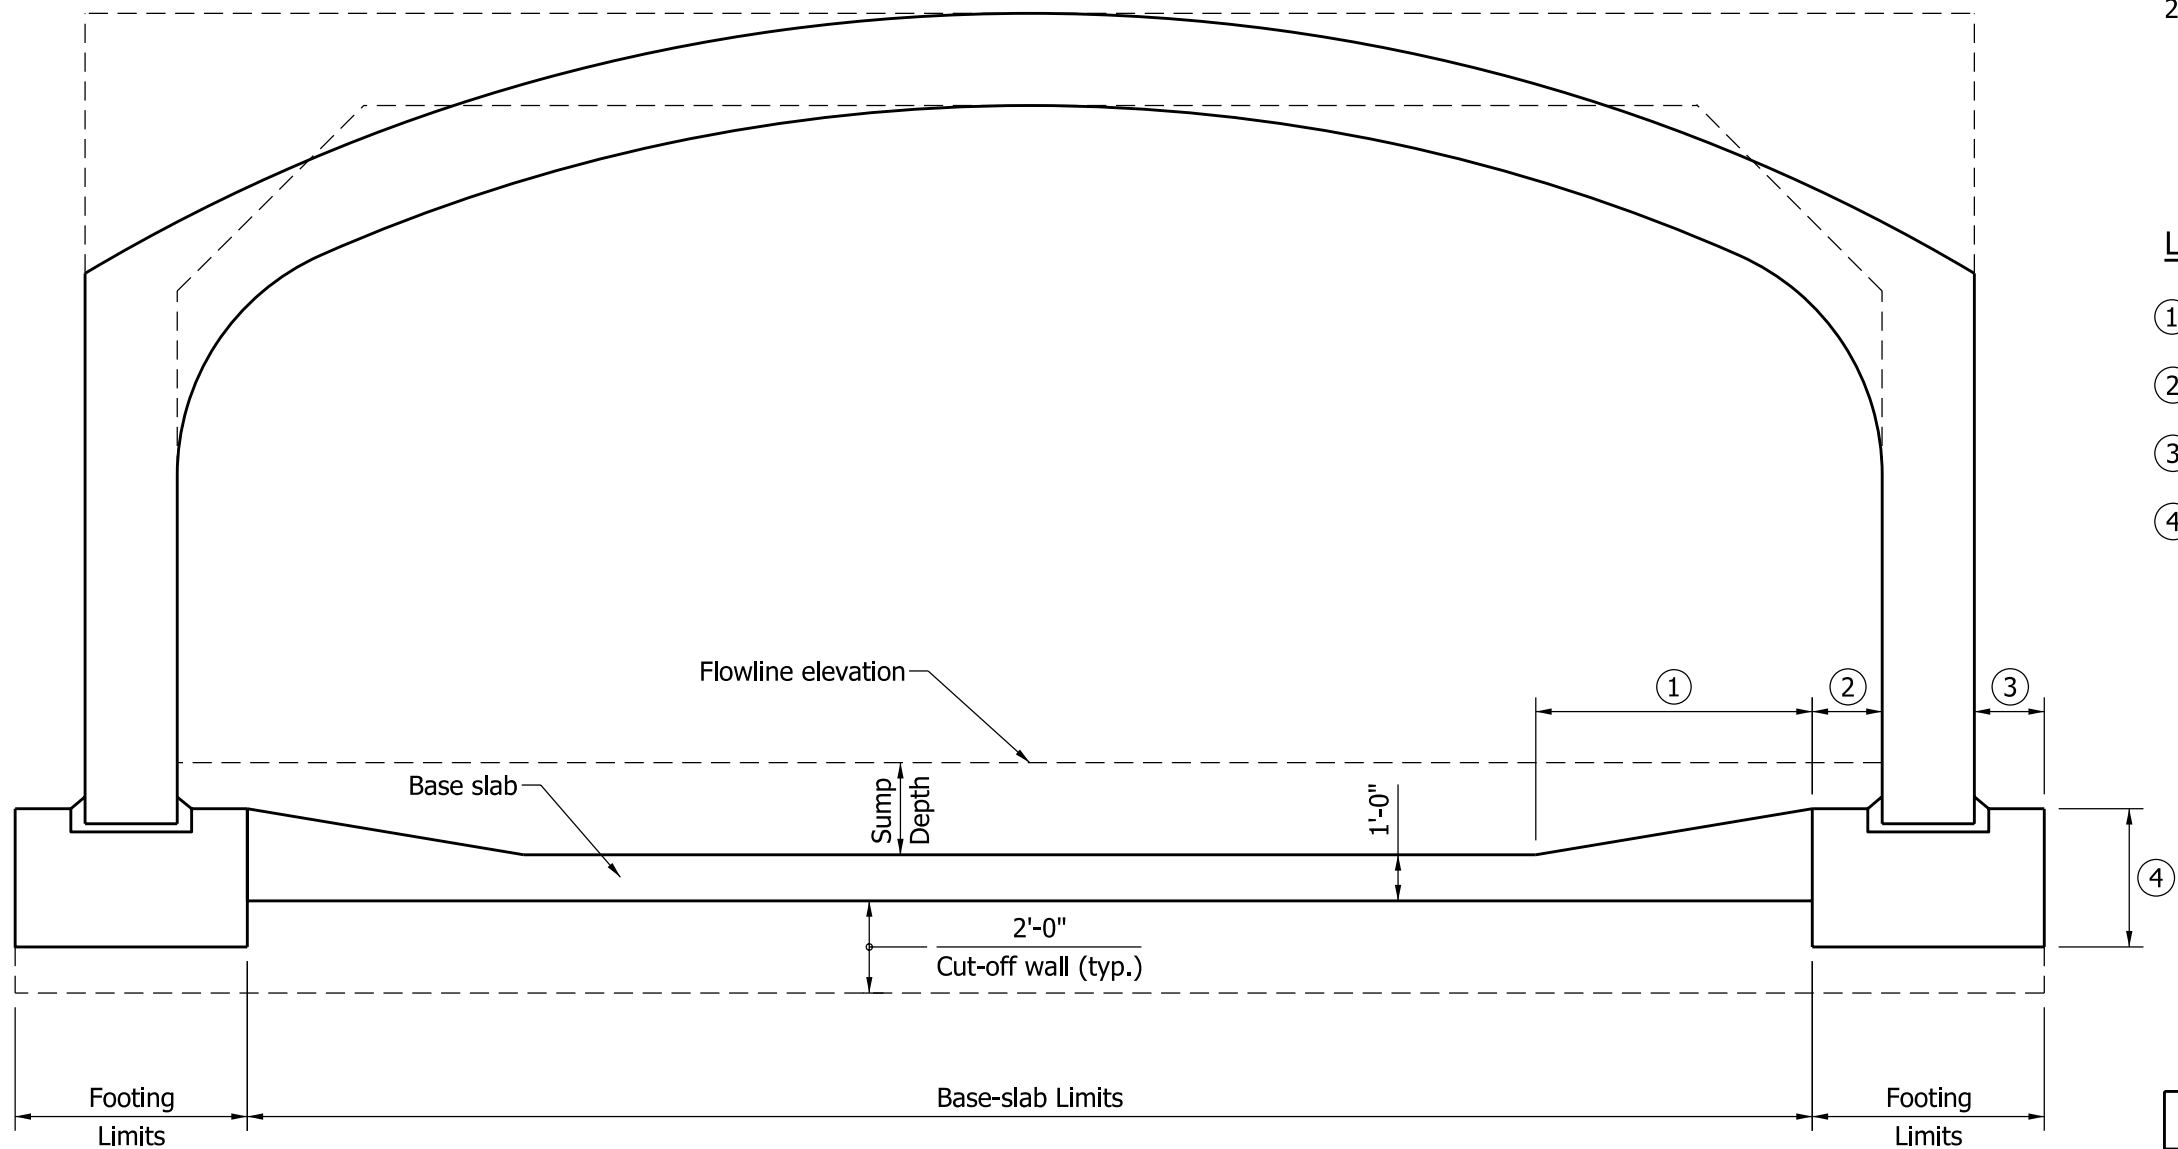

SECTION A-A  
BASE SLAB METHOD

NOTES:

1. See the working drawings for dimension ① through ④.
2. See Standard Drawing E 723-CCSP-05 for plan view of Section A-A

LEGEND:

- ① Taper length
- ② Inside-footing width
- ③ Outside-footing width
- ④ Footing depth

INDIANA DEPARTMENT OF TRANSPORTATION

THREE-SIDED CONCRETE CULVERT  
SCOUR PROTECTION, SECTION,  
BASE-SLAB METHOD

SEPTEMBER 2011


STANDARD DRAWING NO. E 723-CCSP-06




/s/ *Richard L. VanCleave* 09/01/11  
DESIGN STANDARDS ENGINEER DATE

/s/ *Mark A. Miller* 09/01/11  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

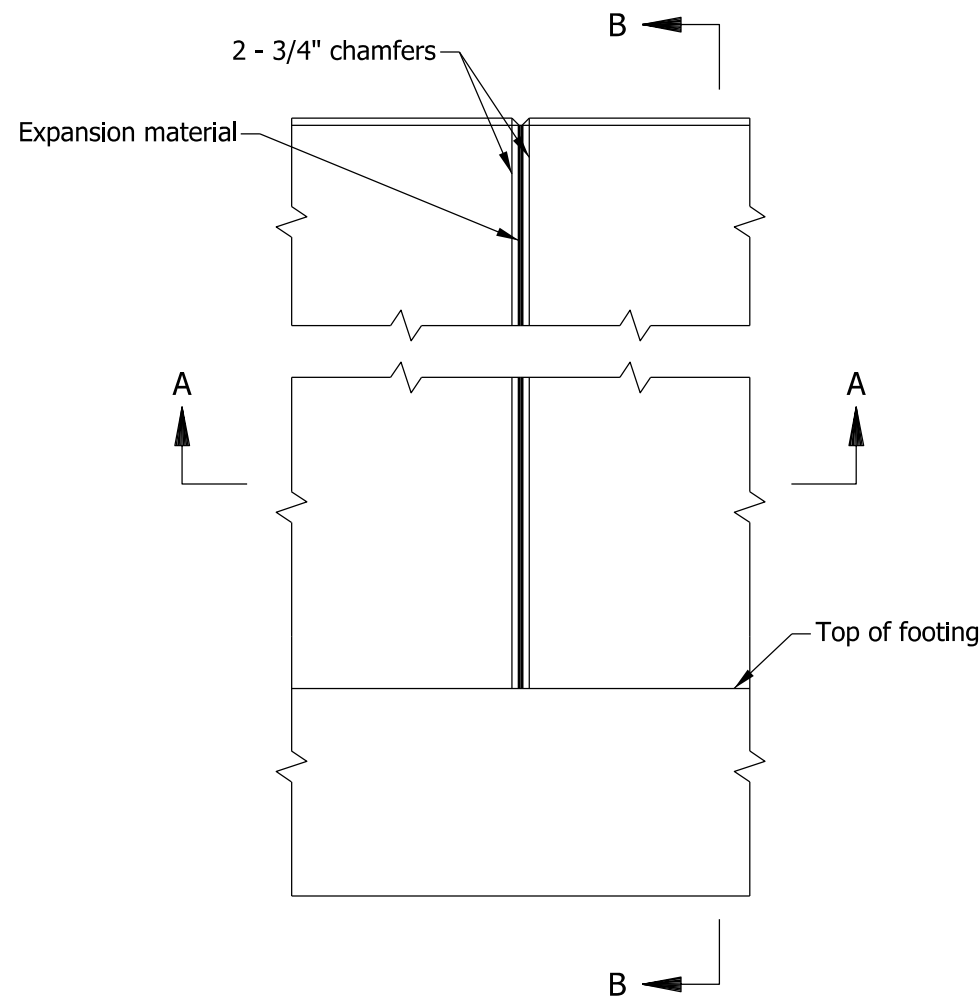

WALL FRONT FACE

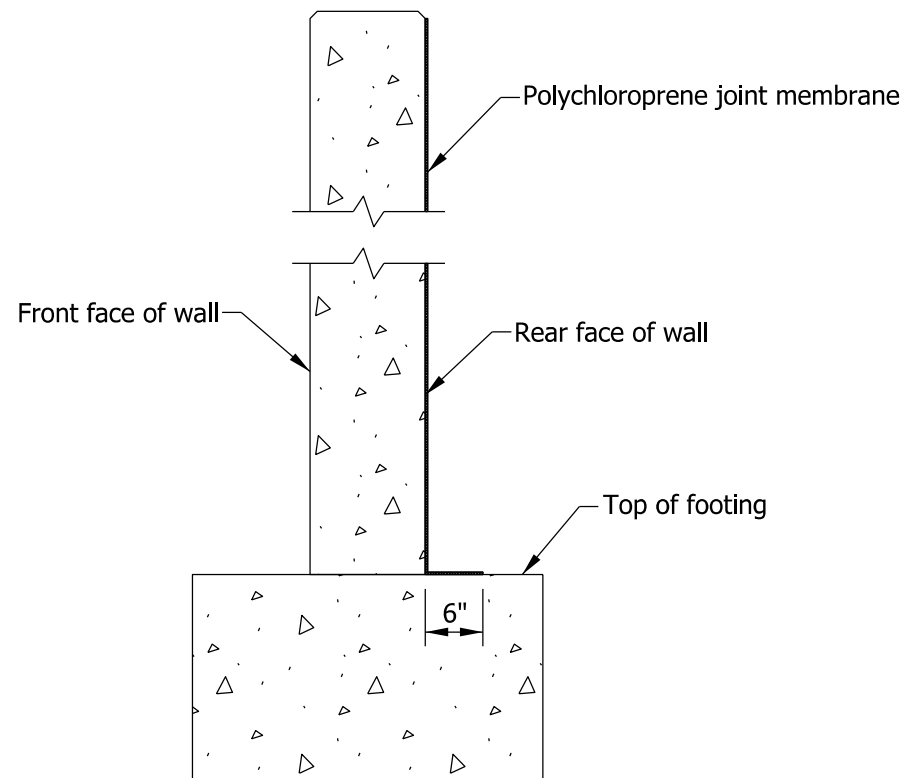

SECTION B-B

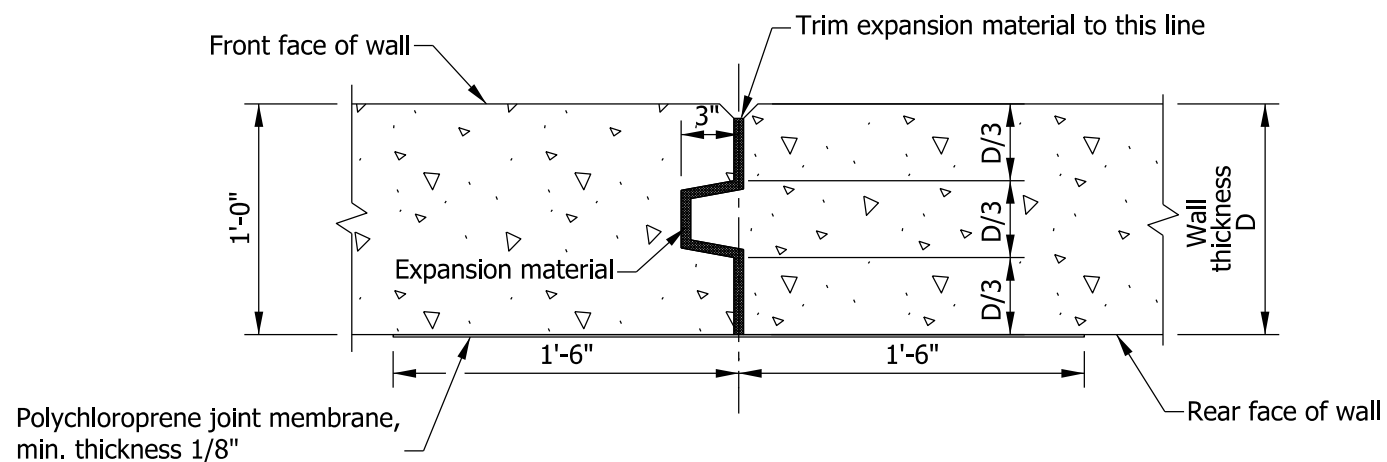

SECTION A-A

NOTES


1. Expansion material in joints shall be preformed joint filler.
2. All chamfered edges shall be 3/4".

INDIANA DEPARTMENT OF TRANSPORTATION

EXPANSION JOINT

SEPTEMBER 2012

STANDARD DRAWING NO. E 724-BJTS-01




/s/ *Richard L. VanCleave* 09/04/12


SUPERVISOR, ROADWAY STANDARDS DATE

/s/ *Mark A. Miller* 09/04/12


CHIEF ENGINEER DATE

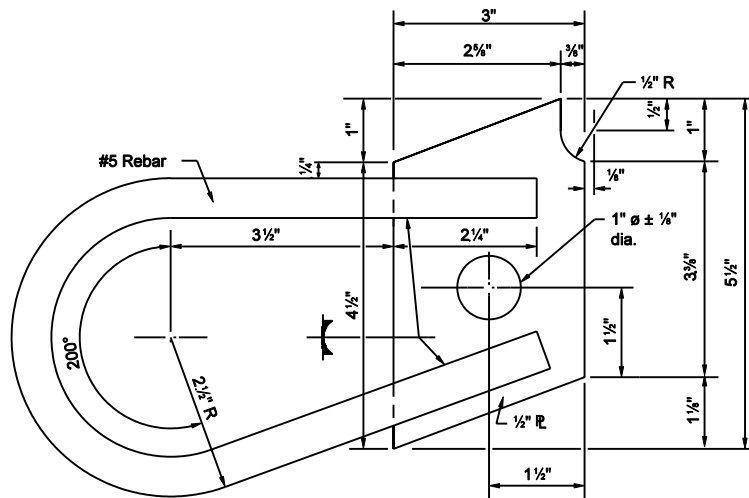


**ANCHOR PLATE ALTERNATE A-1**

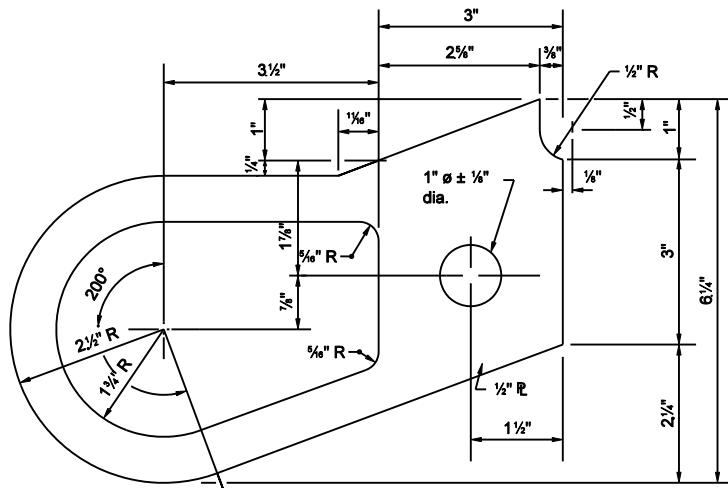

**ANCHOR PLATE ALTERNATE A-2**

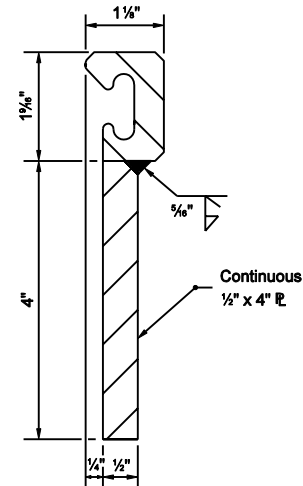


**EXTRUSION & PLATE  
ASSEMBLY DETAIL**

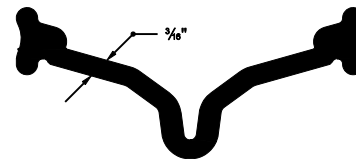


**STRIP SEAL**


INDIANA DEPARTMENT OF TRANSPORTATION	
EXPANSION JOINTS CLASS SS (ALTERNATE A)	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 724-BSSJ -01	
	/s/ Richard L. VanCleave 9-02-03 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard K. Smutzer 9-02-03 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	

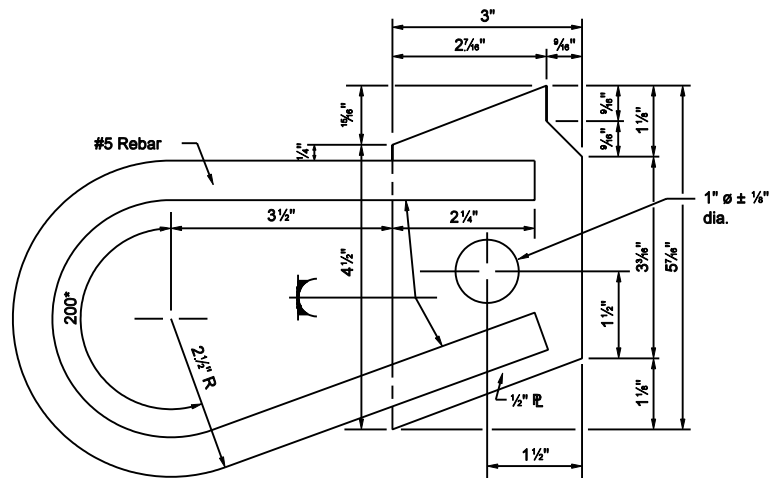


**ANCHOR PLATE ALTERNATE B-1**

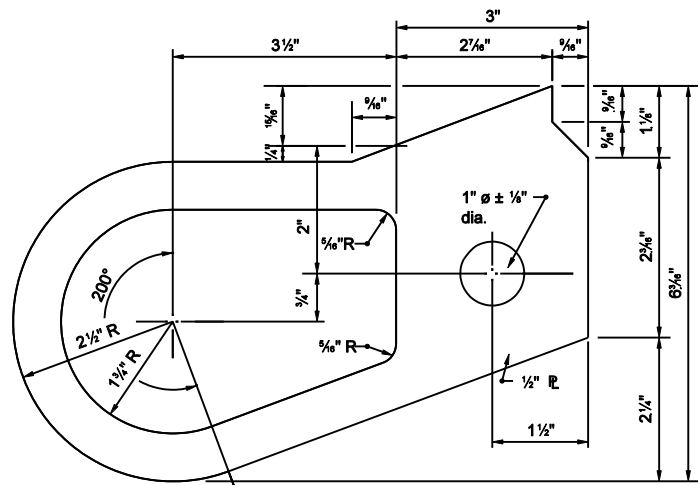

**ANCHOR PLATE ALTERNATE B-2**

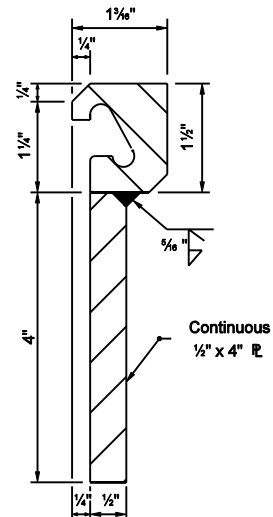


**EXTRUSION & PLATE  
ASSEMBLY DETAIL**




**STRIP SEAL**


INDIANA DEPARTMENT OF TRANSPORTATION	
EXPANSION JOINTS CLASS SS (ALTERNATE B)	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 724-BSSJ -02	
	/s/ Richard L. VanCleave DESIGN STANDARDS ENGINEER
	9-02-03 DATE
	/s/ Richard K. Smutzer CHIEF HIGHWAY ENGINEER
	9-02-03 DATE

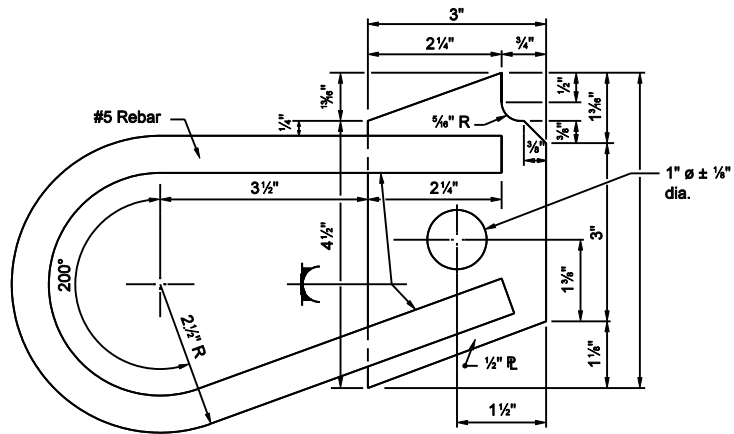


**ANCHOR PLATE ALTERNATE C-1**

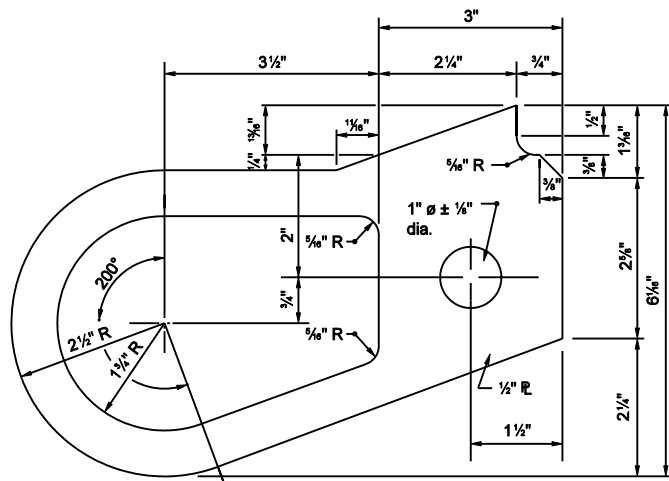

**ANCHOR PLATE ALTERNATE C-2**

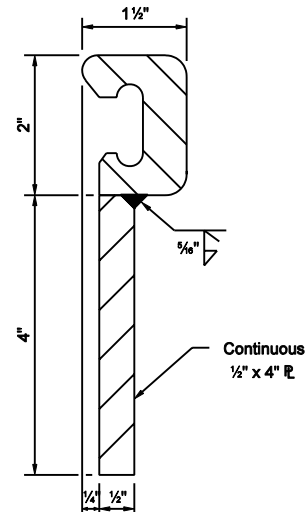

**EXTRUSION & PLATE  
ASSEMBLY DETAIL**




**STRIP SEAL**

INDIANA DEPARTMENT OF TRANSPORTATION		
EXPANSION JOINTS CLASS SS (ALTERNATE C)		
SEPTEMBER 2003		
STANDARD DRAWING NO. E 724-BSSJ-03		
	/s/ Richard L. VanCleave	9-02-03
	DESIGN STANDARDS ENGINEER	DATE
	/s/ Richard K. Smulzer	9-02-03
	CHIEF HIGHWAY ENGINEER	DATE
DESIGN STANDARDS ENGINEER		

GENERAL NOTES

- 1. This sheet shall be used in conjunction with Standard Drawing Nos. E 724-BSSJ-05 through 09.
- 2. Allowable expansion lengths shall not be increased for skewed structures.
- 3 Tool concrete edges to 1/4" to 3/8" radius.
- 4 Anchors shall be spaced at 9 in.


DIMENSIONS			
ALTERNATES	A	B	C
A-1	9 3/4"	1"	7 1/4"
A-2			
B-1	9 3/4"	15/16"	7 1/8"
B-2			
C-1	9 3/4"	1 13/16"	7 1/4"
C-2			
D-1	9 3/4"	1"	7 5/16"
D-2			

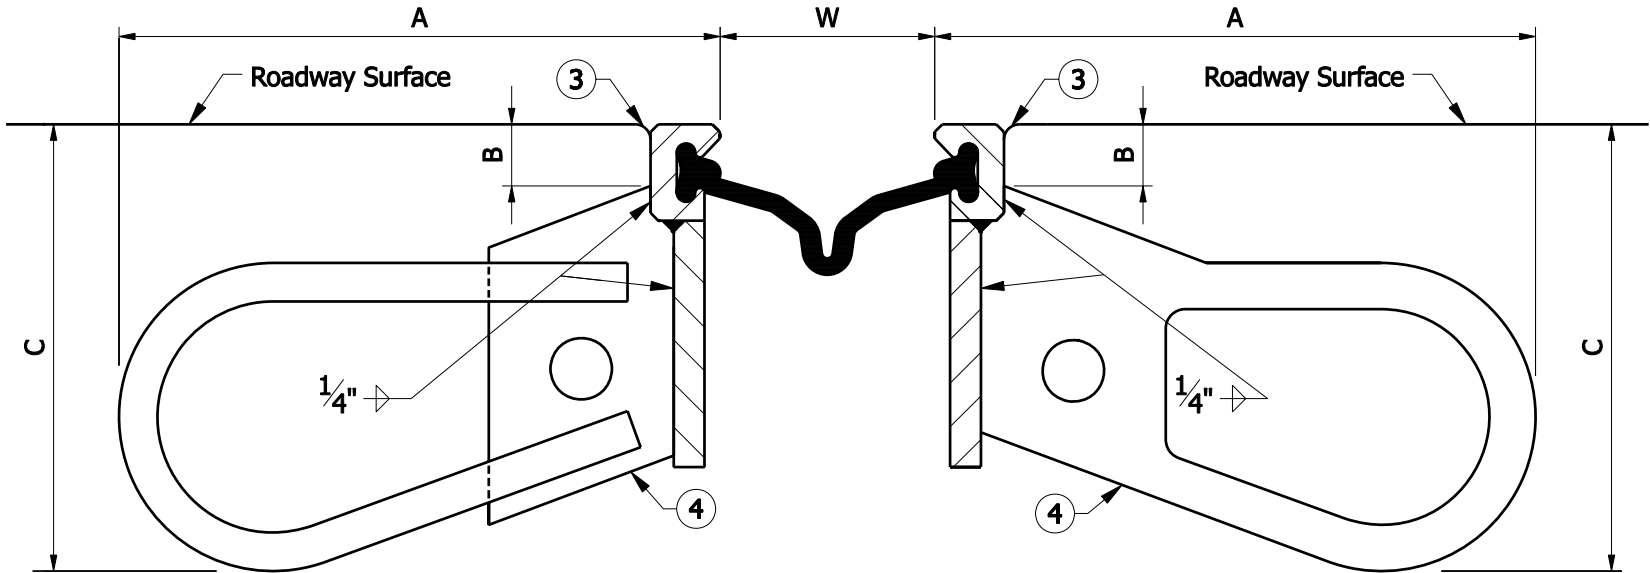


INSTALLATION DETAIL

JOINT SETTING TABLE			
Ambient Temperature °F	DIMENSION "W"		
	Expansion Length		
	100'-200'	200'-300'	300'-400'
120°	2 1/8"	1 5/16"	1/2"
100°	2 7/8"	1 3/4"	1 1/8"
80°	2 11/16"	2 3/16"	1 11/16"
60°	3"	2 5/8"	2 1/4"
40°	3 5/16"	3 1/16"	2 13/16"
20°	3 9/16"	3 1/2"	3 3/8"
0°	3 7/8"	3 5/16"	4"


INDIANA DEPARTMENT OF TRANSPORTATION	
EXPANSION JOINTS CLASS SS	
SEPTEMBER 2007	
STANDARD DRAWING NO. E 724-BSSJ-04	
	<div>/s/ Richard L. VanCleave 09/04/07 DESIGN STANDARDS ENGINEER DATE</div> <div>/s/ Mark A. Miller 09/04/07 CHIEF HIGHWAY ENGINEER DATE</div>
DESIGN STANDARDS ENGINEER	

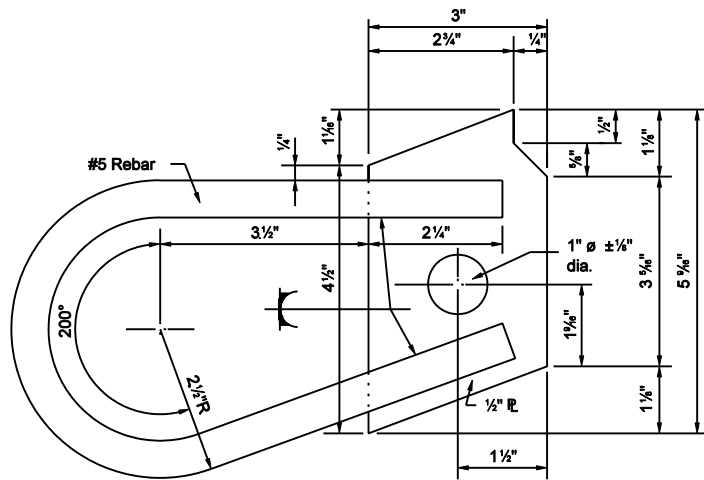


**ANCHOR PLATE ALTERNATE D-1**

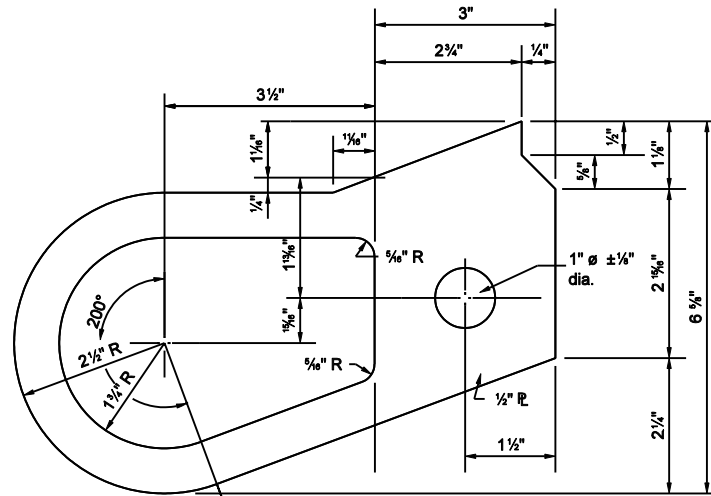

**ANCHOR PLATE ALTERNATE D-2**

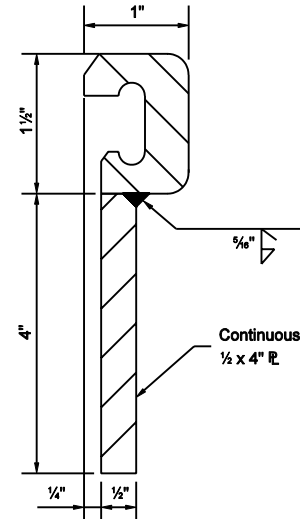


**EXTRUSION & PLATE  
ASSEMBLY DETAIL**




**RJ-400 STRIP  
SEAL GLAND**


INDIANA DEPARTMENT OF TRANSPORTATION	
EXPANSION JOINTS CLASS SS (ALTERNATE D)	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 724-BSSJ-04A	
	/s/ Richard L. VanCleave DESIGN STANDARDS ENGINEER
	9-02-03 DATE
	/s/ Richard K. Smulzer CHIEF HIGHWAY ENGINEER
	9-02-03 DATE

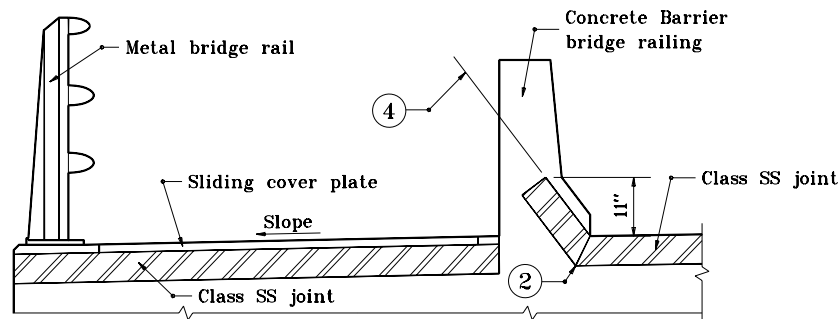


**SECTION D-D**

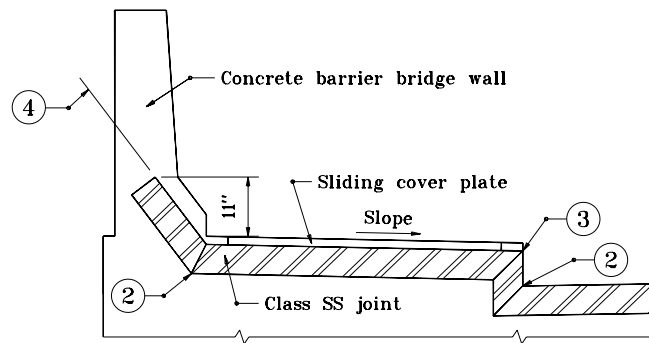

**SECTION B-B**

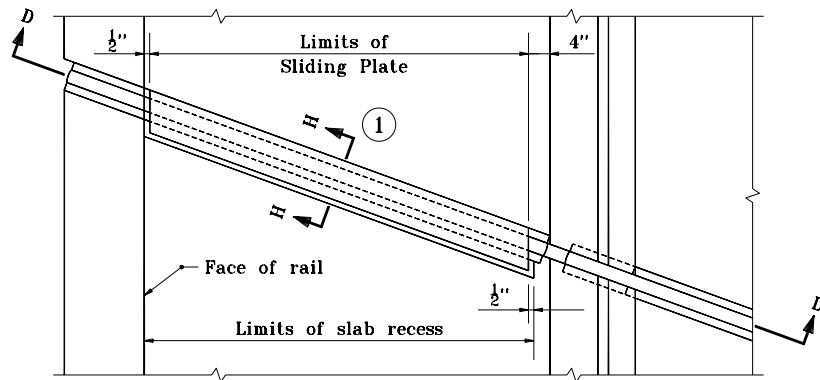

**PLAN**

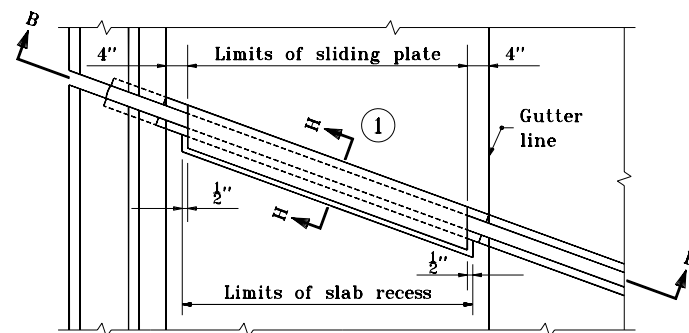

**PLAN**

### SIDEWALKS


- ① For section H-H see sheet number E 724-BSSJ-08.
- ② The extrusion and plate assemblies with anchors shall be miter cut and shop spliced at this location. A miter cut, vulcanized shop splice will be require in the strip seal at this location.
- ③ The extrusion and plate assemblies with anchors shall be shop prepared for field welding at this location. A miter cut vulcanized shop splice will be require in the strip seal at this location.
- ④ The joint shall be placed parallel to the lower sloped face of the rail with a maximum 3 in. depth to the top of the extrusion.

INDIANA DEPARTMENT OF TRANSPORTATION

### EXPANSION JOINTS CLASS SS

SEPTEMBER 1994

STANDARD DRAWING NO. E 724-BSSJ-05



DETAILS PLACED IN THIS FORMAT 11-15-99





/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-30-94



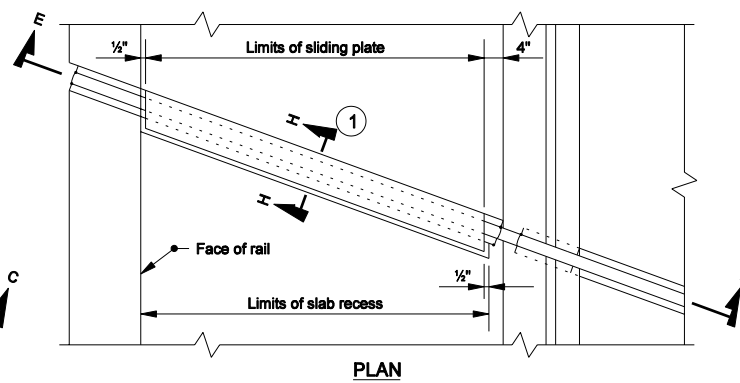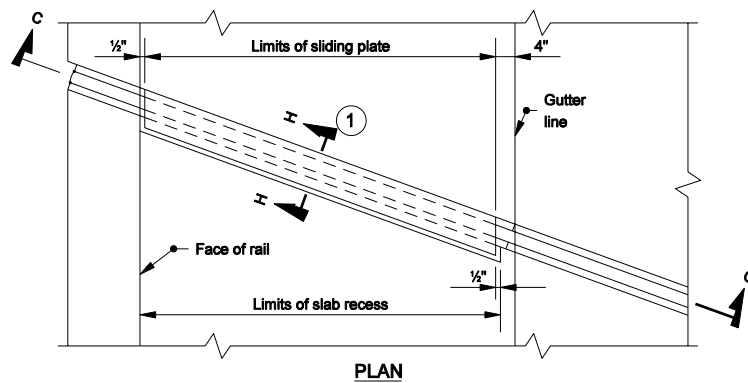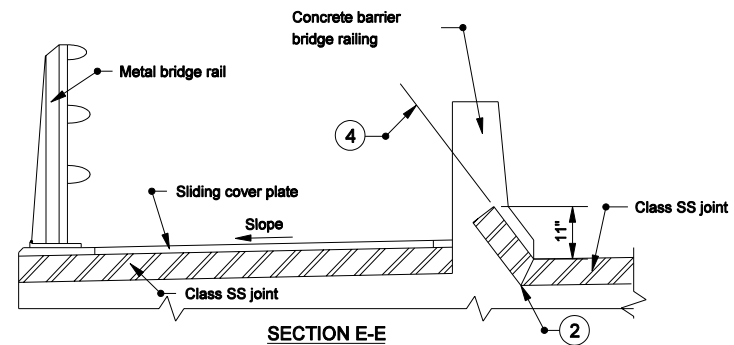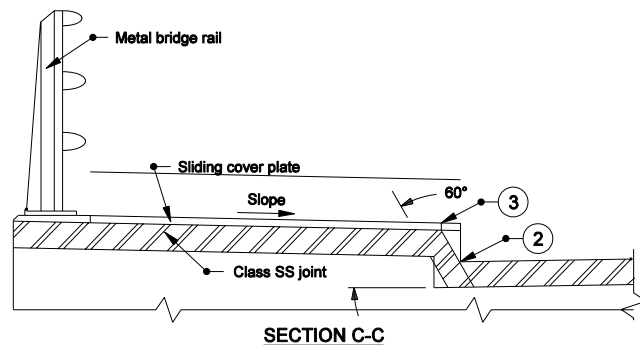

### SIDEWALKS


- ① For section H-H see sheet number E 724-BSSJ-08.
- ② The extrusion and plate assemblies with anchors shall be miter cut and shop spliced at this location. A miter cut, vulcanized shop splice will be required in the strip seal at this location.
- ③ The extrusion and plate assemblies with anchors shall be shop prepared for field welding at this location. A miter cut vulcanized shop splice will be required in the strip seal at this location.
- ④ The joint shall be placed parallel to the lower sloped face of the rail with a maximum 3 in. depth to the top of the extrusion.

INDIANA DEPARTMENT OF TRANSPORTATION

### EXPANSION JOINTS CLASS SS


MARCH 2005

STANDARD DRAWING NO. E 724-BSSJ-06




/s/ Richard L. VanCleave 3-01-05  
DESIGN STANDARDS ENGINEER DATE


/s/ Richard K. Smutzer 3-01-05  
CHIEF HIGHWAY ENGINEER DATE

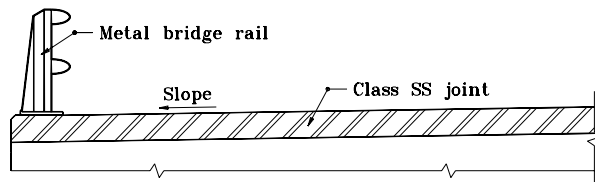


**SECTION F-F**

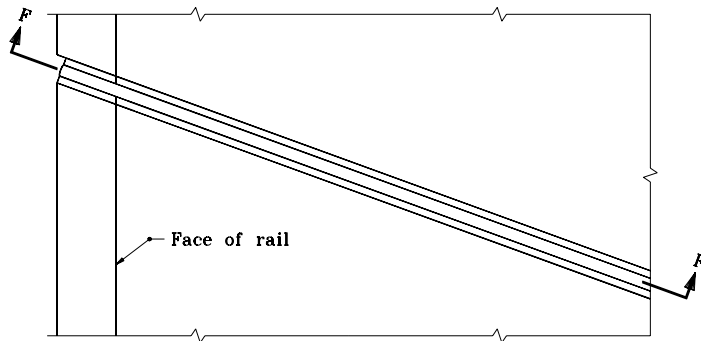

**PLAN**

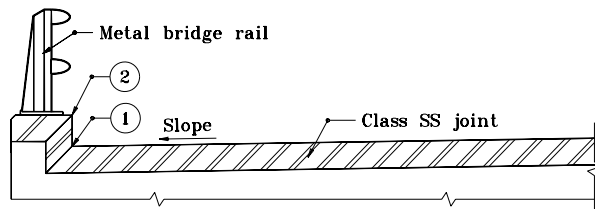

**SECTION G-G**

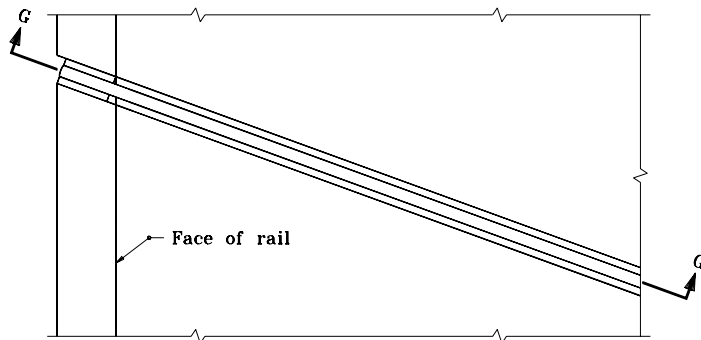

**PLAN**

**METAL RAILING WITHOUT SIDEWALK**


- ① The extrusion and plate assemblies with anchors shall be miter cut and shop spliced at this location. A miter cut, vulcanized shop spliced will be required in the strip seal at the location.
- ② The extrusion and plate assemblies with anchors shall be shop prepared for field welding at this location. A miter cut, vulcanized shop splice will be required in the strip seal at this location.

INDIANA DEPARTMENT OF TRANSPORTATION

**EXPANSION JOINTS CLASS SS**

SEPTEMBER 1994

STANDARD DRAWING NO. **E 724-BSSJ-07**




DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE


DESIGN STANDARDS ENGINEER

ORIGINALLY APPROVED 9-30-94

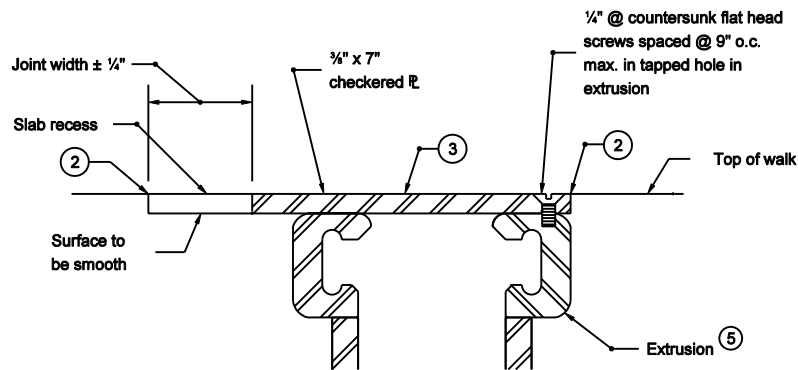


SECTION H-H

SLIDING COVER PLATE DETAIL

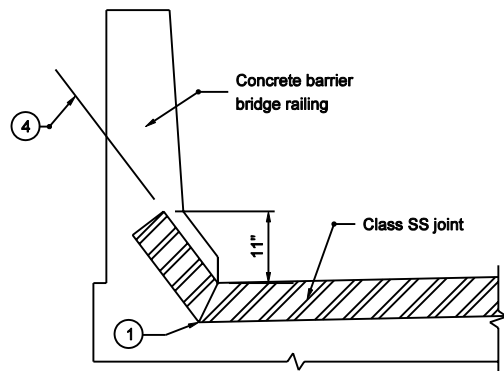

SECTION A-A

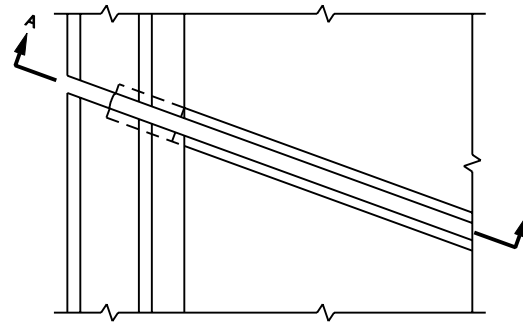

PLAN

CONCRETE BARRIER BRIDGE RAILING

- ① The extrusion and plate assemblies with anchors shall be miter cut and shop spliced at this location. A miter cut, vulcanized shop splice will be required in the strip seal at this location.
- ② Tool concrete edges to 1/4" to 3/8" radius.
- ③ The length of the sliding cover plate, measured along the centerline of the Class SS Joint, shall be 3/4" shorter at each end than the limits of the recess as shown on these details.
- ④ The joint shall be placed parallel to the lower sloped face of the rail with a maximum 3" depth to the top of the extrusion.
- ⑤ See Standard Drawings E 724-BSSJ-03 and -04 for details.

INDIANA DEPARTMENT OF TRANSPORTATION	
EXPANSION JOINTS CLASS SS	
SEPTEMBER 2003	
STANDARD DRAWING NO. E 724-BSSJ-08	
	/s/ Richard L. VanCleave DESIGN STANDARDS ENGINEER
	9-02-03 DATE
	/s/ Richard K. Smutzer CHIEF HIGHWAY ENGINEER
	9-02-03 DATE

**GENERAL NOTES**


- 1. Standard Drawing Nos. E 724-BSSJ-05 through 09 shall be used in conjunction with Standard Drawing Nos. E 724-BSSJ-01 through 04.
- 2. The details shown on Standard Drawing Nos. E 724-BSSJ-05 through 09 are the only approved methods of placing Class SS Joints in curbs, sidewalks, concrete bridge railing and under metal bridge railing.
- 3. The locations of the anchor plates in sidewalks and in the concrete barrier bridge rail shall be as shown on the approved shop drawings but in no case shall the spacing exceed 9 in.

INDIANA DEPARTMENT OF TRANSPORTATION

**EXPANSION JOINTS CLASS SS**

SEPTEMBER 1994

**STANDARD DRAWING NO. E 724-BSSJ-09**



DETAILS PLACED IN THIS FORMAT 11-15-99


/s/ Anthony L. Uremovich 11-15-99  
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99  
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER


ORIGINALLY APPROVED

9-30-94

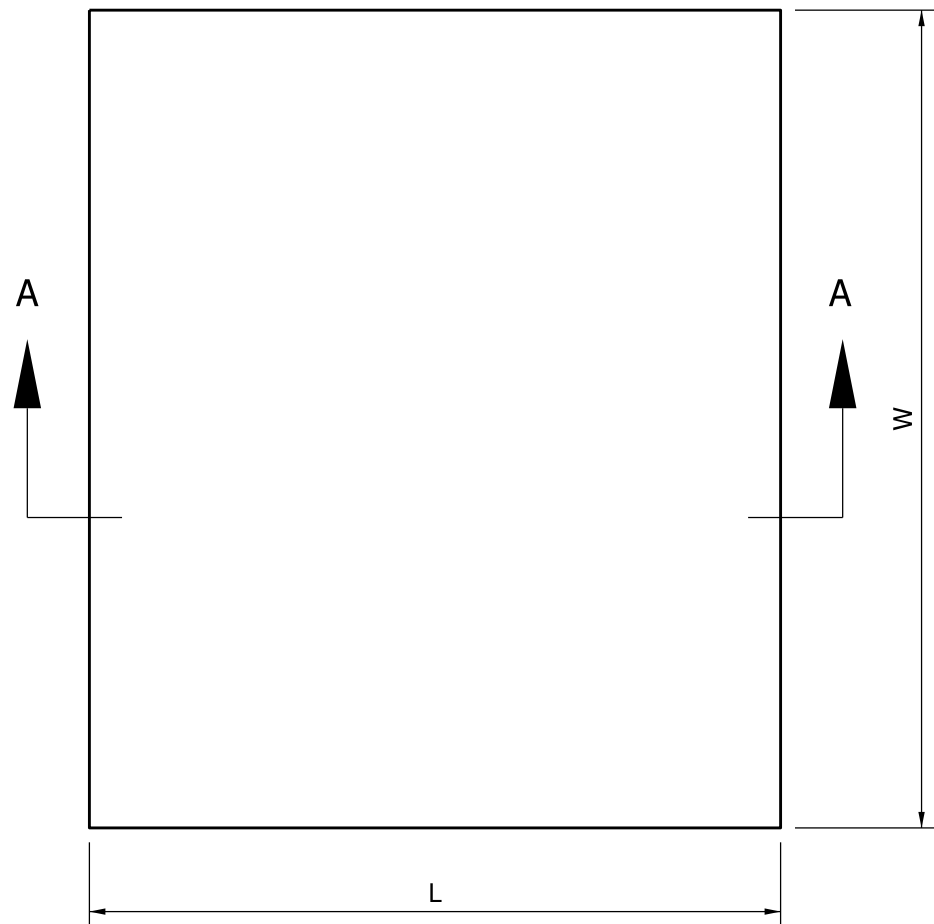

ELASTOMERIC BEARING PAD

PLAN

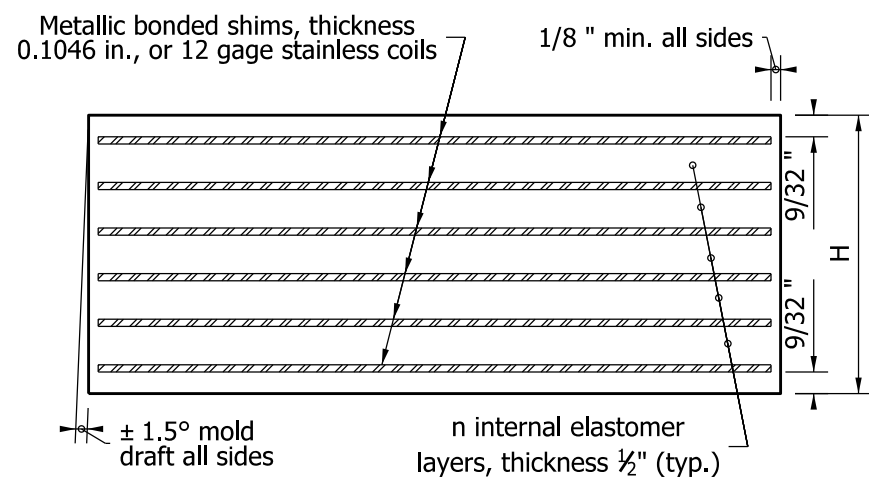

SECTION A - A

NOTES:

1. The rectangular Elastomeric Bearing Pad shall be placed with L dimension parallel to longitudinal bridge axis.
2.  $h_{rt}$  is defined as the summation of all internal elastomer thickness plus the two external layers thickness.


TABLE OF DIMENSIONS

Bearing Designation	Bearing Width W	Bearing Length L	Number of Internal Elastomer Layers n	$h_{rt}$	Number of Steel Shims $n_s$	Bearing Total Thickness H
TYPE 1	14"	10 1/2"	3	2 1/16"	4	2 15/32"
TYPE 2	14"	11 1/2"	4	2 9/16"	5	3 3/32"
TYPE 3	18"	11"	4	2 9/16"	5	3 3/32"
TYPE 4	24"	12"	5	3 1/16"	6	3 11/16"
TYPE 5A	22"	11"	4	2 9/16"	5	3 3/32"
TYPE 6A	22"	10"	4	2 9/16"	5	3 3/32"
TYPE 7A	22"	9"	3	2 1/16"	4	2 15/32"
TYPE 5B	12"	12"	4	2 9/16"	5	3 3/32"
TYPE 6B	12"	11"	4	2 9/16"	5	3 3/32"
TYPE 7B	12"	10"	3	2 1/16"	4	2 15/32"

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE ELASTOMERIC BEARING PADS  
TYPE 1 to 7  
FOR PRESTRESSED I-BEAMS & BOX BEAMS  
SEPTEMBER 2009


STANDARD DRAWING NO. E 726-BEBP-01




DESIGN STANDARDS ENGINEER

/s/ *Richard L. VanCleave* 09/01/09  
DESIGN STANDARDS ENGINEER DATE

/s/ *Mark A. Miller* 09/01/09  
CHIEF HIGHWAY ENGINEER DATE

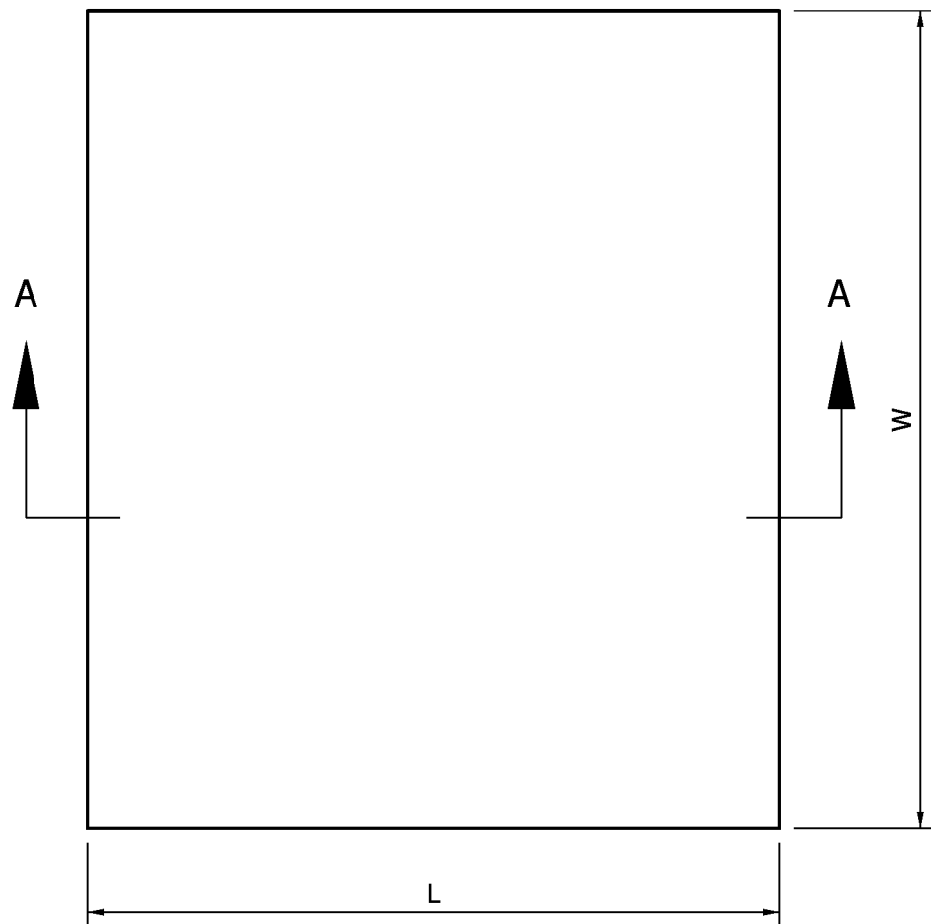

ELASTOMERIC BEARING PAD  
PLAN

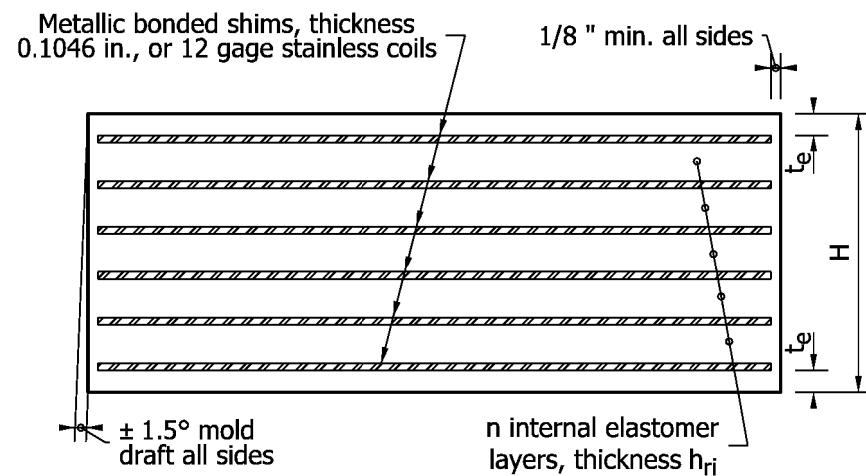

SECTION A - A

- NOTES:
1. The rectangular Elastomeric Bearing Pad shall be placed with L dimension parallel to longitudinal bridge axis.
  2.  $h_{rt}$  is defined as the summation of all internal elastomer thickness plus the two external layers thickness.

TABLE OF DIMENSIONS

Bearing Designation	Bearing Width W	Bearing Length L	Internal Elastomer Thickness $h_{ri}$	Number of Internal Elastomer Layers n	External Elastomer Thickness $t_e$	$h_{rt}$	Number of Steel Shims $n_s$	Bearing Total Thickness H
T1	23"	12"	$\frac{1}{2}"$	5	$\frac{9}{32}"$	$3 \frac{1}{16}"$	6	$3 \frac{1}{16}"$
T2	23"	14"	$\frac{1}{2}"$	6	$\frac{9}{32}"$	$3 \frac{9}{16}"$	7	$4 \frac{5}{16}"$
T3	23"	17"	$\frac{19}{32}"$	7	$\frac{5}{16}"$	$4 \frac{25}{32}"$	8	$5 \frac{5}{8}"$
T4	24"	19"	$\frac{19}{32}"$	8	$\frac{5}{16}"$	$5 \frac{3}{8}"$	9	$6 \frac{5}{16}"$

INDIANA DEPARTMENT OF TRANSPORTATION  
BRIDGE ELASTOMERIC BEARING PADS  
TYPE T-1 to T-4  
FOR PRESTRESSED BULB-TEE BEAMS  
SEPTEMBER 2009

STANDARD DRAWING NO. E 726-BEBP-02


/s/ Richard L. VanCleave
09/01/09

DESIGN STANDARDS ENGINEER
DATE

/s/ Mark A. Miller
09/01/09

CHIEF HIGHWAY ENGINEER
DATE

DESIGN STANDARDS ENGINEER

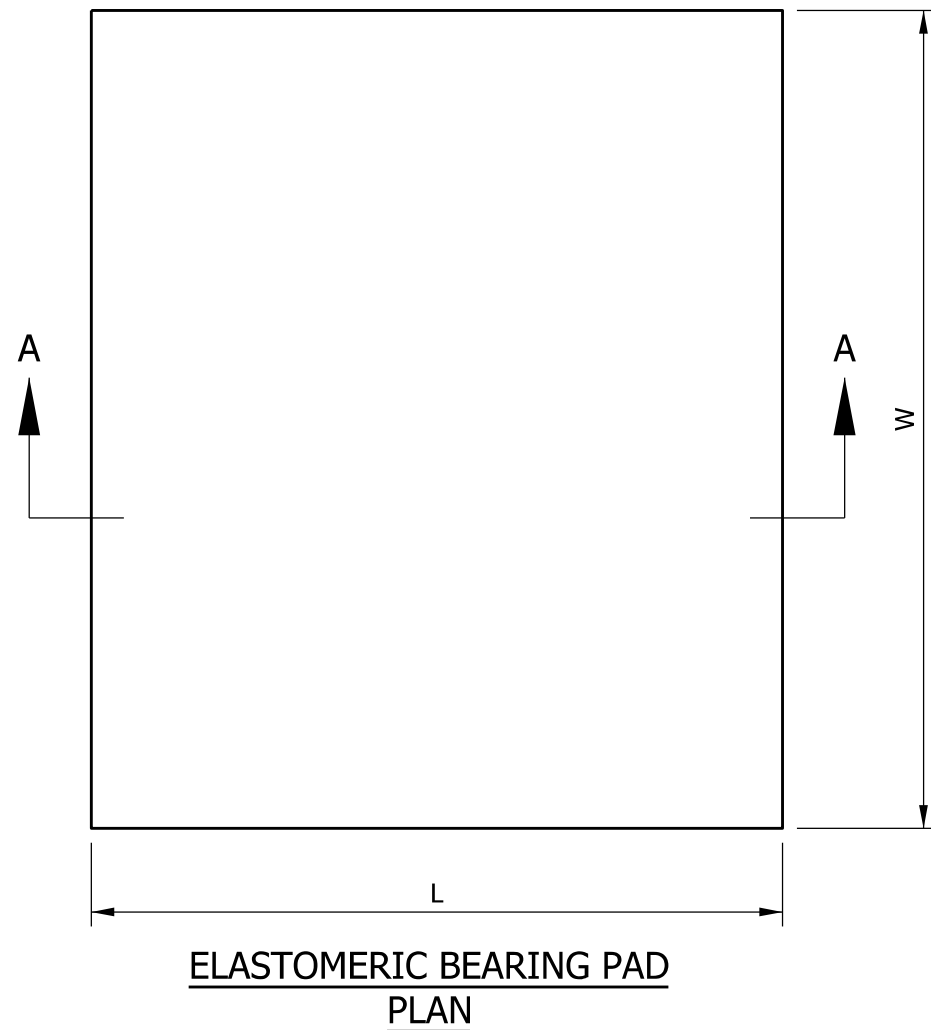


**NOTES:**

1. The rectangular Elastomeric Bearing Pad shall be placed with  $L$  dimension parallel to longitudinal bridge axis.
2.  $h_{rt}$  is defined as the summation of all internal elastomer thickness plus the two external layers thickness.
3. The Contractor shall check that the bearing seat is level. Grinding may be required to obtain a level seat.
4. The bridge seat shall be finished level at the time concrete is placed. Finished concrete shall be ground if necessary to ensure full and level contact between the seat and the bearing pads when the beams are set.

**TABLE OF DIMENSIONS**


Bearing Designation	Bearing Width $W$	Bearing Length $L$	Internal Elastomer Thickness $h_{ri}$	Number of Internal Elastomer Layers $n$	External Elastomer Thickness $t_e$	$h_{rt}$	Number of Steel Shims $n_s$	Bearing Total Thickness $H$
TH1	36"	12"	1/2"	5	9/32"	3 1/16"	6	3 11/16"
TH2	36"	14"	1/2"	6	9/32"	3 9/16"	7	4 5/16"
TH3	36"	17"	19/32"	7	5/16"	4 25/32"	8	5 5/8"
TH4	36"	19"	19/32"	8	5/16"	5 3/8"	9	6 5/16"

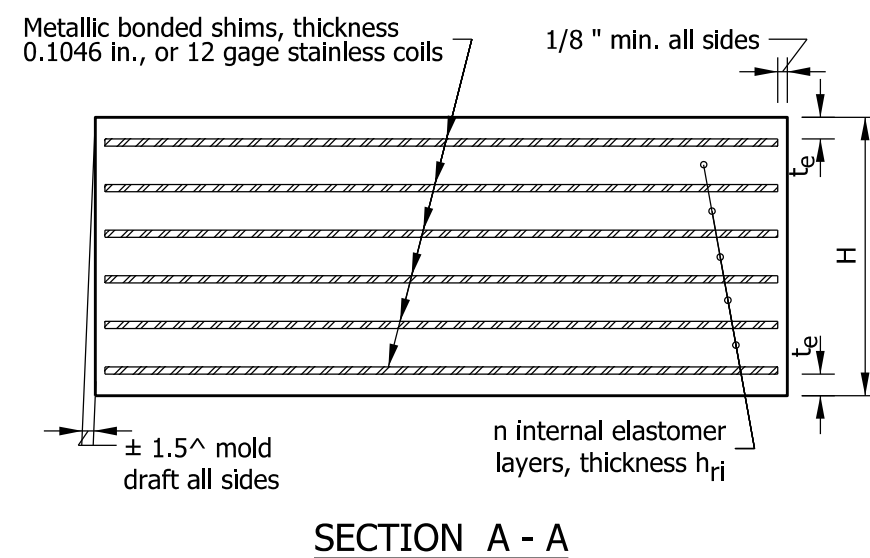

**INDIANA DEPARTMENT OF TRANSPORTATION**

**BRIDGE ELASTOMERIC BEARING PADS  
TYPE TH1 - TH4 FOR PRESTRESSED  
WIDE-FLANGE BULB-TEE BEAMS  
SEPTEMBER 2012**

**STANDARD DRAWING NO. E 726-BEBP-03**




*/s/ Richard L. VanCleave* 09/04/12  
SUPERVISOR, ROADWAY STANDARDS DATE

*/s/ Mark A. Miller* 09/04/12  
CHIEF ENGINEER DATE



BOLT DIA.	y	z	t	d
1"	2 1/8"	4"	1/2"	1 1/8"
1 1/4"	2 1/4"	4 3/4"	1/2"	1 3/8"
1 1/2"	2 3/4"	5 1/2"	3/4"	1 5/8"

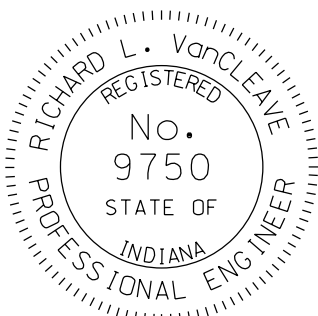INDIANA DEPARTMENT OF TRANSPORTATION	
BRIDGE ELASTOMERIC BEARING PADS TYPE S - FOR STEEL BEAMS	
SEPTEMBER 2012	
STANDARD DRAWING NO. E 726-BEBP-04	
	<div><div><i>/s/ Richard L. VanCleave</i>09/04/12</div><div>SUPERVISOR, ROADWAY STANDARDSDATE</div><div><i>/s/ Mark A. Miller</i>09/04/12</div><div>CHIEF ENGINEERDATE</div></div>




NOTES

- ①  $h_{rt}$  is defined as the summation of all internal elastomer thicknesses plus the external elastomer thicknesses.
2. See Standard Drawing E 726-BEBP-04 for Type S bearing assembly details.

TABLE OF DIMENSIONS - TYPE S BEARINGS FOR STEEL BEAMS

Bearing Designation	Bearing Width W	Bearing Length L	Number of Internal Elastomer Layers n	$h_{rt}$ ①	Number of Steel Shims ns	Bearing Total Thickness H
S1-A	11"	8"	2	1 9/16"	3	1 27/32"
S1-B	11"	8"	3	2 1/16"	4	2 7/16"
S2-A	12"	9"	2	1 9/16"	3	1 27/32"
S2-B	12"	9"	3	2 1/16"	4	2 7/16"
S3-A	13"	10"	3	2 1/16"	4	2 7/16"
S3-B	13"	10"	4	2 9/16"	5	3 1/32"
S4-A	15"	11"	4	2 9/16"	5	3 1/32"
S4-B	15"	11"	5	3 1/16"	6	3 5/8"
S5-A	16"	12"	4	2 9/16"	5	3 1/32"
S5-B	16"	12"	5	3 1/16"	6	3 5/8"
S6-A	20"	13"	5	3 1/16"	6	3 5/8"
S6-B	20"	13"	6	3 9/16"	7	4 7/32"
S7-A	20"	15"	6	3 9/16"	7	4 7/32"
S7-B	20"	15"	7	4 1/16"	8	4 13/16"


INDIANA DEPARTMENT OF TRANSPORTATION	
ELASTOMERIC BEARING PADS TYPE S	
SEPTEMBER 2012	
STANDARD DRAWING NO. E 726-BEBP-05	
<div><div><div><div><div><div><span></span></div><div>REGISTERED</div><div>No.</div><div>9750</div><div>STATE OF</div><div>INDIANA</div><div>PROFESSIONAL ENGINEER</div></div></div><div><div><div><span></span></div><div>RICHARD L. VANCLEAVE</div></div></div></div></div></div>	

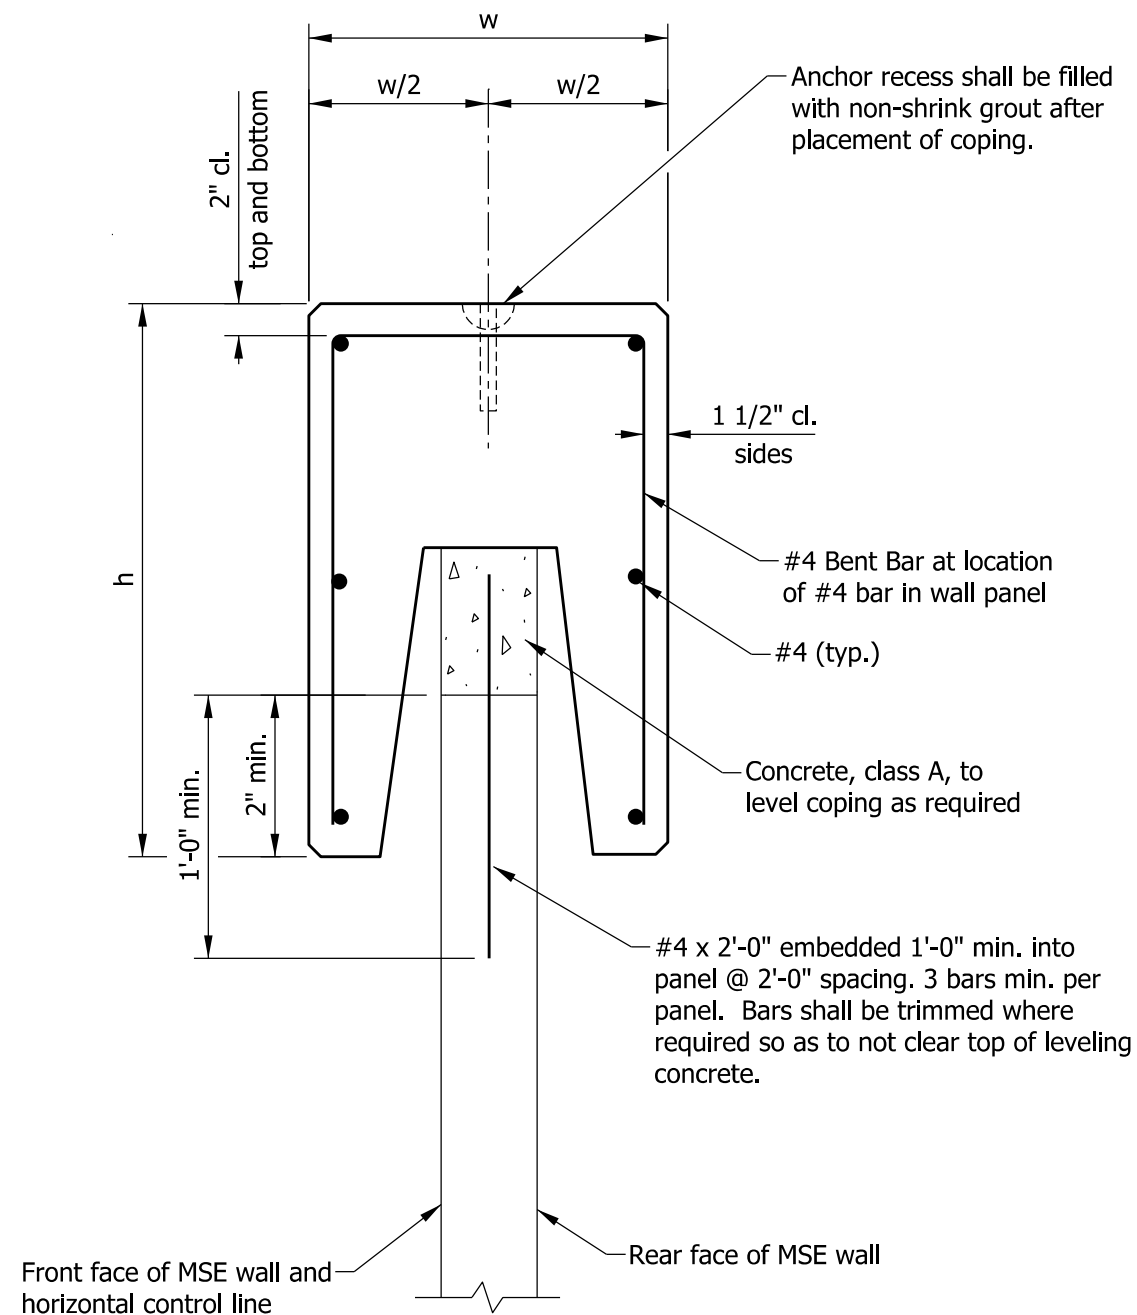

**TYPICAL SECTION**


**NOTES**

1. Precast coping unit length shall be 10'-0".
2. Reinforcing bars' size, length, and spacing shall be determined by the manufacturer.
3. All chamfered edges shall be 3/4".
4. See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

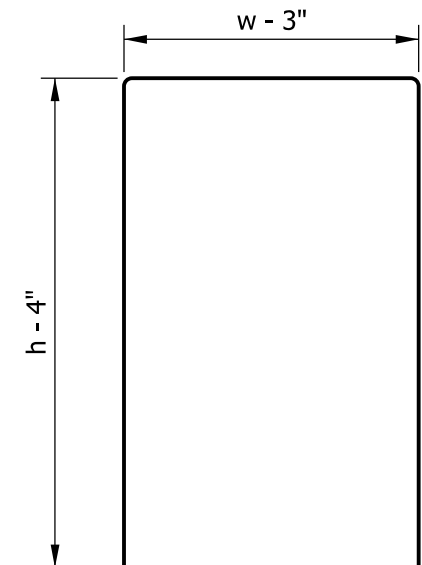

**#4 BENT BAR**


INDIANA DEPARTMENT OF TRANSPORTATION			
MSE WALL PRECAST CONCRETE COPING SEPTEMBER 2012			
STANDARD DRAWING NO.		E 731-MSEW-01	
	/s/ <i>Richard L. VanCleave</i>		09/04/12
	SUPERVISOR, ROADWAY STANDARDS		DATE
	/s/ <i>Mark A. Miller</i>		09/04/12
	CHIEF ENGINEER		DATE

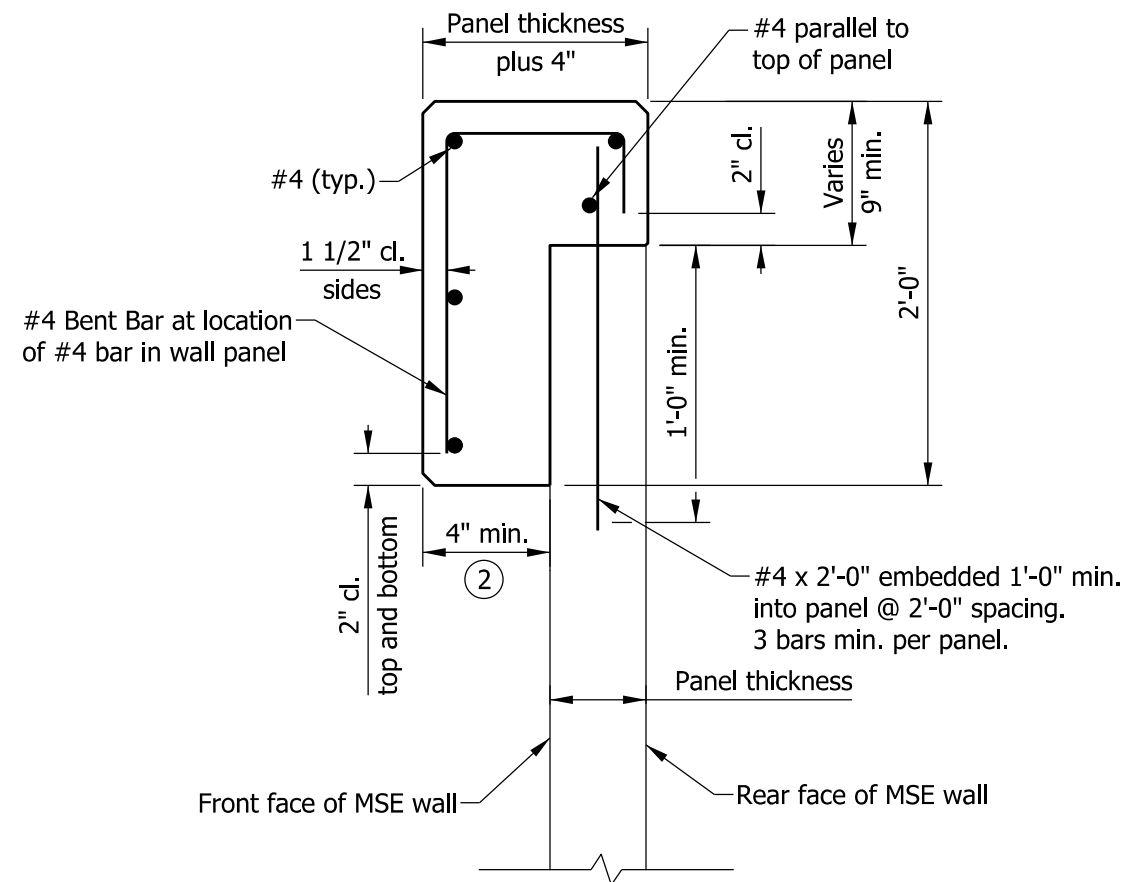

TYPICAL SECTION

NOTES

- Coping joints shall coincide approximately with the panel joints. Reinforcing bars' ends shall be 2" short of near side of each joint.
- The front face of a cast-in-place coping shall match the front face of a precast coping where used in conjunction.
- All chamfered edges shall be 3/4".
- See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

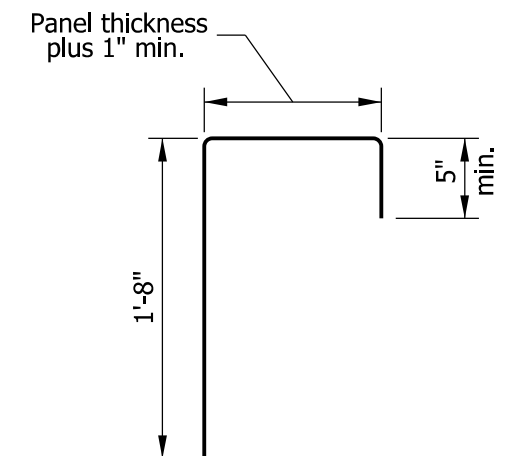


#4 BENT BAR

INDIANA DEPARTMENT OF TRANSPORTATION

MSE WALL  
CAST-IN-PLACE CONCRETE COPING

SEPTEMBER 2012

STANDARD DRAWING NO. E 731-MSEW-02




/s/ *Richard L. VanCleave* 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ *Mark A. Miller* 09/04/12


CHIEF ENGINEER DATE

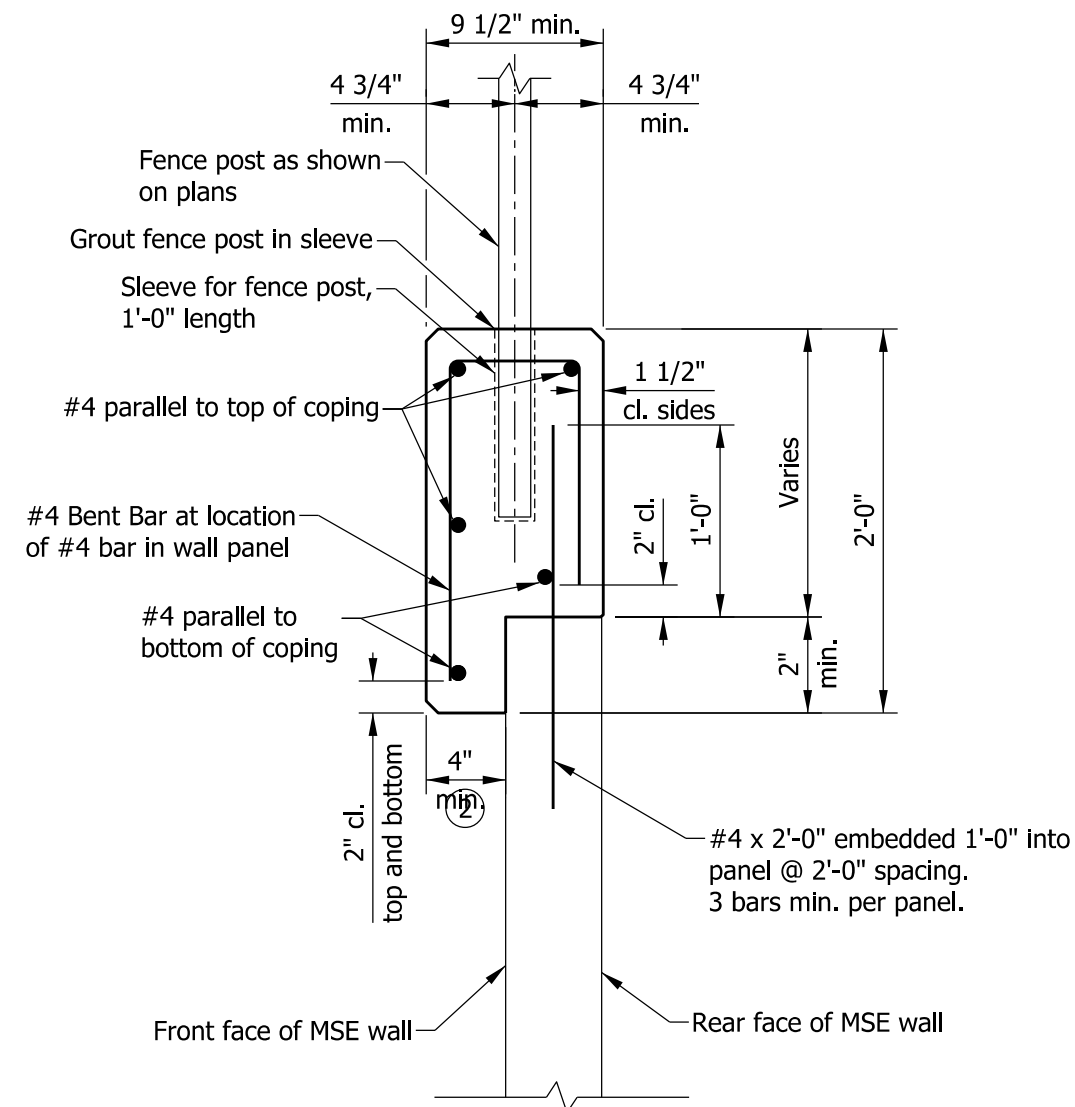

TYPICAL SECTION

NOTES

- Coping joints shall coincide approximately with the panel joints. Reinforcing bars' ends shall be 2" short of near side of each joint.
- The front face of a cast-in-place coping shall match the front face of a precast coping where used in conjunction.
- All chamfered edges shall be 3/4".
- See Standard Drawing E 703-BRST-01 for reinforcing-bar bending details and notes.

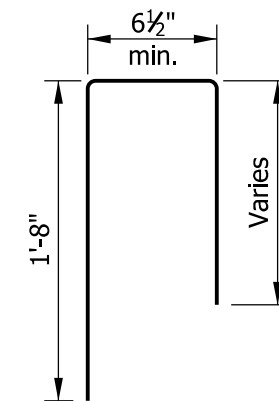


#4 BENT BAR

INDIANA DEPARTMENT OF TRANSPORTATION

MSE WALL  
CAST-IN-PLACE CONCRETE COPING  
WITH PEDESTRIAN FENCE  
SEPTEMBER 2012

STANDARD DRAWING NO. E 731-MSEW-03



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE