


GENERAL NOTES :

- ① Shoulder cross slope in superelevated section shall be as follows:
 Where the high side is on the outside of the curve:
 4% ↘ for horizontal curve radius $R \geq 3820$ ft
 2% ↘ for $2870 \text{ ft} \leq R \leq 3820$ ft
 Where the high side of the superelevated pavement is on the median side of the curve; maintain adjacent travel lane's superelevation transition rate or superelevation rate.
 The low side of a superelevated pavement shall maintain the adjacent travel lane's superelevation transition rate or superelevation rate.
- ② See Standard Drawing 801-TCDV-01 for channelizing device.

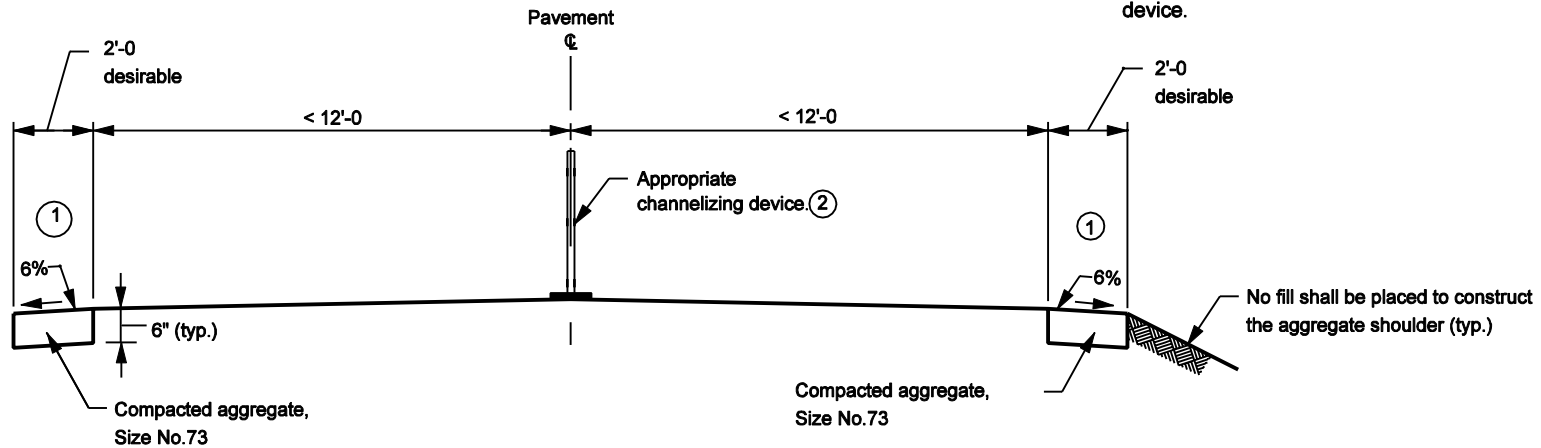

INDIANA DEPARTMENT OF TRANSPORTATION	
TEMPORARY SHOULDER FOR TRAFFIC MAINTENANCE	
SEPTEMBER 2002	
STANDARD DRAWING NO. E 801-TCTS-01	
	/s/ Richard L. VanCleave 9-03-02 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard K. Smutzer 9-03-02 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	