
TIPPECANOE



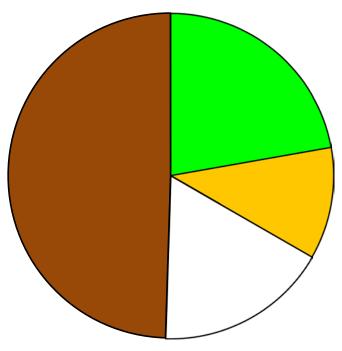


- ■No-Till * (22%) = 24100 ac
- Mulch Till (11%) = 12000 ac
- ☐ Reduced Till (17%) = 18600 ac
- Conventional (49%) = 53700 ac

* No-Till - Any direct seeding system, including site preparation, with minimal soil disturbance (includes strip & ridge till)

Mulch Till - Any tillage system leaving 30% - 75% residue cover after planting, excluding no-till

Reduced - Any tillage system leaving 16% - 30% residue cover after planting

Conventional - Any tillage system leaving less than 15% residue cover after planting



2013 Cropland Tillage Data - Soybean

- Diesel fuel savings are from NRCS Energy Estimators - Tillage

- ■No-Till * (51%) = 42100 ac
- ■Mulch Till (23%) = 19000 ac
- □ Reduced Till (14%) = 11600 ac
- Conventional (11%) = 9100 ac

⁻ Erosion estimates are from USLE based on each point's R, k, LS, and ap

- Acreage Estimates from NASS 2009 (corn and soybean only)
- Erosion estimates are from USLE based on each point's R, k, LS, and appropriate C factor based on rotation and tillage
- Diesel fuel savings are from NRCS Energy Estimators Tillage