



**GENERAL NOTES**

1. This sheet shall be used when W-beam guardrail is specified along the outside shoulder of a multi-lane divided roadway to shield the piers of overhead structures.
2. The details on this sheet are typical guardrail layouts for shielding the piers of twin overhead structures. The required length of guardrail shall be determined in accordance with Tables P-2-1 and P-2-2, and shall be as shown on the plans.
3. Dimensions and details not shown on this sheet shall be as shown on the plans.
- ④ Rectangular plate washers shall be installed at each post along this section.
5. Tables P-2-1 and P-2-2 are shown on Standard Drawing 601-RPPG-03.

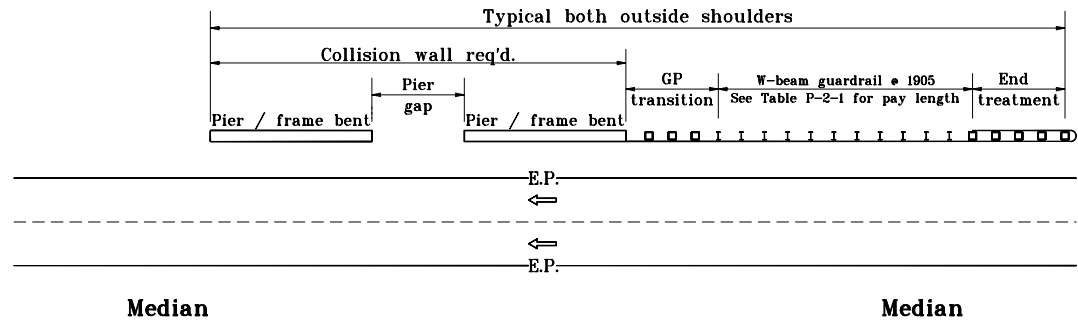

**MULTI-LANE DIVIDED WITH TWIN OVERHEAD STRUCTURE AND OUTSIDE SHOULDER PIER TO E.P. ≤ 4.9 m**

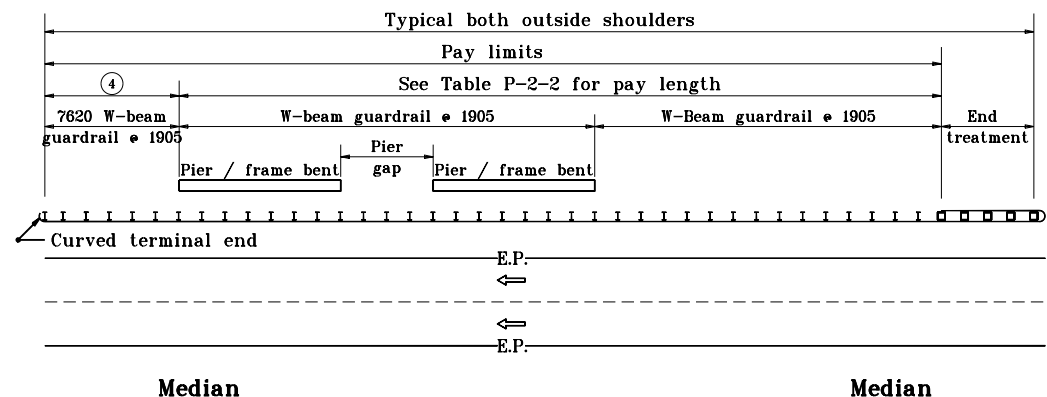

**MULTI-LANE DIVIDED WITH TWIN OVERHEAD STRUCTURE AND OUTSIDE SHOULDER PIER TO E.P. > 4.9 m**

All dimensions are in mm unless otherwise specified.

<b>INDIANA DEPARTMENT OF TRANSPORTATION</b>	
<b>ROADSIDE PIER PROTECTION GUARDRAIL</b>	
SEPTEMBER 1997	
STANDARD DRAWING NO. <b>601-RPPG-02</b>	
	/s/ Anthony L. Uremovich 9-01-97 DESIGN STANDARDS ENGINEER      DATE
	/s/ Donald W. Lucas 9-01-97 CHIEF HIGHWAY ENGINEER      DATE