


PLAN VIEW
(PAVED SHOULDER LESS THAN 2400
IN WIDTH OR UNPAVED SHOULDER)

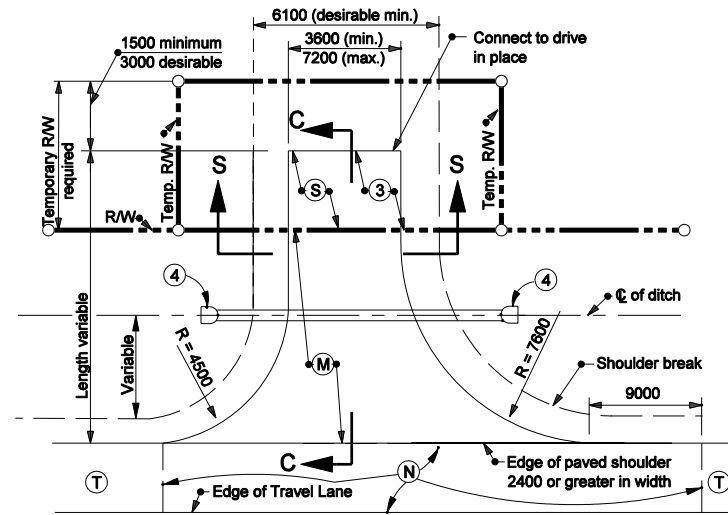

PLAN VIEW
(PAVED SHOULDER 2400
OR GREATER IN WIDTH)

NOTES :

1. See Standard Drawing 610-DRIV-13 for General Notes and Legend.
2. See Standard Drawing 610-DRIV-10 for Sections A-A, B-B and C-C.
3. See Standard Drawing 610-DRIV-10 for approach grades.
4. See Standard Drawing 610-DRIV-09 for Section S-S.

LEGEND

- (M) 90 kg/m² HMA Surface Type A on
150 kg/m² HMA Intermediate Type A on
200 mm compacted aggregate base
or
150 mm. PCC on
150 mm. compacted aggregate base
- (N) Thicker of drive or shoulder section
- (S) Equivalent to surface in place
- (T) Plan shoulder section


All Dimensions are in mm unless otherwise specified

INDIANA DEPARTMENT OF TRANSPORTATION

CLASS II DRIVE

MARCH 2006

STANDARD DRAWING NO. 610-DRIV-02



/s/ Richard L. VanCleave 3-01-06
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 3-01-06
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER