


PLAN VIEW
(PAVED SHOULDER 2400
OR GREATER IN WIDTH)

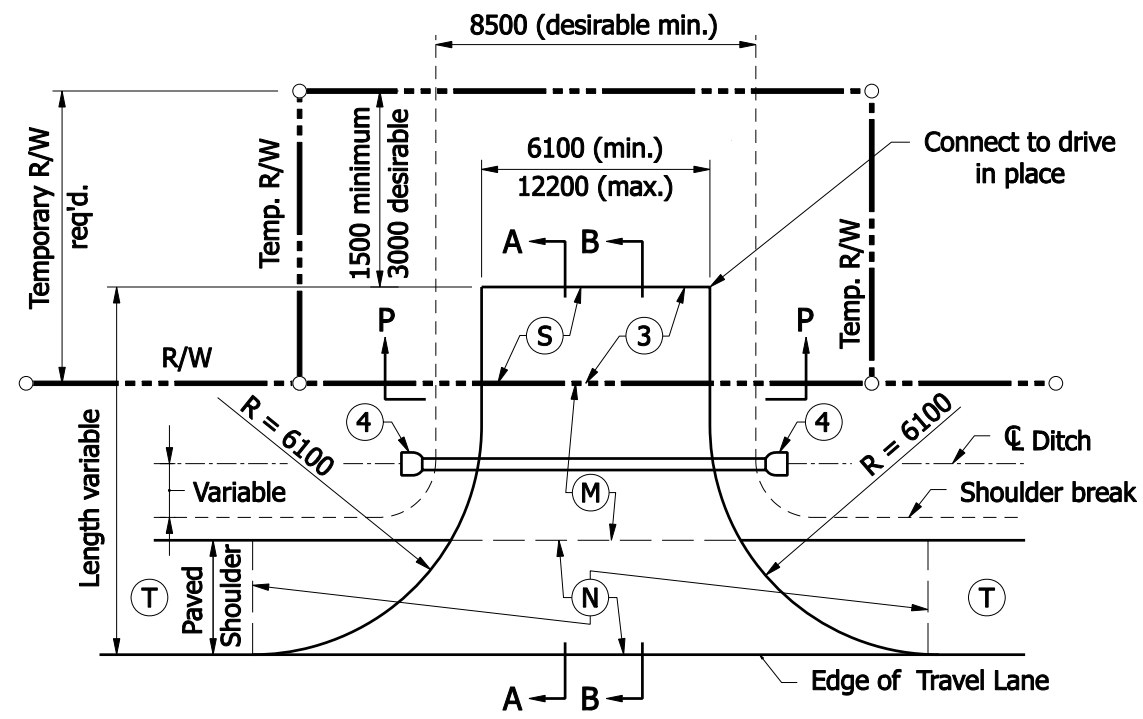

PLAN VIEW
(PAVED SHOULDER LESS THAN 2400
IN WIDTH OR UNPAVED SHOULDER)

NOTES :

1. See Standard Drawing 610-DRIV-13 for General Notes and Legend.
2. See Standard Drawing 610-DRIV-10 for Sections A-A, B-B, and C-C.
3. See Standard Drawing 610-DRIV-09 for Sections P-P.

LEGEND

- (M) 90 kg/m² HMA Surface Type B on 150 kg/m² HMA Intermediate Type B on 480 kg/m² HMA base, Type B on subgrade treatment Type IIIA
or
225 mm PCC on subgrade treatment Type IIIA
- (N) Thicker of drive or shoulder section
- (S) Equivalent to surface in place
- (T) Plan shoulder section

All Dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION	
CLASS IV DRIVE	
SEPTEMBER 2007	
STANDARD DRAWING NO. 610-DRIV-04	
	<p><i>/s/ Richard L. VanCleave</i> 09/04/07 DESIGN STANDARDS ENGINEER DATE</p> <p><i>/s/ Mark A. Miller</i> 09/04/07 CHIEF HIGHWAY ENGINEER DATE</p>
DESIGN STANDARDS ENGINEER	